

FCC RADIO TEST REPORT

FCC ID: 2BW6Y-UKEYCORE26

Sample : Ukey Core 26

Trade Mark : N/A

Main Model : Ukey Core 26

Additional Model : N/A

Report No. : UNIA26051201ER-62

Prepared for

UKEY LIMITED

**3A8, 19/F HIP SHING HONGRM CENTRE 55 DES VOEUX
ROAD CENTRAL CENTRAL, HongKong, China**

Prepared by

Shenzhen United Testing Technology Co., Ltd.

**D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China**

TEST RESULT CERTIFICATION

Applicant : UKEY LIMITED
Address..... : 3A8, 19/F HIP SHING HONGRM CENTRE 55 DES VOEUX
ROADCENTRAL CENTRAL, HongKong, China
Manufacturer : UKEY LIMITED
Address..... : 3A8, 19/F HIP SHING HONGRM CENTRE 55 DES VOEUX
ROADCENTRAL CENTRAL, HongKong, China

Product description

Product : Ukey Core 26
Trade Mark..... : N/A
Model Name : Ukey Core 26

Test Methods : FCC Rules and Regulations Part 15 Subpart C Section 15.225,
ANSI C63.10: 2020


This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... : Jun. 02, 2026 ~ Aug. 24, 2026
Date of Issue : Aug. 25, 2026
Test Result..... : Pass

Edited by:




Abe Yang

Reviewed by:



Kelly Cheng

Approved by:



Liuze

Table of Contents	Pages
1 TEST SUMMARY	4
1.1 TEST PROCEDURES AND RESULTS	4
1.2 TEST FACILITY	5
1.3 MEASUREMENT UNCERTAINTY	6
1.4 ENVIRONMENTAL CONDITIONS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 TEST MODE	8
2.3 TEST SETUP	8
2.4 EQUIPMENT USED IN TESTED SYSTEM	8
2.5 MEASUREMENT INSTRUMENTS LIST	9
3 CONDUCTED EMISSION	10
3.1 TEST LIMIT	10
3.2 TEST SETUP	10
3.3 TEST PROCEDURE	10
3.4 TEST RESULT	11
4 RADIATED EMISSION	14
4.1 TEST LIMIT	14
4.2 TEST SETUP	15
4.3 TEST PROCEDURE	16
4.4 TEST RESULT	16
5 20DB BANDWIDTH	21
5.1 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	21
5.2 MEASUREMENT EQUIPMENT USED	21
5.3 TEST PROCEDURE	21
5.4 TEST RESULT	22
6 ANTENNA REQUIREMENT	23
7 PHOTO OF TEST	24

1 TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

Item	FCC Rules	Description of Test	Result
1	§15.225&15.209	Radiated Emission	Compliant
2	§15.215	20dB bandwidth	Compliant
3	§15.207	Conducted Emission	Pass
4	FCC Part 15.203	Antenna Requirement	Pass

Note:

“N/A” denotes test is not applicable in this Test Report.

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
Address : D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 31584

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
UNI	ANSI	9kHz ~ 150kHz	2.96	--
		150kHz ~ 30MHz	2.44	--

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
UNI	ANSI	9kHz ~ 30MHz	2.50	--
		30MHz ~ 1000MHz	4.80	--
		Above 1000MHz	4.13	--

C. RF Conducted Method:

Item	Measurement Uncertainty
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$

1.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (°C)	15 - 35	-20 - 50
Relative humidity range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT


Product:	Ukey Core 26
Trade Name:	N/A
Main Model:	Ukey Core 26
Additional Model:	N/A
Model Difference:	N/A
FCC ID:	2BW6Y-UKEYCORE26
Operation Frequency:	13.56MHz
Number of Channels:	1CH
Field Strength of Fundamental:	37.17dBuV/m(Average)@3m
Modulation Type:	FSK
Antenna Type:	Coil antenna
Antenna Gain:	0dBi
Battery:	DC 3.7V, 620mAh
Adapter:	N/A
Power Source:	DC 5V by adapter or DC 3.7V by battery

2.2 TEST MODE

No.	Test Mode Description
1	Transmitting mode (13.56MHz)
Note: 1. All the test modes can be supply by new battery, and only the data of the worst case recorded in the test report. 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.	

2.3 TEST SETUP


Operation of EUT during Conducted testing:



Operation of EUT during Radiation testing:



Operation of EUT during RF Conducted testing:

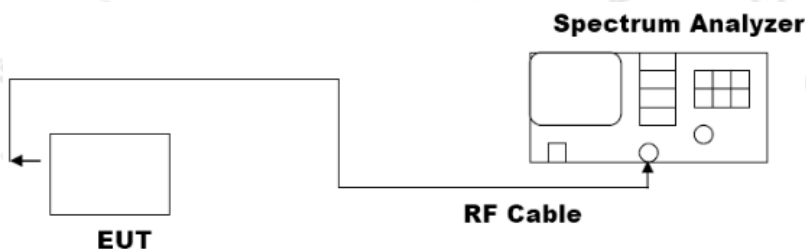

2.4 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model/Type No.	Cable Length(m)	Note
1	Ukey Core 26	Ukey Core 26	--	EUT
2	Adapter	--	--	AE

Note:

- The support equipment was authorized by Declaration of Confirmation.
- All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Conduction Emissions Measurement					
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2027.03.25
3	AAN	TESEQ	T8-Cat6	38888	2027.03.25
4	Pulse Limiter	CYBRTEK	EM5010	E115010056	2027.03.25
5	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2027.03.25
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2027.03.27
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2027.03.27
4	PREAMP	HP	8449B	3008A00160	2027.03.29
5	PREAMP	HP	8447D	2944A07999	2027.03.25
6	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2027.03.25
7	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2027.03.25
8	Signal Generator	Agilent	E4421B	MY4335105	2027.03.25
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2027.03.25
10	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2027.03.25
11	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2027.03.26
12	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2027.03.26
13	RF power divider	Anritsu	K241B	992289	2027.03.26
14	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2027.03.25
15	Active Loop Antenna	Com-Power	AL-130R	10160009	2027.05.26
16	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2027.03.25
17	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2027.03.25
18	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2027.03.25
19	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2027.03.26
20	Signal Generator	Agilent	N5183A	MY47420153	2027.03.27
21	Spectrum Analyzer	Rohde&Schwarz	FSP 40	100501	2027.03.27
22	Power Meter	KEYSIGHT	N1911A	MY50520168	2027.03.27
23	Frequency Meter	VICTOR	VC2000	997406086	2027.03.27
24	DC Power Source	HYELEC	HY5020E	055161818	2027.03.27
25	Low-noise Amplifier	WSC	DLNA-9K-1000	WCSLNA240816A	2027.03.25
26	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101798	2027.06.25
27	MTS 8310	MW	Copyright MWRFTest 2017	V2.0.0.0	N/A

3 CONDUCTED EMISSION

3.1 TEST LIMIT


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dBuV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 TEST SETUP

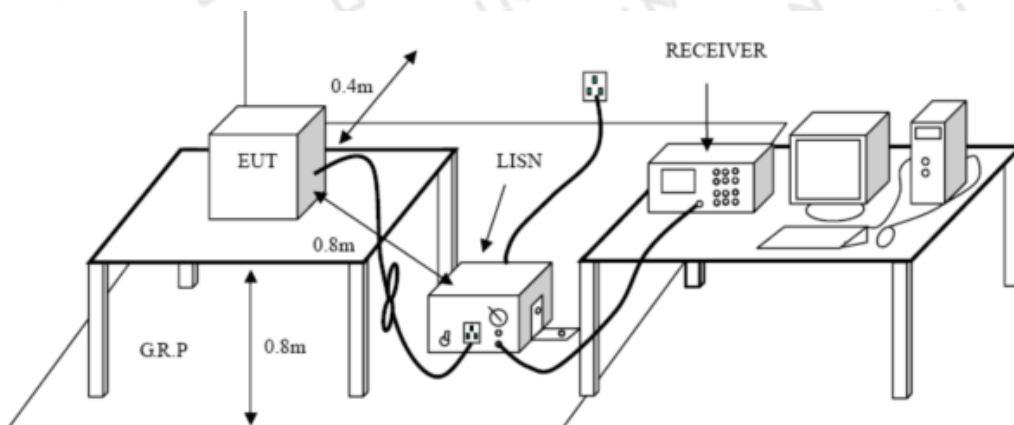

3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.


3.4 TEST RESULT

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.


Temperature:	26°C	Relative Humidity:	60%
Test Date:	Jun. 02, 2026	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of 13.56MHz		

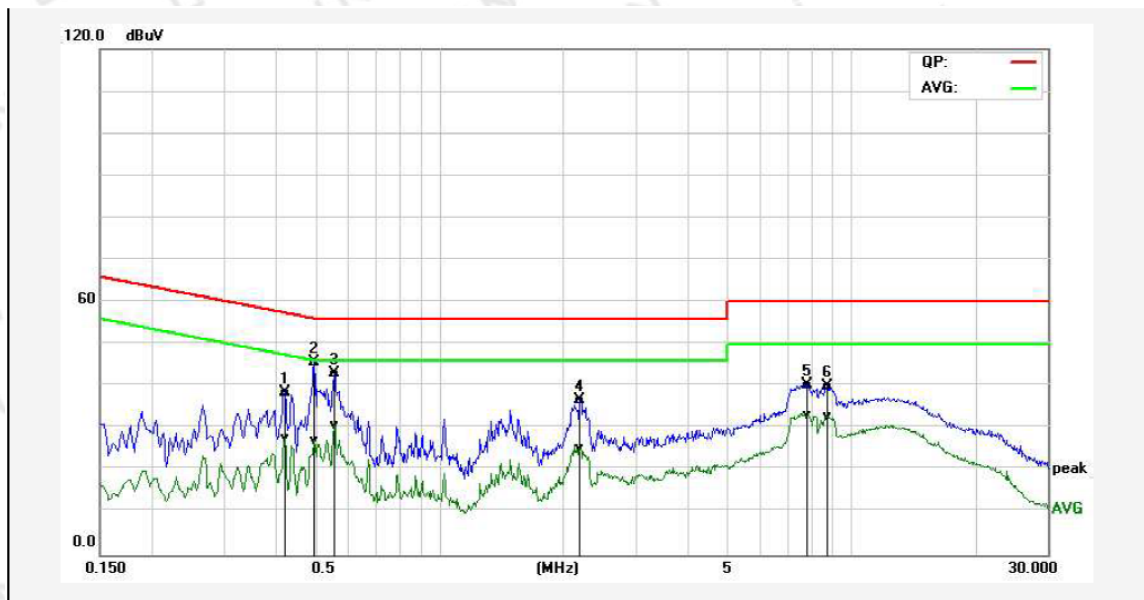

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.4220	27.65	16.88	10.88	38.53	27.76	57.41	47.41	-18.88	-19.65	Pass
2*	0.4980	34.96	16.21	10.92	45.88	27.13	56.03	46.03	-10.15	-18.90	Pass
3P	0.5580	32.26	19.73	10.93	43.19	30.66	56.00	46.00	-12.81	-15.34	Pass
4P	2.1940	25.49	13.96	11.31	36.80	25.27	56.00	46.00	-19.20	-20.73	Pass
5P	7.8380	27.71	20.51	12.56	40.27	33.07	60.00	50.00	-19.73	-16.93	Pass
6P	8.7299	27.14	20.06	12.85	39.99	32.91	60.00	50.00	-20.01	-17.09	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	26°C	Relative Humidity:	60%
Test Date:	Jun. 02, 2026	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of 13.56MHz		

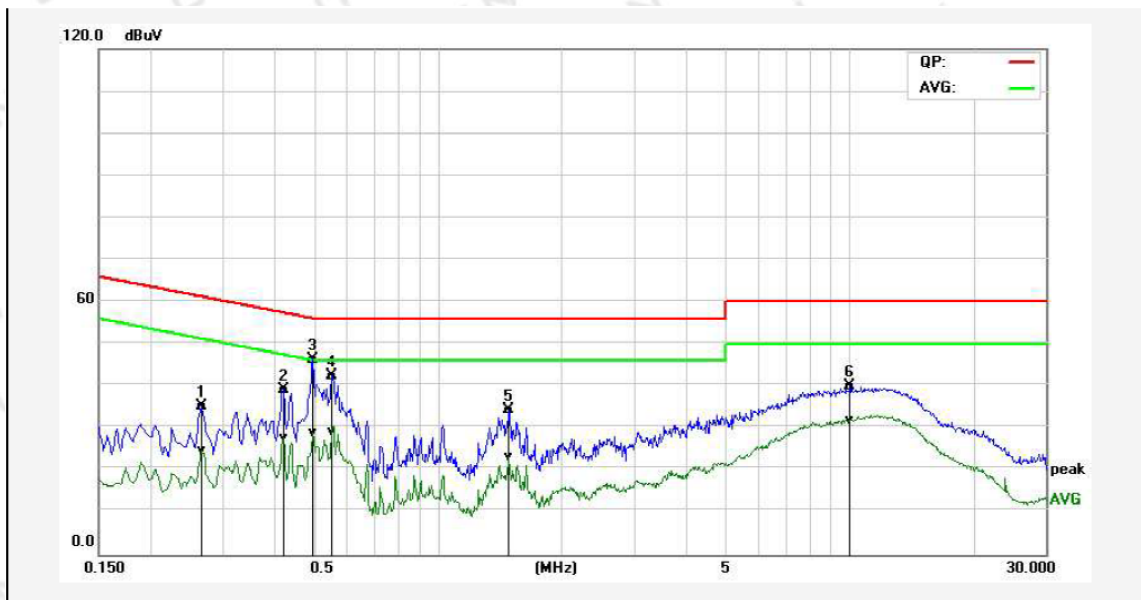

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.2660	24.52	13.93	10.77	35.29	24.70	61.24	51.24	-25.95	-26.54	Pass
2P	0.4220	28.18	16.90	10.88	39.06	27.78	57.41	47.41	-18.35	-19.63	Pass
3*	0.4980	35.28	18.08	10.92	46.20	29.00	56.03	46.03	-9.83	-17.03	Pass
4P	0.5540	31.64	18.25	10.93	42.57	29.18	56.00	46.00	-13.43	-16.82	Pass
5P	1.4900	23.36	12.07	11.12	34.48	23.19	56.00	46.00	-21.52	-22.81	Pass
6P	10.0420	26.82	18.73	13.29	40.11	32.02	60.00	50.00	-19.89	-17.98	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4 RADIATED EMISSION

4.1 TEST LIMIT

For unintentional device, according to § 15.209(a), except for Class B digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F (kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

§15.225 Limit:


- The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15848 microvolts/meter at 30 meters
- Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Field strength of the fundamental signal:


Frequency (MHz)	Field Strengths Limit ($\mu\text{V}/\text{m}@30\text{m}$)	Field Strengths Limit (dB $\mu\text{V}/\text{m}@30\text{m}$)	Field Strengths Limit (dB $\mu\text{V}/\text{m} @3\text{m}$)
13.553-13.567	15848	84.00	124.00
13.410 ~ 13.553 13.567 ~ 13.710	334	50.47	90.47
13.110 ~ 13.410 13.710 ~ 14.010	106	40.51	80.51

4.2 TEST SETUP

1. Radiated Emission Test-Up Frequency Below 30MHz

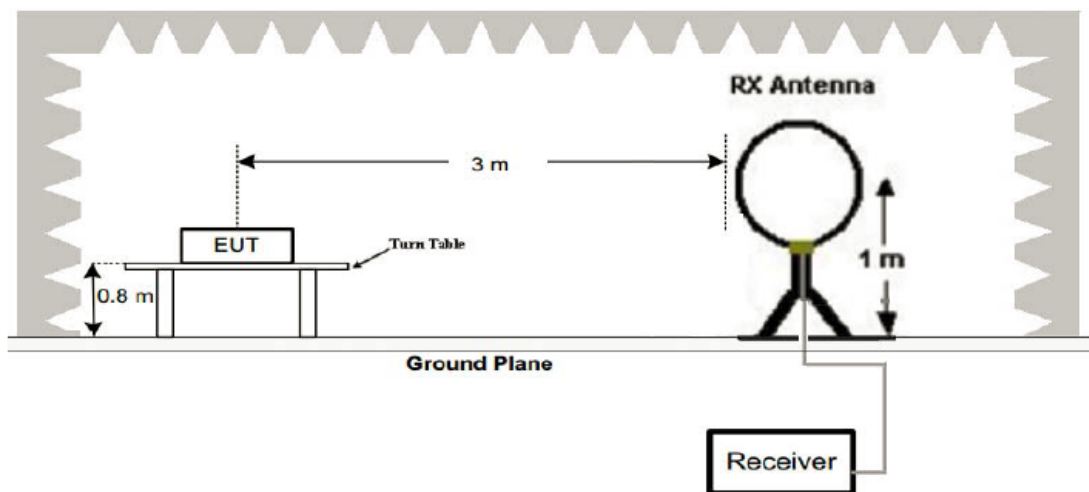

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

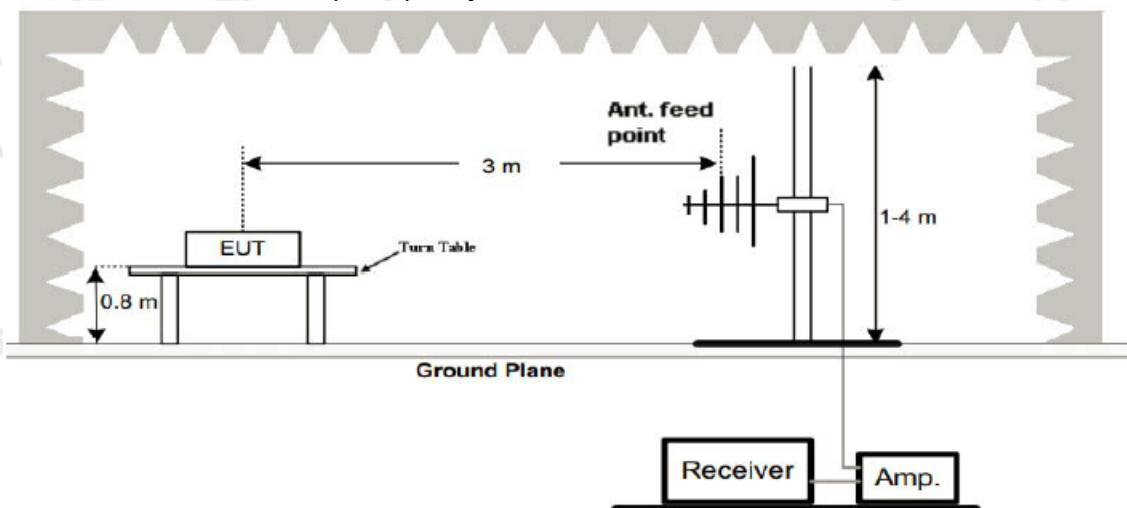

4.3 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to 1GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Broadband Hybrid Antenna	3

Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP

4.4 TEST RESULT


PASS

Remark:

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.

Emission Mask: FCC15.225 (a)(b)(c)

Temperature:	25°C	Relative Humidity:	60%
Test Date:	Aug. 24, 2026	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz		
Test Mode:	Transmitting mode of 13.56MHz		
Phase:	Face		

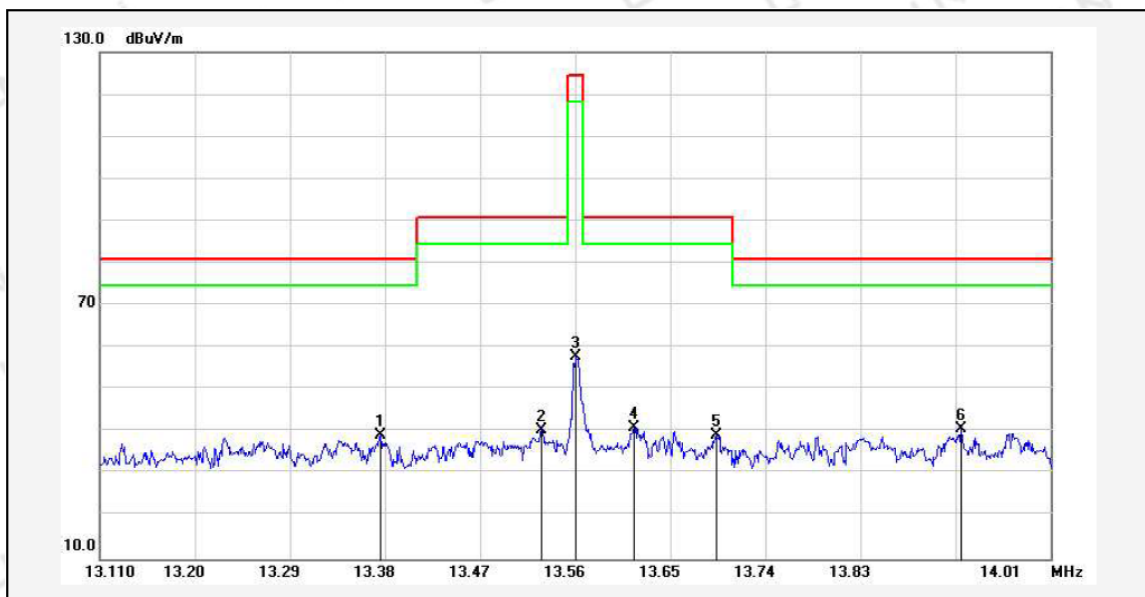


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	13.3755	68.47	-29.29	39.18	80.50	-41.32	165	100	QP
2	13.5282	69.80	-29.29	40.51	90.47	-49.96	121	100	QP
3	13.5610	87.19	-29.29	57.90	124.00	-66.10	119	100	QP
4	13.6158	70.27	-29.29	40.98	90.47	-49.49	155	100	QP
5	13.6930	68.41	-29.29	39.12	90.47	-51.35	88	100	QP
6*	13.9253	70.15	-29.28	40.87	80.50	-39.63	103	100	QP

RADIATED EMISSION

BELOW 30MHZ

Temperature:	25℃	Relative Humidity:	60%
Test Date:	Jun. 03, 2026	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz		
Test Mode:	Transmitting mode of 13.56MHz		
Phase:	Face		

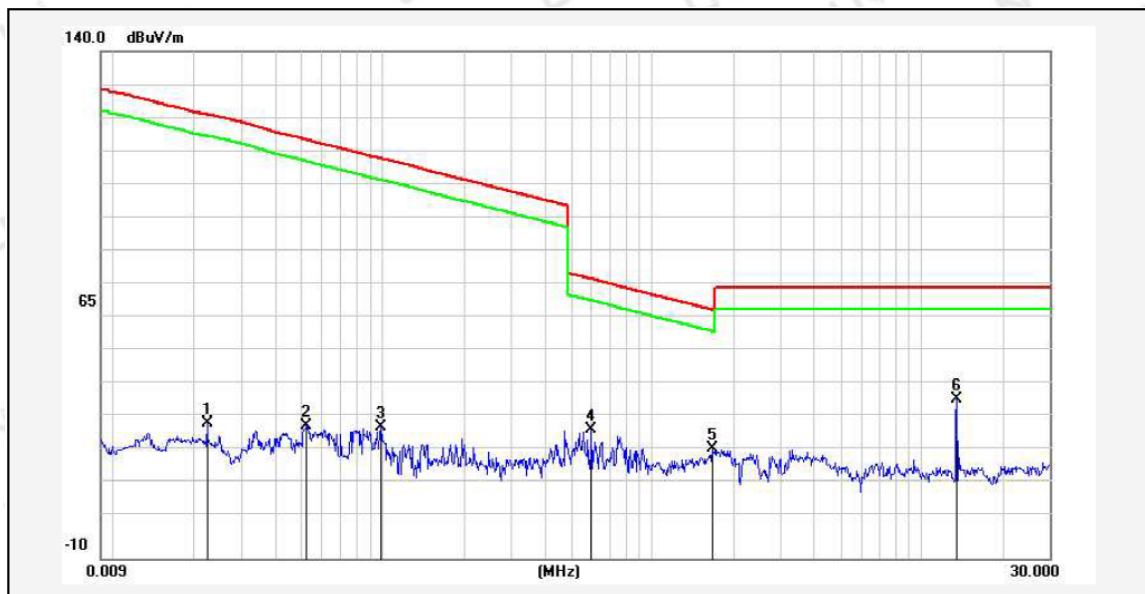

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	0.0223	55.14	-25.10	30.04	120.89	-90.85	185	100	QP
2	0.0522	55.22	-26.06	29.16	113.41	-84.25	142	100	QP
3	0.0985	54.32	-25.54	28.78	107.89	-79.11	111	100	QP
4	0.5964	52.51	-24.45	28.06	72.29	-44.23	133	100	QP
5	1.6710	47.63	-25.33	22.30	63.14	-40.84	146	100	QP
6*	13.5625	62.54	-25.37	37.17	69.54	-32.37	175	100	QP

Note:

1. The level of peak emission is less than the average limit, so the level of average emission need not to be tested. Other emissions from 9kHz to 30MHz are considered as ambient noise. No recording in the test report.


2. $\text{Level(dBuV/m)} = \text{Reading(dBuV)} + \text{Factor(dB/m)}$

$\text{Factor(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable loss(dB)} + \text{Attenuation(dB) for Attenuator}$

$\text{Margin} = \text{Level} - \text{Limit}$


30MHz-1GHz Test Results:

Temperature:	25°C	Relative Humidity:	60%
Test Date:	Jun. 03, 2026	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Horizontal
Test Mode:	Transmitting mode of 13.56MHz		

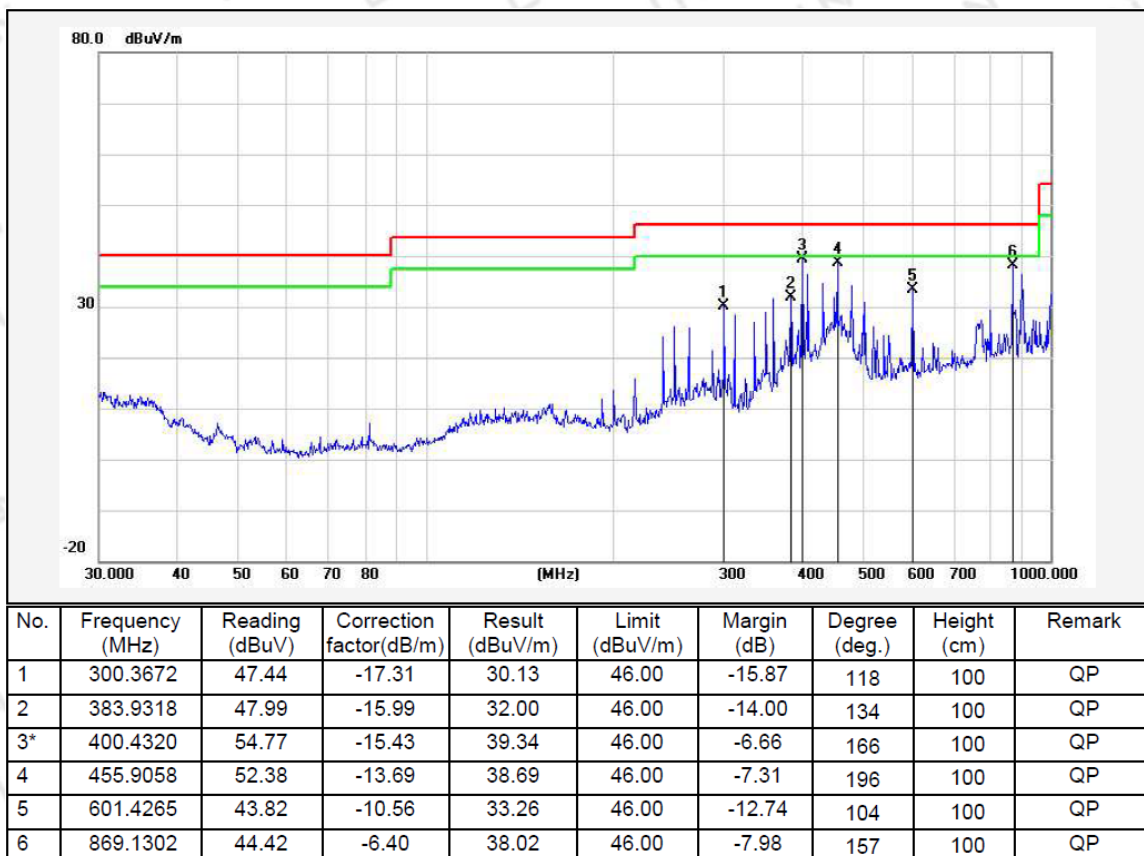

Remark: Result = Reading Level + Factor, Margin = Result – Limit
Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	25°C	Relative Humidity:	60%
Test Date:	Jun. 03, 2026	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Vertical
Test Mode:	Transmitting mode of 13.56MHz		

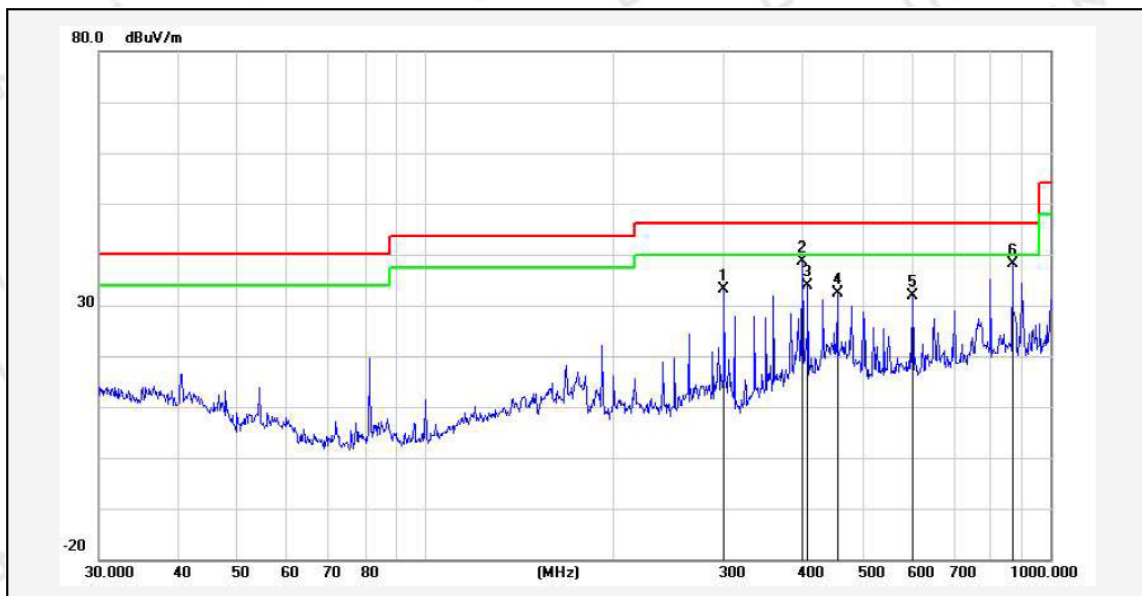

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	300.3672	50.47	-17.31	33.16	46.00	-12.84	107	100	QP
2*	400.4320	54.02	-15.43	38.59	46.00	-7.41	141	100	QP
3	408.9460	49.14	-15.37	33.77	46.00	-12.23	162	100	QP
4	455.9058	45.95	-13.69	32.26	46.00	-13.74	155	100	QP
5	601.4265	42.41	-10.56	31.85	46.00	-14.15	183	100	QP
6	869.1302	44.60	-6.40	38.20	46.00	-7.80	127	100	QP


Remark: Result = Reading Level + Factor, Margin = Result – Limit
Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

1. Measuring frequencies from 9 kHz to the 1 GHz, Radiated emission test from 9kHz to 30MHz was verified, and no any emission was found except system noise floor.
2. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz.

5 20DB BANDWIDTH

5.1 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

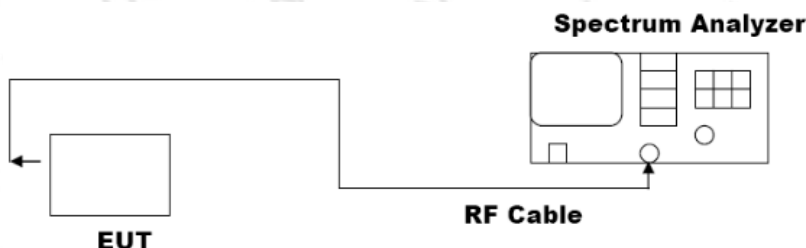

5.2 MEASUREMENT EQUIPMENT USED

Refer to Section 3.3.

5.3 TEST PROCEDURE

1. Set the parameters of SPA as below:
Centre frequency = Operation Frequency
RBW=10kHz
VBW=30kHz
Span=500kHz
Sweep time: Auto
2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the “N dB down” function of SPA to define the bandwidth.
3. Record the plots and Reported.


5.4 TEST RESULT

PASS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	FSK

Test Data (kHz)		Result
Operate Channel	27.82	PASS

TEST PLOT OF BANDWIDTH

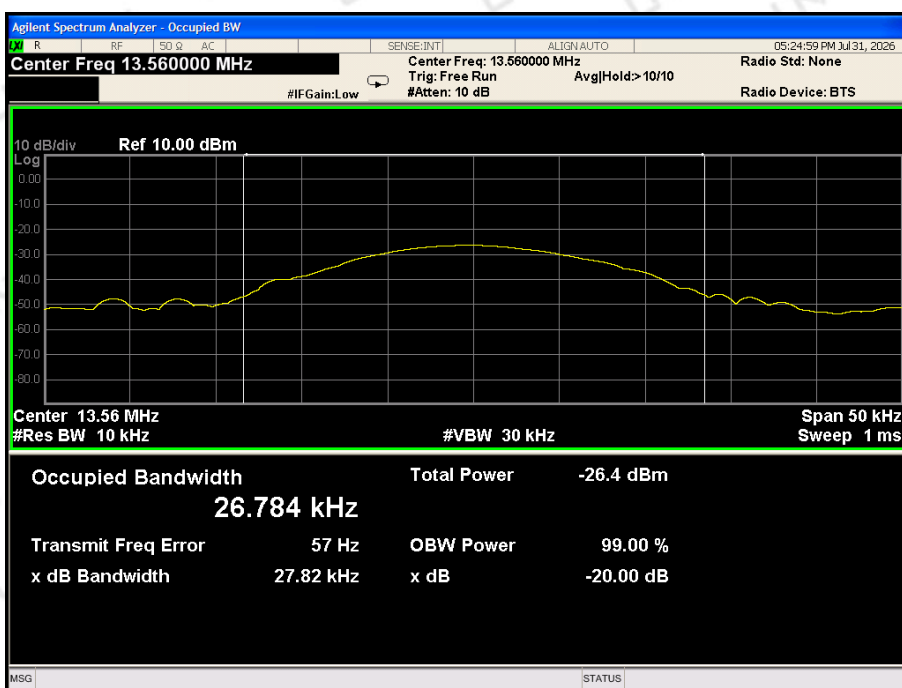

6 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction


The antenna used in this product is a Coil Antenna, The directional gains of antenna used for transmitting is 0dBi.

ANTENNA:

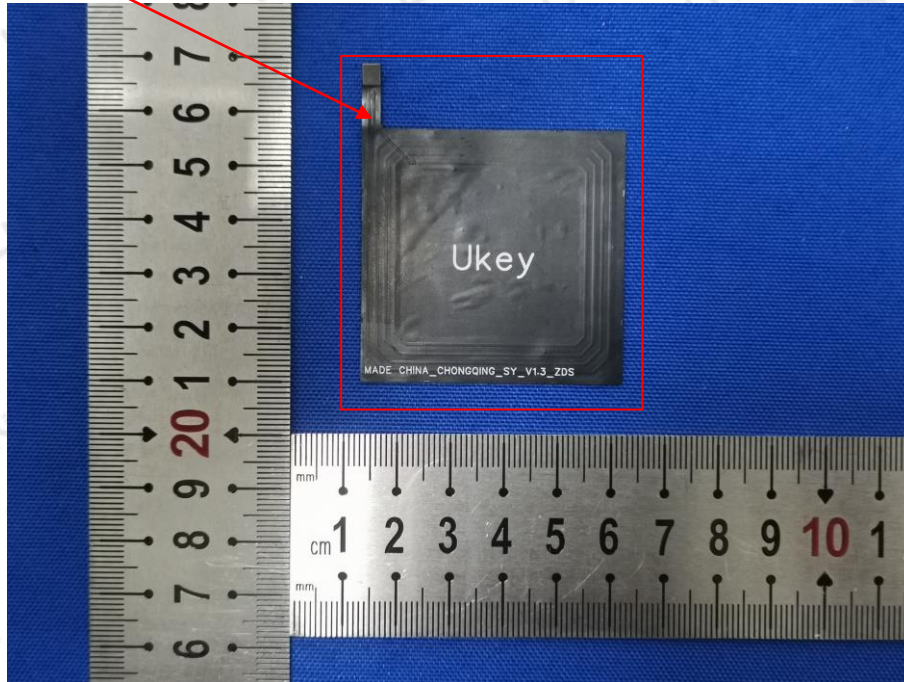


7 PHOTO OF TEST

Radiated Emission

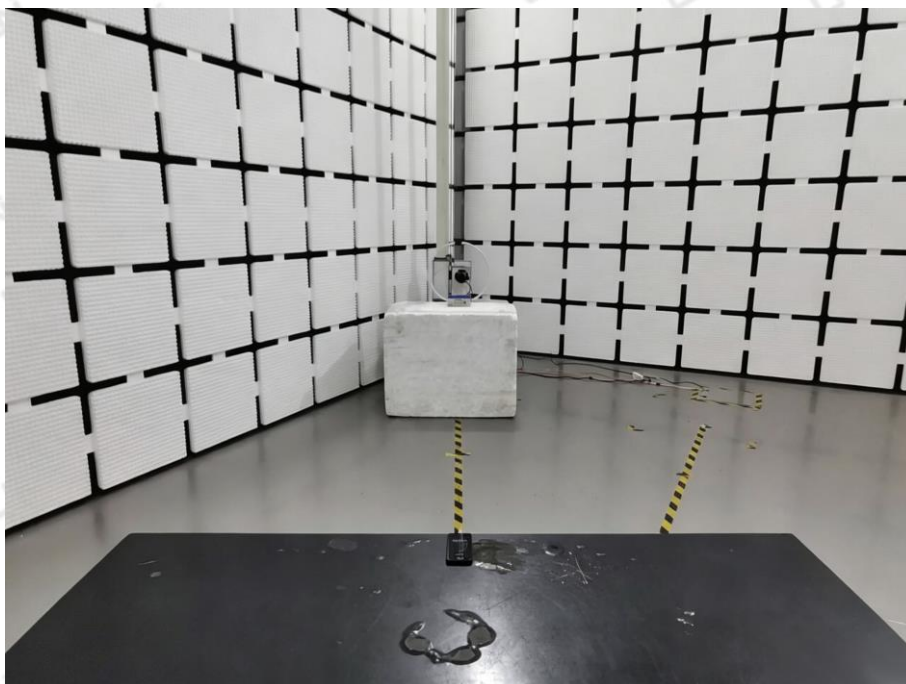


Below 30MHz

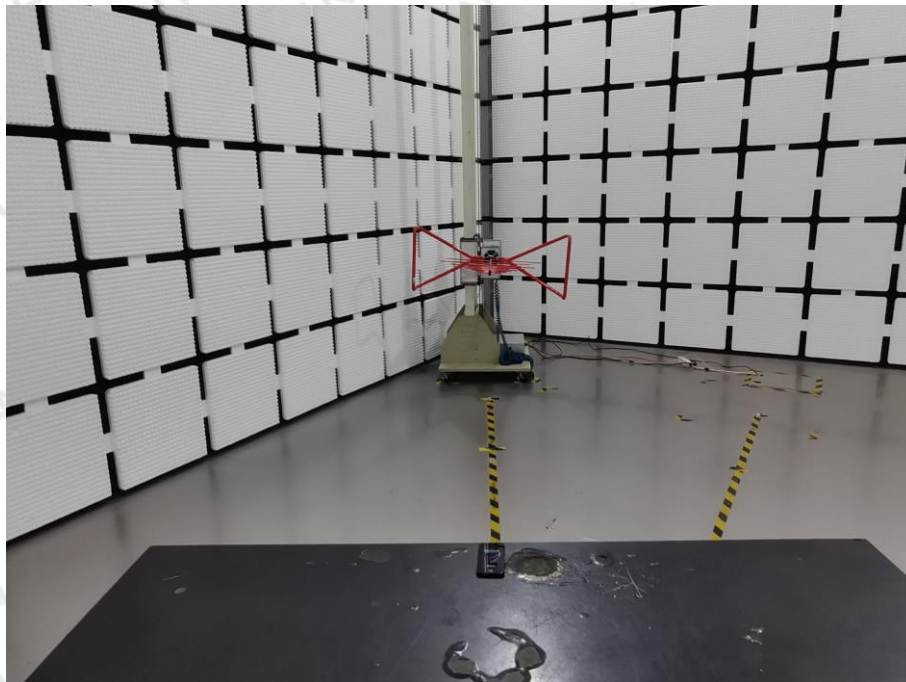

30MHz-1000MHz

Conducted Emission

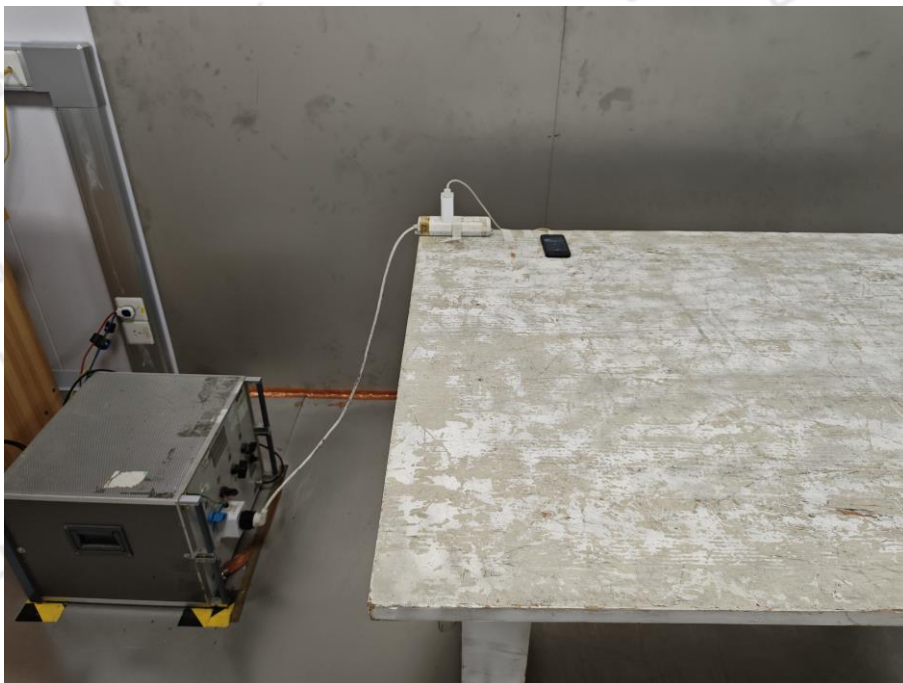

RF Conducted



Statement

1. This report must have the signature of the authorized signatory and the special seal of the report, otherwise it will be considered invalid. If there is no anti-counterfeiting electronic seal of the laboratory in the report in PDF format or it is displayed as "x", the report is invalid.
2. This report shall not be modified, added or deleted without authorization. The antenna gain in the report is provided by the customer.
3. The results of this report are only valid for the EUT provided by Applicant to our laboratory for inspection (That is, EUT received by our laboratory. Without special explanation, it refers to the samples presented in the report "PHOTO OF EUT").
4. If there is any objection to the test data and conclusions of this report, please submit it in writing within 10 working days after the date of issuance of the report.
5. Without the written consent of the laboratory, this report shall not be copied (except for full copy), nor shall it be used as publicity materials or advertising.
6. The cover of the report is for decoration only, not included in the body of the report.
7. The paper report issued by our laboratory has the same effect as the electronic report. In case of any difference between the two, the electronic report shall prevail.
8. The Chinese and English reports issued by our laboratory have the same effect. In case of any difference in understanding, the Chinese version shall prevail.
9. Please provide the complete report documents issued by our laboratory when inquiring the report.
10. For cases where compliance is determined based on test values, when relevant specifications, standards, documents, and customers have no relevant requirements and no other special instructions, the test report issued by this laboratory is carried out in full value and adopts ILAC-G8:09 /2019 "Simple Acceptance Rule" for judgment.
11. In the People's Republic of China, when there is no CMA Accredited Symbol in this report, the report is only for scientific research, teaching or internal quality control activities.

End of Report