

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/8

System Check_H750_0808

DUT: Dipole 750 MHz D750V3;SN:1095;


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.876 \text{ S/m}$; $\epsilon_r = 42.606$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.97, 9.77, 10.6) @ 750 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 37.39 V/m ; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.823 W/kg ; SAR(10 g) = 0.547 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 68.9%
Maximum value of SAR (measured) = 1.08 W/kg

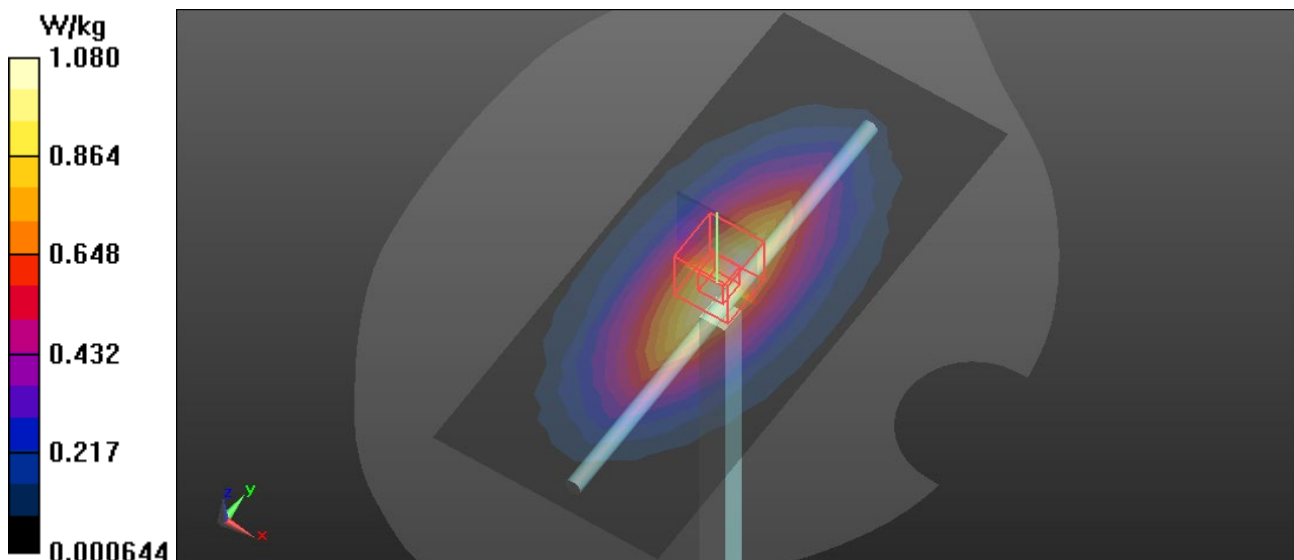

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/18

System Check_H750_0818**DUT: Dipole 750 MHz D750V3;SN:1095;**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.63$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(9.97, 9.77, 10.6) @ 750 MHz; Calibrated:2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.926 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 34.78 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.568 W/kg
Smallest distance from peaks to all points 3 dB below = 16.3 mm
Ratio of SAR at M2 to SAR at M1 = 71%
Maximum value of SAR (measured) = 1.08 W/kg

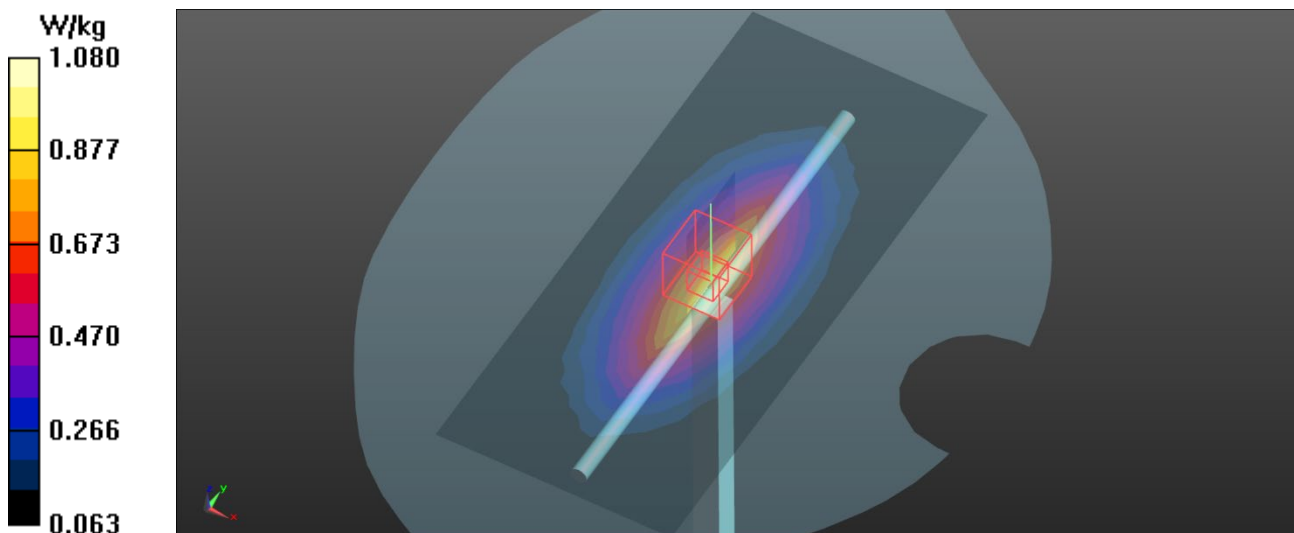

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/7

System Check_H835_0807

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.174$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 835 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.24 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 39.00 V/m ; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 0.949 W/kg ; SAR(10 g) = 0.622 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 68.2%
Maximum value of SAR (measured) = 1.25 W/kg

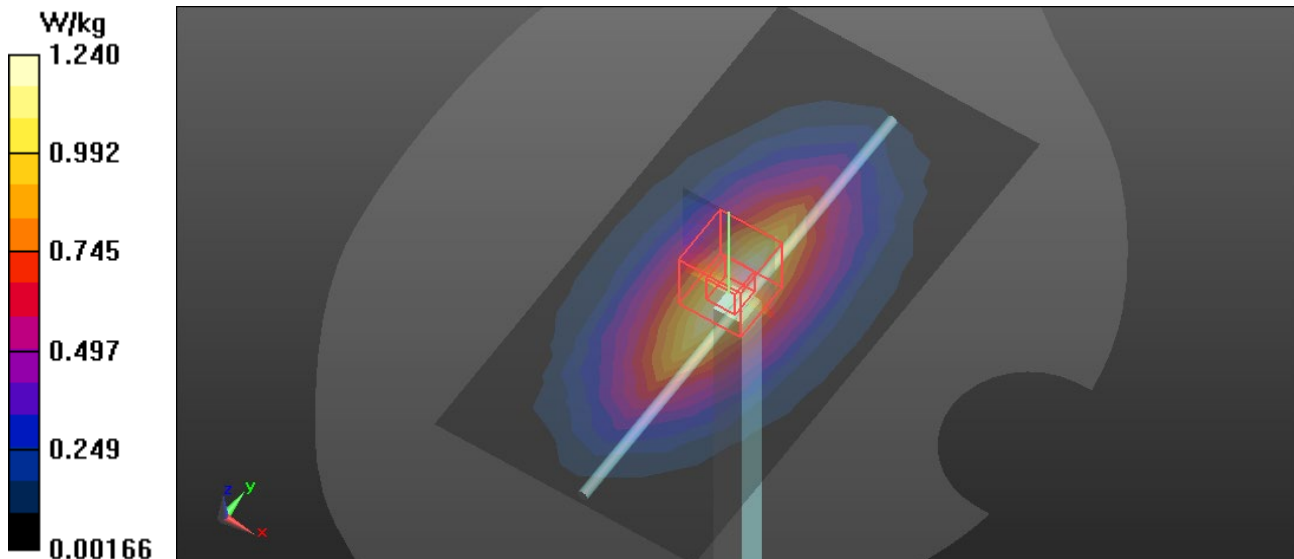

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/8

System Check_H835_0808

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.171$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.75, 9.55, 10.36) @ 835 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.25 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 39.17 V/m ; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.969 W/kg ; SAR(10 g) = 0.636 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 68.3%
Maximum value of SAR (measured) = 1.28 W/kg

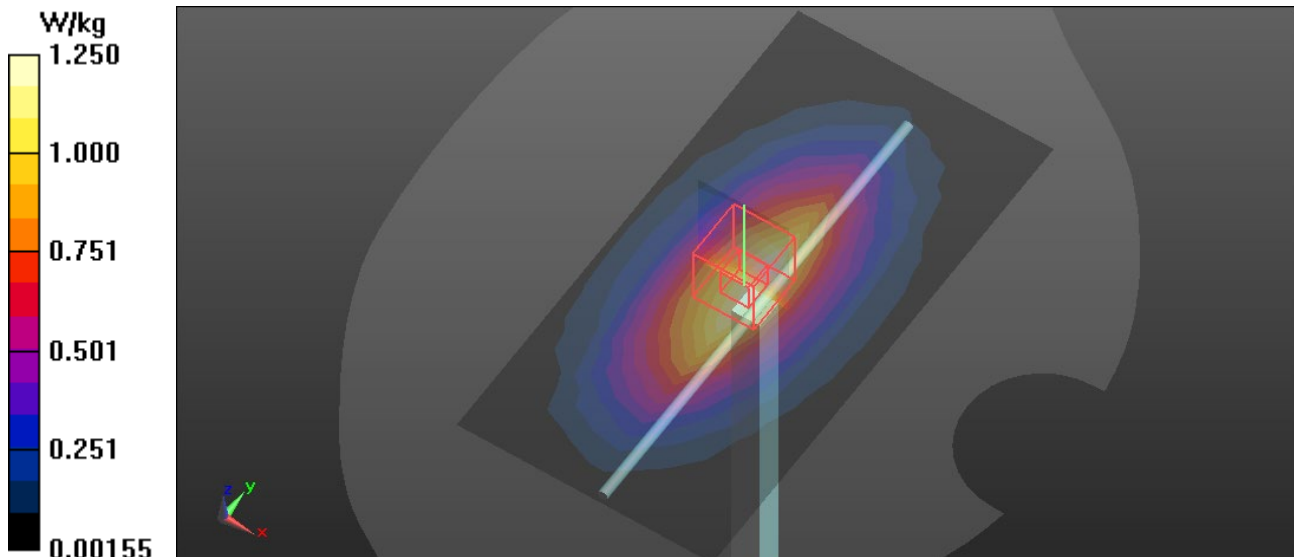

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/18

System Check_H835_0818

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.194$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(9.75,9.55,10.36) @ 835 MHz; Calibrated:2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 38.05 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.934 W/kg ; SAR(10 g) = 0.623 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 70.4%
Maximum value of SAR (measured) = 1.21 W/kg

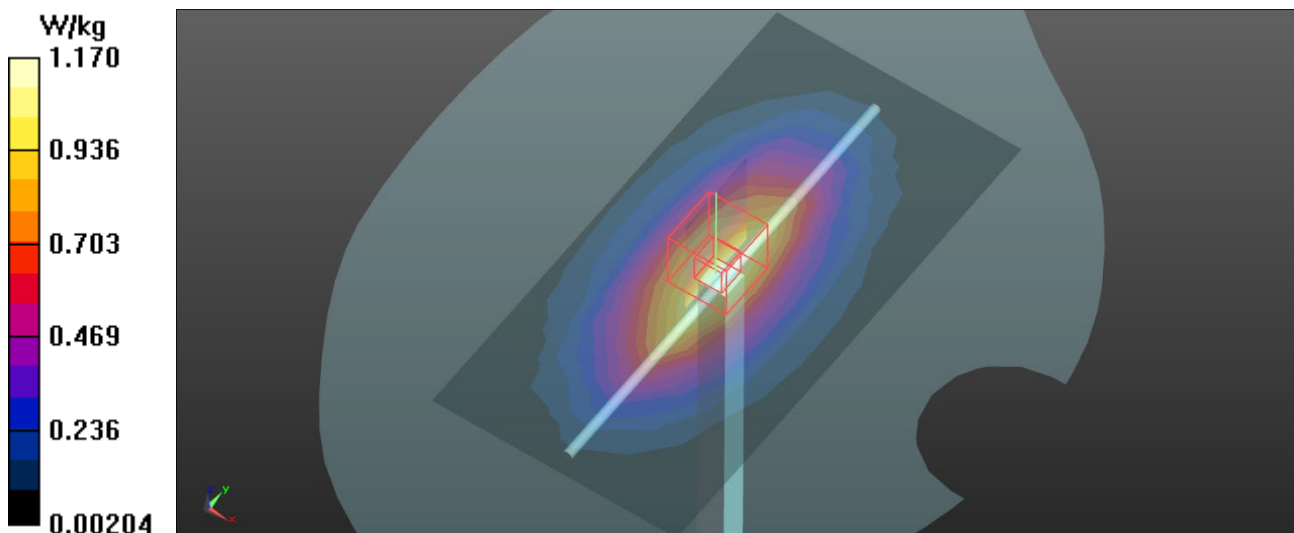

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/7

System Check_H1750_0807**DUT: Dipole 1750 MHz D1750V2;SN:1101;**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 39.036$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(8.21, 8.04, 8.72) @ 1750 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 3.66 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 68.01 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 6.22 W/kg

SAR(1 g) = 3.6 W/kg; SAR(10 g) = 1.93 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 5.36 W/kg

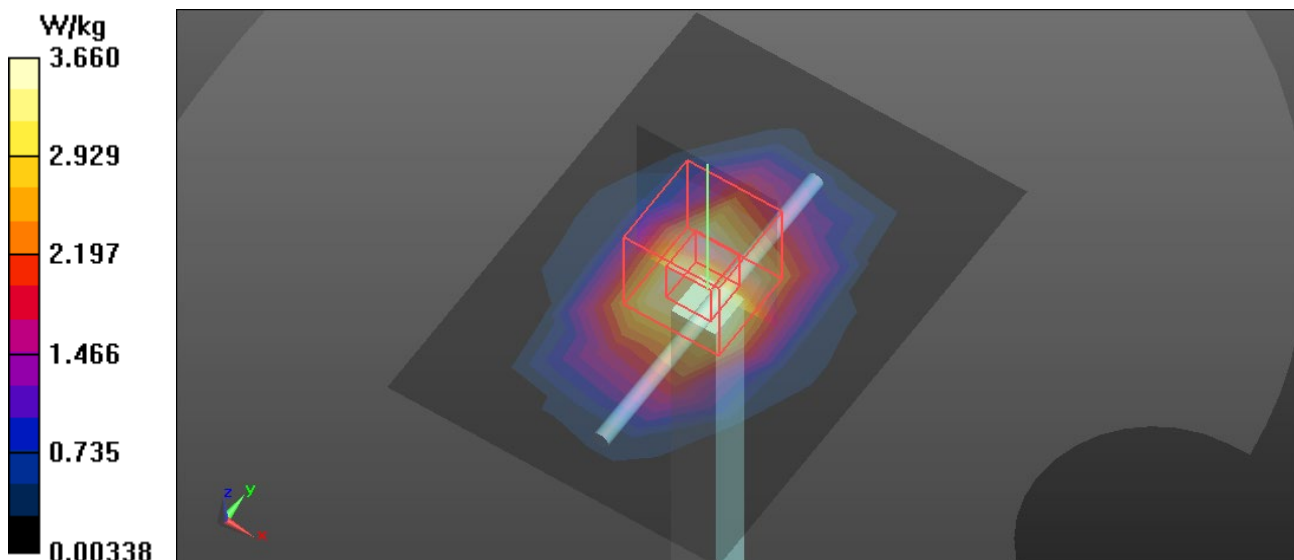

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/18

System Check_H1750_0818**DUT: Dipole 1750 MHz D1750V2;SN:1101;**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.314$ S/m; $\epsilon_r = 39.208$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(8.21,8.04,8.72) @ 1750 MHz; Calibrated:2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 4.35 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 69.39 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 6.28 W/kg

SAR(1 g) = 3.65 W/kg; SAR(10 g) = 1.95 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 5.44 W/kg

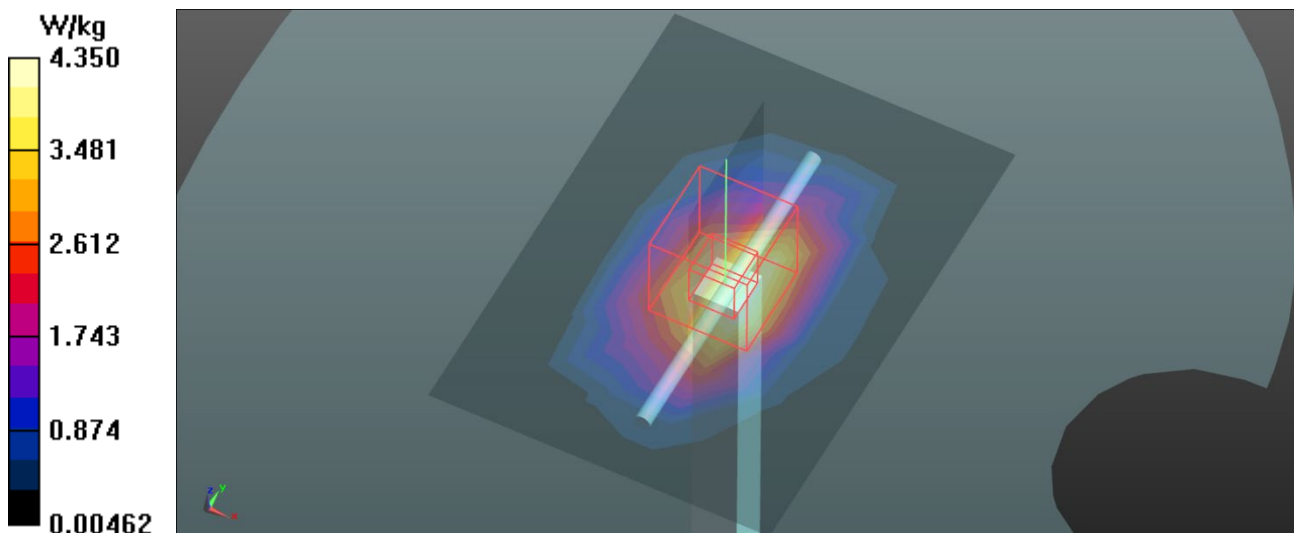

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/7

System Check_H1900_0807

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.342 \text{ S/m}$; $\epsilon_r = 39.214$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.0 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.89, 7.73, 8.39) @ 1900 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Maximum value of SAR (measured) = 4.16 W/kg
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.82 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.77 W/kg
SAR(1 g) = 3.88 W/kg ; SAR(10 g) = 2.05 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

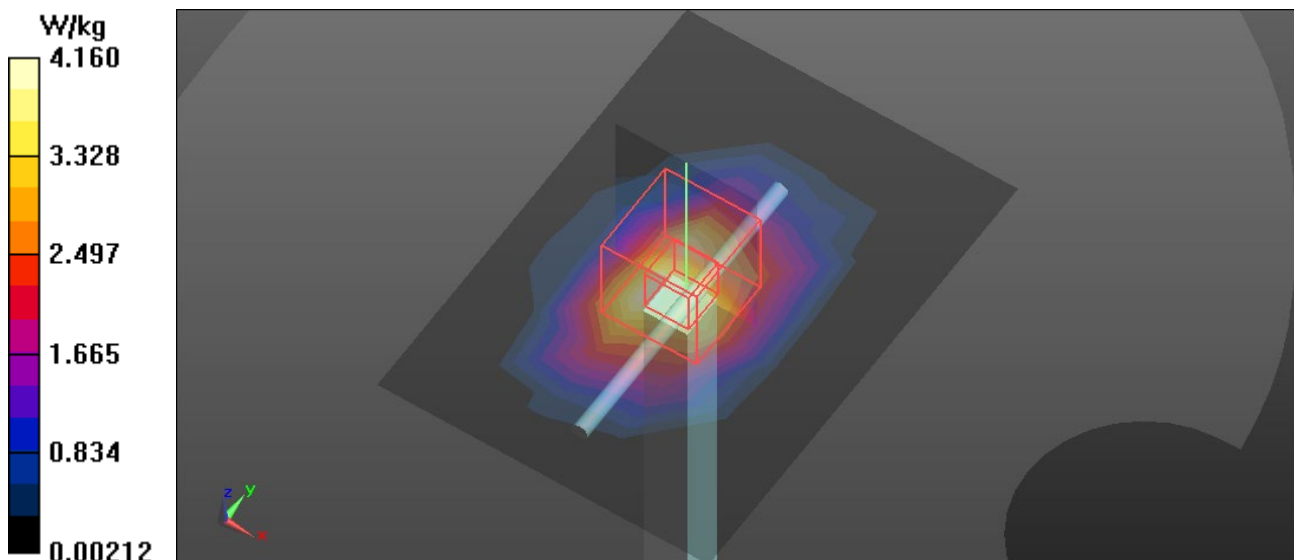Maximum value of SAR (measured) = 5.81 W/kg


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/18

System Check_H1900_0818**DUT: Dipole 1900 MHz D1900V2;SN:5d179;**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.333$ S/m; $\epsilon_r = 39.275$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(7.89,7.73,8.39) @ 1900 MHz; Calibrated:2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (6x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 4.01 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 71.48 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 6.92 W/kg

SAR(1 g) = 3.93 W/kg; SAR(10 g) = 2.05 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 5.89 W/kg

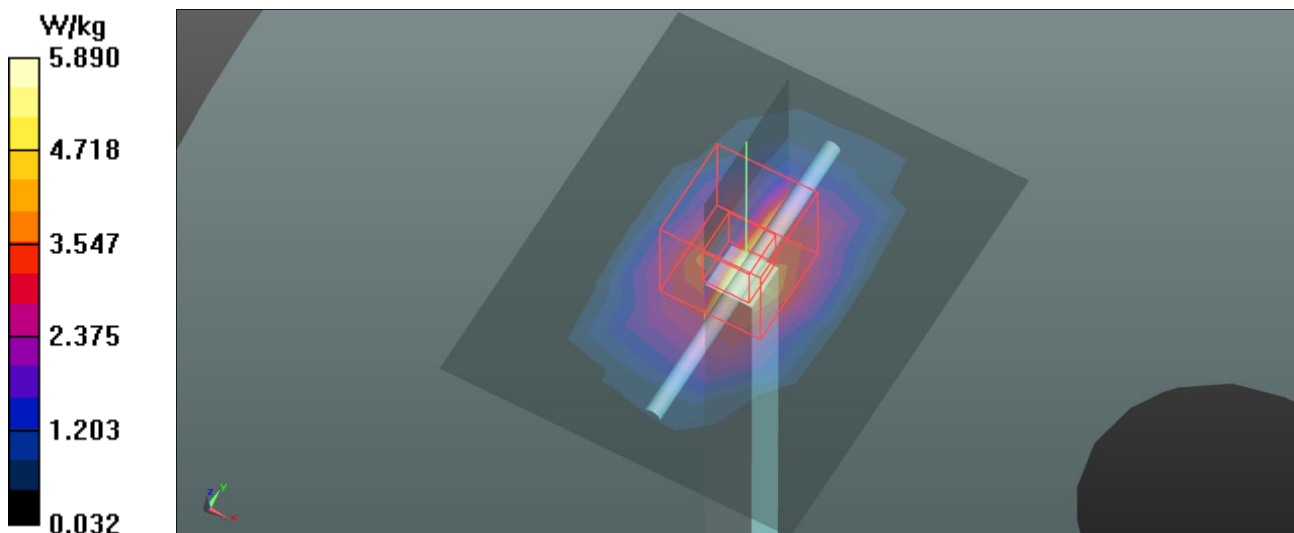

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/9

System Check_H2450_0809**DUT: Dipole 2450 MHz D2450V2;SN:919;**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.952$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.29, 7.14, 7.75) @ 2450 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 5.97 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 69.97 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 9.84 W/kg

SAR(1 g) = 5.07 W/kg; SAR(10 g) = 2.39 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 8.13 W/kg

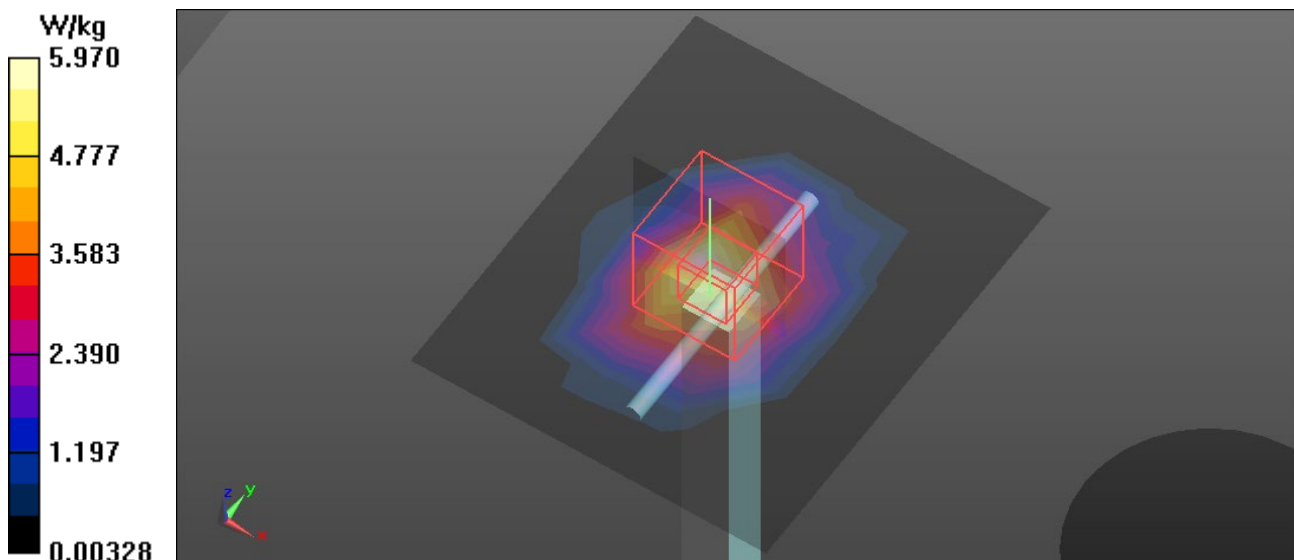

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/19

System Check_H2450_0819

DUT: Dipole 2450 MHz D2450V2;SN:919;

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 38.998$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.0 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(7.29,7.14,7.75) @ 2450 MHz; Calibrated:2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 6.31 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 71.07 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 5.23 W/kg; SAR(10 g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 8.37 W/kg

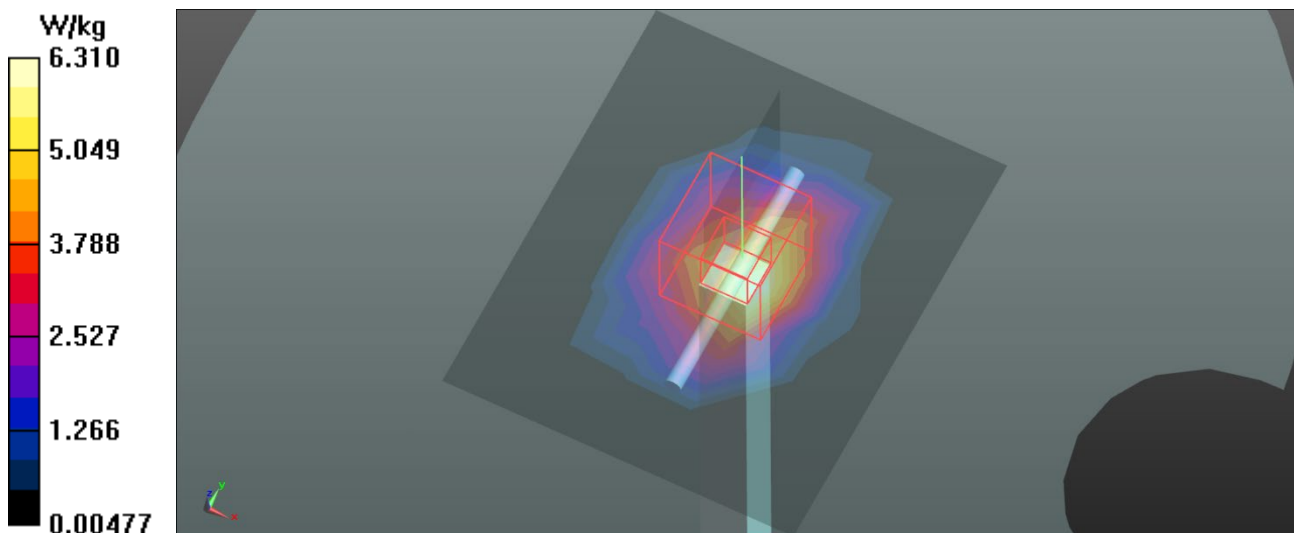

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/6

System Check_H2600_0806

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 39.326$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.17, 7.03, 7.62) @ 2600 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 7.20 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 72.83 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.57 W/kg; SAR(10 g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 9.64 W/kg

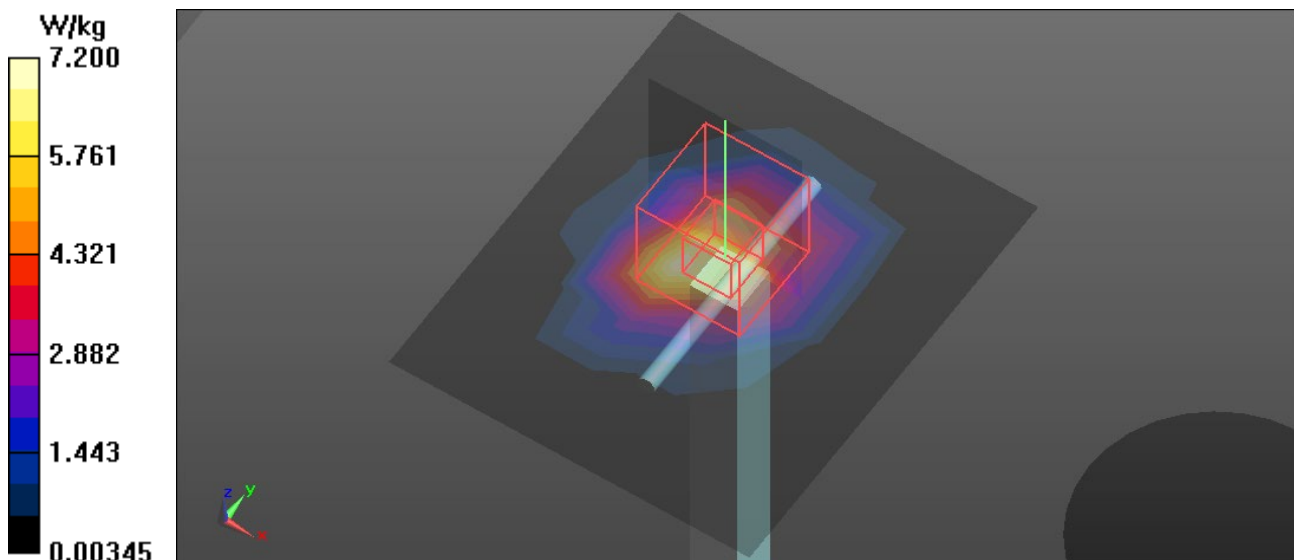

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/8/18

System Check_H2600_0818

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.006$ S/m; $\epsilon_r = 38.452$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(7.17,7.03,7.62) @ 2600 MHz; Calibrated:2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 5.98 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 70.94 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 5.47 W/kg; SAR(10 g) = 2.44 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 9.17 W/kg

