

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907


EMCTT_ERE011-A02-05_1GHz-18GHz_With PreAMP EXT

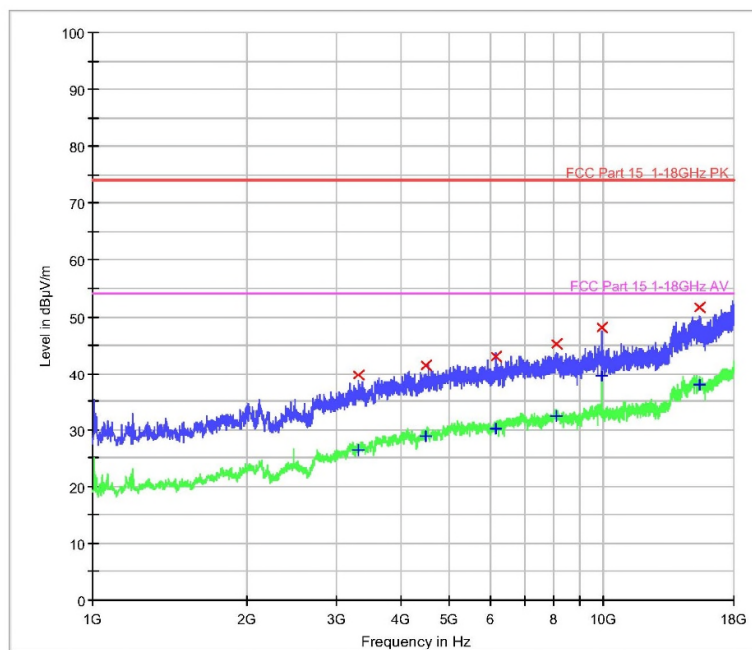

Tested by:


20260814

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
3316.000000	39.6	1000.0	1000.000	H	-16.0	34.4	74.0
4476.500000	41.5	1000.0	1000.000	H	-12.9	32.5	74.0
6159.500000	43.1	1000.0	1000.000	H	-10.3	30.9	74.0
8067.500000	45.2	1000.0	1000.000	H	-8.0	28.8	74.0
9906.000000	48.1	1000.0	1000.000	H	-6.3	25.9	74.0
15390.500000	51.6	1000.0	1000.000	H	-1.9	22.4	74.0


Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
3316.000000	26.4	1000.0	1000.000	H	-16.0	27.6	54.0
4476.500000	28.9	1000.0	1000.000	H	-12.9	25.1	54.0
6159.500000	30.2	1000.0	1000.000	H	-10.3	23.8	54.0
8067.500000	32.4	1000.0	1000.000	H	-8.0	21.6	54.0
9906.000000	39.4	1000.0	1000.000	H	-6.3	14.6	54.0
15390.500000	37.9	1000.0	1000.000	H	-1.9	16.1	54.0

Tested by:


20260814

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_ERE011-A02-05_1GHz-18GHz_With PreAMP EXT

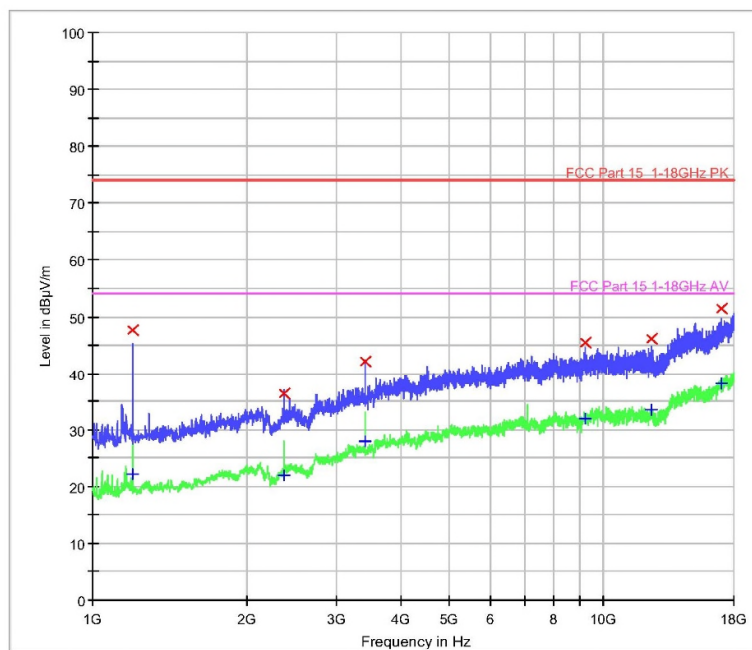

Tested by:

Jason Li
20260814

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1197.500000	47.6	1000.0	1000.000	V	-24.0	26.4	74.0
2370.500000	36.4	1000.0	1000.000	V	-19.4	37.6	74.0
3416.000000	42.1	1000.0	1000.000	V	-15.7	31.9	74.0
9189.500000	45.5	1000.0	1000.000	V	-6.7	28.5	74.0
12392.000000	46.0	1000.0	1000.000	V	-5.4	28.0	74.0
16984.000000	51.5	1000.0	1000.000	V	0.8	22.5	74.0


Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1197.500000	22.3	1000.0	1000.000	V	-24.0	31.8	54.0
2370.500000	22.0	1000.0	1000.000	V	-19.4	32.0	54.0
3416.000000	27.9	1000.0	1000.000	V	-15.7	26.1	54.0
9189.500000	31.9	1000.0	1000.000	V	-6.7	22.1	54.0
12392.000000	33.4	1000.0	1000.000	V	-5.4	20.6	54.0
16984.000000	38.2	1000.0	1000.000	V	0.8	15.8	54.0

Tested by:


20260814

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_ERE011-A02-05_1GHz-18GHz_With PreAMP EXT

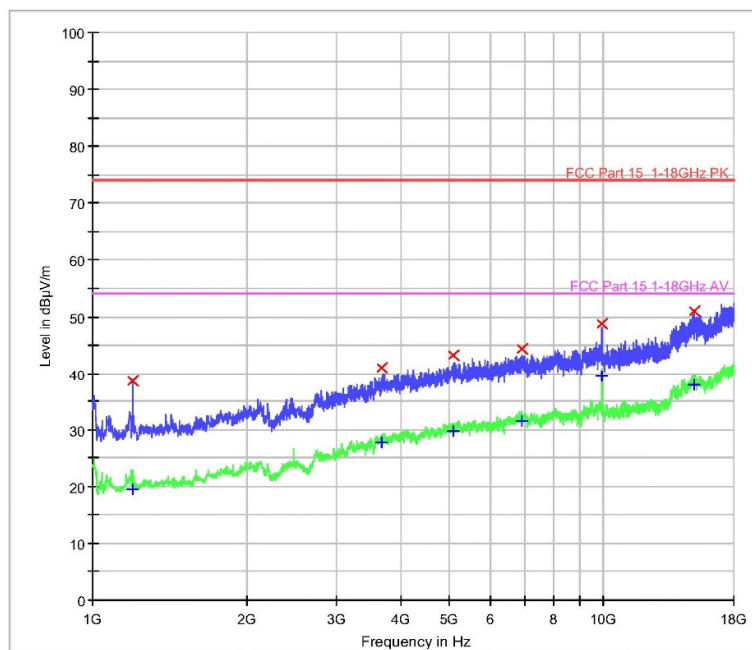

Tested by:

Janson Li
20260814

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1195.500000	38.6	1000.0	1000.000	H	-24.0	35.4	74.0
3690.000000	41.0	1000.0	1000.000	H	-14.8	33.1	74.0
5073.500000	43.3	1000.0	1000.000	H	-11.6	30.7	74.0
6905.500000	44.4	1000.0	1000.000	H	-9.0	29.6	74.0
9906.000000	48.7	1000.0	1000.000	H	-6.3	25.3	74.0
15042.000000	51.0	1000.0	1000.000	H	-1.9	23.0	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1195.500000	19.6	1000.0	1000.000	H	-24.0	34.4	54.0
3690.000000	27.7	1000.0	1000.000	H	-14.8	26.4	54.0
5073.500000	29.6	1000.0	1000.000	H	-11.6	24.4	54.0
6905.500000	31.5	1000.0	1000.000	H	-9.0	22.5	54.0
9906.000000	39.5	1000.0	1000.000	H	-6.3	14.5	54.0
15042.000000	38.0	1000.0	1000.000	H	-1.9	16.0	54.0

Tested by:


20260814

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	1GHz-18GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_ERE011-A02-05_1GHz-18GHz_With PreAMP EXT

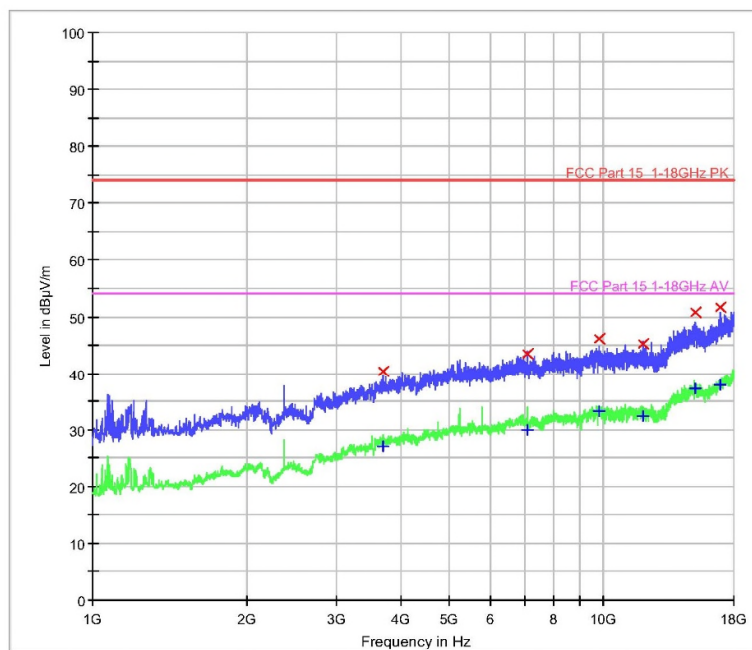

Tested by:

Janson Li
20260814

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
3696.500000	40.4	1000.0	1000.000	V	-14.8	33.6	74.0
7115.500000	43.4	1000.0	1000.000	V	-8.9	30.6	74.0
9789.000000	46.1	1000.0	1000.000	V	-6.2	27.9	74.0
11943.500000	45.2	1000.0	1000.000	V	-5.7	28.8	74.0
15165.000000	50.7	1000.0	1000.000	V	-1.9	23.3	74.0
16914.000000	51.7	1000.0	1000.000	V	0.7	22.3	74.0


Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
3696.500000	27.1	1000.0	1000.000	V	-14.8	26.9	54.0
7115.500000	29.9	1000.0	1000.000	V	-8.9	24.1	54.0
9789.000000	33.3	1000.0	1000.000	V	-6.2	20.7	54.0
11943.500000	32.4	1000.0	1000.000	V	-5.7	21.6	54.0
15165.000000	37.2	1000.0	1000.000	V	-1.9	16.8	54.0
16914.000000	37.9	1000.0	1000.000	V	0.7	16.1	54.0

Tested by:


20260814

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

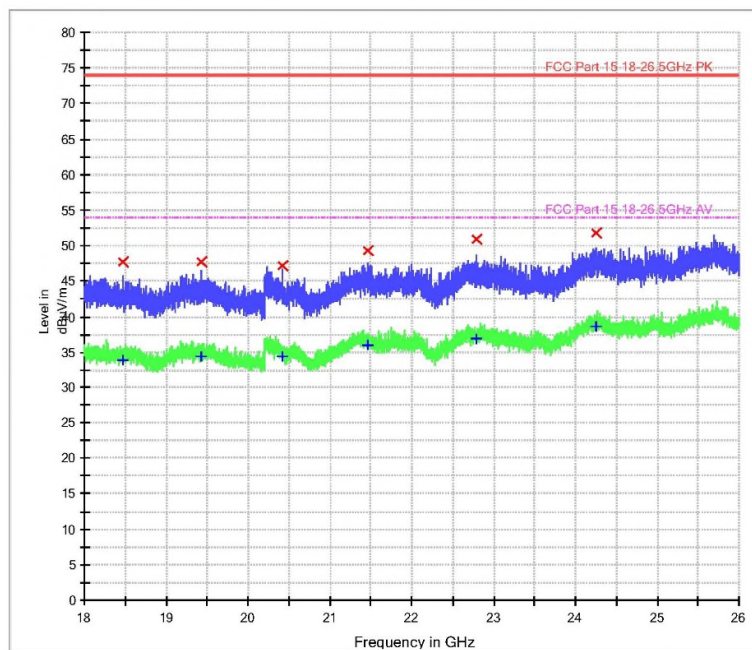

Tested by:

Janson Li
20260814

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18467.000000	47.6	1000.0	1000.000	H	3.6	26.4	74.0
19422.000000	47.6	1000.0	1000.000	H	4.4	26.4	74.0
20427.000000	47.3	1000.0	1000.000	H	4.1	26.7	74.0
21470.000000	49.4	1000.0	1000.000	H	4.4	24.6	74.0
22793.000000	50.9	1000.0	1000.000	H	4.8	23.1	74.0
24244.000000	51.8	1000.0	1000.000	H	5.1	22.2	74.0


Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18467.000000	34.0	1000.0	1000.000	H	3.6	20.0	54.0
19422.000000	34.4	1000.0	1000.000	H	4.4	19.6	54.0
20427.000000	34.5	1000.0	1000.000	H	4.1	19.6	54.0
21470.000000	36.0	1000.0	1000.000	H	4.4	18.0	54.0
22793.000000	36.8	1000.0	1000.000	H	4.8	17.2	54.0
24244.000000	38.7	1000.0	1000.000	H	5.1	15.3	54.0

Tested by:


20260814

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

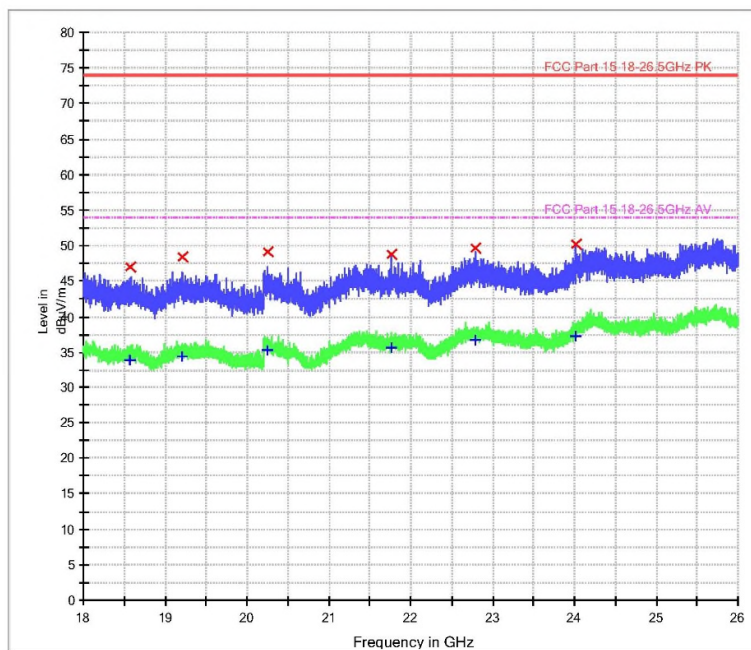

Tested by:

Jason Li
20260814

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18575.000000	47.0	1000.0	1000.000	V	3.7	27.0	74.0
19218.000000	48.4	1000.0	1000.000	V	4.4	25.6	74.0
20246.000000	49.1	1000.0	1000.000	V	4.2	24.9	74.0
21764.000000	48.7	1000.0	1000.000	V	4.6	25.3	74.0
22798.000000	49.8	1000.0	1000.000	V	4.8	24.2	74.0
24011.000000	50.1	1000.0	1000.000	V	4.9	23.9	74.0


Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18575.000000	33.9	1000.0	1000.000	V	3.7	20.1	54.0
19218.000000	34.5	1000.0	1000.000	V	4.4	19.5	54.0
20246.000000	35.3	1000.0	1000.000	V	4.2	18.7	54.0
21764.000000	35.7	1000.0	1000.000	V	4.6	18.3	54.0
22798.000000	36.8	1000.0	1000.000	V	4.8	17.2	54.0
24011.000000	37.2	1000.0	1000.000	V	4.9	16.8	54.0

Tested by:


20260814

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

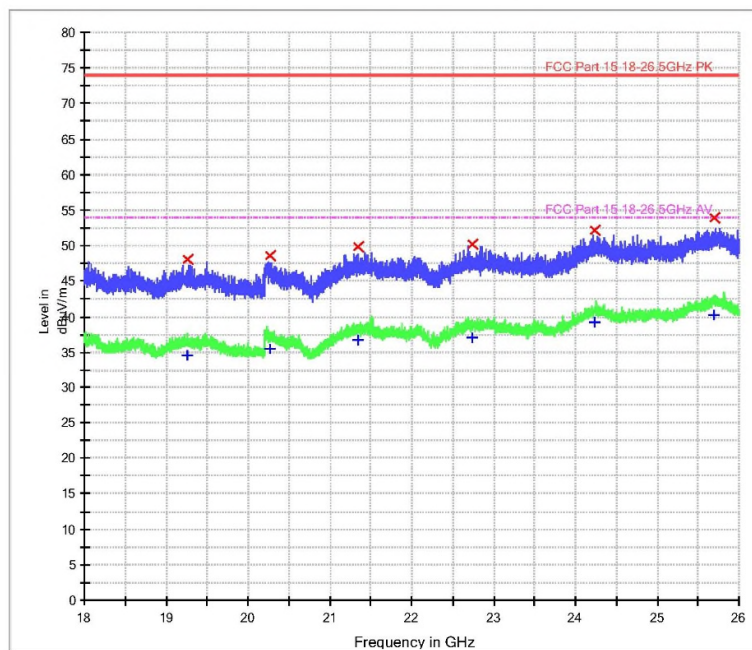

Tested by:

Jason Li
20260817

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
19256.000000	48.1	1000.0	1000.000	H	4.4	25.9	74.0
20264.000000	48.5	1000.0	1000.000	H	4.2	25.5	74.0
21351.000000	49.8	1000.0	1000.000	H	4.2	24.2	74.0
22735.000000	50.2	1000.0	1000.000	H	4.9	23.8	74.0
24228.000000	52.2	1000.0	1000.000	H	5.1	21.8	74.0
25699.000000	53.9	1000.0	1000.000	H	6.0	20.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
19256.000000	34.5	1000.0	1000.000	H	4.4	19.5	54.0
20264.000000	35.6	1000.0	1000.000	H	4.2	18.4	54.0
21351.000000	36.7	1000.0	1000.000	H	4.2	17.3	54.0
22735.000000	37.0	1000.0	1000.000	H	4.9	17.0	54.0
24228.000000	39.2	1000.0	1000.000	H	5.1	14.8	54.0
25699.000000	40.3	1000.0	1000.000	H	6.0	13.7	54.0

Tested by:


20260817

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

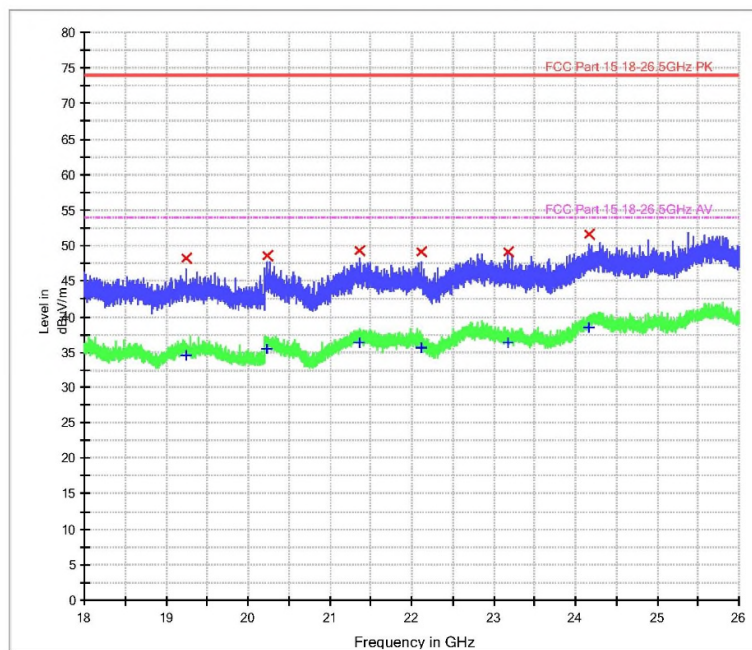

Tested by:

Jason Li
20260817

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
19245.000000	48.2	1000.0	1000.000	V	4.4	25.8	74.0
20237.000000	48.7	1000.0	1000.000	V	4.2	25.3	74.0
21358.000000	49.4	1000.0	1000.000	V	4.2	24.7	74.0
22111.000000	49.1	1000.0	1000.000	V	4.8	24.9	74.0
23177.000000	49.1	1000.0	1000.000	V	4.6	24.9	74.0
24161.000000	51.6	1000.0	1000.000	V	5.0	22.4	74.0


Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
19245.000000	34.6	1000.0	1000.000	V	4.4	19.4	54.0
20237.000000	35.6	1000.0	1000.000	V	4.2	18.5	54.0
21358.000000	36.3	1000.0	1000.000	V	4.2	17.7	54.0
22111.000000	35.7	1000.0	1000.000	V	4.8	18.3	54.0
23177.000000	36.4	1000.0	1000.000	V	4.6	17.6	54.0
24161.000000	38.4	1000.0	1000.000	V	5.0	15.6	54.0

Tested by:


20260817

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

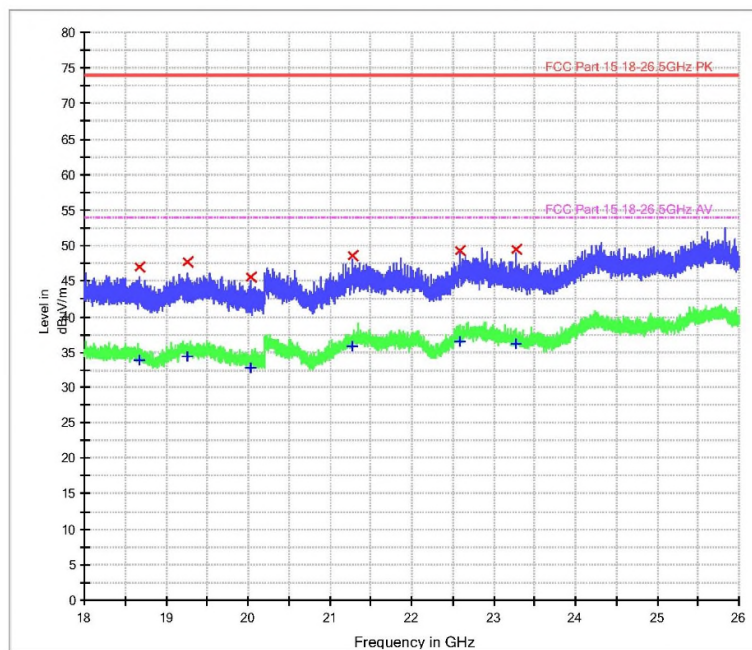

Tested by:

Janson Li
20260817

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18667.000000	47.1	1000.0	1000.000	H	3.8	27.0	74.0
19267.000000	47.7	1000.0	1000.000	H	4.4	26.3	74.0
20040.000000	45.6	1000.0	1000.000	H	4.3	28.4	74.0
21271.000000	48.6	1000.0	1000.000	H	4.2	25.5	74.0
22592.000000	49.3	1000.0	1000.000	H	5.0	24.7	74.0
23283.000000	49.5	1000.0	1000.000	H	4.6	24.6	74.0


Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18667.000000	33.9	1000.0	1000.000	H	3.8	20.1	54.0
19267.000000	34.4	1000.0	1000.000	H	4.4	19.6	54.0
20040.000000	32.9	1000.0	1000.000	H	4.3	21.2	54.0
21271.000000	35.8	1000.0	1000.000	H	4.2	18.2	54.0
22592.000000	36.5	1000.0	1000.000	H	5.0	17.5	54.0
23283.000000	36.1	1000.0	1000.000	H	4.6	17.9	54.0

Tested by:


20260817

Reviewed by:


20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Exoskeleton robot
Identification:	EG01
Test Standard:	FCC Part 15C
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	23 °C, 56 %, 101kPa
Test Voltage/ Freq:	Battery
Receipt No:	170440177
Report No:	/
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency Range:	18GHz-26GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF907/ TUV FSP30-TUV SAC HF907

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

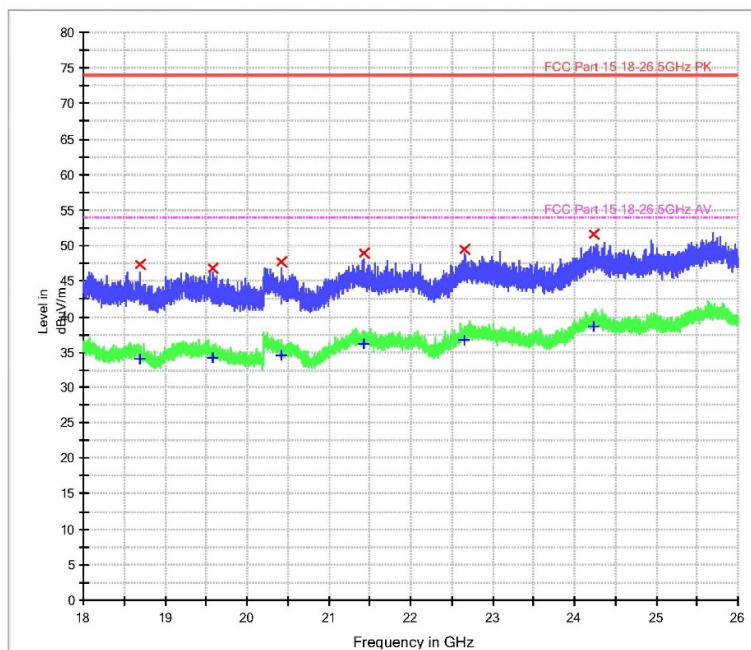

Tested by:

Jason Li
20260817

Reviewed by:

Judy Chen
20260825

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18688.000000	47.4	1000.0	1000.000	V	3.8	26.7	74.0
19584.000000	46.8	1000.0	1000.000	V	4.4	27.2	74.0
20422.000000	47.7	1000.0	1000.000	V	4.1	26.3	74.0
21422.000000	49.0	1000.0	1000.000	V	4.2	25.0	74.0
22655.000000	49.5	1000.0	1000.000	V	4.9	24.5	74.0
24238.000000	51.6	1000.0	1000.000	V	5.1	22.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18688.000000	34.0	1000.0	1000.000	V	3.8	20.0	54.0
19584.000000	34.2	1000.0	1000.000	V	4.4	19.8	54.0
20422.000000	34.5	1000.0	1000.000	V	4.1	19.5	54.0
21422.000000	36.1	1000.0	1000.000	V	4.2	17.9	54.0
22655.000000	36.7	1000.0	1000.000	V	4.9	17.3	54.0
24238.000000	38.8	1000.0	1000.000	V	5.1	15.3	54.0

Tested by:


20260817

Reviewed by:


20260825