

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: 深圳科中宝科技有限公司
CUSTOMER: Shenzhen Kezhongbao Technology Co., Ltd
客 戶 料 號:
CUST P/N: D.
合源通料 號: 0.08*48P bare copper
FINE P/N: 6.5 UH10%, 43.5*0.65 slotted back adhesive
A.0
日 期: 2025 6/11
DATE:
版 本:
Version:

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
戴雄彪	魏红艳	魏红艳	

SPECIFICATION

產品型號:
DESC $\Phi 43.5 \times 20.5-10Ts-0.08 \times 48P$ Slotted back
adhesive

客戶 CUST: 331
料号 Fine P/N: FYD331003
客户料号 CUST P/N:


版本 Rev: A.0
一、尺寸 DIMENSION:(mm)

- A 39.6 ± 0.5
B 20.5 ± 0.5
C 0.65 kind
D1 $43 \text{mm} \pm 2$
D2 $40 \text{mm} \pm 2$
F 43.5 ± 0.3
G 14.7 ± 1
H 1.8-2.3
E 3-4mm

二、原理图 SCHEMATIC DIAGRAM:



三、绕线参数 Winding Specification:

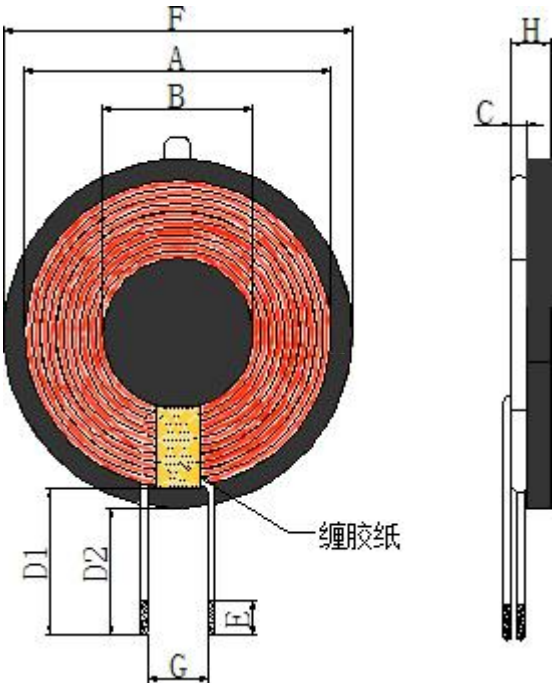

Note: 1. Apply magnetic sheets to the coil; dimensions: 43.5 ± 0.3 mm, thickness: 0.65 mm. 2. At the coil lead-out position, wrap 1 - 2 meters of high-temperature adhesive tape (ref. width: 8 mm). 3. Apply standard double-sided adhesive tape with a circular surface (ref. diameter: 43.6 mm) on both sides of the magnetic sheet, featuring an inner hole (ref. diameter: 20.5 mm).

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	Raw copper 0.08*48P	10Ts	CCW

拟制/日期 PREPARED BY/DATE

2025/6/11

审核/日期 CHECKED BY/DATE

2025/6/13