



FCC TEST REPORT

FCC ID: 2BWH7-TG-901

On Behalf of

SHENZHEN BORUN EDUCATION TECHNOLOGY CO., LTD.

Bluetooth speaker

Model No.: TG-901

Prepared for : SHENZHEN BORUN EDUCATION TECHNOLOGY CO., LTD.
1407, HOWELL TECHNOLOGY BUILDING, NO. 2, KEJI SOUTH
Address : 8TH ROAD, GAOXINDISTRICT COMMUNITY, YUEHAI STREET.
NANSHAN DISTRICT. SHENZHEN

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2603132-C01-R11-V1
Date of Receipt : May 22, 2026
Date of Test : May 22, 2026–June 2, 2026
Date of Report : June 16, 2026
Version Number : V1

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results.....	6
1.1. Description of Standards and Results.....	6
2. General Information	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details.....	8
2.4. Block Diagram of Connection Between EUT and Simulators	8
2.5. Test Mode Description	9
2.6. Software test version and power setting information.....	9
2.7. Test Conditions.....	10
2.8. Test Facility	10
2.9. Measurement Uncertainty	10
2.10. Test Equipment List	11
3. Maximum Peak Output Power.....	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Result	13
4. Bandwidth.....	23
4.1. Limit	23
4.2. Test Procedure	23
4.3. Test Setup	24
4.4. Test Result	24
5. Carrier Frequency Separation.....	34
5.1. Limit	34
5.2. Test Procedure	34
5.3. Test Setup	34
5.4. Test Result	35
6. Number Of Hopping Channel.....	37
6.1. Limit	37
6.2. Test Procedure	37
6.3. Test Setup	37
6.4. Test Result	38
7. Dwell Time	40
7.1. Test limit	40
7.2. Test Procedure	40
7.3. Test Setup	41
7.4. Test Result	41
8. Out-of-band Emissions	51
8.1. Test Limits	51
8.2. Test Procedure	51
8.3. Test Setup	51

8.4. Test Results	51
9. Spurious Emission	75
9.1. Test Limits	75
9.2. Block Diagram of Test setup	76
9.3. Test Procedure	77
9.4. Test Results	78
10. Band Edge Test	85
10.1. Test Limit	85
10.2. Block Diagram of Test Setup	85
10.3. Test Procedure	85
10.4. Test Results	86
11. Power Line Conducted Emissions.....	89
11.1. Test Limits	89
11.2. Test Procedure	89
11.3. Test Setup	89
11.4. Test Results	90
12. Antenna Requirements	93
12.1. Limit	93
12.2. Result.....	93
13. Photos of test setup	94
14. Photos of EUT.....	94

TEST REPORT DECLARATION

Applicant : SHENZHEN BORUN EDUCATION TECHNOLOGY CO., LTD.
1407, HOWELL TECHNOLOGY BUILDING, NO. 2, KEJI SOUTH 8TH ROAD,
Address : GAOXINDISTRICT COMMUNITY, YUEHAI STREET. NANSHAN DISTRICT.
SHENZHEN
Manufacturer : Shenzhen chengtai electronic and technology co.,LTD
6th Floor, Building C, Qinyu Industrial Zone, Sanwei, Sanwei Community,
Address : Hangcheng Street, Baoan District, Shenzhen
EUT Description : Bluetooth speaker
(A) Model No. : TG-901
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
Test Engineer


.....

Approved by (name + signature).....:

Simple Guan
Project Manager


.....

Date of issue.....:

June 16, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	June 2, 2026	Initial released Issue	Felix Pang
V1	June 16, 2026	The customer provided a new antenna specification sheet, requesting changes to the antenna gain.	Felix Pang



1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Bandwidth	FCC Part 15: 15.215(c), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Radiated Spurious Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Out-of-band Emissions	FCC Part 15: 15.247(d), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Power Line Conducted Emissions	FCC Part 15: 15.207(a), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	P
Antenna requirement	FCC Part 15: 15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.

5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.

2. General Information

2.1. Description of Device (EUT)

Product Name : Bluetooth speaker
Model No. : TG-901
Diff : N/A
Power supply : DC 5V from adapter, DC 3.7V from battery.

Radio Technology : Bluetooth V5.0 EDR
Operation frequency : 2402-2480MHz
Channel No. : 79 channels
Channel Separation : 1MHz
Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type : Internal antenna, Maximum Gain is 1.7dBi.

PMN : N/A
HVIN : N/A

Software version : N/A
Hardware version/FVIN : N/A

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2. Accessories of Device (EUT)

Accessories 1 : N/A

Manufacturer : N/A

Model : N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	Baseus	CCXFK65CC	AJ250501
2	Notebook PC	Dell	Latitude 3490	N/A

2.4. Block Diagram of Connection Between EUT and Simulators


Spurious Emission



Power Line Conducted Emission



RF



2.5. Test Mode Description

The test software used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK / Pi/4-DQPSK / 8DPSK Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8DPSK hopping on Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.6. Software test version and power setting information

Software testing version	FCC_assist_1.0.2.2.exe		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
GFSK, Pi/4-DQPSK, 8DPSK	CH0	2402	TX level is set as defaults value.
	CH39	2441	TX level is set as defaults value.
	CH78	2480	TX level is set as defaults value.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

Designation Number: CN1362

September 21, 2023 Certificated by IC

Registration Number: 31123

CAB identifier: CN0158

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2.10.Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.18	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118G-50	SK2022032901	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840G-50	SK2019040302	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02-1111533-Fz	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P008	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10A	202211251638	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2025.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

3. Maximum Peak Output Power

3.1. Limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

3.2. Test Procedure

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

3.3. Test Setup

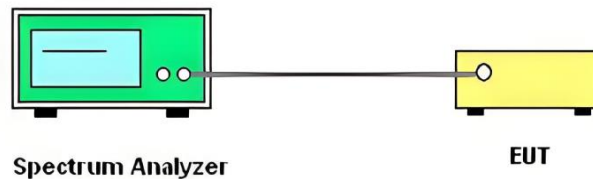


3.4. Test Result

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH1	2402.00	-0.17	0.96	1000	Pass
NVNT	ANT1	1-DH1	2441.00	0.57	1.14	1000	Pass
NVNT	ANT1	1-DH1	2480.00	0.69	1.17	1000	Pass
NVNT	ANT1	2-DH1	2402.00	1.03	1.27	125	Pass
NVNT	ANT1	2-DH1	2441.00	1.63	1.46	125	Pass
NVNT	ANT1	2-DH1	2480.00	1.81	1.52	125	Pass
NVNT	ANT1	3-DH1	2402.00	1.64	1.46	125	Pass
NVNT	ANT1	3-DH1	2441.00	2.18	1.65	125	Pass
NVNT	ANT1	3-DH1	2480.00	2.32	1.71	125	Pass

Peak Output Power_NVNT_ANT1_1-DH1_2402_00



Peak_Output_Power_NVNT_ANT1_1-DH1_2441_00

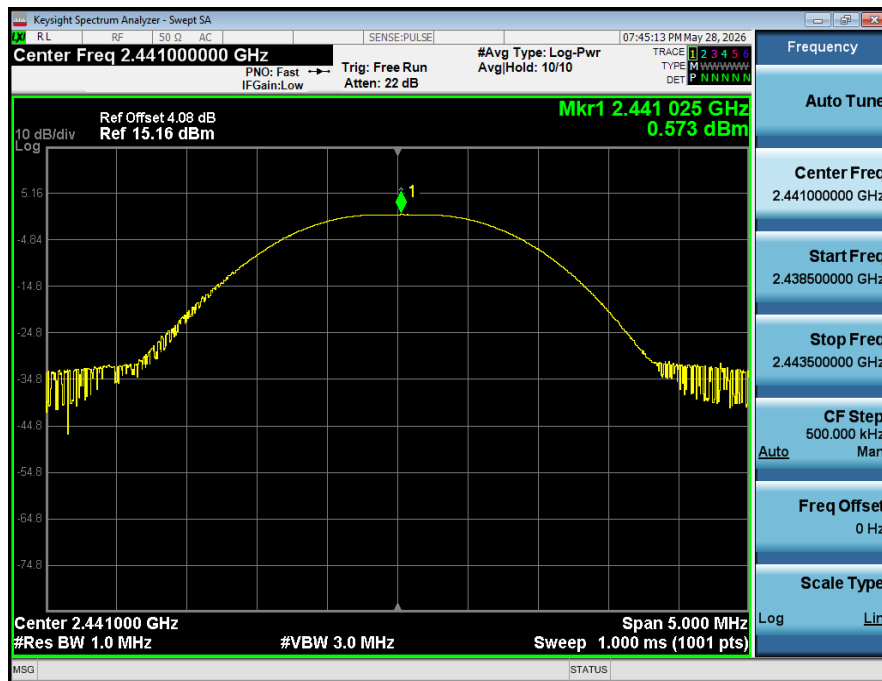

Peak_Output_Power_NVNT_ANT1_1-DH1_2480_00




Peak_Output_Power_NVNT_ANT1_2-DH1_2402_00




Peak_Output_Power_NVNT_ANT1_2-DH1_2441_00



Peak_Output_Power_NVNT_ANT1_2-DH1_2480_00

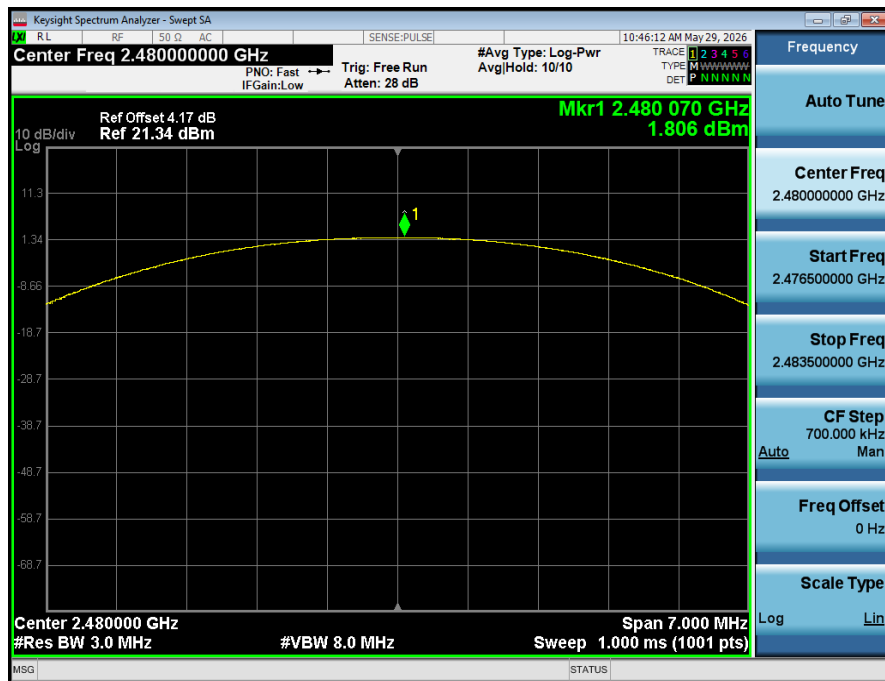


Peak_Output_Power_NVNT_ANT1_3-DH1_2402_00

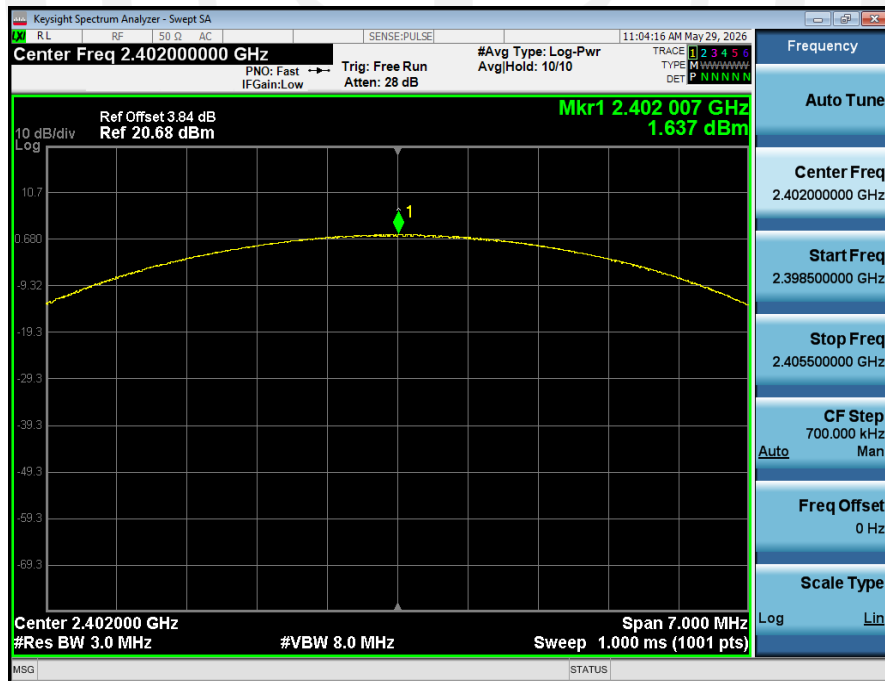

Peak_Output_Power_NVNT_ANT1_3-DH1_2441_00




Peak_Output_Power_NVNT_ANT1_3-DH1_2480_00

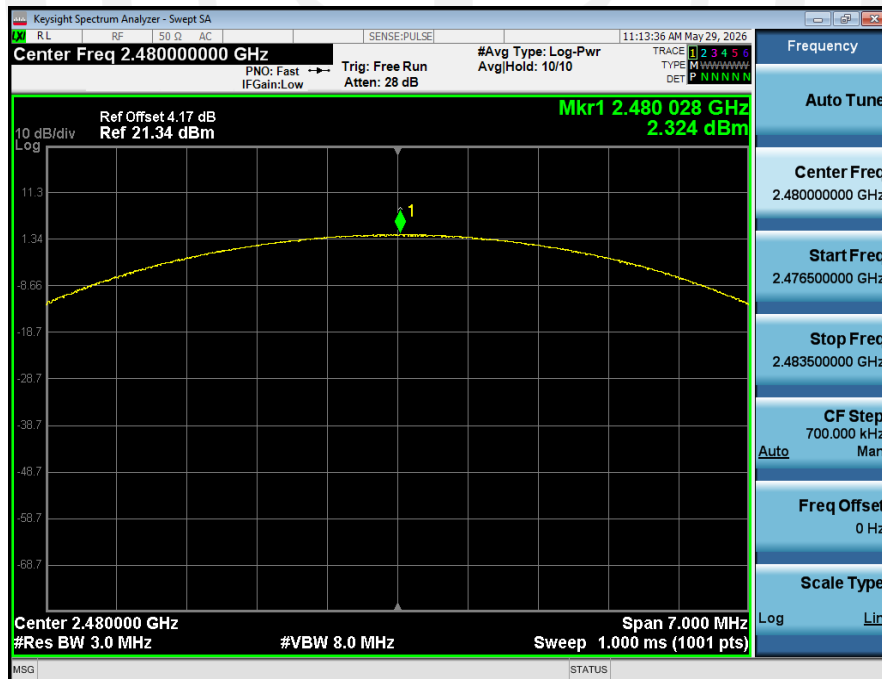


Condition	Antenna	Rate	Frequency (MHz)	Dutycycle(%)	Duty_factor
NVNT	ANT1	1-DH1	2402.00	30.65	5.14
NVNT	ANT1	1-DH1	2441.00	30.65	5.14
NVNT	ANT1	1-DH1	2480.00	30.16	5.21
NVNT	ANT1	2-DH1	2402.00	32.26	4.91
NVNT	ANT1	2-DH1	2441.00	30.65	5.14
NVNT	ANT1	2-DH1	2480.00	30.65	5.14
NVNT	ANT1	3-DH1	2402.00	32.26	4.91
NVNT	ANT1	3-DH1	2441.00	31.75	4.98
NVNT	ANT1	3-DH1	2480.00	30.65	5.14


Duty_Cycle_NVNT_ANT1_1-DH1_2402

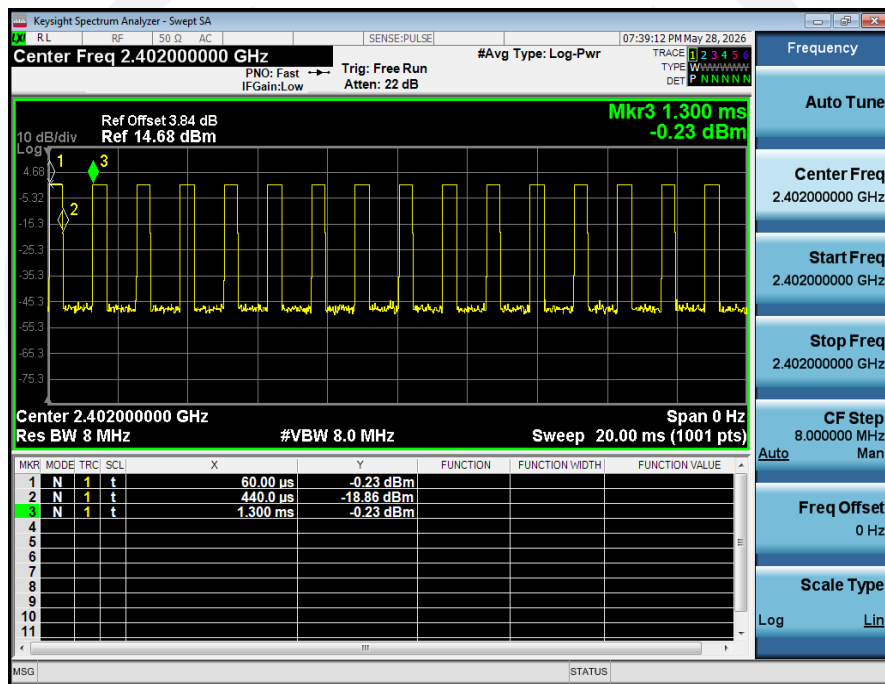


Duty_Cycle_NVNT_ANT1_1-DH1_2441

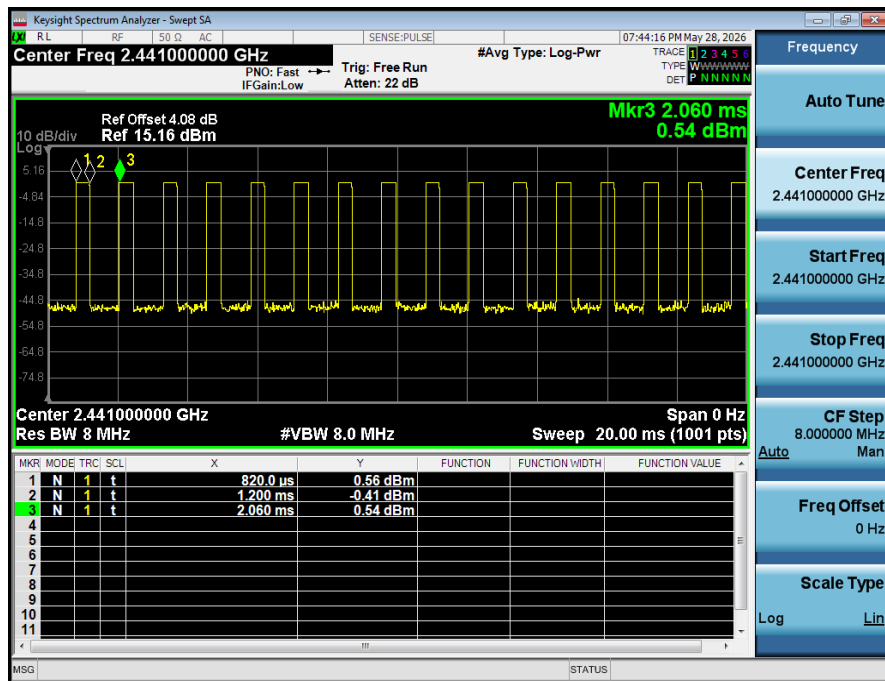


Duty_Cycle_NVNT_ANT1_1-DH1_2480

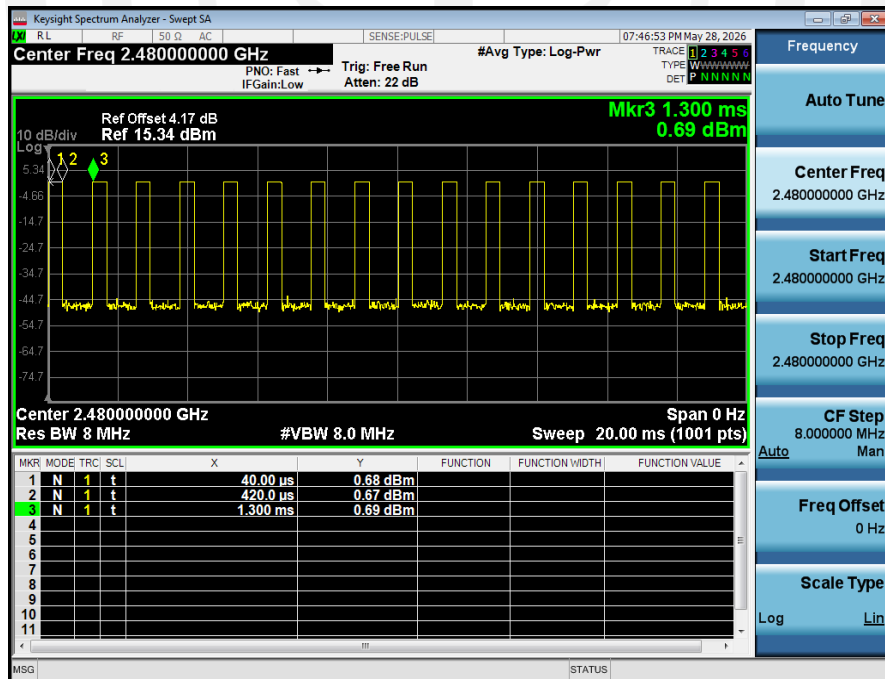


Duty_Cycle_NVNT_ANT1_2-DH1_2402

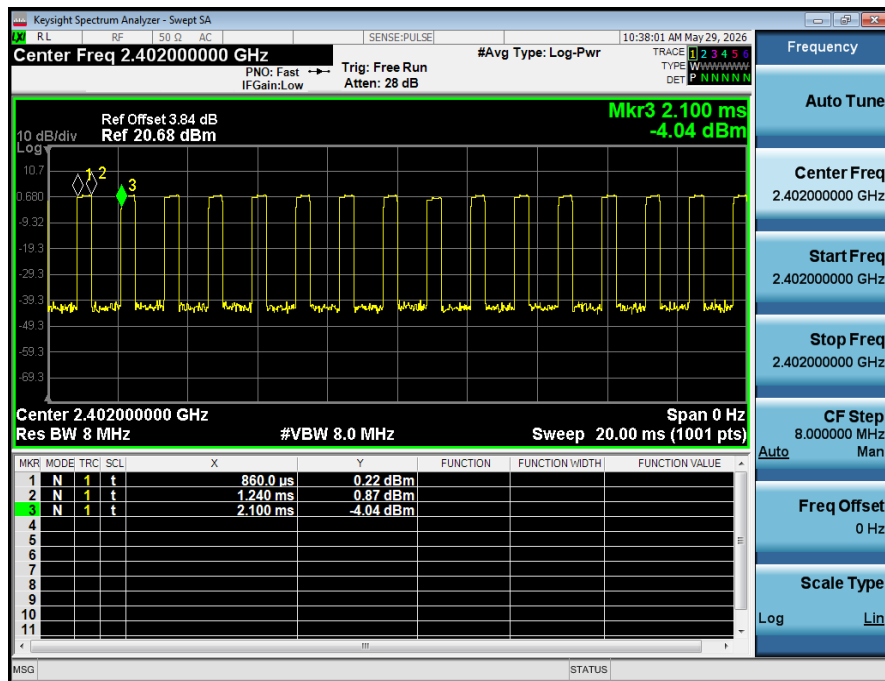


Duty_Cycle_NVNT_ANT1_2-DH1_2441

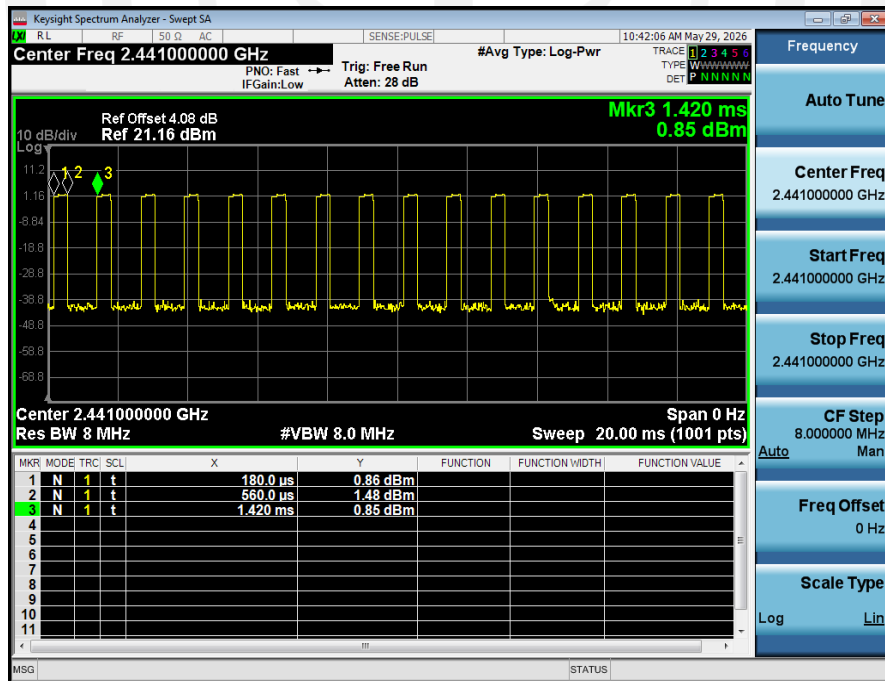


Duty_Cycle_NVNT_ANT1_2-DH1_2480

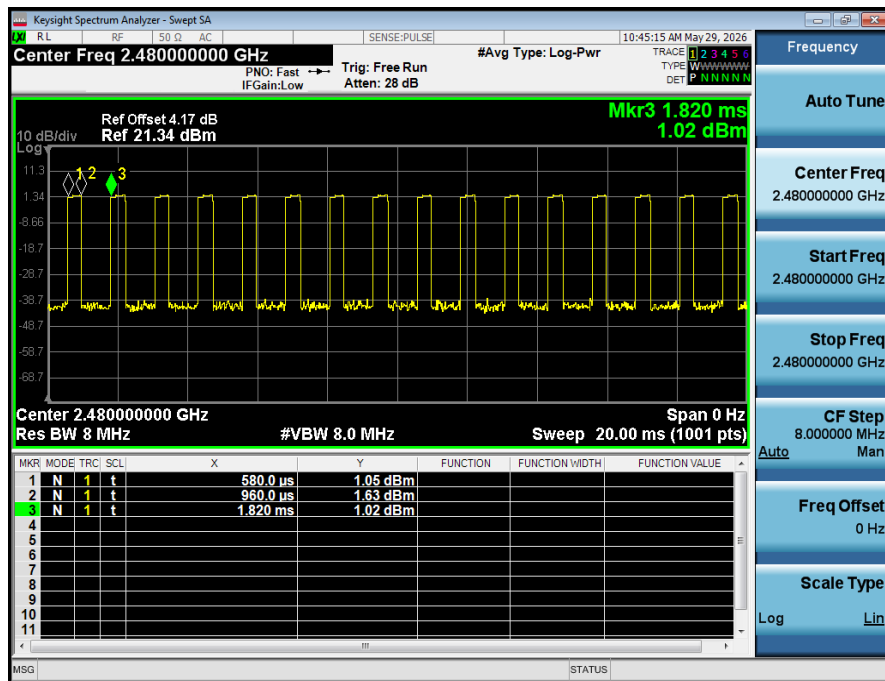


Duty_Cycle_NVNT_ANT1_3-DH1_2402

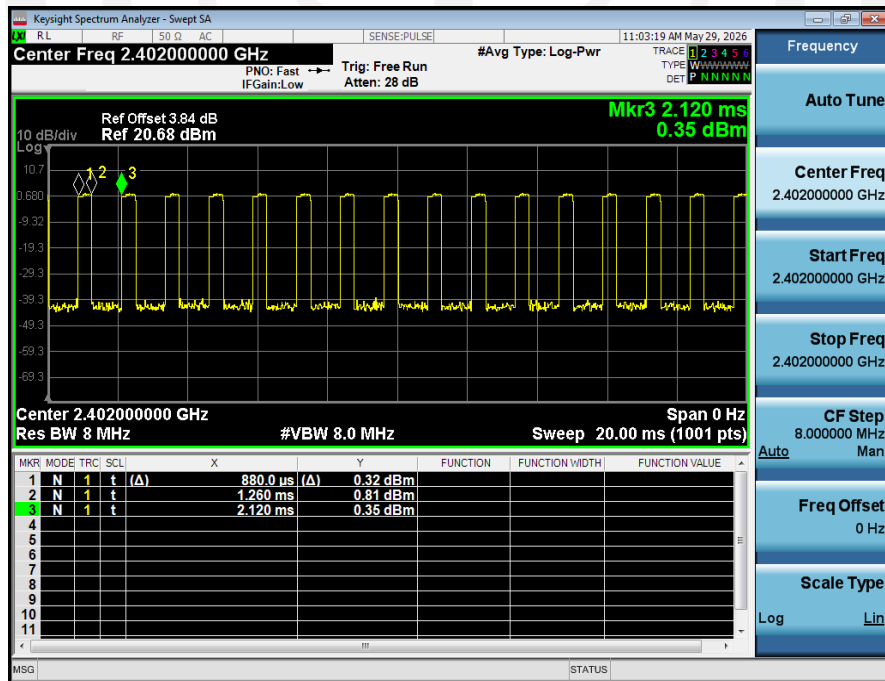

Duty_Cycle_NVNT_ANT1_3-DH1_2441

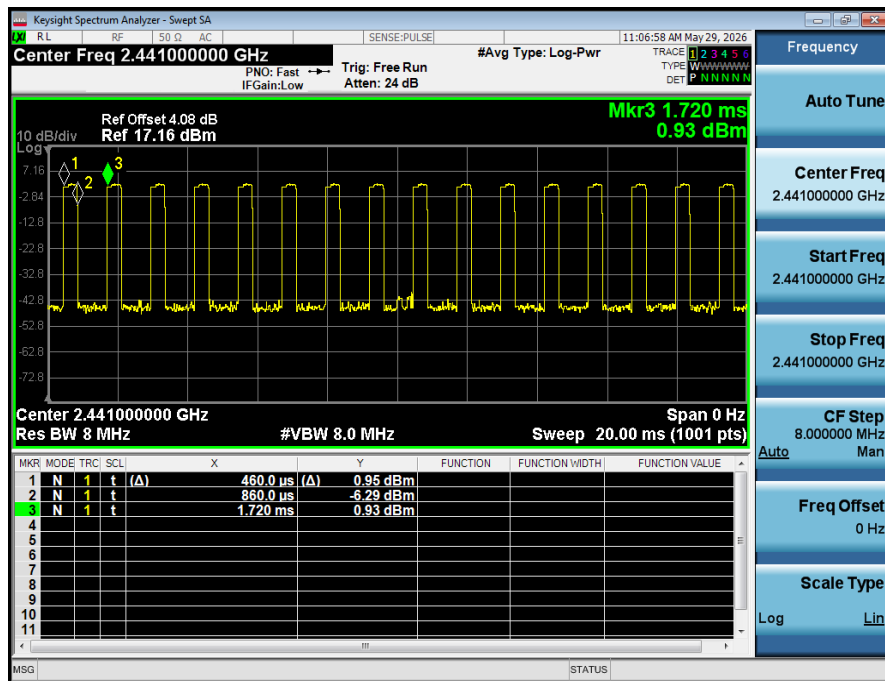

Duty_Cycle_NVNT_ANT1_3-DH1_2480

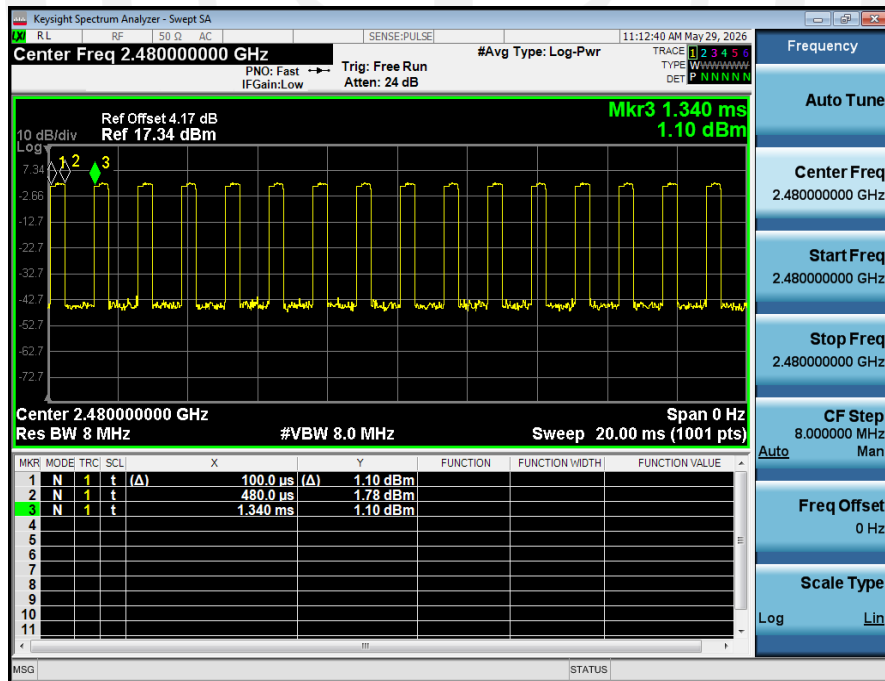

4. Bandwidth

4.1. Limit


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument


display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).



4.3. Test Setup


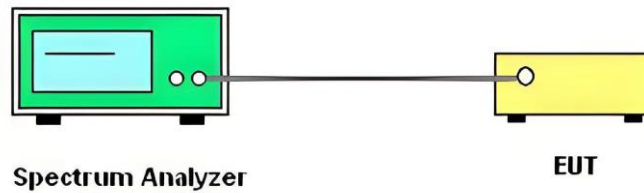


4.4. Test Result

Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH1	2402.00	0.879	No
NVNT	ANT1	1-DH1	2441.00	0.878	No
NVNT	ANT1	1-DH1	2480.00	0.878	No
NVNT	ANT1	2-DH1	2402.00	1.265	Yes
NVNT	ANT1	2-DH1	2441.00	1.265	Yes
NVNT	ANT1	2-DH1	2480.00	1.274	Yes
NVNT	ANT1	3-DH1	2402.00	1.223	Yes
NVNT	ANT1	3-DH1	2441.00	1.222	Yes
NVNT	ANT1	3-DH1	2480.00	1.223	Yes

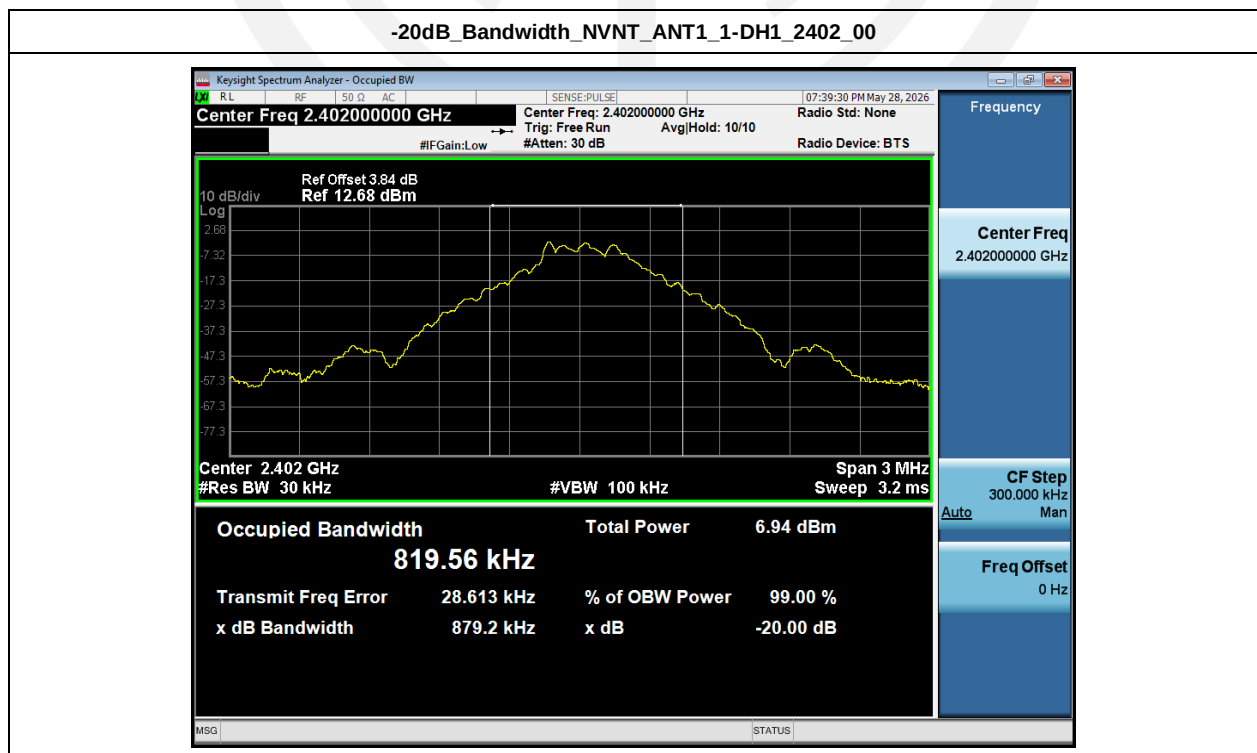

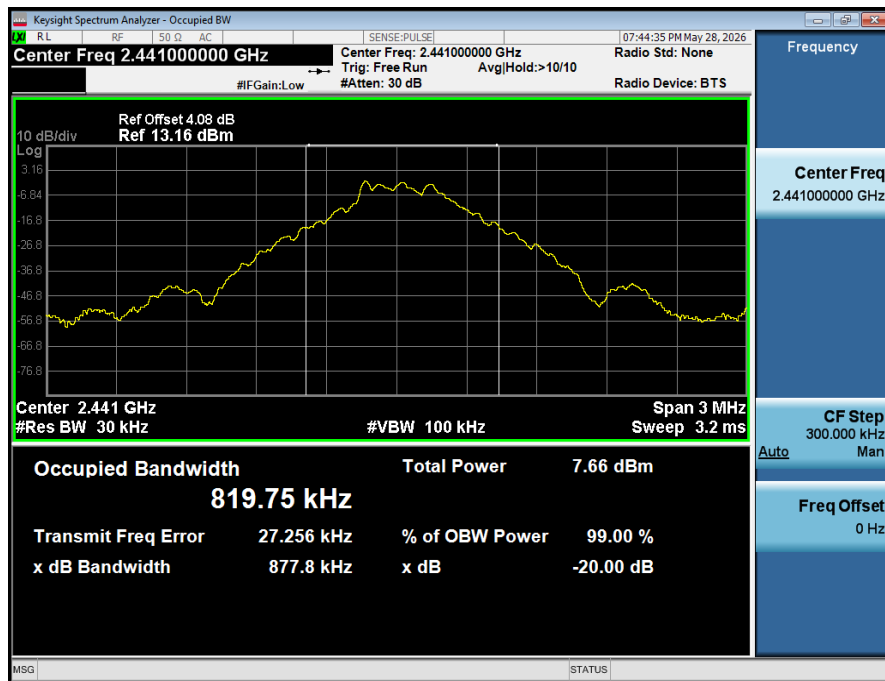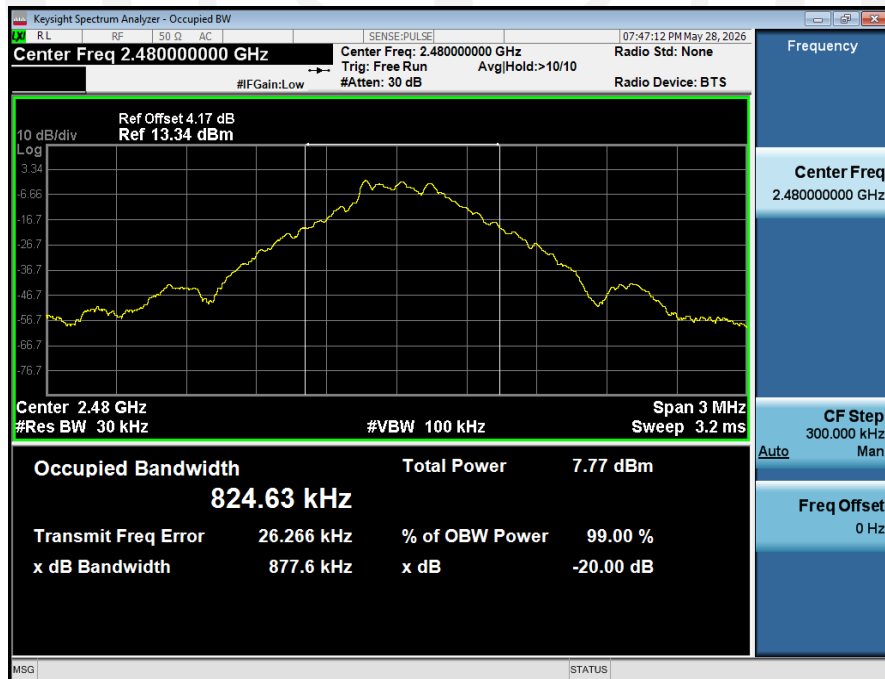-20dB_Bandwidth_NVNT_ANT1_1-DH1_2441_00**-20dB_Bandwidth_NVNT_ANT1_1-DH1_2480_00**

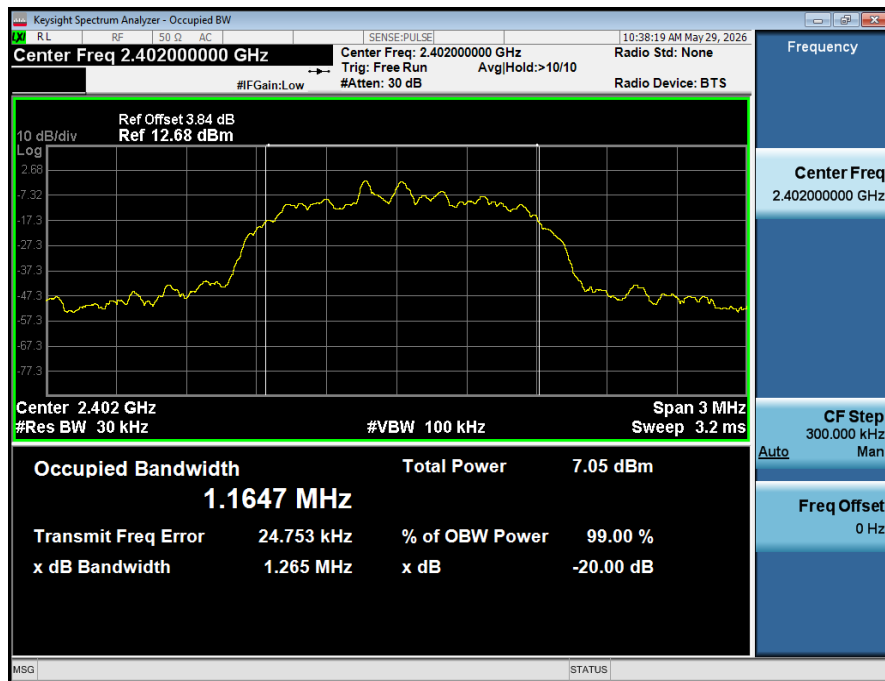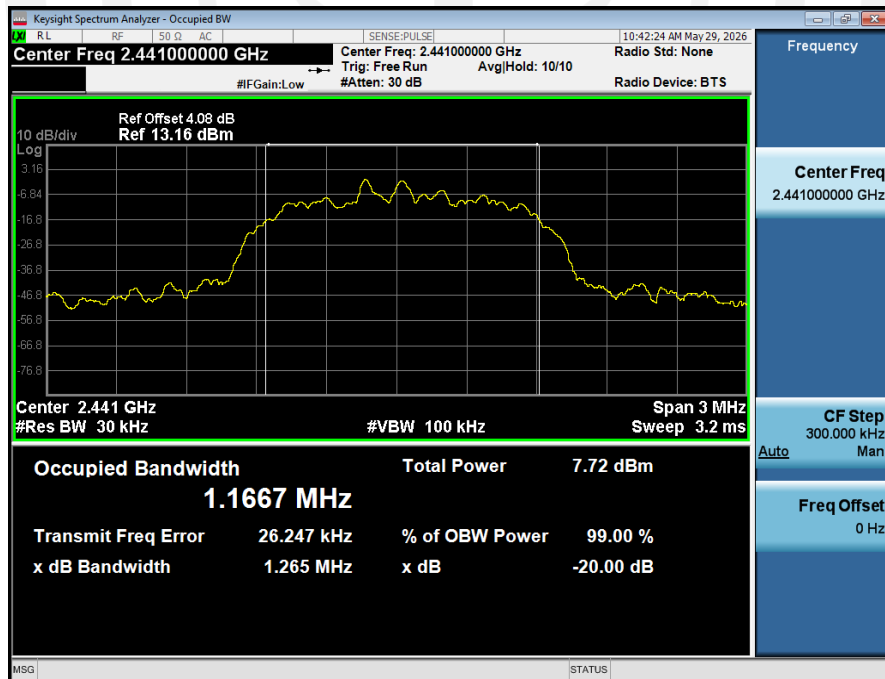
-20dB_Bandwidth_NVNT_ANT1_2-DH1_2402_00**-20dB_Bandwidth_NVNT_ANT1_2-DH1_2441_00**

-20dB_Bandwidth_NVNT_ANT1_2-DH1_2480_00**-20dB_Bandwidth_NVNT_ANT1_3-DH1_2402_00**

-20dB_Bandwidth_NVNT_ANT1_3-DH1_2441_00**-20dB_Bandwidth_NVNT_ANT1_3-DH1_2480_00**

Condition	Antenna	Modulation	Frequency (MHz)	99%BW(MHz)
NVNT	ANT1	1-DH1	2402.00	0.819
NVNT	ANT1	1-DH1	2441.00	0.820
NVNT	ANT1	1-DH1	2480.00	0.824
NVNT	ANT1	2-DH1	2402.00	1.165
NVNT	ANT1	2-DH1	2441.00	1.167
NVNT	ANT1	2-DH1	2480.00	1.170
NVNT	ANT1	3-DH1	2402.00	1.156
NVNT	ANT1	3-DH1	2441.00	1.159
NVNT	ANT1	3-DH1	2480.00	1.163


99%_Occupied_Bandwidth_NVNT_ANT1_1-DH1_2402_00

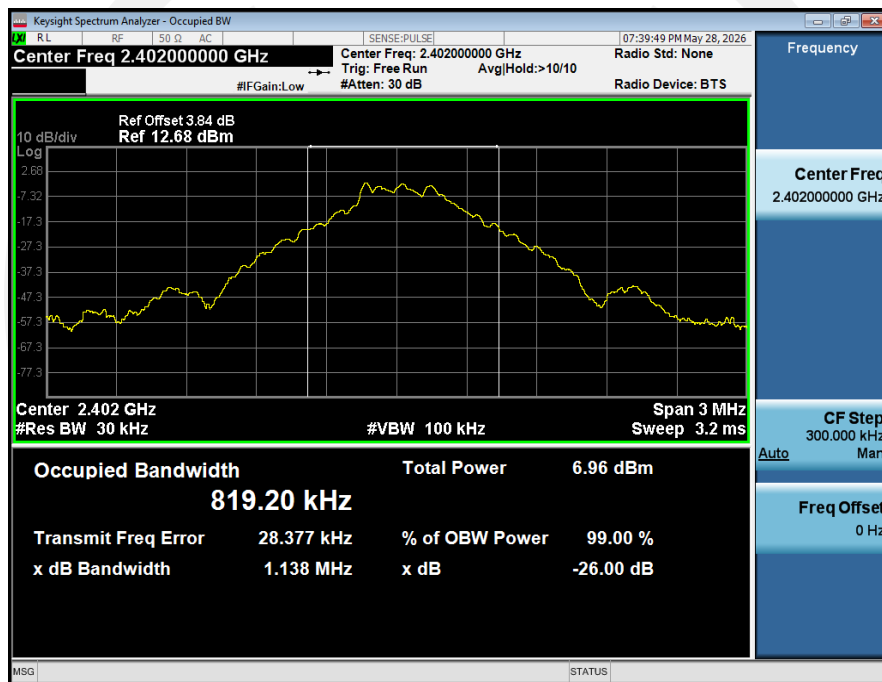

99%_Occupied_Bandwidth_NVNT_ANT1_1-DH1_2441_00




99%_Occupied_Bandwidth_NVNT_ANT1_1-DH1_2480_00

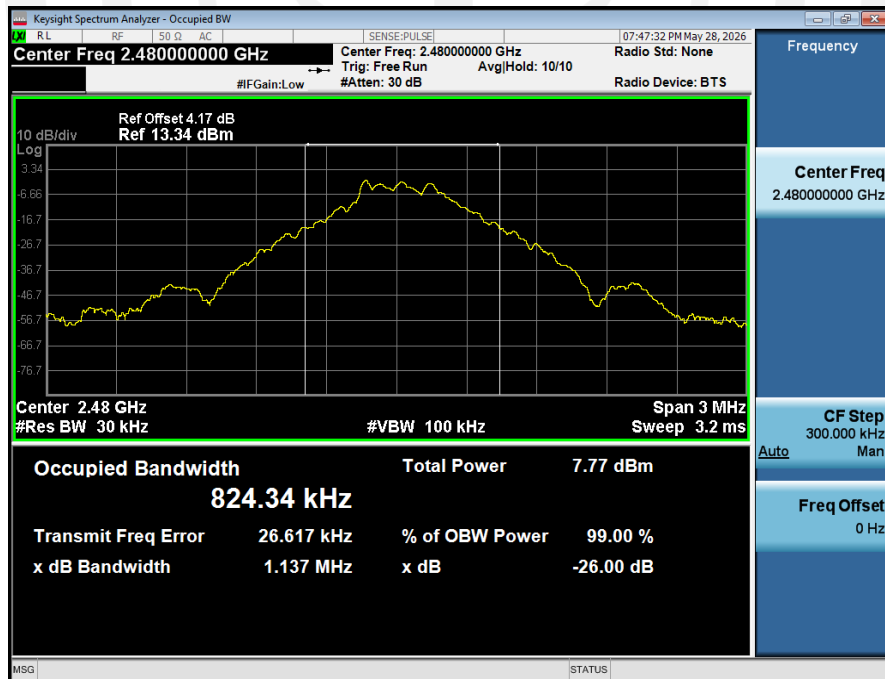


99%_Occupied_Bandwidth_NVNT_ANT1_2-DH1_2402_00



99%_Occupied_Bandwidth_NVNT_ANT1_2-DH1_2441_00

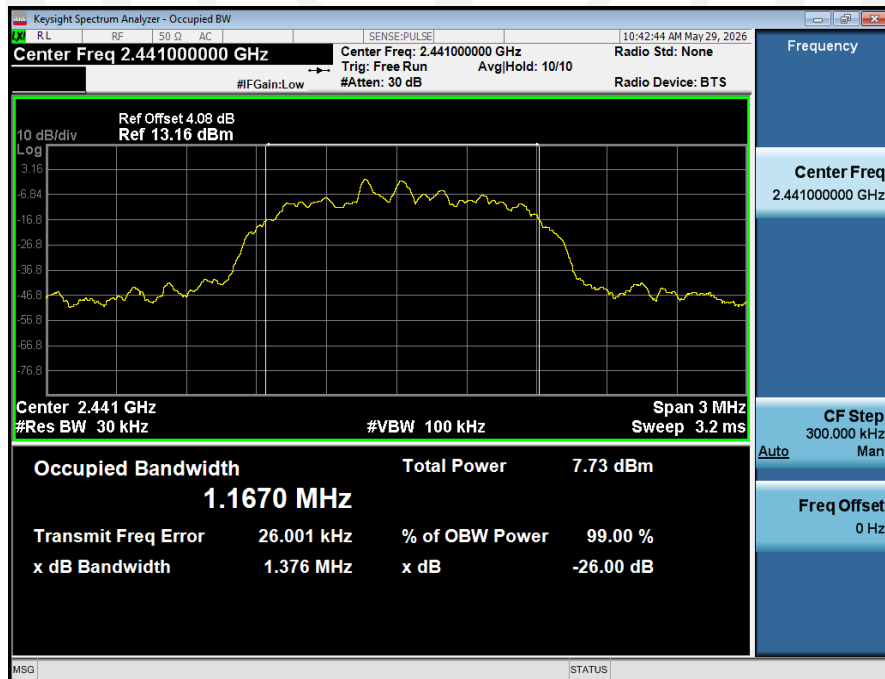

99%_Occupied_Bandwidth_NVNT_ANT1_2-DH1_2480_00

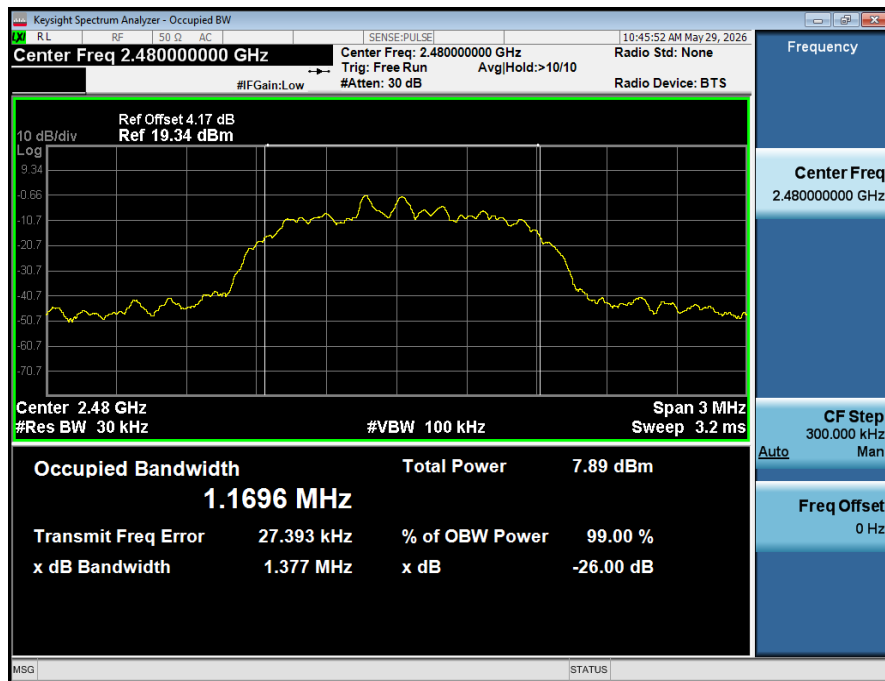

99%_Occupied_Bandwidth_NVNT_ANT1_3-DH1_2402_00



99%_Occupied_Bandwidth_NVNT_ANT1_3-DH1_2441_00



99%_Occupied_Bandwidth_NVNT_ANT1_3-DH1_2480_00



5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


5.2. Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) $\geq$ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.


Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

5.3. Test Setup

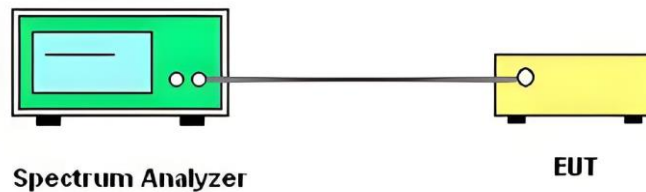


5.4. Test Result

Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH1	2441.00	2441.026	2442.016	0.99	0.878	Pass
NVNT	ANT1	2-DH1	2441.00	2441.026	2442.019	0.99	0.843	Pass
NVNT	ANT1	3-DH1	2441.00	2441.038	2442.028	0.99	0.815	Pass

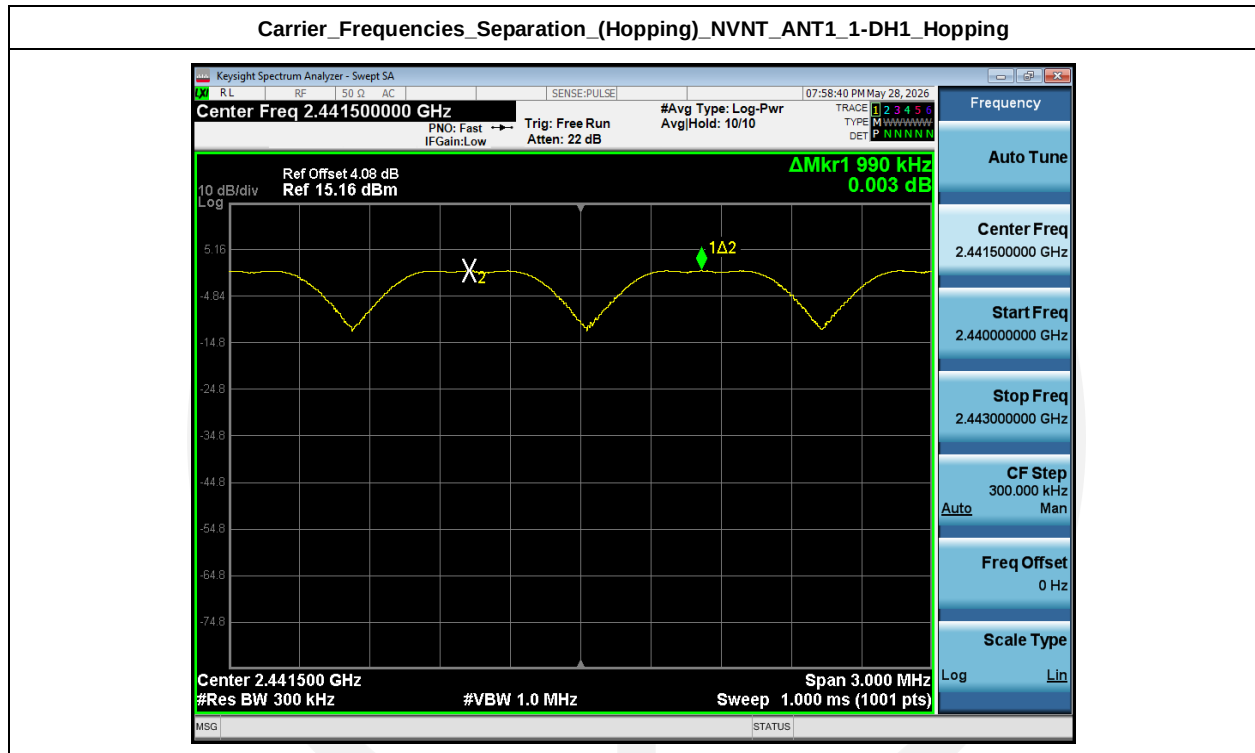

Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH1_Hopping

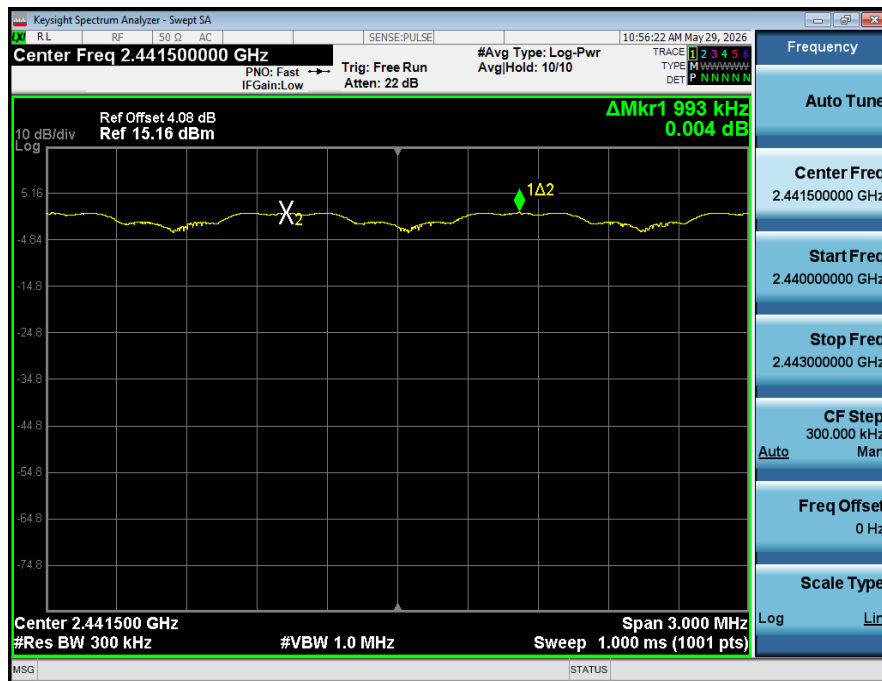

Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_3-DH1_Hopping



6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


6.2. Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW $\geq$ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into sub ranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.


6.3. Test Setup

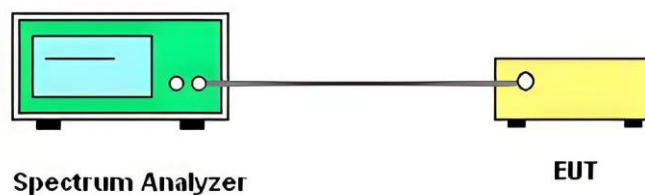


6.4. Test Result

Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH1	79	15	Pass
NVNT	ANT1	2-DH1	79	15	Pass
NVNT	ANT1	3-DH1	79	15	Pass


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH1_Hopping

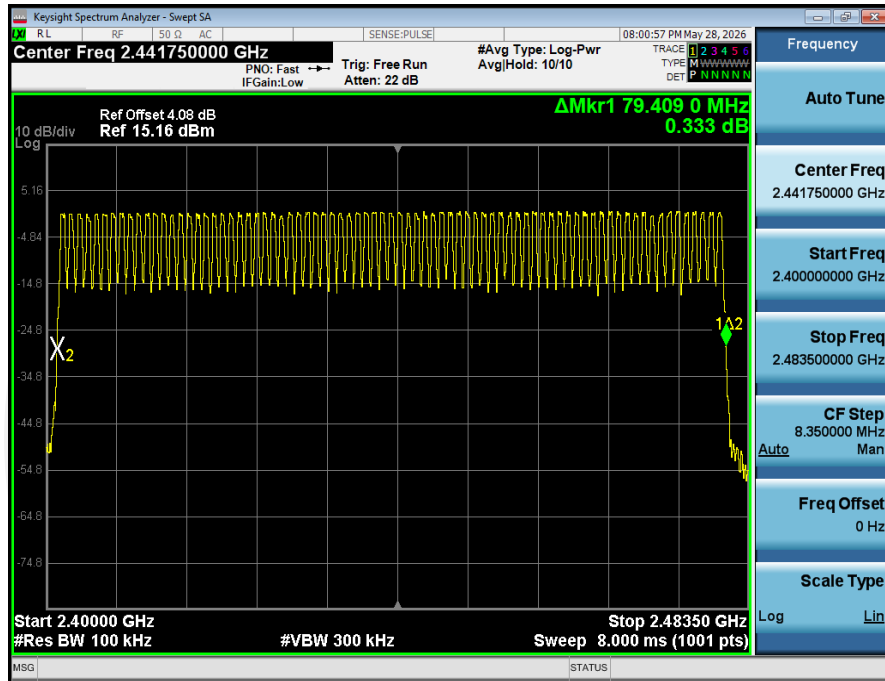

Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH1_Hopping

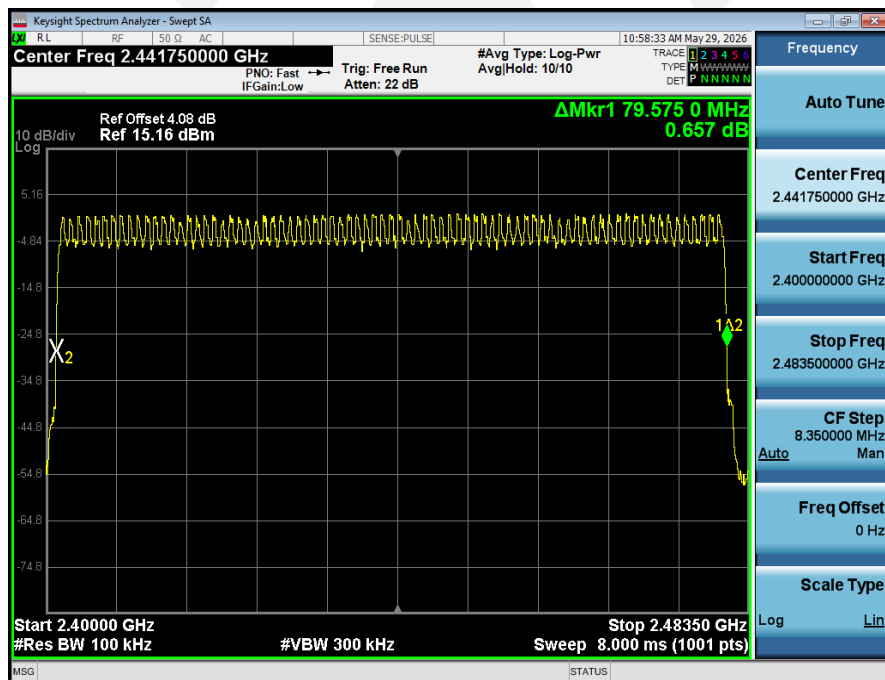

Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_3-DH1_Hopping

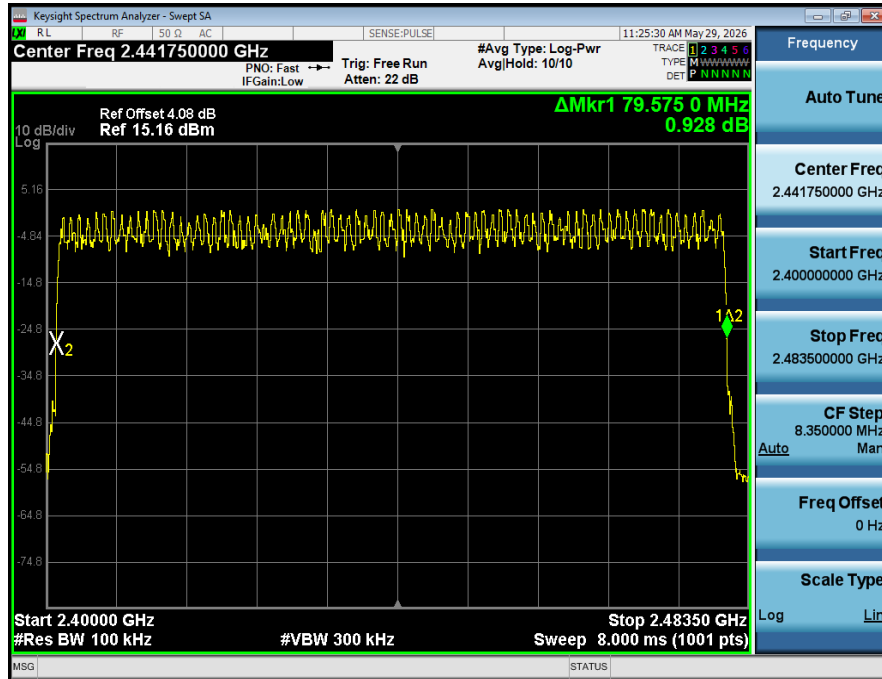

7. Dwell Time

7.1. Test limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

7.2. Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test

for each variation in transmit time.


Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & (\text{Number of hops in the period specified in the requirements}) = \\ & (\text{number of hops on spectrum analyzer}) \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

7.3. Test Setup

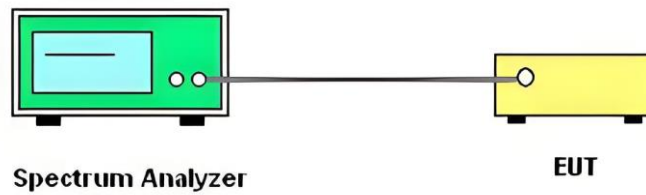

7.4. Test Result

Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH1	0.390	318.00	124.020	0.40	Pass
NVNT	ANT1	2-DH1	0.400	318.00	127.200	0.40	Pass
NVNT	ANT1	3-DH1	0.400	320.00	128.000	0.40	Pass
NVNT	ANT1	1-DH3	1.640	162.00	265.680	0.40	Pass
NVNT	ANT1	1-DH5	2.890	99.00	286.110	0.40	Pass
NVNT	ANT1	2-DH3	1.650	165.00	272.250	0.40	Pass
NVNT	ANT1	2-DH5	2.900	99.00	287.100	0.40	Pass
NVNT	ANT1	3-DH3	1.650	157.00	259.050	0.40	Pass
NVNT	ANT1	3-DH5	2.900	120.00	348.000	0.40	Pass

KeySight Spectrum Analyzer - Sweep SA

08:01:12 PM May 28, 2026

Center Freq 2.441000000 GHz

Trig Delay-500.0 μ s #Avg Type: Log-Pwr

PNO: Fast IFGain:Low Att: 22 dB

TRACE 1 2 3 4 5 6

TYPE W W W W W W W W

DET P N N N N N

Ref Offset 4.08 dB

Ref 15.16 dBm

Δ Mkr1 390.0 μ s

-59.41 dB

10 dB/div

Log

5.16

-4.04

-14.8

-24.8

-34.8

-44.8

-54.8

-64.8

-74.8

TRIG LVL

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 1.0 MHz

Span 0 Hz

Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	t	(Δ)	390.0 μ s	(Δ) -59.41 dBm			
2	F	t		480.0 μ s	0.61 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG

STATUS

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz

Man

Freq Offset
0 Hz

Scale Type
Log

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Mkr1 26.98 s
0.65 dBm

10 dB/div
Log

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)

Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz


Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man


Freq Offset
0 Hz

Scale Type
Log


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH1_2441_00_One_Burst_Time

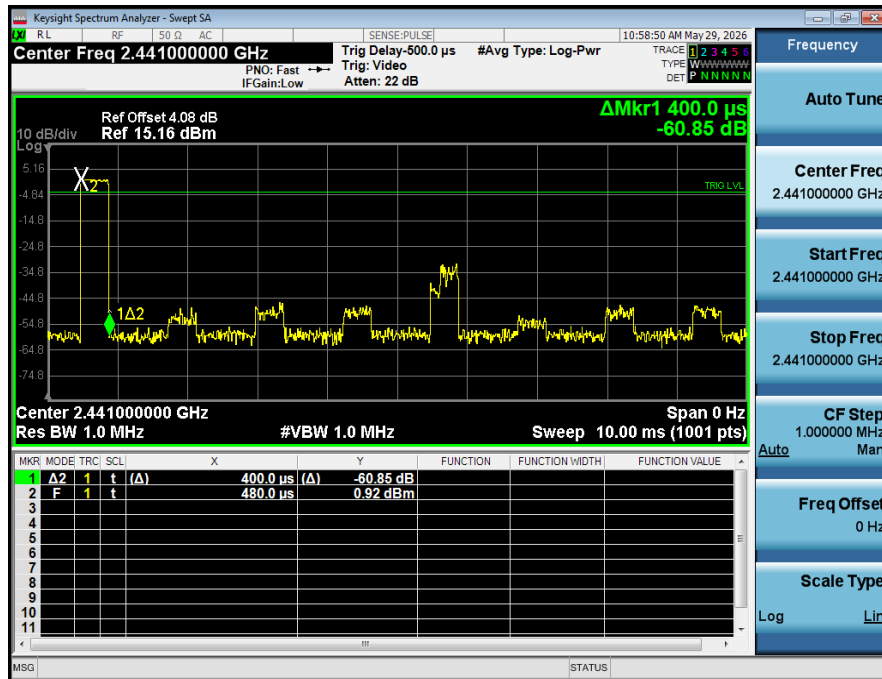


Dwell_Time_(Hopping)_NVNT_ANT1_2-DH1_2441_00_Accumulated

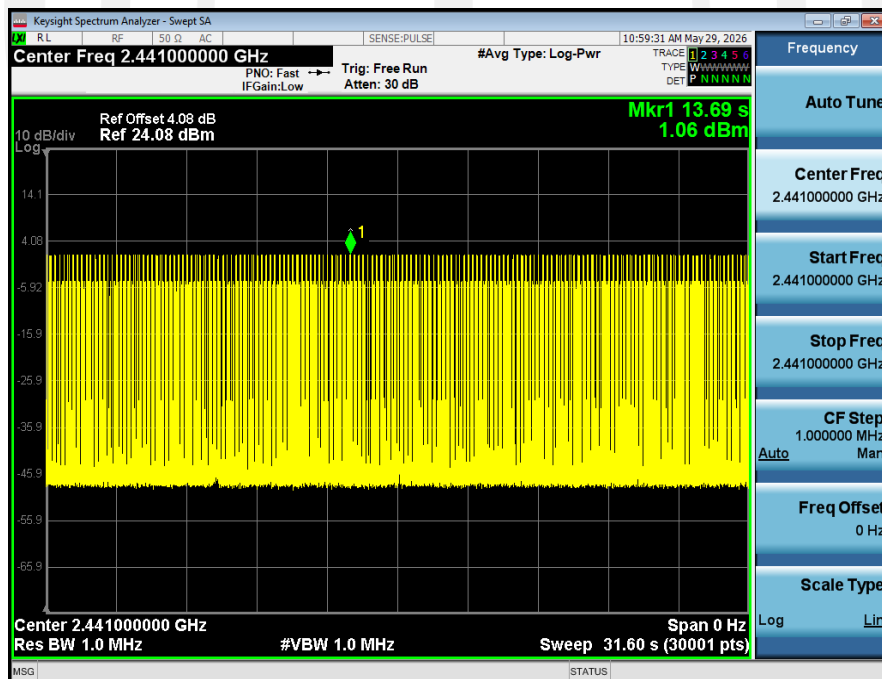

Dwell_Time_(Hopping)_NVNT_ANT1_3-DH1_2441_00_One_Burst_Time

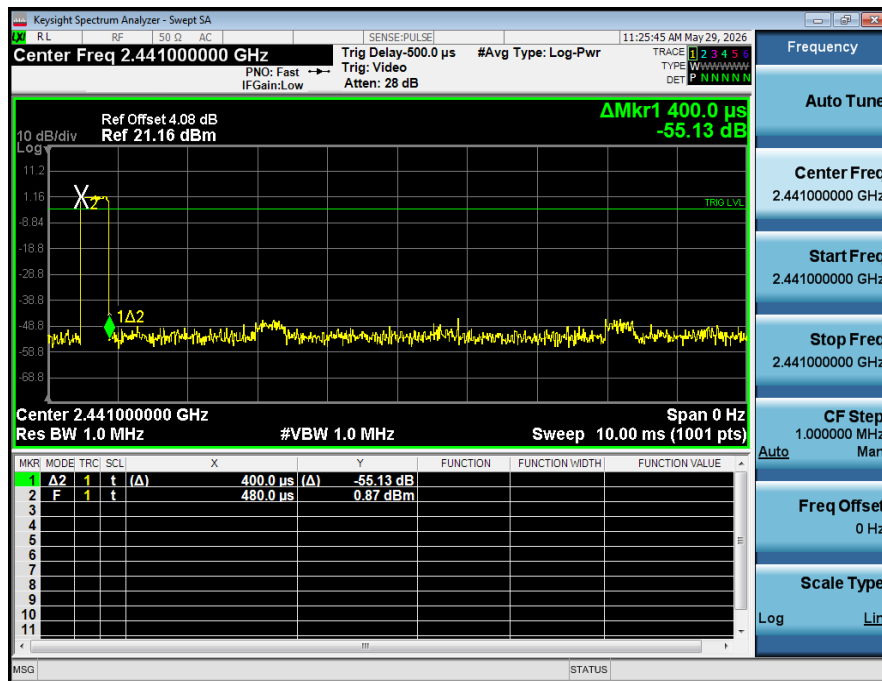

Dwell_Time_(Hopping)_NVNT_ANT1_3-DH1_2441_00_Accumulated

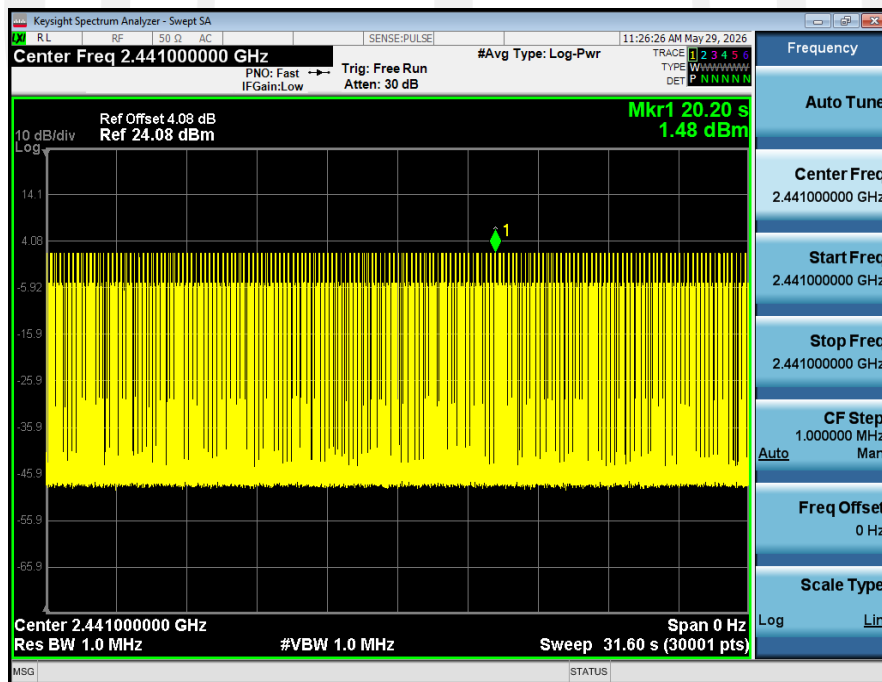

KeySight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz Trig Delay 500.0 μ s #Avg Type: Log-Pwr TRACE 1 2 3 4 5 6
 PNO: Fast Trig: Video TYPE W W W W W W W W W W
 IFGain: Low Atten: 22 dB DET P N N N N N N

Ref Offset 4.08 dB Δ Mkr1 1.640 ms
 Ref 15.16 dBm -49.04 dB

10 dB/div Log

Center 2.441000000 GHz Span 0 Hz
 Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	t	(Δ)	1.640 ms	(Δ) -49.04 dB			
2	F	t		480.0 μ s	0.81 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man

Auto

Freq Offset
0 Hz

Scale Type
Log Lin

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Mkr1 2.094 s
0.85 dBm

10 dB/div
Log

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)

Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz


Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man


Freq Offset
0 Hz

Scale Type
Log


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_One_Burst_Time

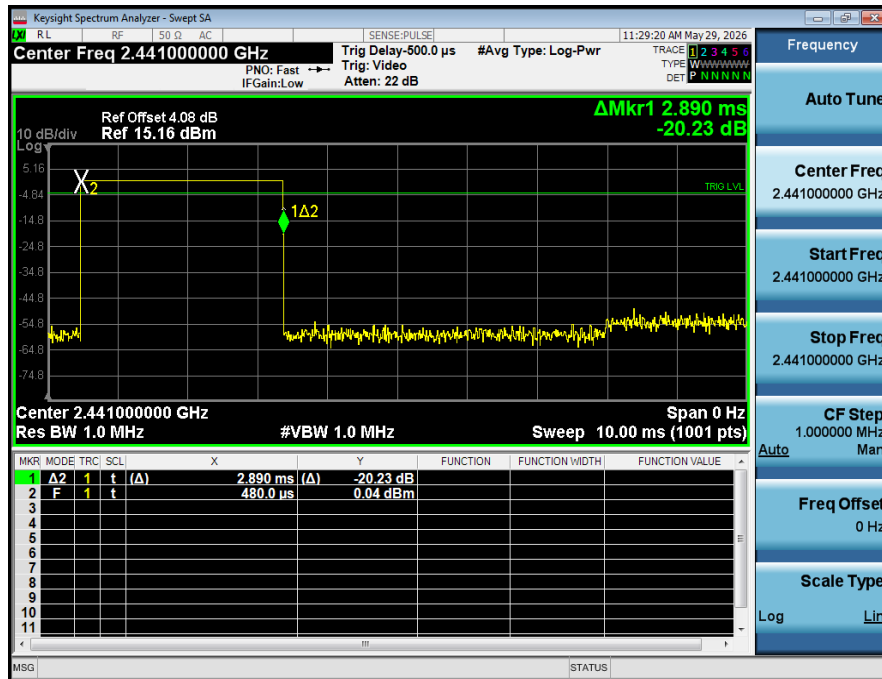


Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_Accumulated

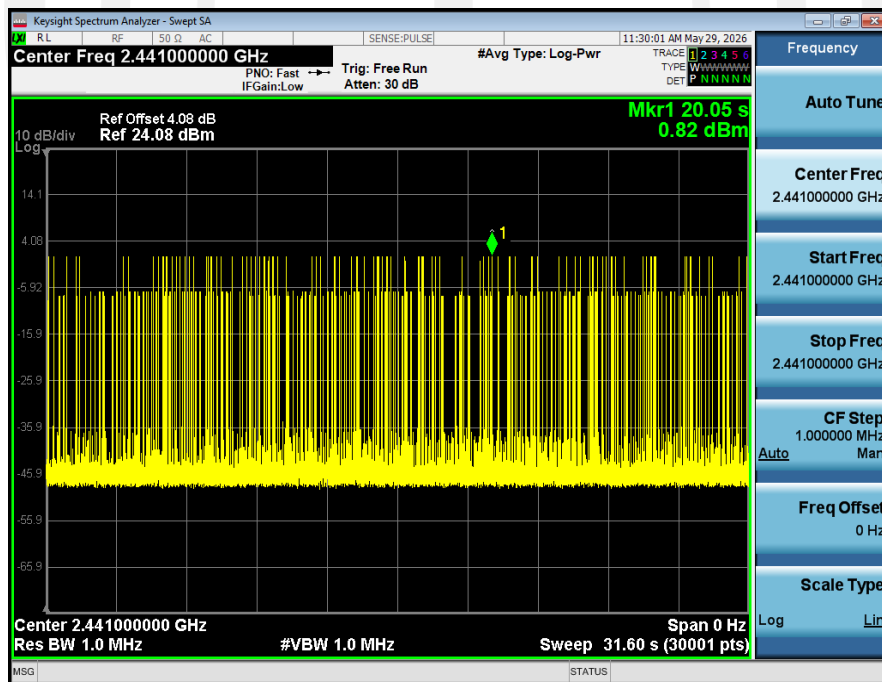

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH3_2441_00_One_Burst_Time

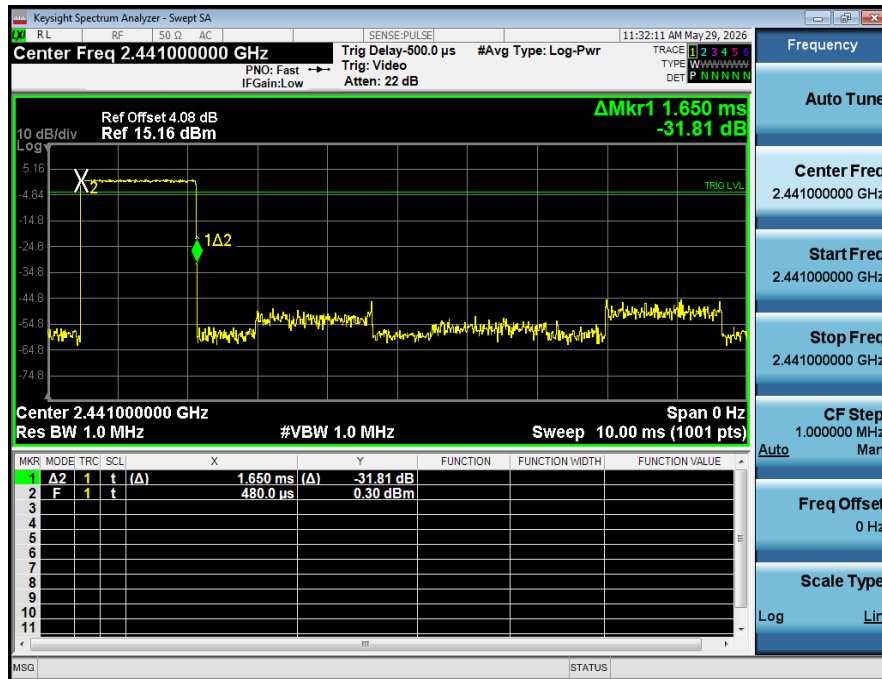

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH3_2441_00_Accumulated

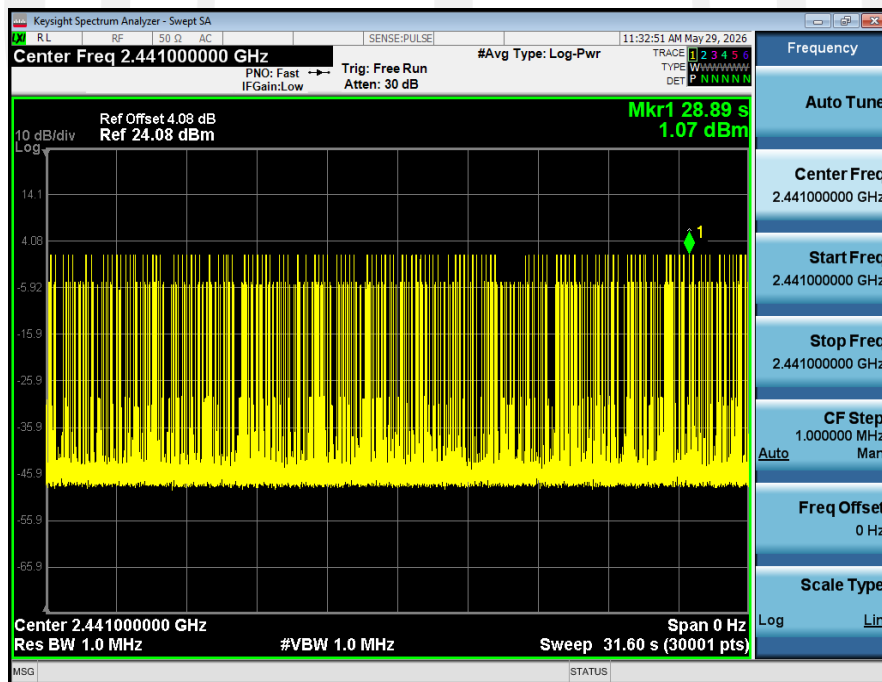

KeySight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz Trig Delay 500.0 μ s #Avg Type: Log-Pwr TRACE 1 2 3 4 5 6
 PNO: Fast Trig: Video TYPE W W W W W W W W
 IFGain: Low Atten: 22 dB DET P N N N N N

Ref Offset 4.08 dB Δ Mkr1 2.900 ms
 Ref 15.16 dBm -42.24 dB

10 dB/div
LOG

Center 2.441000000 GHz Span 0 Hz
 Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	t	(Δ)	2.900 ms	-42.24 dB			
3	F	t		480.0 μ s	0.75 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man

Auto

Freq Offset
0 Hz

Scale Type
Log Lin

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

PNO: Fast → Trg: Free Run #Avg Type: Log-Pwr

IFGain: Low Atten: 30 dB

TRACE 1 2 3 4 5 6 TYPE W W W W W W W W DET P N N N N N

11:36:59 AM May 29, 2026

Ref Offset 4.08 dB Mkr1 19.21 s

Ref 24.08 dBm 1.04 dBm

10 dB/div Log

14.1

4.08

-5.92

-15.9

-25.9

-35.9

-45.9

-55.9

-65.9

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 1.0 MHz

Span 0 Hz

Sweep 31.60 s (30001 pts)

Frequency

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Man

Auto

Freq Offset 0 Hz

Scale Type Log

Lin

The screenshot displays a Keysight Spectrum Analyzer interface. The main plot shows a frequency spectrum with a yellow trace representing the signal. A green horizontal line indicates the reference level at -57.07 dBm. The signal is a burst that starts at approximately 1.650 ms and ends at 480.0 μs. The peak power is measured as -57.07 dBm. The center frequency is set to 2.441 GHz, and the resolution bandwidth (RBW) is 1.0 MHz. The span is 0 Hz, indicating a narrowband measurement.

Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value
1	Δ	t	(Δ)	1.650 ms	(Δ)	-57.07 dBm		
2	F	t		480.0 μs	0.82 dBm			

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Mkr1 30.11 s
1.33 dBm

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)

Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man

Freq Offset
0 Hz

Scale Type
Log

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Trig Delay 500.0 μ s #Avg Type: Log-Pwr

PNO: Fast IFGain: Low Trig: Video Atten: 28 dB

TRACE 1 2 3 4 5 6

TYPE W W W W W W W W

DET P N N N N N

Ref Offset 4.08 dB

Ref 21.16 dBm

Δ Mkr1 2.900 ms

-53.30 dB

10 dB/div

Log

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 1.0 MHz

Sweep 10.00 ms (1001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	2.900 ms	(Δ)	-53.30 dB	
2	F	1	t		480.0 μ s		0.82 dBm	
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Auto Man

Freq Offset 0 Hz

Scale Type

Log Lin

KeySight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Mkr1 3.279 s
1.36 dBm

10 dB/div
Log

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)

Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man

Freq Offset
0 Hz

Scale Type
Log

8. Out-of-band Emissions


8.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required.

8.2. Test Procedure

Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers. Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

8.3. Test Setup

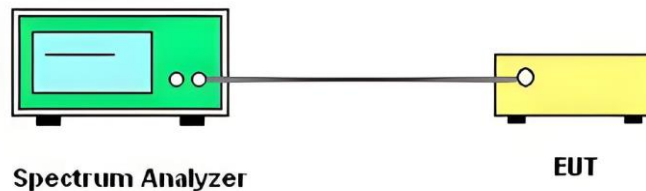

8.4. Test Results

PASS.

The test results are listed in next pages.

Band Edge: Pass

Condition	Antenna	Modulation	TX Mode	Ref_level(dBm)	Bandedge MAX.Value (dBm)	Limit(dBm)	Result
NVNT	ANT1	1-DH1	2402.00	-0.237	-49.760	-20.237	Pass
NVNT	ANT1	1-DH1	Hopping_LCH	0.407	-55.993	-19.593	Pass
NVNT	ANT1	1-DH1	2480.00	0.605	-55.472	-19.395	Pass
NVNT	ANT1	1-DH1	Hopping_HCH	0.725	-51.495	-19.275	Pass
NVNT	ANT1	2-DH1	2402.00	0.146	-51.862	-19.854	Pass
NVNT	ANT1	2-DH1	Hopping_LCH	0.714	-51.817	-19.286	Pass
NVNT	ANT1	2-DH1	2480.00	0.942	-55.131	-19.058	Pass
NVNT	ANT1	2-DH1	Hopping_HCH	1.038	-53.083	-18.962	Pass
NVNT	ANT1	3-DH1	2402.00	0.175	-53.381	-19.825	Pass
NVNT	ANT1	3-DH1	Hopping_LCH	0.649	-54.384	-19.351	Pass
NVNT	ANT1	3-DH1	2480.00	0.975	-53.583	-19.025	Pass
NVNT	ANT1	3-DH1	Hopping_HCH	0.990	-52.303	-19.010	Pass

