




5.7 Band Edge

5.7.1 Test Specification

Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10: 2020
Limit:	(1) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should complies 15.209.
Test Setup:	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a turn table at a height of 1.5 m. The turn table is 3 m away from the antenna feed point. The antenna is mounted on a variable-height antenna tower at a height of 1.4 m. The antenna is connected to a receiver and an amplifier. The ground plane is indicated at the base of the setup.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

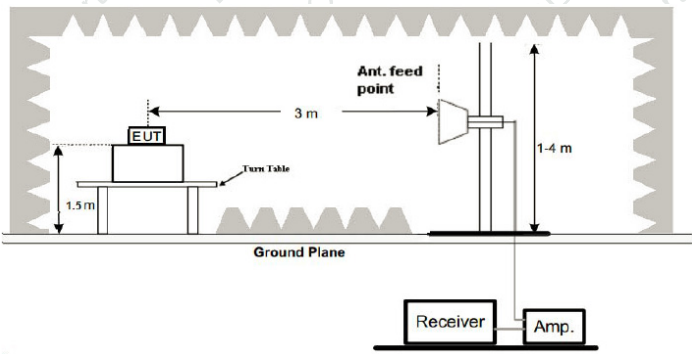

	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.
Test Result:	PASS




5.7.2 Test Data

All the test modes completed for test. Only the worst result was reported as below:

802.11n(HT20)-5745

Antenna polarity: Horizontal

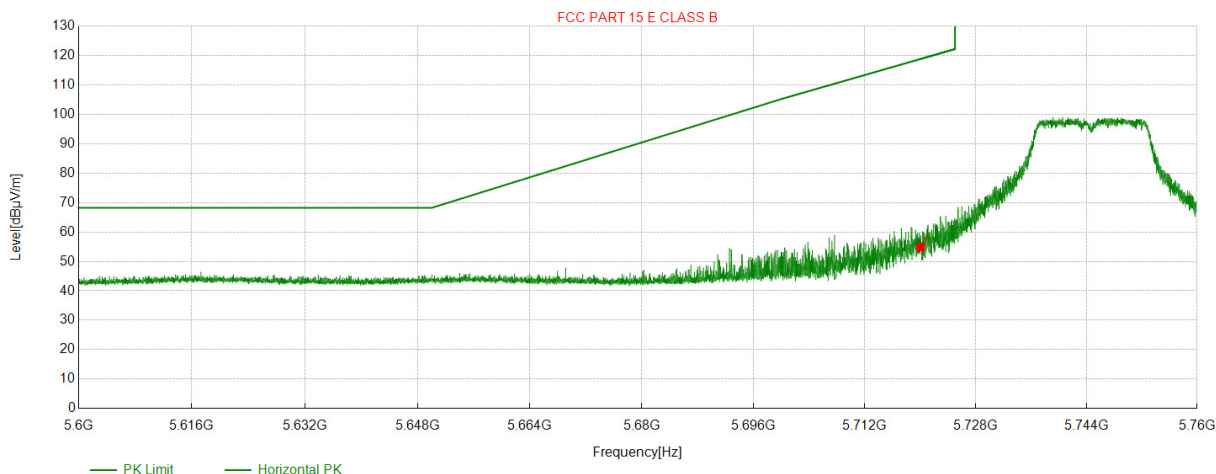


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5720.000	60.85	54.78	-6.07	118.81	64.03	150	238	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: Vertical

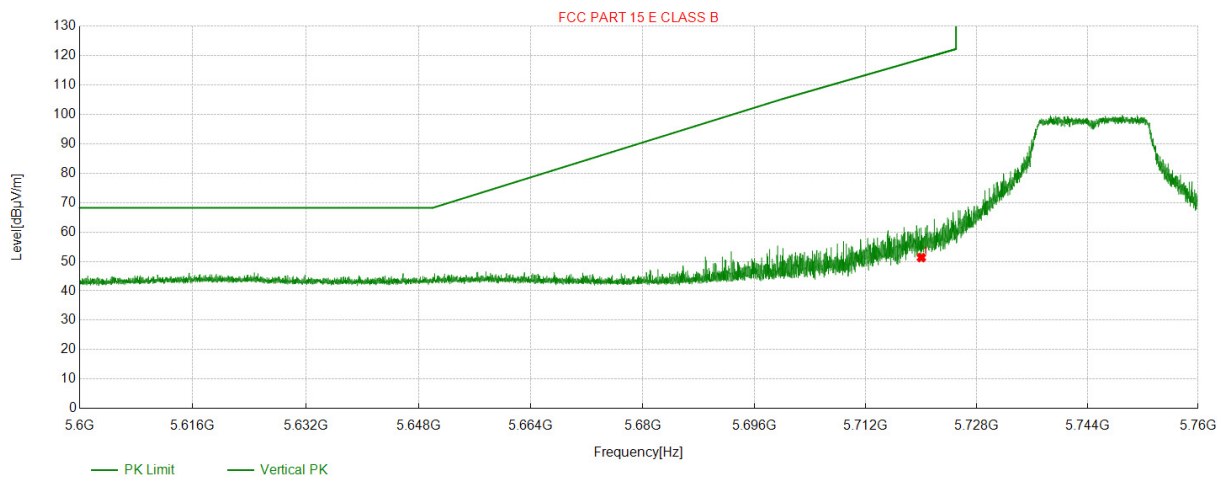


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5720.000	57.39	51.32	-6.07	118.81	67.49	150	328	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



802.11n(HT20)-5825

Antenna polarity: Horizontal

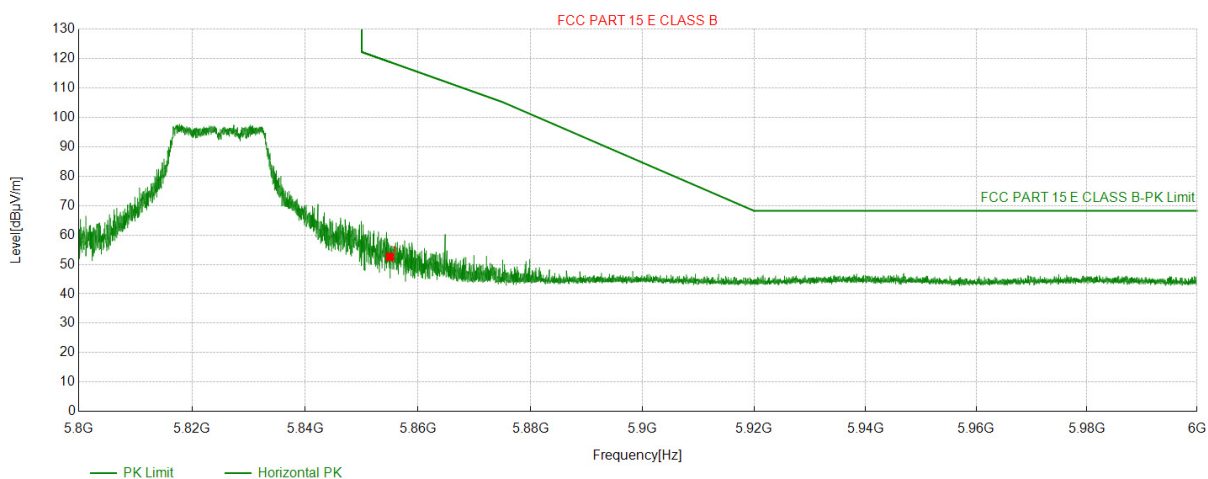


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5855.000	58.36	52.57	-5.79	118.80	66.23	150	198	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: Vertical

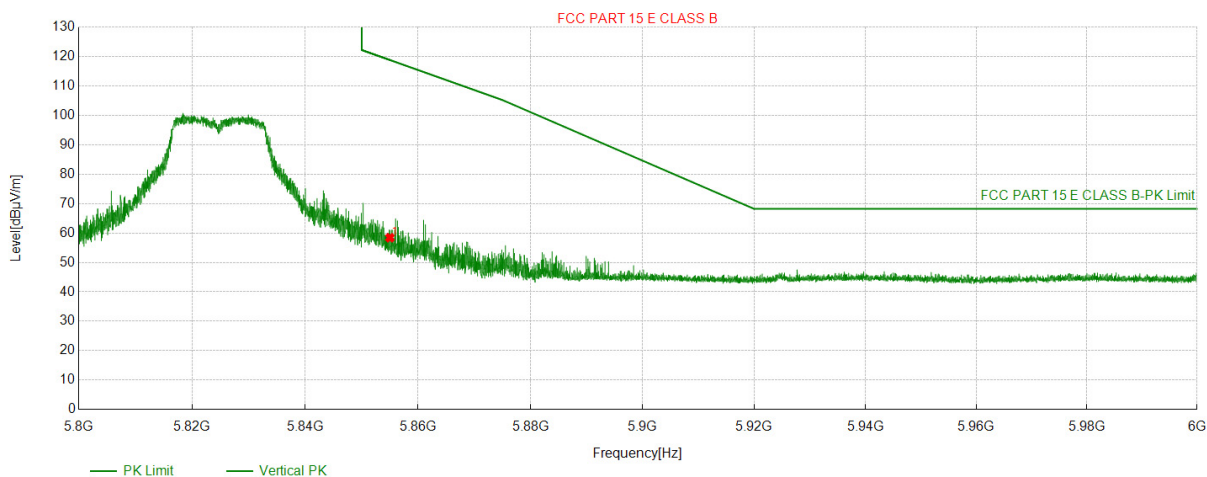

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	PK Level [dBμV/m]	Factor [dB]	PK Limit [dBμV/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5855.000	64.19	58.40	-5.79	118.80	60.40	150	283	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



5.8 Frequency Stability Measurement

5.8.1 Test Specification


Test Requirement:	FCC Part15 Section 15.407(g)
Test Method:	ANSI C63.10: 2020
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre>graph LR; SA[Spectrum Analyzer] --- EUT[EUT]; EUT --- TCh[Temperature Chamber]; EUT --- P[AC/DC Power supply];</pre>
Test Procedure:	- The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. - Turn the EUT on and couple its output to a spectrum analyzer. - Turn the EUT off and set the chamber to the highest temperature specified. - Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. - Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. - The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A



5.8.2 Test Result

Test Mode	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)
802.11a	5745	NV	NT	-54600.00	-9.503916	20
802.11a	5745	LV	NT	-53400.00	-9.295039	20
802.11a	5745	HV	NT	-53100.00	-9.242820	20
802.11a	5785	NV	NT	-54900.00	-9.490061	20
802.11a	5785	LV	NT	-54000.00	-9.334486	20
802.11a	5785	HV	NT	-53700.00	-9.282627	20
802.11a	5825	NV	NT	-56100.00	-9.630901	20
802.11a	5825	LV	NT	-54600.00	-9.373391	20
802.11a	5825	HV	NT	-54300.00	-9.321888	20

Test Mode	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)
802.11a	5745	NV	-30	-52800.00	-9.190601	20
802.11a	5745	NV	-20	-52800.00	-9.190601	20
802.11a	5745	NV	-10	-52800.00	-9.190601	20
802.11a	5745	NV	0	-52800.00	-9.190601	20
802.11a	5745	NV	10	-52500.00	-9.138381	20
802.11a	5745	NV	20	-52800.00	-9.190601	20
802.11a	5745	NV	30	-52500.00	-9.138381	20
802.11a	5745	NV	40	-52500.00	-9.138381	20
802.11a	5745	NV	50	-52500.00	-9.138381	20
802.11a	5785	NV	-30	-53400.00	-9.230769	20
802.11a	5785	NV	-20	-53100.00	-9.178911	20
802.11a	5785	NV	-10	-52800.00	-9.127053	20
802.11a	5785	NV	0	-52800.00	-9.127053	20
802.11a	5785	NV	10	-52500.00	-9.075194	20
802.11a	5785	NV	20	-52500.00	-9.075194	20
802.11a	5785	NV	30	-52500.00	-9.075194	20
802.11a	5785	NV	40	-52500.00	-9.075194	20
802.11a	5785	NV	50	-52500.00	-9.075194	20
802.11a	5825	NV	-30	-54000.00	-9.270386	20
802.11a	5825	NV	-20	-53700.00	-9.218884	20
802.11a	5825	NV	-10	-53700.00	-9.218884	20
802.11a	5825	NV	0	-53100.00	-9.115880	20
802.11a	5825	NV	10	-53100.00	-9.115880	20
802.11a	5825	NV	20	-53100.00	-9.115880	20
802.11a	5825	NV	30	-52800.00	-9.064378	20
802.11a	5825	NV	40	-52800.00	-9.064378	20
802.11a	5825	NV	50	-52800.00	-9.064378	20



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

The antenna used in this product is an External Antenna, with non-standard SMA connector, need professional installation. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 6.13dBi.

Back view of the Zehnt EC001 monitor. The image shows the mounting bracket and the label with the following information:



- Brand: ZEHNT
- Model: EC001
- S/N: [Barcode]

The label also includes a barcode and the text "DC JACK TYPE-C ON/OFF MIC". A red arrow points to the mounting bracket.



6. Test Setup Photos of the EUT

Radiated Emission

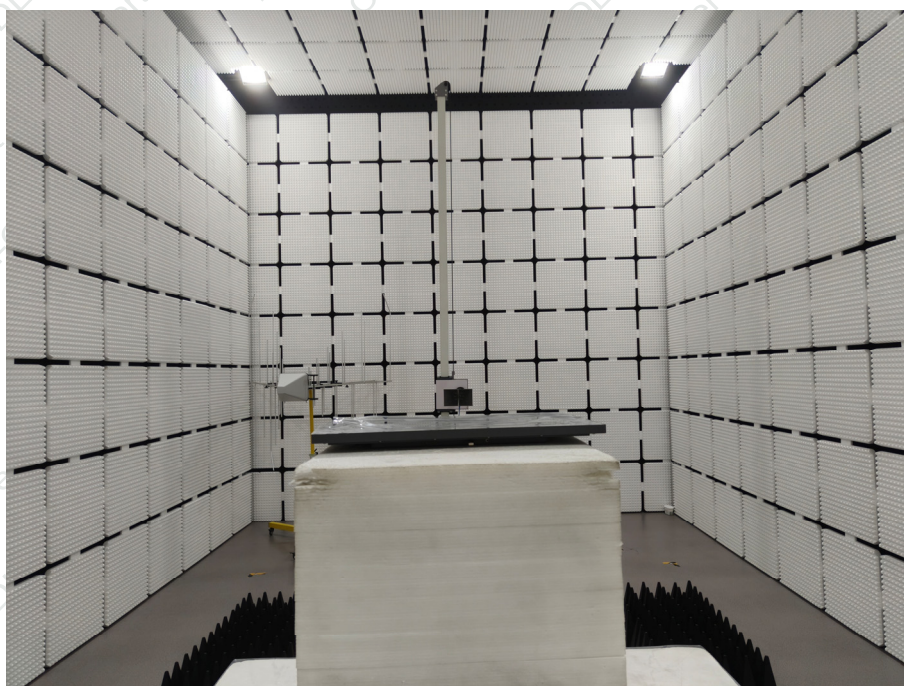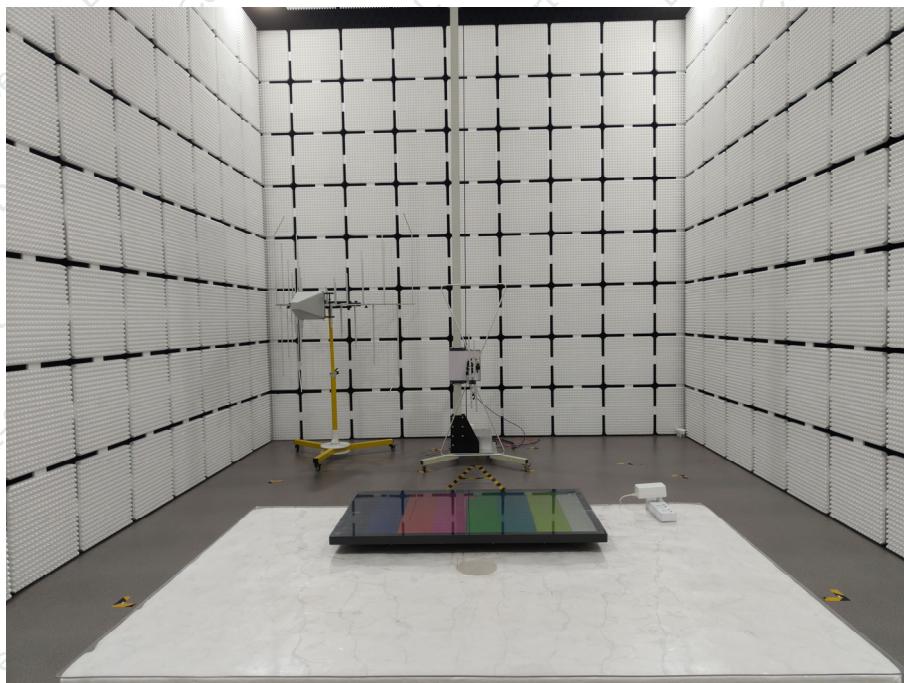




AC Conducted Emission



RF Conducted Emission

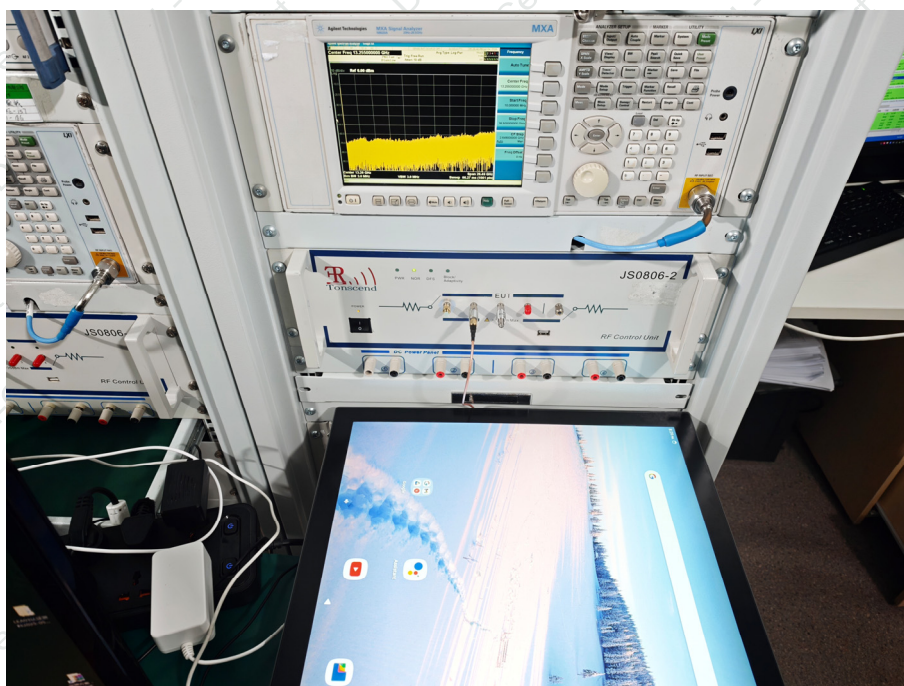



7. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----