


# FCC TEST REPORT

**Report No.**..... : NTC-ER2605015

**Applicant's name** ..... : Guangdong Moore Technology Co Ltd

**Address** ..... : Building 39-1, No. 1, Huizhi Road Daze Town, Xinhui  
District,Jiangmen,Guangdong

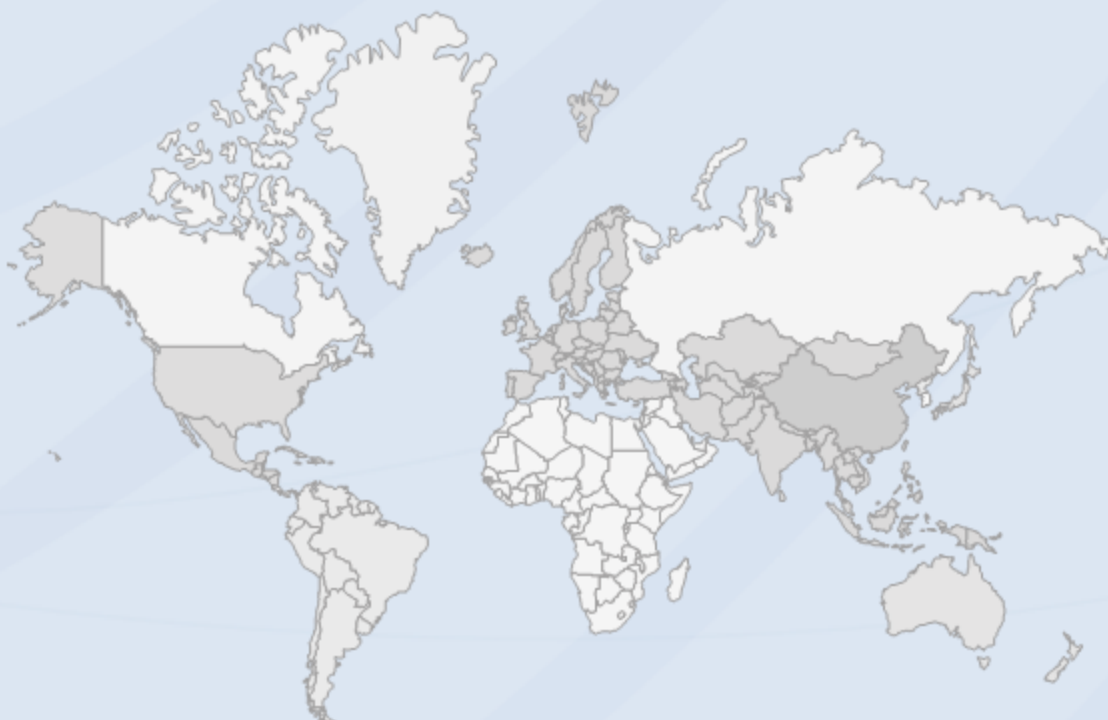

## DONGGUAN NEW TESTING CENTRE CO., LTD

Address: 1F & 3F, No. 1 the 1st North Industry Road Songshan Lake Science & Technology Park Dongguan, People's Republic of China 523808

Tel: +86-769-22212079

Web: <http://www.ntc-cert.com>

E-mail: [dave@ntc-cert.com](mailto:dave@ntc-cert.com)

## TABLE OF CONTENTS

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. SUMMARY.....</b>                                 | <b>4</b>  |
| 1.1. Test Standards.....                               | 4         |
| 1.2. Test Description .....                            | 4         |
| <b>2. Test Facility.....</b>                           | <b>5</b>  |
| <b>3. GENERAL INFORMATION .....</b>                    | <b>6</b>  |
| 3.1. Environmental conditions .....                    | 6         |
| 3.2. General Description of EUT .....                  | 6         |
| 3.3. Related Submittal(s) / Grant (s) .....            | 6         |
| 3.4. Modifications.....                                | 6         |
| 3.5. Equipments Used During The Test.....              | 7         |
| <b>4. TEST CONDITIONS AND RESULTS.....</b>             | <b>8</b>  |
| 4.1. Conducted Emission (AC Main).....                 | 8         |
| 4.2. Radiated Emission .....                           | 9         |
| 4.3. 20dB Bandwidth.....                               | 19        |
| 4.4. Deactivation Time.....                            | 20        |
| 4.5. Antenna Requirement.....                          | 21        |
| <b>5. Test Setup Photos of the EUT.....</b>            | <b>22</b> |
| <b>6. External and Internal Photos of the EUT.....</b> | <b>23</b> |

## TEST REPORT DECLARE

|                             |   |                                                                                                                                |
|-----------------------------|---|--------------------------------------------------------------------------------------------------------------------------------|
| <b>FCC ID</b>               | : | 2BWIX-ZX-RF12J                                                                                                                 |
| <b>Applicant</b>            | : | Guangdong Moore Technology Co Ltd                                                                                              |
| <b>Address</b>              | : | Building 39-1, No. 1, Huizhi Road Daze Town, Xinhui District, Jiangmen, Guangdong                                              |
| <b>Equipment under Test</b> | : | Remote control                                                                                                                 |
| <b>Model/Type reference</b> | : | ZX-RF12J                                                                                                                       |
| <b>List Model(s)</b>        | : | N/A                                                                                                                            |
| <b>Trade Mark</b>           | : | N/A                                                                                                                            |
| <b>Manufacturer</b>         | : | Guangdong Moore Technology Co Ltd                                                                                              |
| <b>Address</b>              | : | Building 39-1, No. 1, Huizhi Road Daze Town, Xinhui District, Jiangmen, Guangdong                                              |
| <b>Test Laboratory</b>      | : | Dongguan New Testing Centre Co., Ltd                                                                                           |
| <b>CAB identifier</b>       | : | CN1264                                                                                                                         |
| <b>Address</b>              | : | 1F & 3F, No. 1 the 1st North Industry Road Songshan Lake Science & Technology Park Dongguan, People's Republic of China 523808 |

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C 15.231, ANSI C63.10:2020.

### We Declare:

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

|                      |                            |                        |             |
|----------------------|----------------------------|------------------------|-------------|
| <b>Report No.:</b>   | NTC-ER2605015              |                        |             |
| <b>Date of Test:</b> | Jun.08,2026 to Jun.09,2026 | <b>Date of Report:</b> | Jun.09,2026 |

**Prepared By:**

*Taylor Chen*

**Taylor Chen/Engineer**



**Dave Gao/LAB Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

**\*\* Modified History \*\***

| Version     | Description                 | Issued Data | Report No.    | Remark   |
|-------------|-----------------------------|-------------|---------------|----------|
| Version 1.0 | Initial Test Report Release | 2026-06-09  | NTC-ER2605015 | Dave Gao |
|             |                             |             |               |          |
|             |                             |             |               |          |
|             |                             |             |               |          |
|             |                             |             |               |          |
|             |                             |             |               |          |
|             |                             |             |               |          |
|             |                             |             |               |          |
|             |                             |             |               |          |

## 1. SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.231:](#) Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

[ANSI C63.10:2020](#) : American National Standard for Testing Unlicensed Wireless Devices

### 1.2. Test Description

| FCC and IC Requirements              |                                                 |      |
|--------------------------------------|-------------------------------------------------|------|
| FCC Part 15.207                      | Conducted Emission                              | N/A  |
| FCC Part 15.231(a)(1)                | Automatically Deactivate                        | PASS |
| FCC Part 15.231(b)                   | Electric Field Strength of Fundamental Emission | PASS |
| FCC Part 15.205 & 15.209 & 15.231(b) | Electric Field Strength of Spurious Emission    | PASS |
| FCC Part 15.231(c)                   | -20dB bandwidth                                 | PASS |

Remark: The measurement uncertainty is not included in the test result.

## 2. Test Facility

### 1.3.1 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16- 4 “Specification for radiodisturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

| Test Item                                                 | Uncertainty           |
|-----------------------------------------------------------|-----------------------|
| Uncertainty for Conduction emission test                  | 3.2dB                 |
| Uncertainty for Radiation Emission test<br>(30MHz – 1GHz) | 4.60 dB (Polarize: V) |
|                                                           | 4.60 dB (Polarize: H) |
| Uncertainty for Radiation Emission test<br>(1GHz – 18GHz) | 4.82 dB (Polarize: V) |
|                                                           | 4.82 dB (Polarize: H) |
| Uncertainty for conducted RF Power                        | 0.63dB                |
| Stop Transmitting Time Test                               | ±0.5%                 |
| Uncertainty for frequency error                           | 5.8 x 10-8            |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. GENERAL INFORMATION

#### 3.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

#### 3.2. General Description of EUT

|                       |                |
|-----------------------|----------------|
| Product Name:         | Remote control |
| Model/Type reference: | ZX-RF12J       |
| Power supply:         | DC 3V          |
| Modulation:           | ASK            |
| Operation frequency:  | 433.92MHz      |
| Channel number:       | 1              |
| Antenna type:         | PCB antenna    |
| Antenna gain:         | 0dBi           |
| Hardware version:     | V1.0           |
| Software version:     | V1.0           |

Note: 1. For more details, please refer to the user's manual of the EUT.

2. The appearance of the buttons on this model sample may vary depending on the specific requirements of the customer, but the internal modules are the same.

#### 3.3. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

#### 3.4. Modifications

No modifications were implemented to meet testing criteria.

### 3.5. Equipments Used During The Test

| Item | Equipment                           | Manufacturer | Model No.           | Serial No.             | Last Cal.  | Cal. Interval |
|------|-------------------------------------|--------------|---------------------|------------------------|------------|---------------|
| 1    | Test Receiver                       | R&S          | ESPI                | 100146                 | 2026-05-11 | 1 Year        |
| 2    | LISN                                | R&S          | ENV216              | 3650.6550.06           | 2026-05-11 | 1 Year        |
| 3    | LISN                                | KHC          | KH3765              | 37650053               | 2026-05-11 | 1 Year        |
| 4    | 8-WIRE ISN for CAT6                 | R&S          | ENY81-CA6           | 101862                 | 2026-05-11 | 1 Year        |
| 5    | RF Cable                            | HUBER        | SUCOFLEX100         | 30722/4E               | 2025-05-08 | 2 Year        |
| 6    | EMI Test Receiver                   | R&S          | ESR                 | 7250-304067528         | 2026-05-11 | 1 Year        |
| 7    | Trilog Broadband Antenna            | Schwarzbeck  | VULB9168            | 00969                  | 2025-05-08 | 2 Year        |
| 8    | Pre-amplifier                       | R&S          | 8449B               | 3008A04721             | 2026-05-11 | 1 Year        |
| 9    | Active Loop antenna                 | Schwarzbeck  | FMZB-1519           | 1519-038               | 2026-05-11 | 1 Year        |
| 10   | Horn antenna                        | Schwarzbeck  | BBHA9120D           | 453                    | 2025-05-08 | 2 Year        |
| 11   | Double Ridged Horn Antenna          | A.H. System  | SAS-574             | 584                    | 2026-05-11 | 1 Year        |
| 12   | RF Cable                            | GORE         | OSQ01Q01078.7       | SN15458474             | 2026-05-11 | 1 Year        |
| 13   | RF Cable                            | ESCO         | ETS-LINGREN         | RFC-SMS-100-SMS-340-IN | 2026-05-11 | 1 Year        |
| 14   | Measurement software                | Farad        | EZ-EMC(VER:1.1.4.2) | N/A                    | N/A        | N/A           |
| 15   | SIGNAL ANALYZER                     | KEYSIGHT     | N9020A              | MY53420939             | 2026-05-11 | 1 Year        |
| 16   | SIGNAL GENERATOR                    | Agilent      | N5182A              | MY50141563             | 2026-05-11 | 1 Year        |
| 17   | WIDEBAND RADIO COMMUNICATION TESTER | R&S          | CMW500              | 1201.0002K50           | 2026-05-11 | 1 Year        |
| 18   | POWER SENSOR                        | Agilent      | U2021XA             | MY54320040             | 2026-05-11 | 1 Year        |
| 19   | POWER SENSOR                        | Agilent      | U2021XA             | MY55060007             | 2026-05-11 | 1 Year        |
| 20   | MEASUREMENT SOFTWARE                | MWRftest     | MTS8310             | N/A                    | N/A        | N/A           |

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emission (AC Main)

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a flood stand system; a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
2. Support equipment, if needed, was placed as per ANSI C63.10-2020
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

#### TEST RESULTS

Not applicable for device which is battery supply.

## 4.2. Radiated Emission

### Limit

For intentional device, according to 15.209(a) the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table .

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

In addition to the provisions of 15.231(b) and RSS 210-A1.1.2, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|-----------------------------|--------------------------------------------------|---------------------------------------------------------|
| 40.66-40.70                 | 2,250                                            | 225                                                     |
| 70-130                      | 1,250                                            | 125                                                     |
| 130-174                     | <sup>1</sup> 1,250 to 3,750                      | <sup>1</sup> 125 to 375                                 |
| 174-260                     | 3,750                                            | 375                                                     |
| 260-470                     | <sup>1</sup> 3,750 to 12,500                     | <sup>1</sup> 375 to 1,250                               |
| Above 470                   | 12,500                                           | 1,250                                                   |

<sup>1</sup> Linear interpolations.

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters  $=41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

Note:

(1)The tighter limit applies at the band edges.

(2)For above 30MHz:

Emission Level(dBuV/m)=20log Emission Level(μV/m)

For 0.009-0.490MHz:

Emission Level(dBuV/m)=20log Emission Level(μV/m)+40log(300/3)

For 0.049-30MHz:


Emission Level(dBuV/m)=20log Emission Level(μV/m)+40log(30/3)

So the field strength of emission limits have been calculated in below table.


| Fundamental Frequency(MHz) | Field Strength of Fundamental (microvolt/meter) at 3m |
|----------------------------|-------------------------------------------------------|
| 433.92 MHz                 | 80.82(Average)                                        |
| 433.92 MHz                 | 100.82(Peak)                                          |

**TEST CONFIGURATION**


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

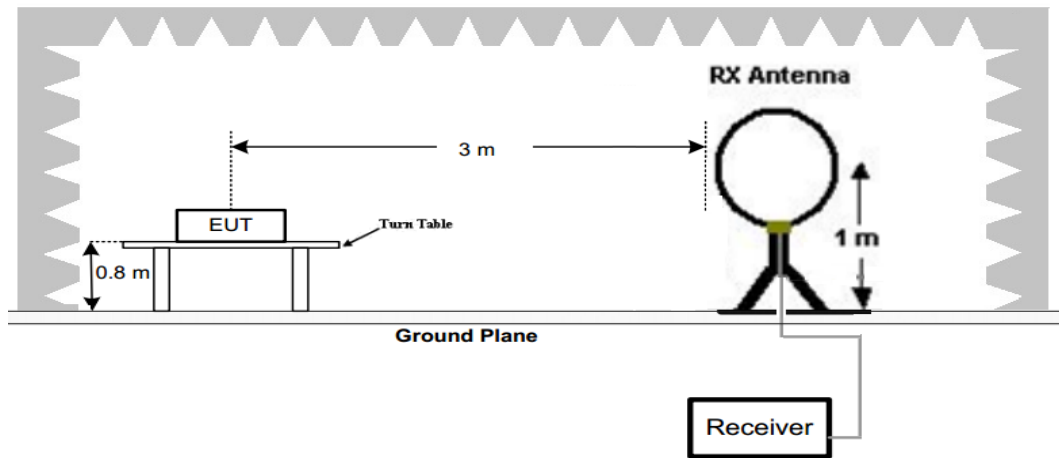

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

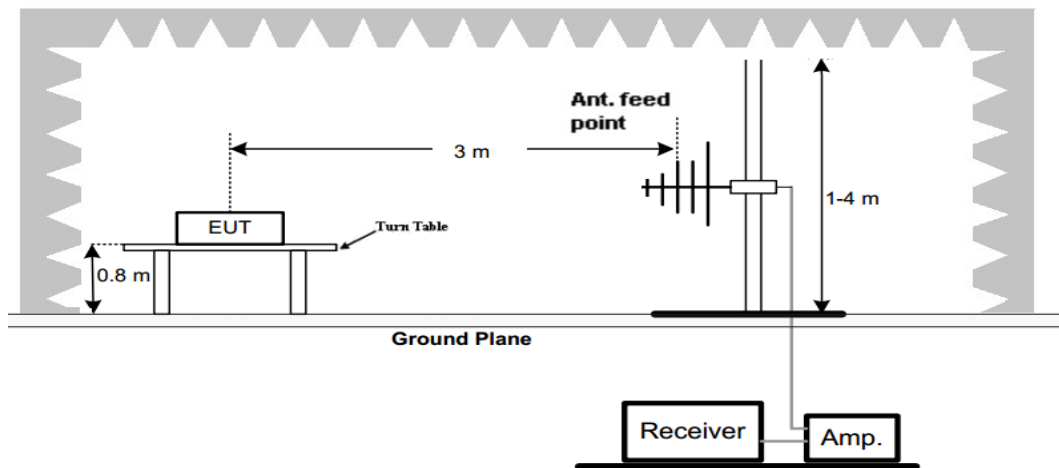


(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

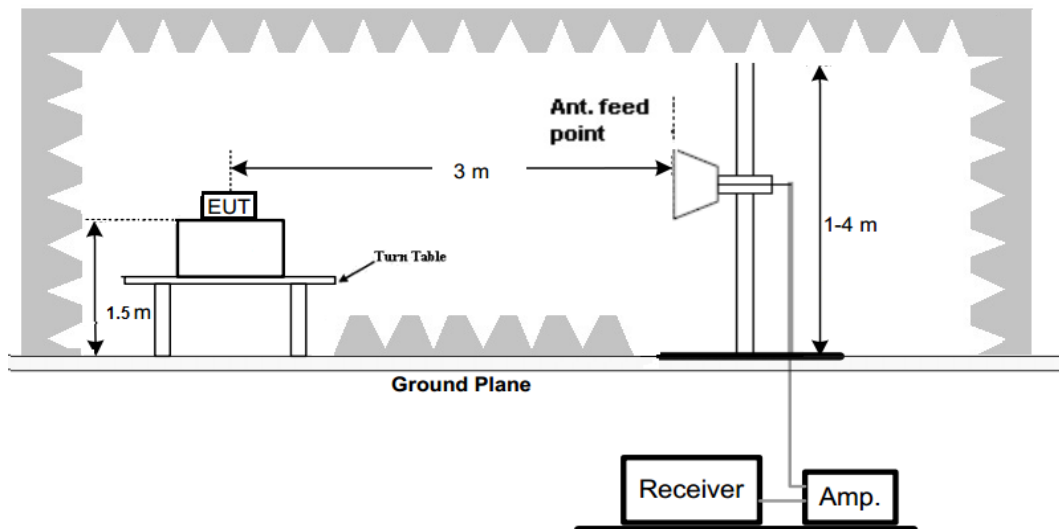

**Test Procedure**

1. The EUT was placed on the top of a rotating table (0.8 meter below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
  2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
  5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
  6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
  7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which is worse case, only the test worst case mode is recorded in the report.
-


**TEST RESULTS**

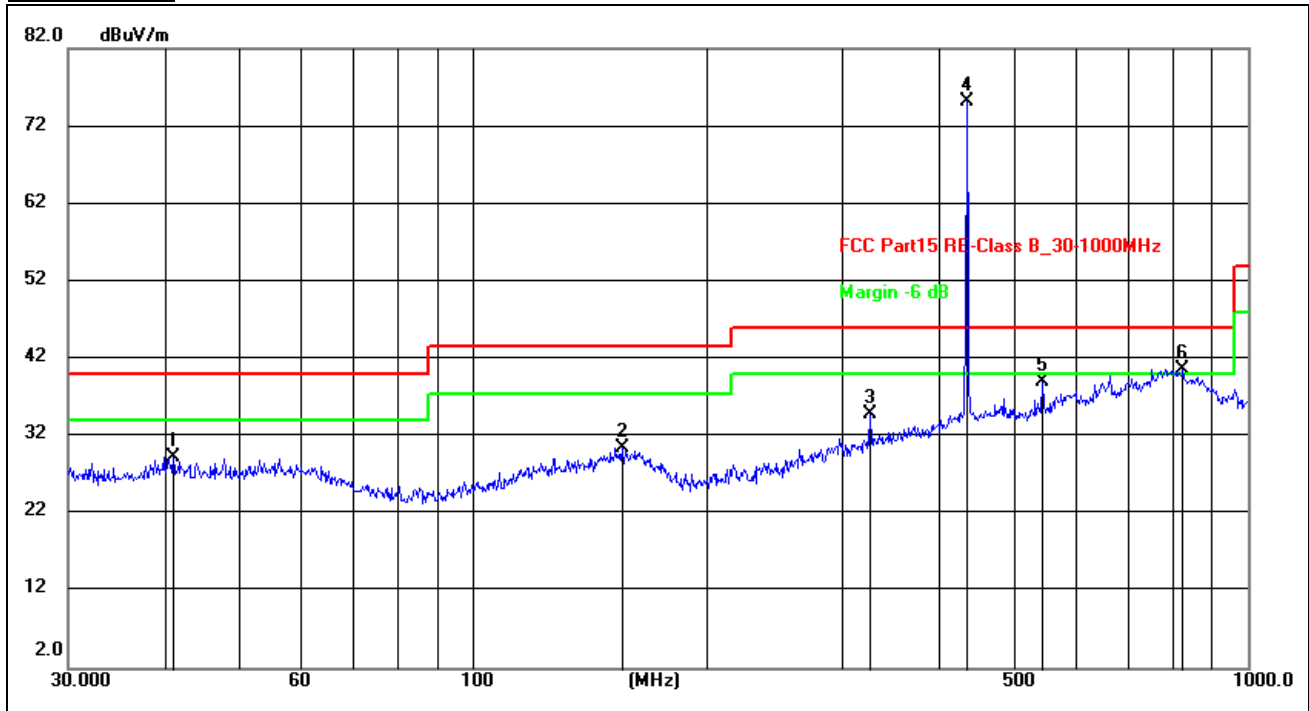

|        |                                  |                     |                      |
|--------|----------------------------------|---------------------|----------------------|
| Site:  | 966LAB                           | Antenna::Horizontal | Temperature(C):24(C) |
| Limit: | FCC Part15 RE-Class B_30-1000MHz |                     | Humidity(%):60%      |
| EUT:   | Remote control                   | Test Time:          | 2026/6/9 10:03:18    |
| M/N.:  | ZX-RF12J                         | Power Rating:       | DC 3V                |
| Mode:  | Working                          | Test Engineer:      | Taylor Chen          |
| Note:  |                                  |                     |                      |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|--------|
| 1   | 40.9880         | 15.63          | 13.59         | 29.22          | 40.00          | -10.78      | peak | 200         | 214           |        |
| 2   | 155.9101        | 15.67          | 14.86         | 30.53          | 43.50          | -12.97      | peak | 100         | 332           |        |
| 3   | 325.5958        | 19.09          | 15.79         | 34.88          | 46.00          | -11.12      | peak | 100         | 278           |        |
| 4 * | 433.9251        | 57.21          | 17.87         | 75.08          | 46.00          | 29.08       | peak | 100         | 230           |        |
| 5   | 543.2742        | 19.31          | 19.80         | 39.11          | 46.00          | -6.89       | peak | 200         | 234           |        |
| 6 ! | 824.5968        | 15.43          | 25.16         | 40.59          | 46.00          | -5.41       | peak | 100         | 92            |        |


| Fundamental and Harmonics |                     |                                       |                        |                            |                         |            |
|---------------------------|---------------------|---------------------------------------|------------------------|----------------------------|-------------------------|------------|
| Freq(MHz)                 | Peak Level (dBuV/m) | AV Factor(dB/m)<br>(see Attachment D) | Average Level (dBuV/m) | Limit(dBuV/m)<br>(average) | Limit(dBuV/m)<br>(Peak) | Conclusion |
| 433.9251                  | 75.08               | -12.06                                | 63.02                  | 80.82                      | 100.82                  | PASS       |

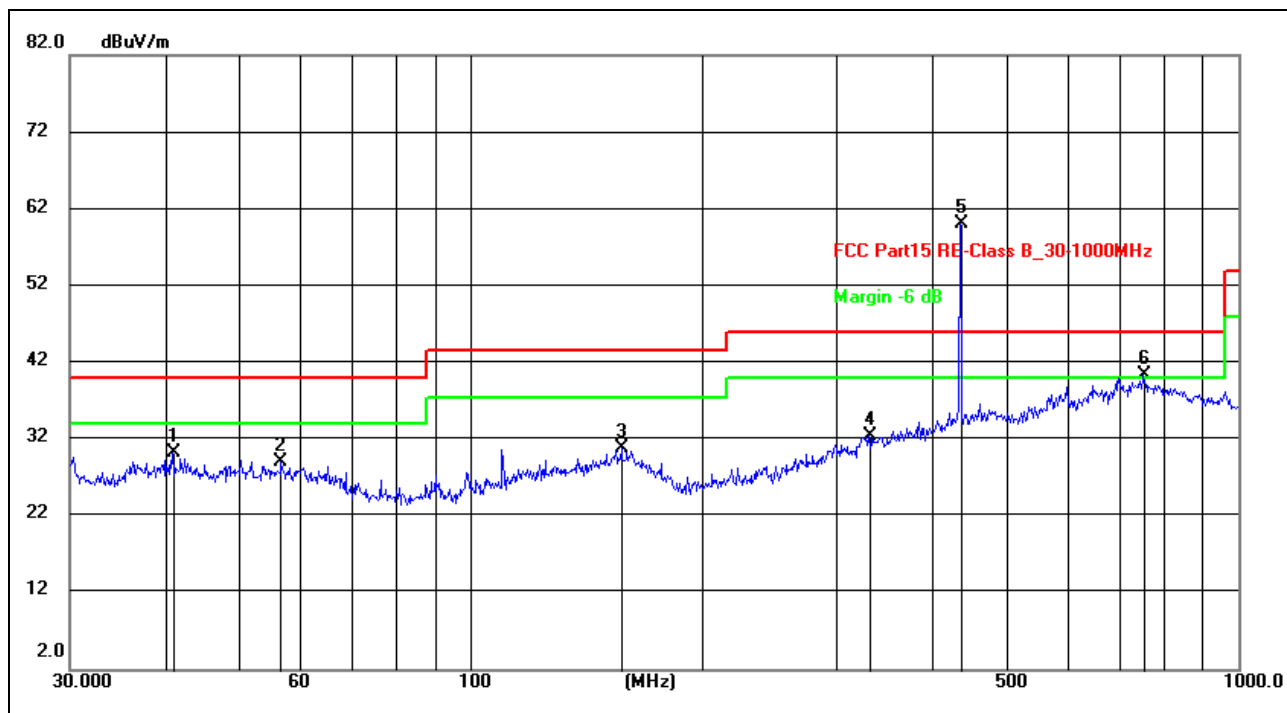

|        |                                  |                   |                      |
|--------|----------------------------------|-------------------|----------------------|
| Site:  | 966LAB                           | Antenna::Vertical | Temperature(C):24(C) |
| Limit: | FCC Part15 RE-Class B_30-1000MHz |                   | Humidity(% ):60%     |
| EUT:   | Remote control                   | Test Time:        | 2026/6/9 10:05:55    |
| M/N.:  | ZX-RF12J                         | Power Rating:     | DC 3V                |
| Mode:  | Working                          | Test Engineer:    | Taylor Chen          |
| Note:  |                                  |                   |                      |


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|--------|
| 1   | 40.8446         | 16.67          | 13.61         | 30.28          | 40.00          | -9.72       | peak | 100         | 4             |        |
| 2   | 56.5929         | 15.86          | 13.22         | 29.08          | 40.00          | -10.92      | peak | 100         | 148           |        |
| 3   | 157.0074        | 15.99          | 14.94         | 30.93          | 43.50          | -12.57      | peak | 200         | 93            |        |
| 4   | 330.1949        | 16.72          | 15.74         | 32.46          | 46.00          | -13.54      | peak | 100         | 309           |        |
| 5 * | 433.9251        | 42.16          | 17.87         | 60.03          | 46.00          | 14.03       | peak | 200         | 174           |        |
| 6 ! | 752.7432        | 16.44          | 23.89         | 40.33          | 46.00          | -5.67       | peak | 100         | 346           |        |

| Fundamental and Harmonics |                     |                                       |                        |                            |                         |            |
|---------------------------|---------------------|---------------------------------------|------------------------|----------------------------|-------------------------|------------|
| Freq(MHz)                 | Peak Level (dBuV/m) | AV Factor(dB/m)<br>(see Attachment D) | Average Level (dBuV/m) | Limit(dBuV/m)<br>(average) | Limit(dBuV/m)<br>(Peak) | Conclusion |
| 433.9251                  | 60.03               | -12.06                                | 47.97                  | 80.82                      | 100.82                  | PASS       |

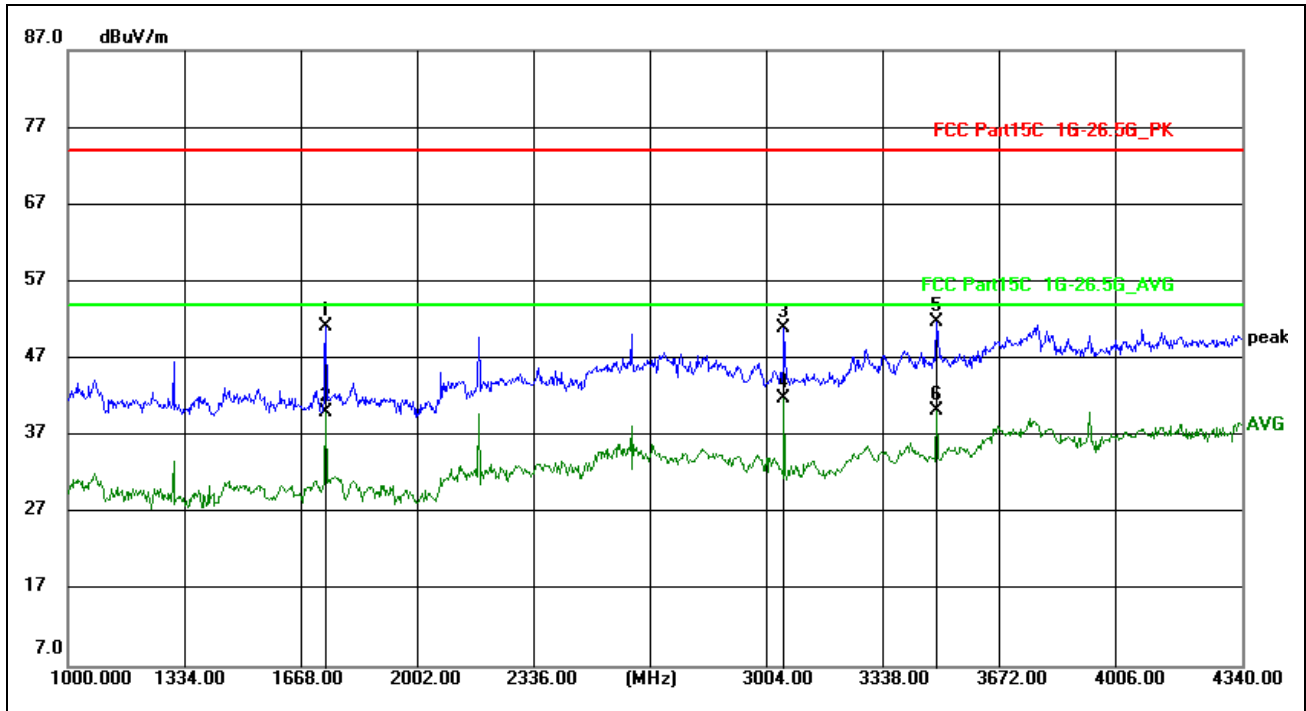

|               |                         |                       |                   |                        |       |
|---------------|-------------------------|-----------------------|-------------------|------------------------|-------|
| <b>Site:</b>  | 966LAB                  | <b>Antenna::</b>      | Horizontal        | <b>Temperature(C):</b> | 24(C) |
| <b>Limit:</b> | FCC Part15C 1G-26.5G_PK |                       |                   | <b>Humidity(%):</b>    | 60%   |
| <b>EUT:</b>   | Remote control          | <b>Test Time:</b>     | 2026/6/8 14:18:16 |                        |       |
| <b>M/N.:</b>  | ZX-RF12J                | <b>Power Rating:</b>  | DC 3V             |                        |       |
| <b>Mode:</b>  | Working                 | <b>Test Engineer:</b> | Taylor Chen       |                        |       |
| <b>Note:</b>  |                         |                       |                   |                        |       |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|--------|
| 1   | 1734.800        | 69.21          | -18.09        | 51.12          | 74.00          | -22.88      | peak |             |               |        |
| 2   | 1734.800        |                |               | 39.06          | 54.00          | -14.94      | AVG  |             |               |        |
| 3   | 3037.400        | 61.50          | -10.59        | 50.91          | 74.00          | -23.09      | peak |             |               |        |
| 4 * | 3037.400        |                |               | 38.85          | 54.00          | -15.15      | AVG  |             |               |        |
| 5   | 3471.600        | 60.93          | -9.20         | 51.73          | 74.00          | -22.27      | peak |             |               |        |
| 6   | 3471.600        |                |               | 39.67          | 54.00          | -14.33      | AVG  |             |               |        |

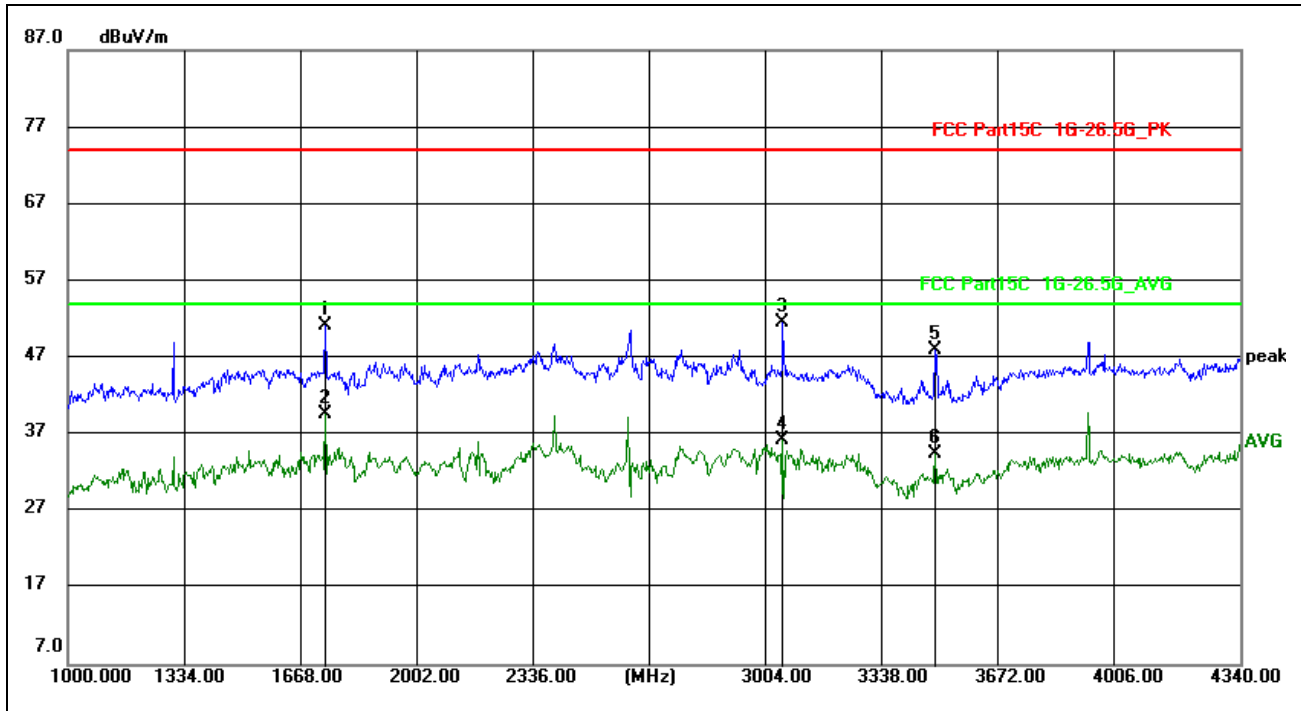

|               |                                |                       |                          |                        |              |
|---------------|--------------------------------|-----------------------|--------------------------|------------------------|--------------|
| <b>Site:</b>  | <b>966LAB</b>                  | <b>Antenna::</b>      | <b>Vertical</b>          | <b>Temperature(C):</b> | <b>24(C)</b> |
| <b>Limit:</b> | <b>FCC Part15C 1G-26.5G_PK</b> |                       |                          | <b>Humidity(%):</b>    | <b>60%</b>   |
| <b>EUT:</b>   | <b>Remote control</b>          | <b>Test Time:</b>     | <b>2026/6/8 14:23:25</b> |                        |              |
| <b>M/N.:</b>  | <b>ZX-RF12J</b>                | <b>Power Rating:</b>  | <b>DC 3V</b>             |                        |              |
| <b>Mode:</b>  | <b>Working</b>                 | <b>Test Engineer:</b> | <b>Taylor Chen</b>       |                        |              |
| <b>Note:</b>  |                                |                       |                          |                        |              |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|--------|
| 1   | 1734.800        | 69.21          | -18.09        | 51.12          | 74.00          | -22.88      | peak |             |               |        |
| 2 * | 1734.800        |                |               | 39.06          | 54.00          | -14.94      | AVG  |             |               |        |
| 3   | 3037.400        | 62.20          | -10.59        | 51.61          | 74.00          | -22.39      | peak |             |               |        |
| 4   | 3037.400        |                |               | 39.55          | 54.00          | -14.45      | AVG  |             |               |        |
| 5   | 3471.600        | 57.12          | -9.20         | 47.92          | 74.00          | -26.08      | peak |             |               |        |
| 6   | 3471.600        |                |               | 35.86          | 54.00          | -18.14      | AVG  |             |               |        |

Note:

1. All Readings are Peak Value
2. Correct Factor= Antenna Factor+Cable Loss- Amplifier Gain
3. Emission Level= Reading Level+Probe Factor +Cable Loss
4. AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dB)
5. Margin = TrueValue – limit(if margin is minus means under limit)


In a transmit cycle 50.60ms period found 1.200 burst 3 pcs,0.410ms burst 22 pcs the Duty Cycle can calculate as below:

1. Test Key: The buttons in the circle was used for all testing, as shown in the EUT diagram below.


2. Signal Uniformity: Pre-test measurements confirmed that all keys produce RF signals with identical strength, frequency, and modulation at 433.92MHz, as the EUT uses a single RF circuit. Testing the Power Key therefore captures the worst-case emission characteristics.
3. Strongest Signal Assurance: Continuous operation of the Power Key ensured measurement of the complete, repeated transmission sequence, representing the EUT's maximum emission state.




4. Duty Cycle=  $(1.200 \times 3 + 0.410 \times 22) / 50.60 = 0.2494$
5. AV Factor=  $20 \times \log(\text{Duty Cycle}) = 20 \times \log(0.2494) = -12.06$   
(The plot of Duty Cycle See the follow page)
6. All the x/y/z orientation has been investigated, and only worst case is presented in this report,  
New battery is used during all test.

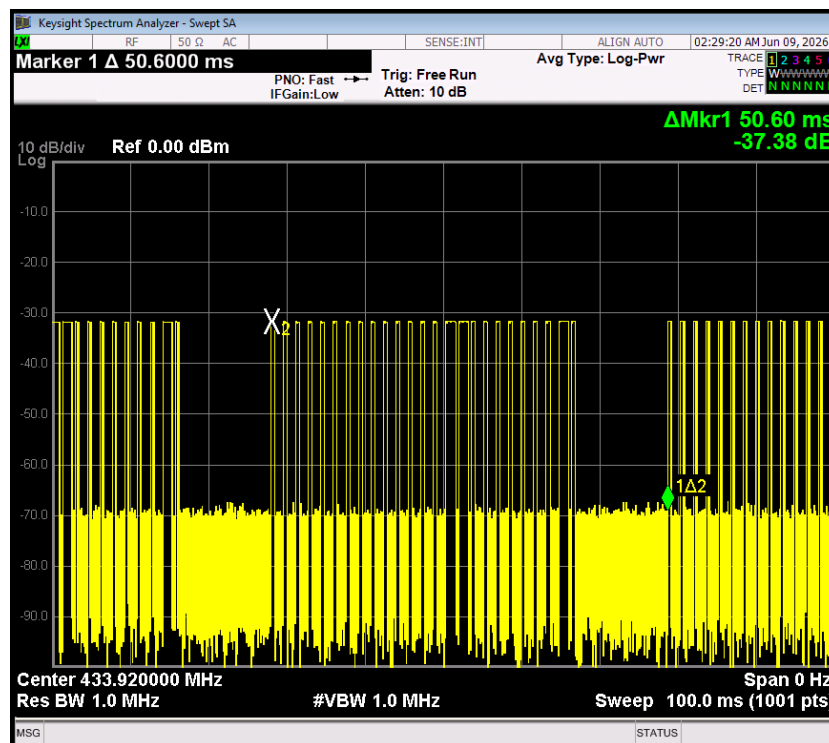


(Transmit cycle 50.60ms)

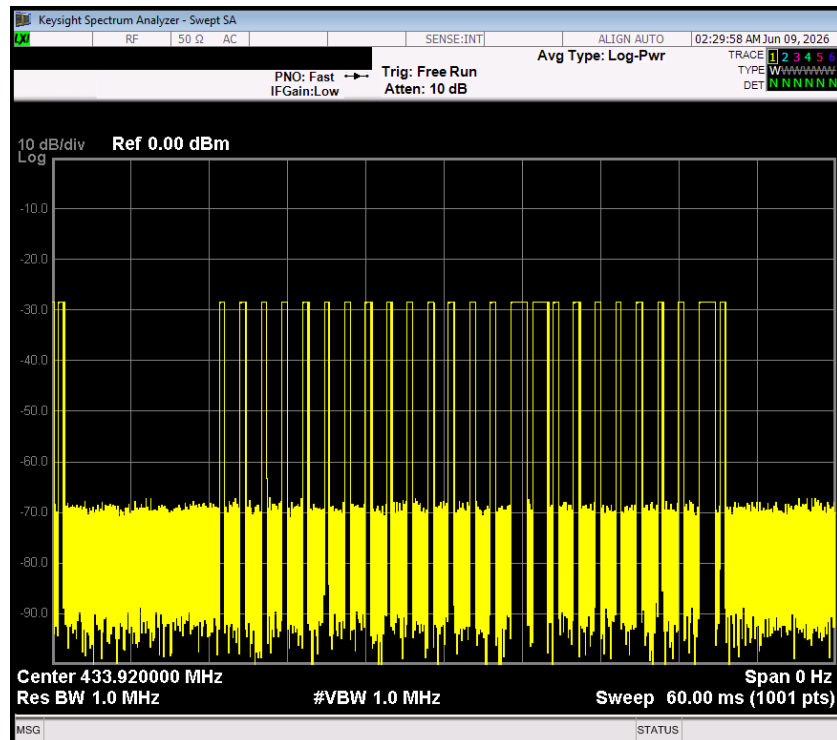

(Total Bursts in a transmit cycle 25 pcs)

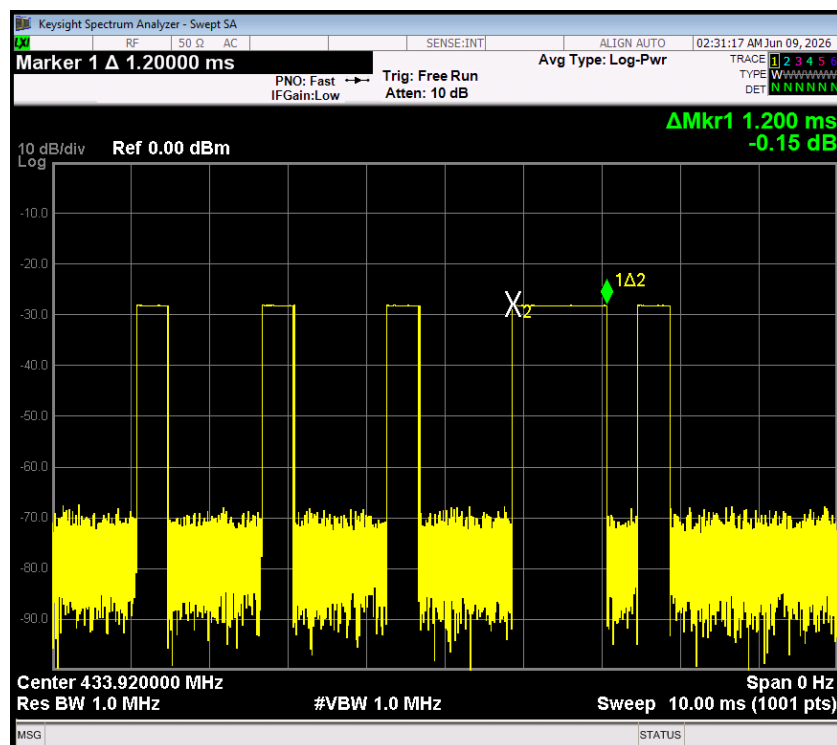

(1.200ms burst 3 pcs)

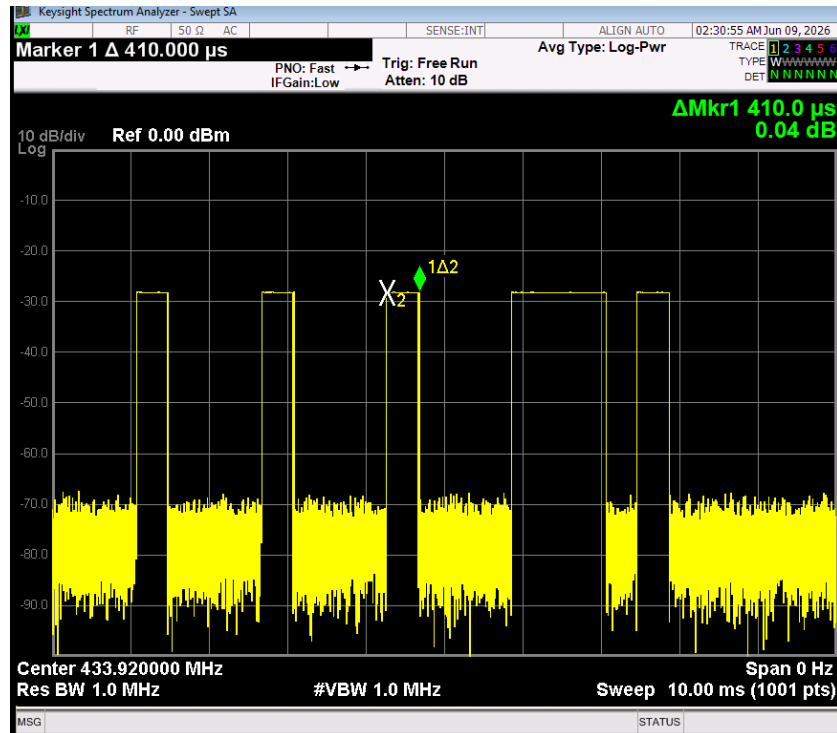


(0.410ms burst 22 pcs)

### 4.3. 20dB Bandwidth

#### Limit

According to 47 CFR 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

#### Test Configuration



#### Test Procedure

The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

#### Test Results

| Modulation | Channel Frequency (MHz) | 99% OBW (KHz) | 20dB bandwidth (KHz) | Limit (KHz)                   | Result |
|------------|-------------------------|---------------|----------------------|-------------------------------|--------|
| ASK        | 433.9210                | 47.878        | 15.04                | $0.25\% * 433.210 = 1084.803$ | Pass   |

Test plot as follows:

## 5. ASK Modulation

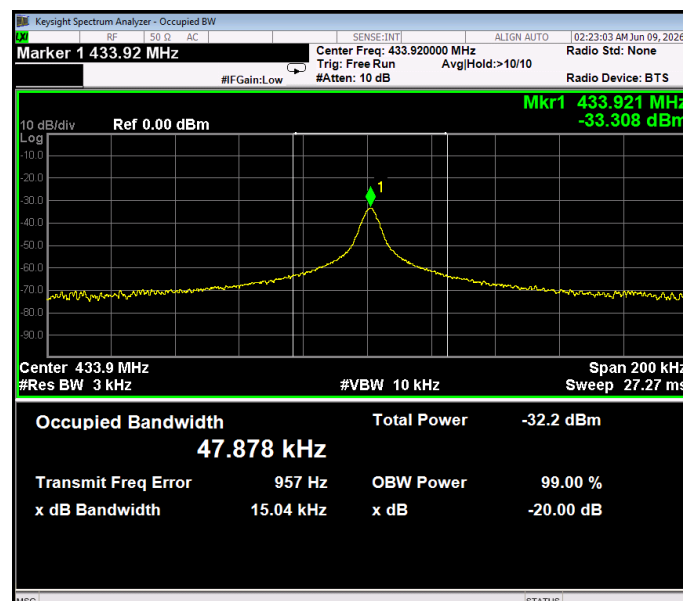


## 5.1. Deactivation Time

### Limit

According to FCC §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### Test Configuration




### Test Procedure

1. The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
2. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was set to 1 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

### TEST RESULTS

Note: The transmitter was automatically activated, and the carrier frequency 433.92MHz:

| Frequency<br>(MHz) | One transmission time<br>(S) | Limit(S) | Result |
|--------------------|------------------------------|----------|--------|
| 433.92             | 0.240                        | 5        | Pass   |

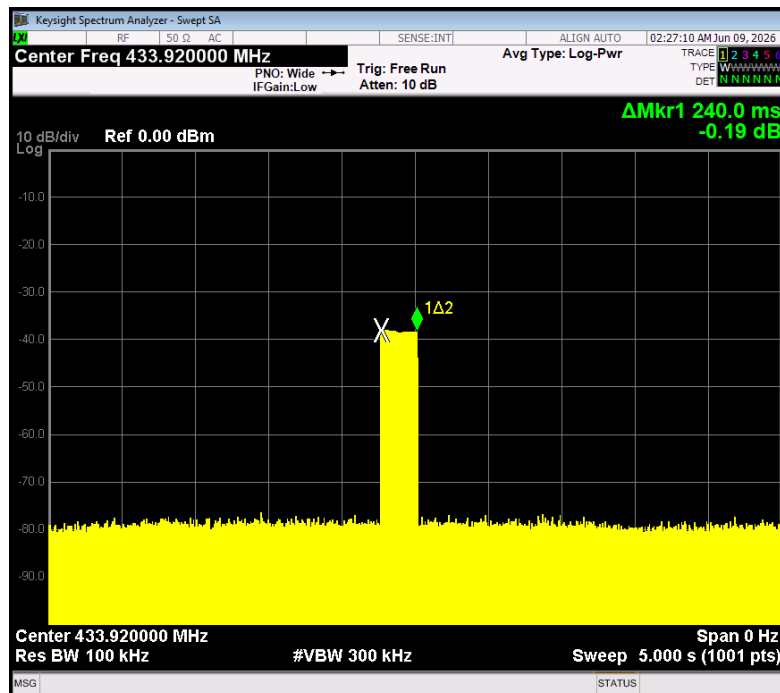

## 5.2. Antenna Requirement

### Standard Applicable

According to FCC Part 15C 15.203


- a) An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b) The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Refer to statement below for compliance.**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 0 dBi.

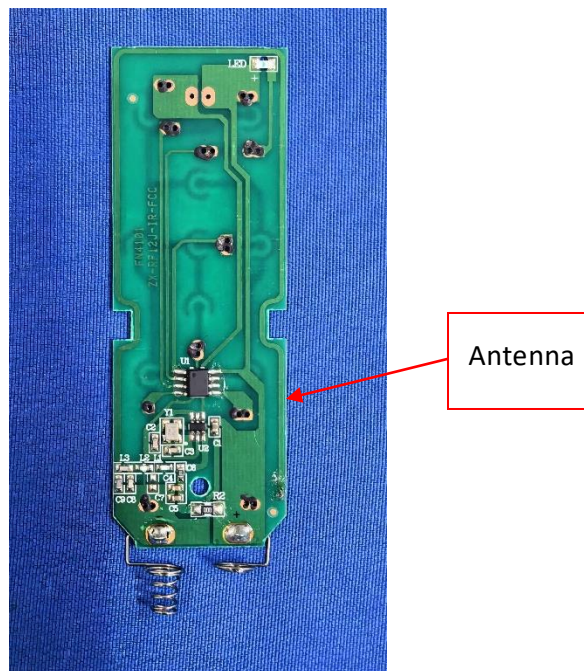


## 6. Test Setup Photos of the EUT




## 7. External and Internal Photos of the EUT





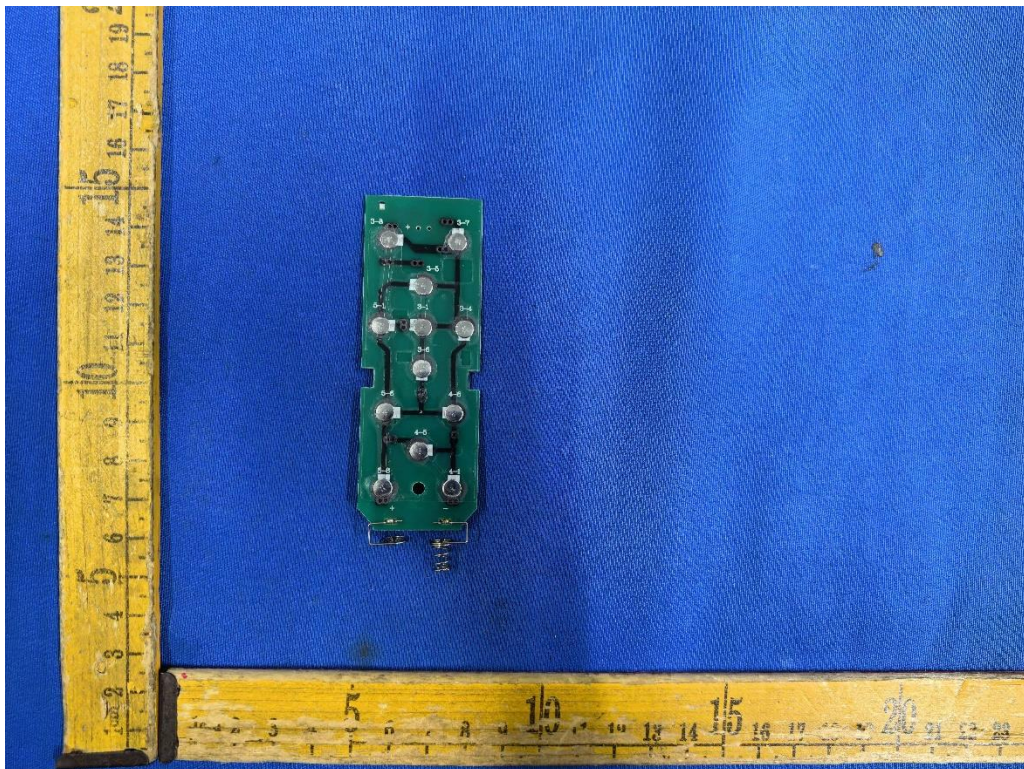

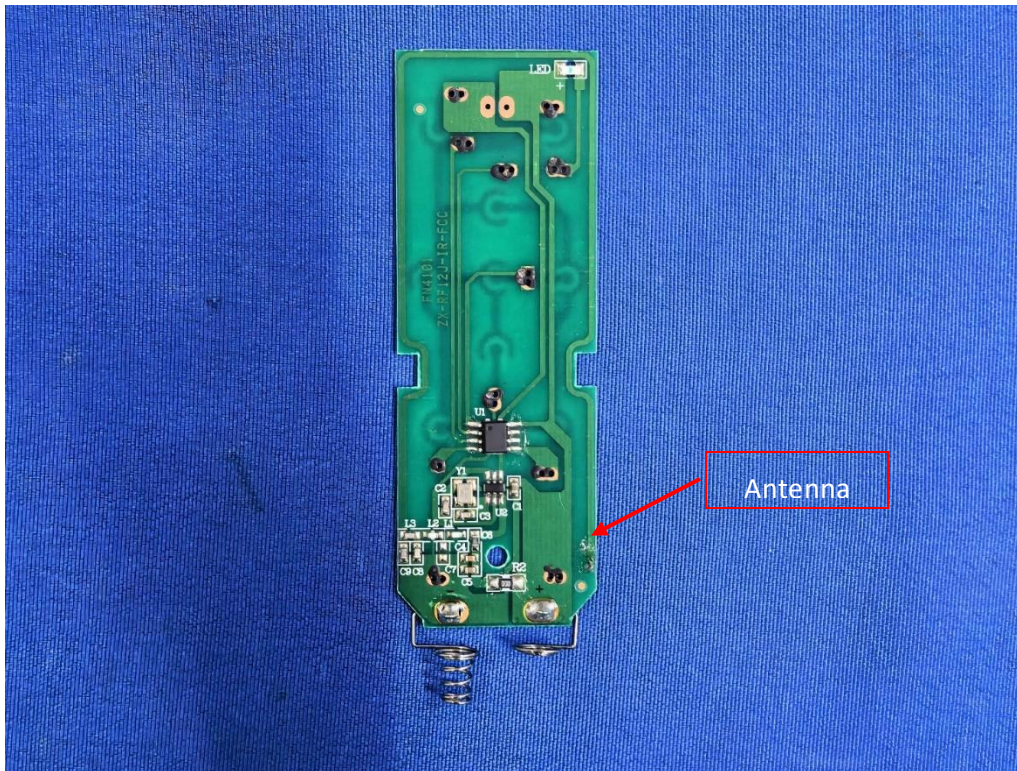

\*\*\*\*\* End of Report \*\*\*\*\*