



FCC TEST REPORT

FCC ID: 2BWKB-LWTF-704Z

On Behalf of

Linkswell Automotive Inc.

7inch Marine Radio

Model No.: LWTF-704Z

Prepared for : Linkswell Automotive Inc.
Address : 1860 Chicago Ave Suite H-1 Riverside, CA., 92507.USA

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2605214-C01-R02
Date of Receipt : June 2, 2026
Date of Test : June 3, 2026 –June16, 2026
Date of Report : June16, 2026
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS.....	7
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
2.8	ADDITIONAL INSTRUCTIONS	8
2.9	TEST CONDITIONS	8
3	TEST INSTRUMENTS LIST	9
4	TEST RESULTS AND MEASUREMENT DATA.....	10
4.1	ANTENNA REQUIREMENT:	10
4.2	CONDUCTED EMISSIONS	11
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	12
4.4	MAXIMUM CONDUCTED OUTPUT POWER.....	35
4.5	POWER SPECTRAL DENSITY	38
4.6	BAND EDGE.....	47
4.7	RADIATED EMISSION	56
4.8	FREQUENCY STABILITY	61
5	PHOTOS OF TEST SETUP.....	62
6	PHOTOS OF EUT.....	62

TEST REPORT DECLARATION

Applicant : Linkswell Automotive Inc.
Address : 1860 Chicago Ave Suite H-1 Riverside, CA., 92507.USA
Manufacturer : Seamless Integration Electronics Technology Co.,Ltd
Address : Rm 412,Bldg 3,No.68 Nanxiang One Rd, Oltan Industrial park,huangpu Dist.,
Guangzhou, China, 510670
EUT Description : 7inch Marine Radio
(A) Model No. : LWTF-704Z
(B) Trademark : Linkswell

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.4:2014, ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Jensen Wang

Test Engineer

Jensen Wang

Approved by (name + signature).....:

Simple Guan

Project Manager

Simple Guan

Date of issue.....:

June16, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	June16, 2026	Initial released Issue	Jensen Wang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
Occupied bandwidth	Section 15.407 (e)	PASS
Maximum Conducted Output Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.
4. Measurement-method usage KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.1 Measurement Uncertainty

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : 7inch Marine Radio
Model : LWTF-704Z
Diff : N/A
Test Voltage : DC 12V from DC Power

Radio Technology : 5G WIFI

Operation frequency : 802.11a/802.11ac20/802.11n(HT20): 5745-5845MHz

802.11ac40/802.11n(HT40): 5755-5795MHz
802.11ac80: 5775MHz

Channel separation : 20MHz for 802.11a/802.11ac20/802.11n(HT20)
40MHz for 802.11ac40/ 802.11n(HT40)
80MHz for 802.11ac80

Modulation technology: : IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)

Antenna Type : External antenna , Maximum Gain is 2.22dBi.

PMN : N/A

HVIN : N/A

Software version : N/A

Hardware version : N/A
FVIN

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.4 Description of Support Units

Accessories 1 : N/A
Manufacturer : N/A
Model : N/A

Accessories 2 : N/A
Manufacturer : N/A
Model : N/A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

2.9 Test Conditions


Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

3 Test Instruments list


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.18	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118 G-50	SK20220329 01	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840 G-50	SK20190403 02	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2025.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

4 Test results and Measurement Data

4.1 Antenna requirement:

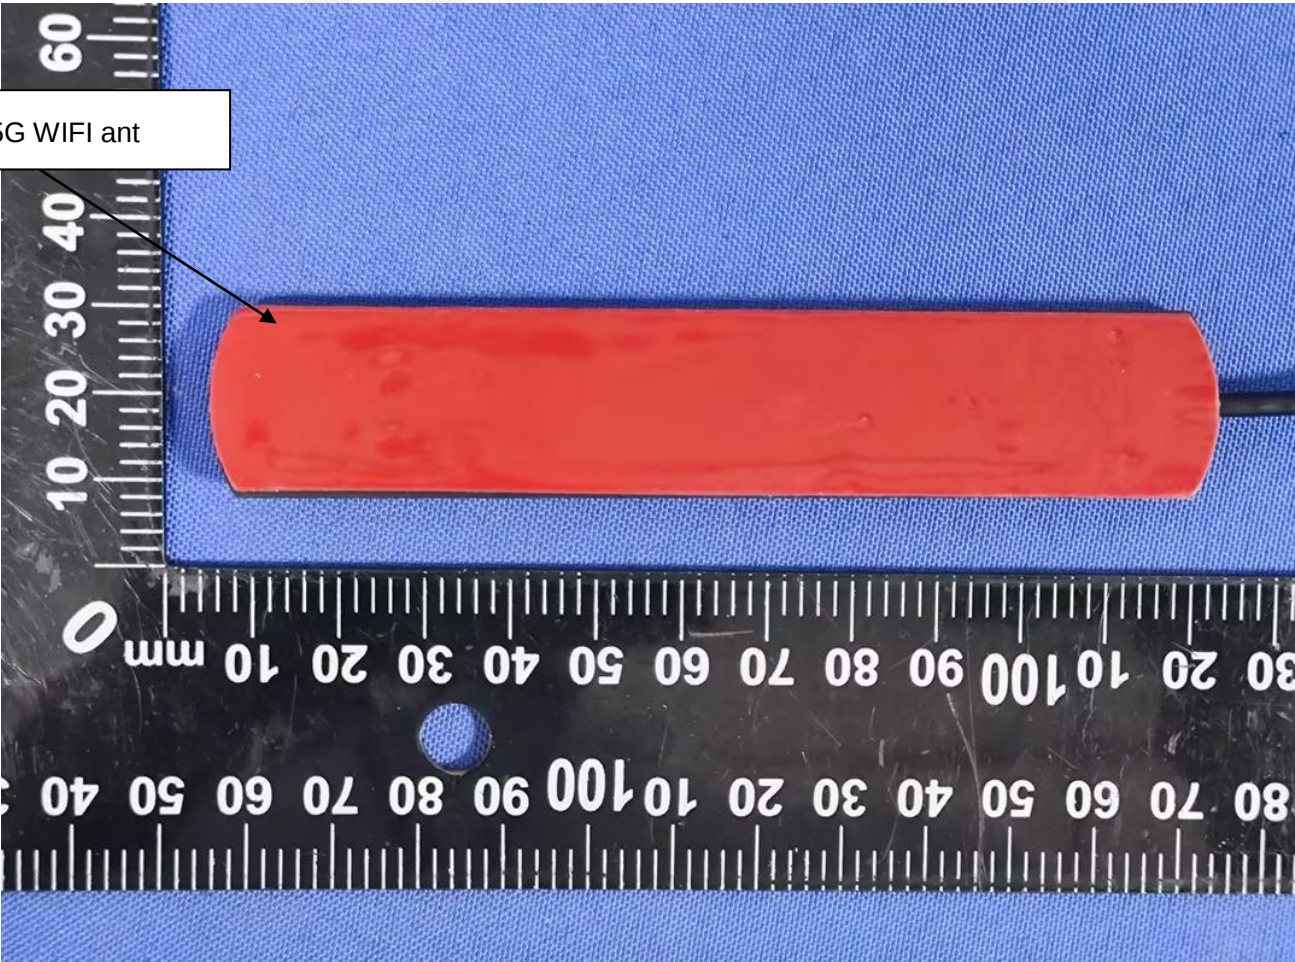
Standard requirement:	FCC Part15 C Section 15.203, RSS-GEN(6.8)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
External antenna , Maximum Gain is 2.22dBi, for 5745-5845MHz	
BT and 5G WIFI ant 	

4.2 Conducted Emissions

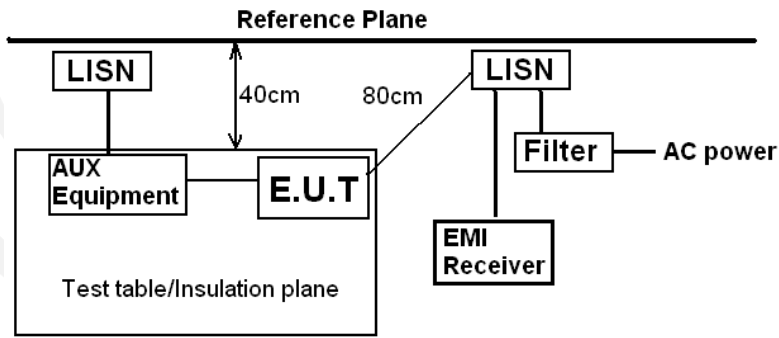Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8		
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	N/A		

Note: The EUT is supplied by Battery, so this item does not applicable.



4.3 Emission Bandwidth and 99% Occupied Bandwidth


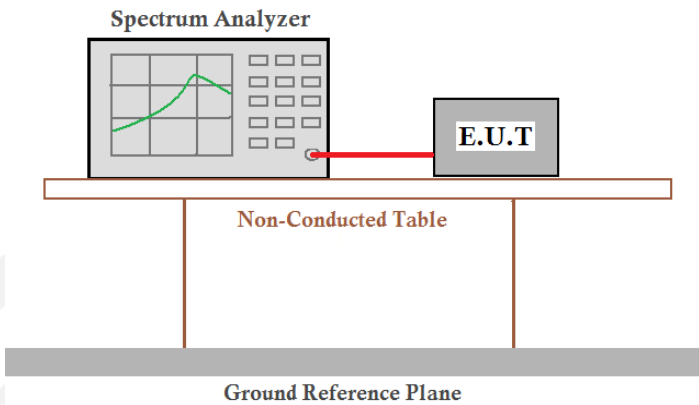
Test Requirement:	FCC Part15 E Section 15.407, RSS-Gen §6.7; RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a probe. The E.U.T. is placed on a Non-Conducted Table, which is supported by a Ground Reference Plane. The Spectrum Analyzer is also connected to the Ground Reference Plane.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass



Measurement Data:



Band 4 (5725-5850 MHz):



Condition	Antenna	Mode	Frequency(MHz)	-6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	16.369	0.500	Pass
NVNT	ANT1	802.11a	5785.00	16.370	0.500	Pass
NVNT	ANT1	802.11a	5825.00	16.342	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	17.021	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	16.974	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	17.247	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	16.869	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	17.090	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	17.238	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	35.584	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	35.405	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	35.574	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	35.412	0.500	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	75.327	0.500	Pass

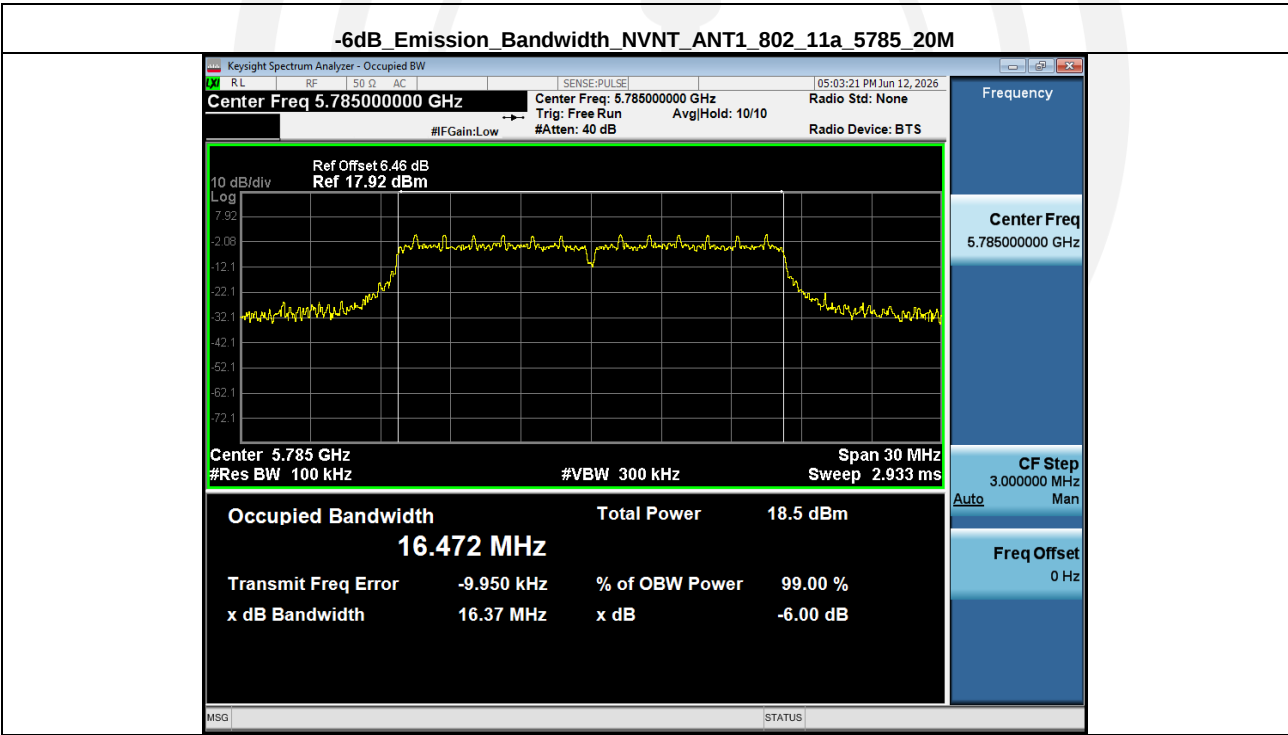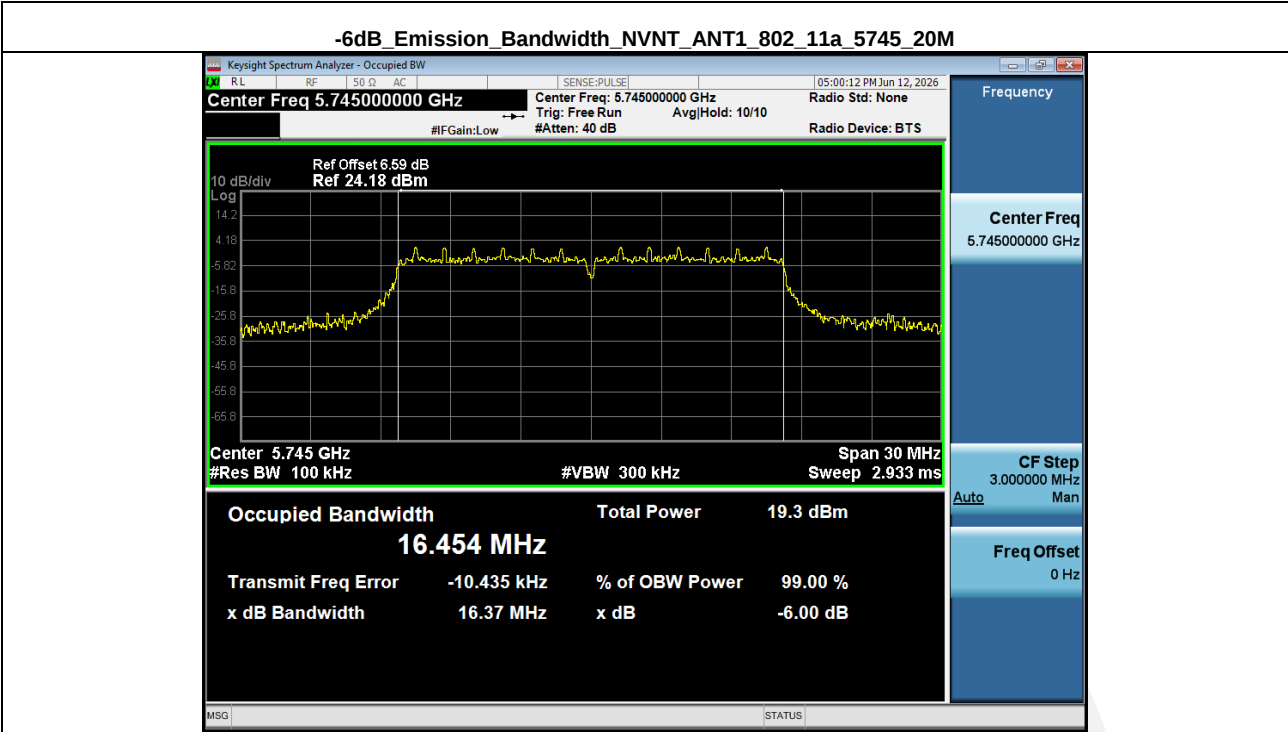

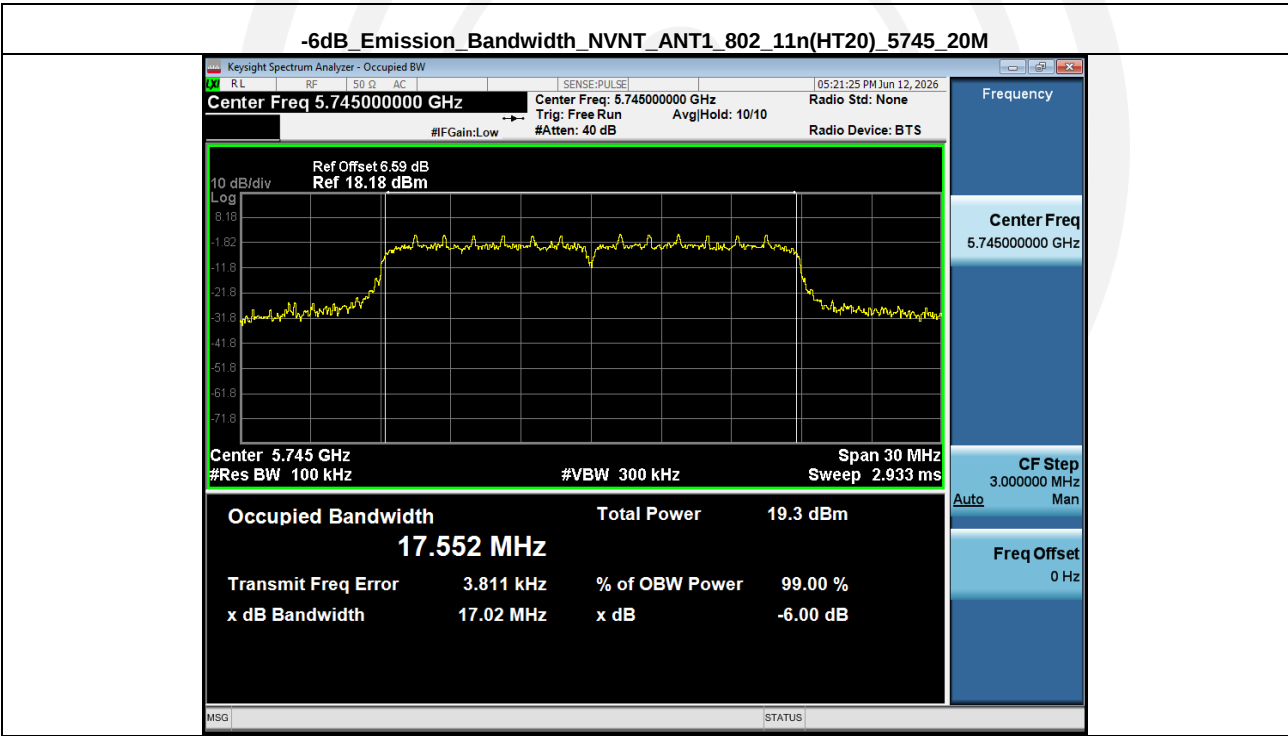
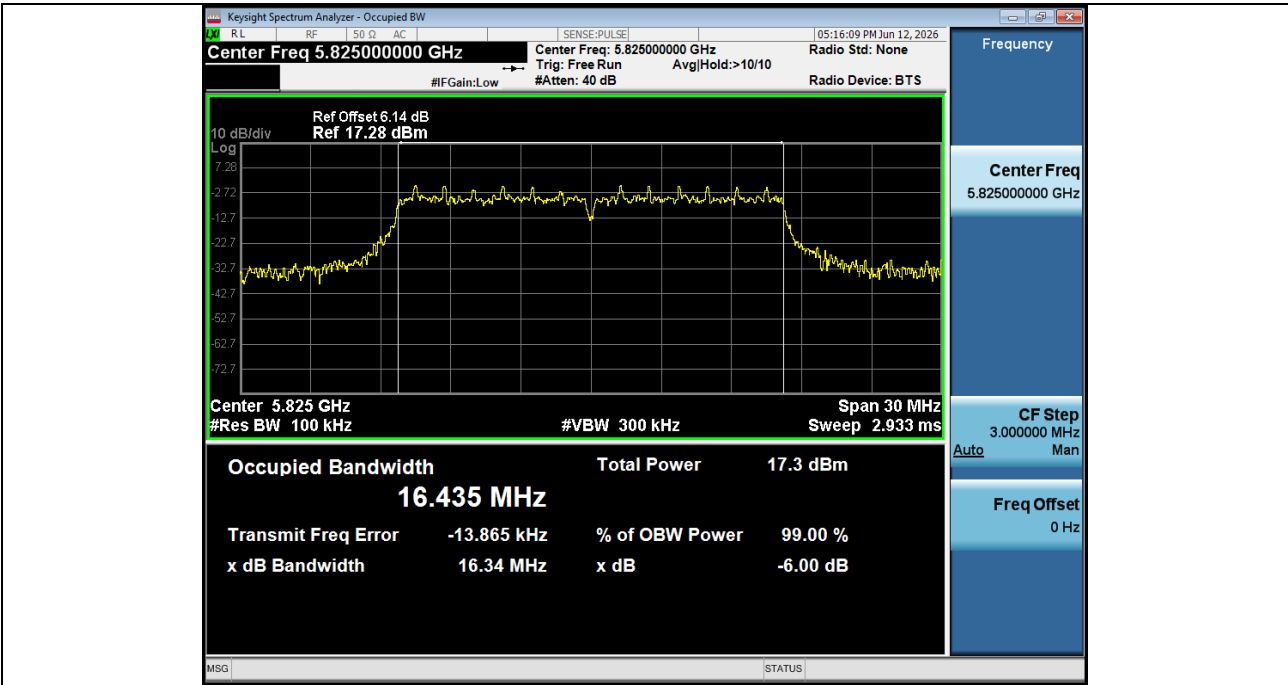


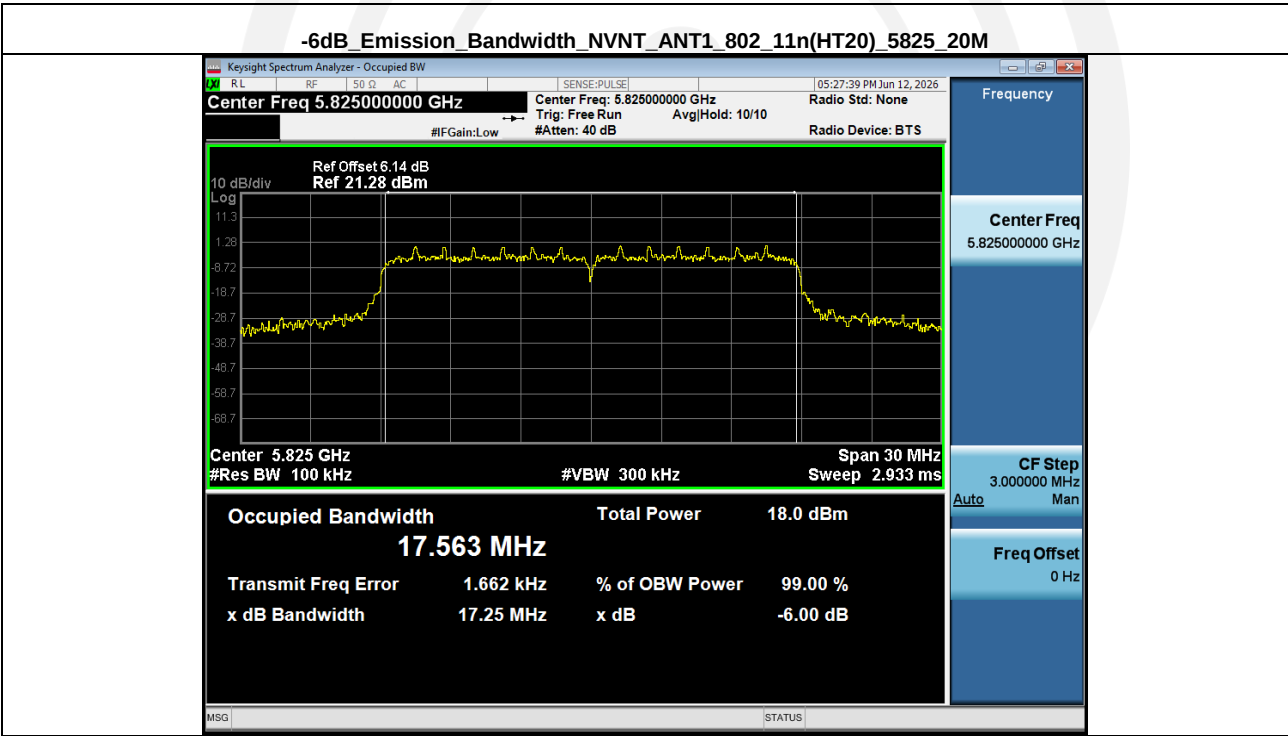
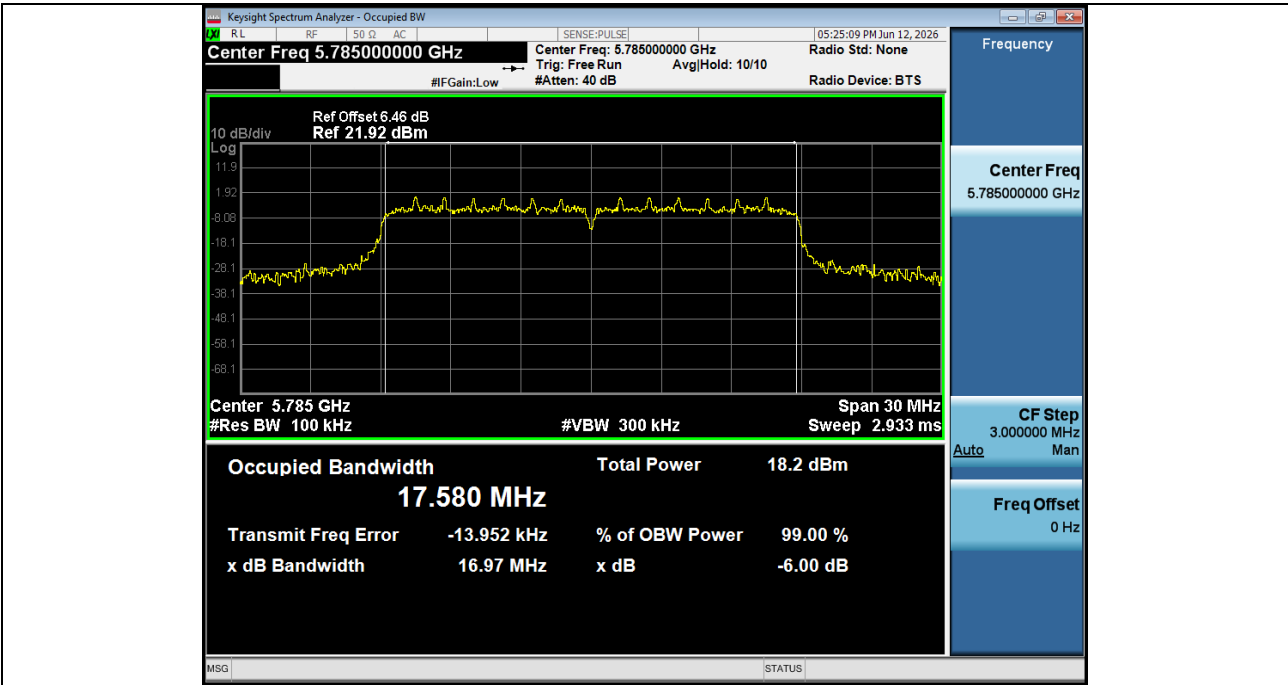


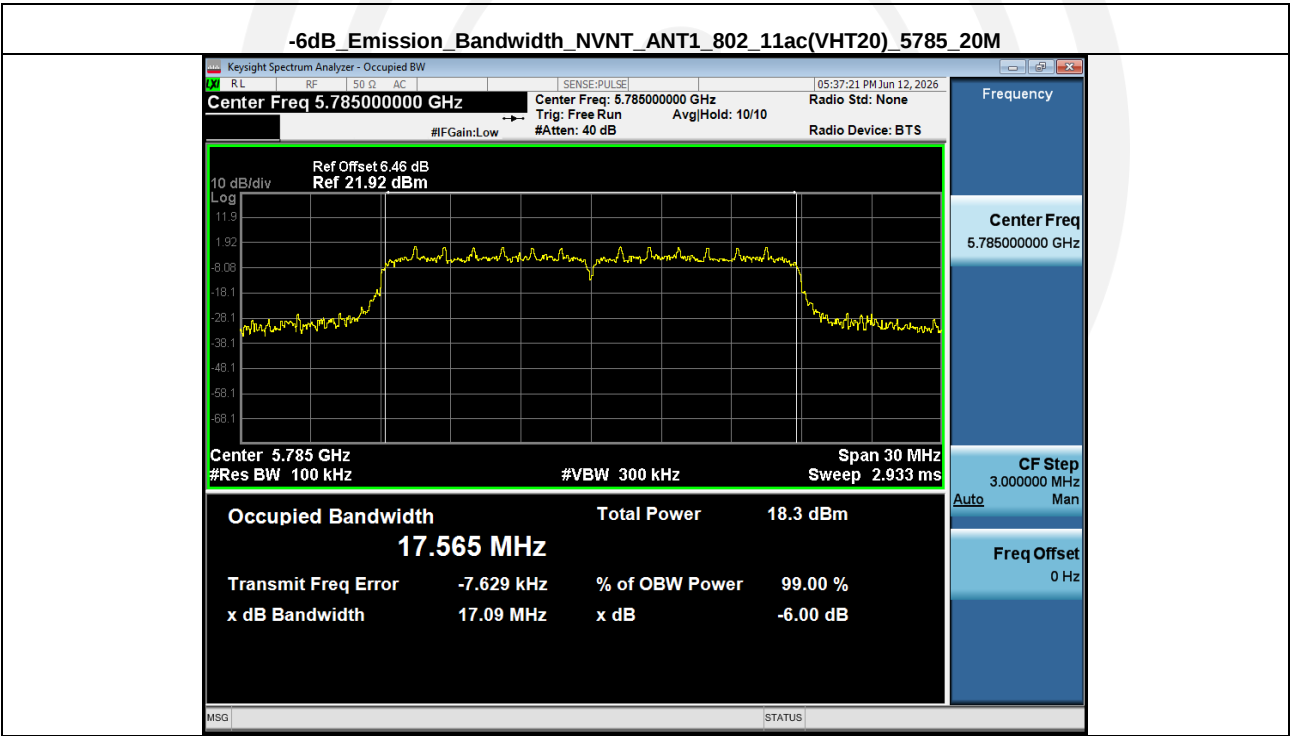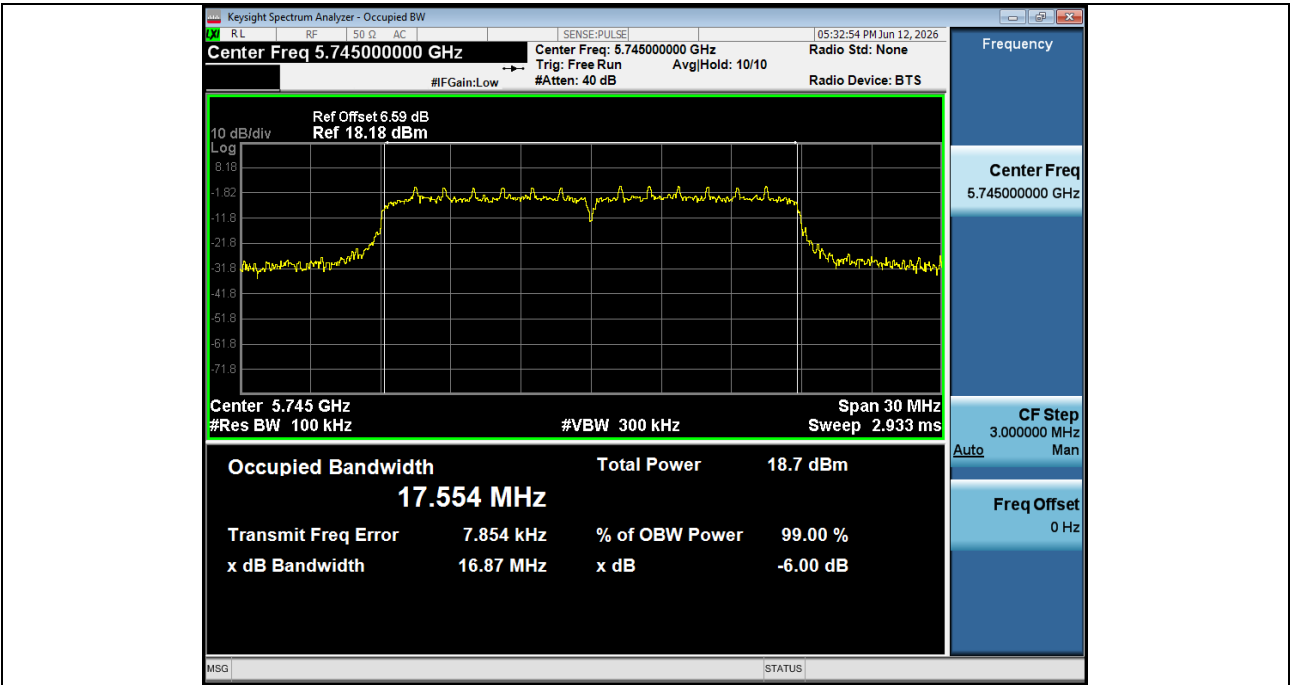

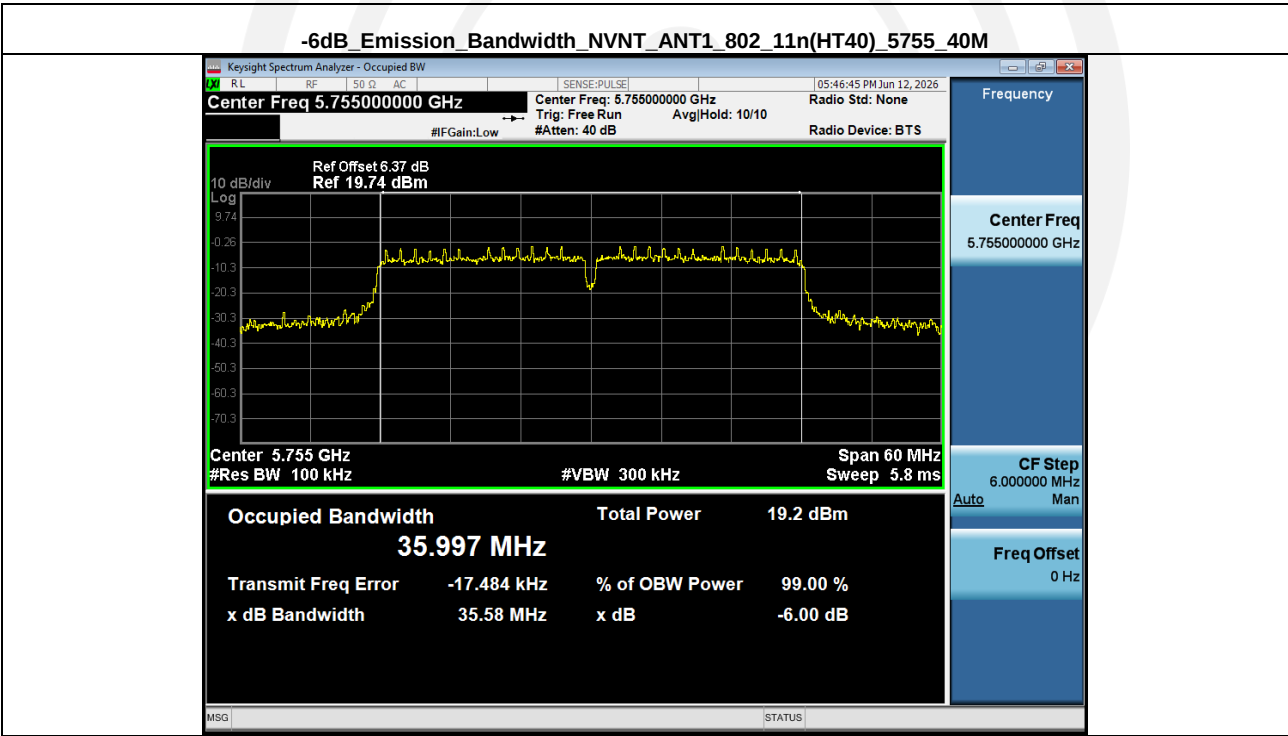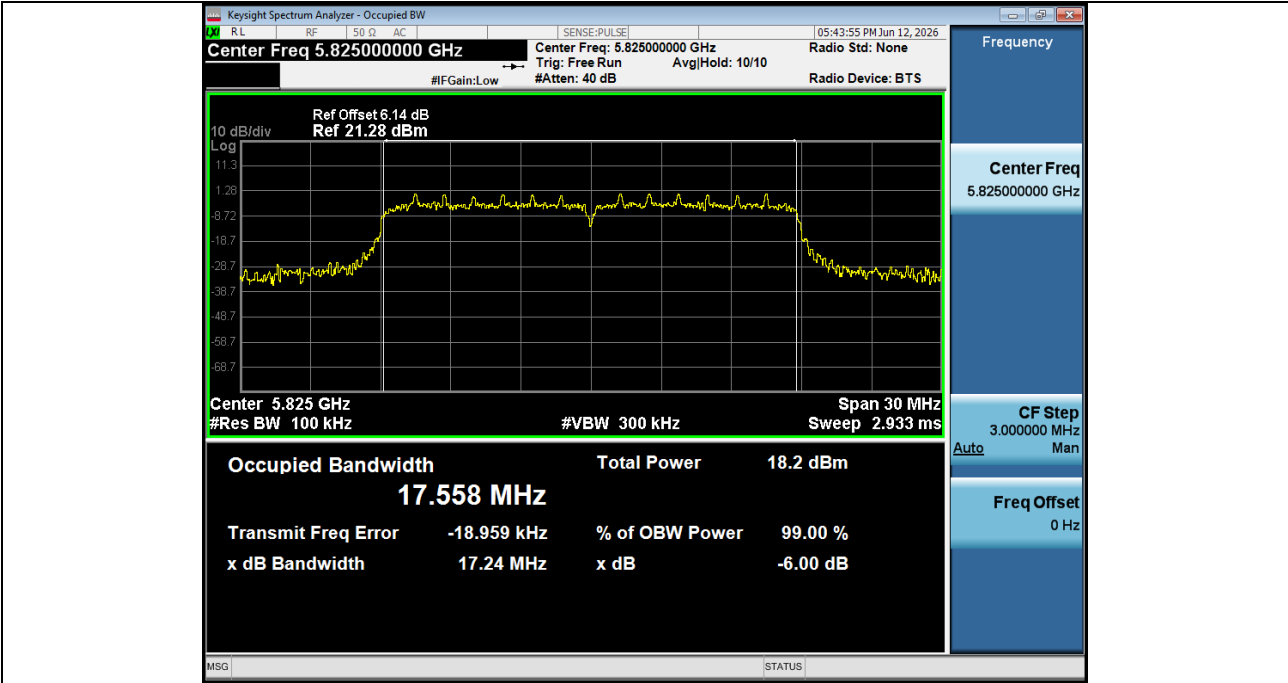


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT40)_5795_40M

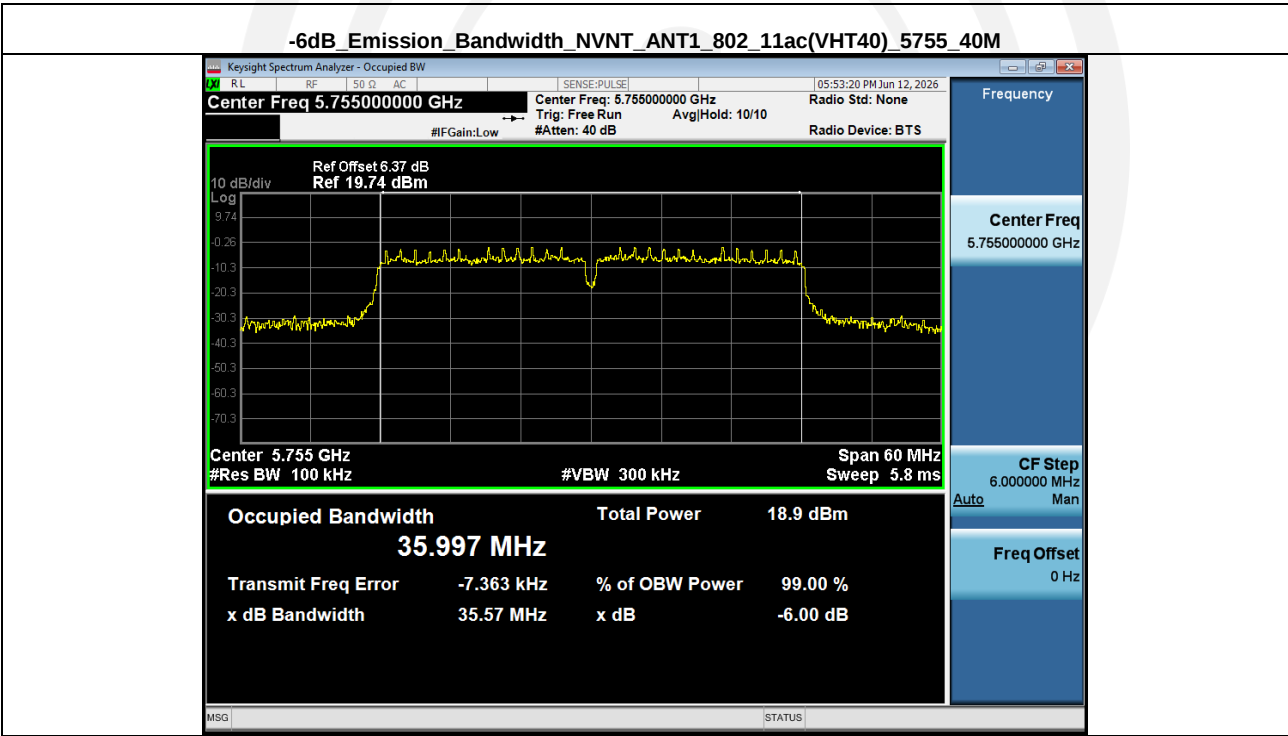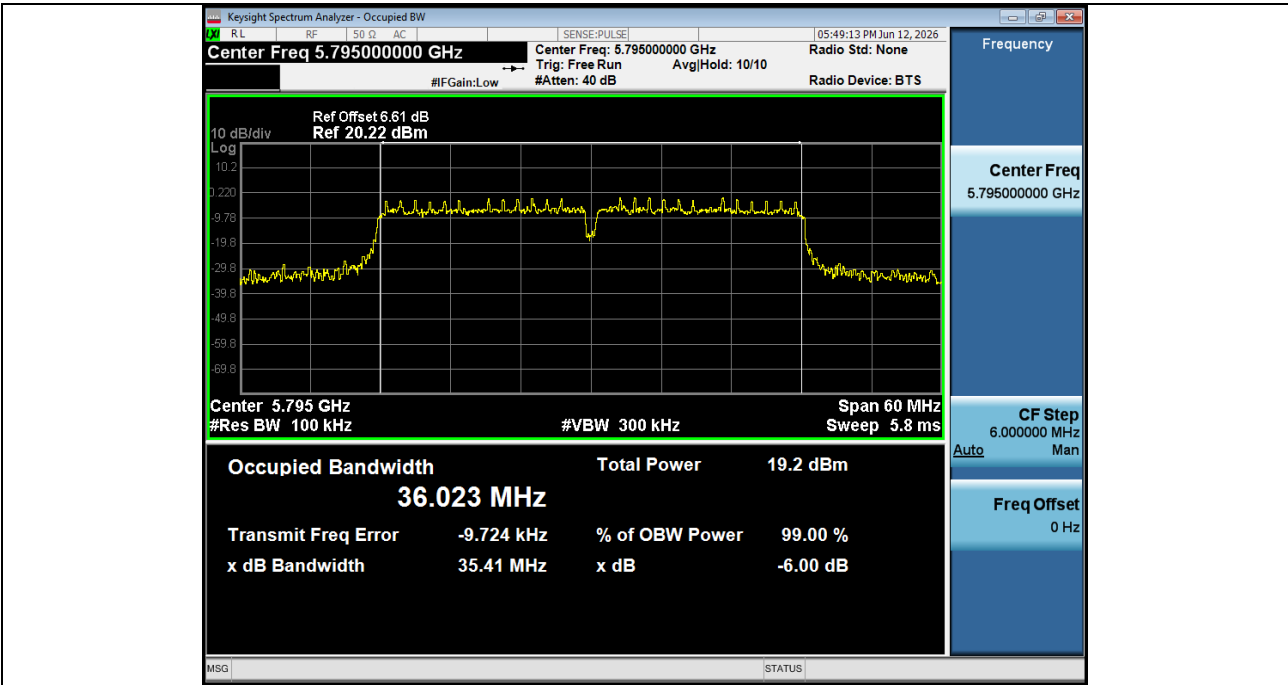


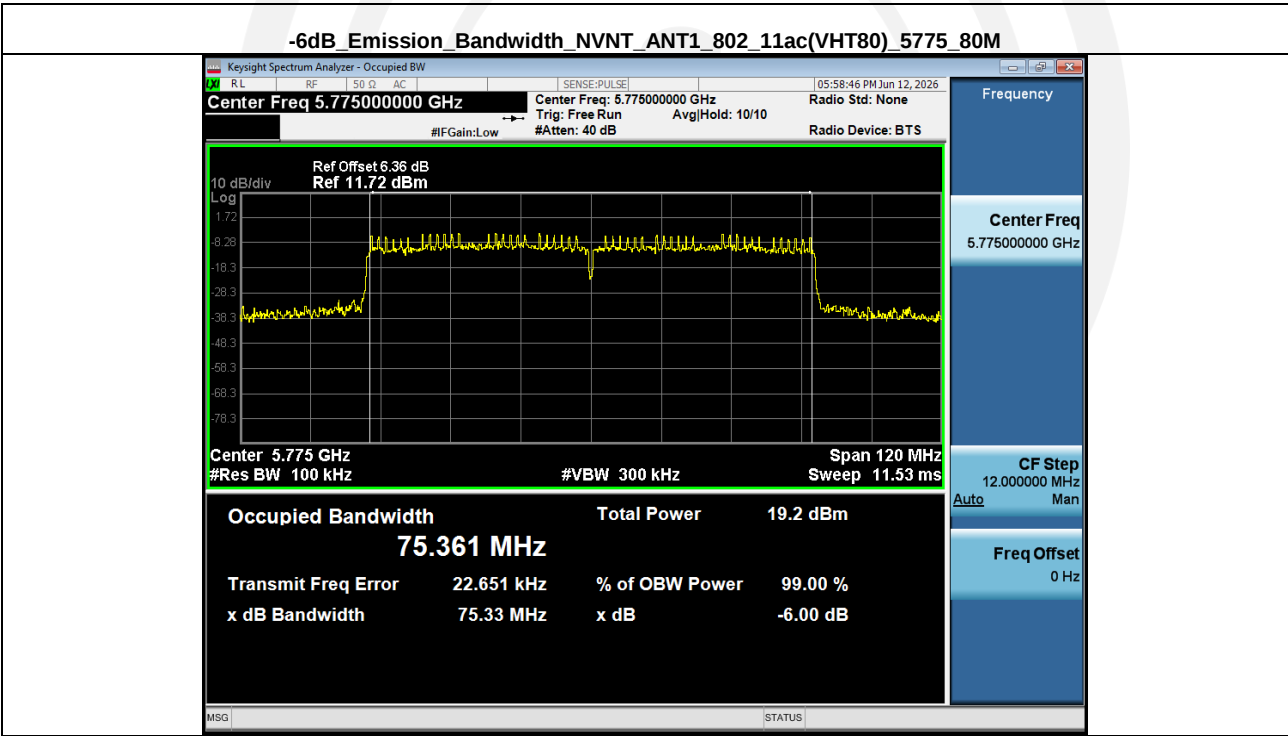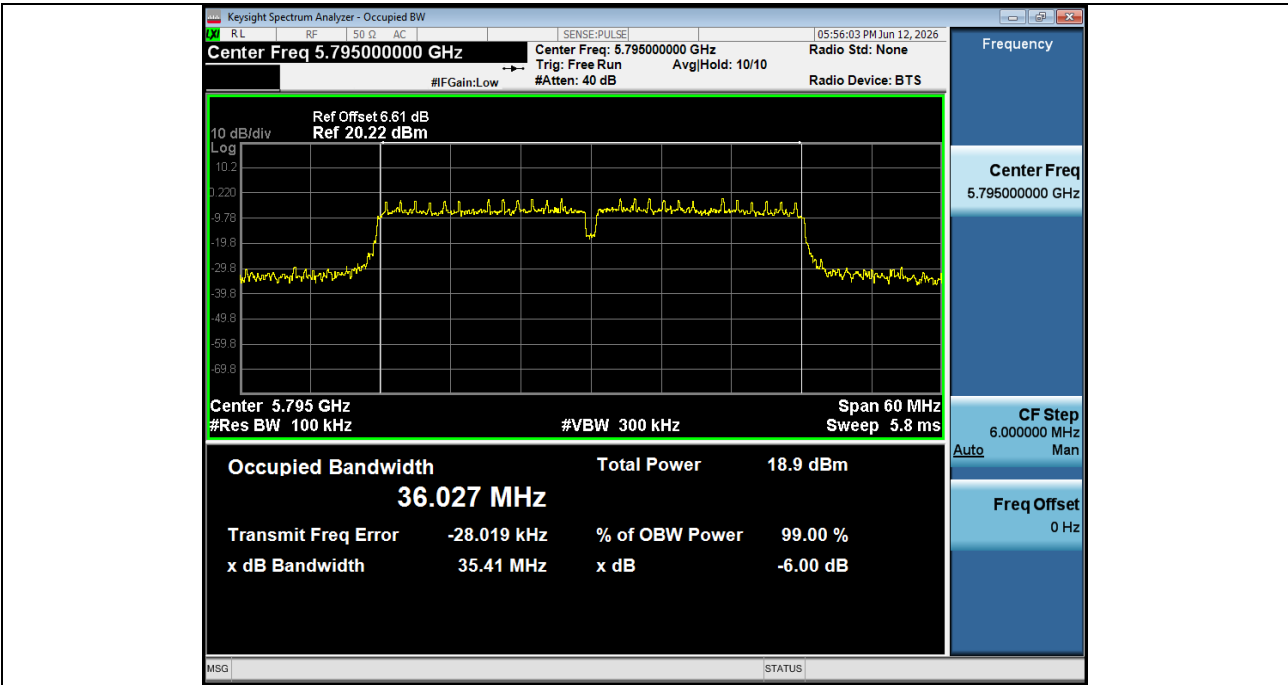


Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	26.94	16.94
NVNT	ANT1	802.11a	5785.00	27.02	16.95
NVNT	ANT1	802.11a	5825.00	26.00	16.89
NVNT	ANT1	802.11n(HT20)	5745.00	29.48	17.83
NVNT	ANT1	802.11n(HT20)	5785.00	35.66	18.05
NVNT	ANT1	802.11n(HT20)	5825.00	27.75	17.92
NVNT	ANT1	802.11ac(VHT20)	5745.00	27.42	17.83
NVNT	ANT1	802.11ac(VHT20)	5785.00	31.70	17.85
NVNT	ANT1	802.11ac(VHT20)	5825.00	31.46	17.82
NVNT	ANT1	802.11n(HT40)	5755.00	56.93	36.58
NVNT	ANT1	802.11n(HT40)	5795.00	64.39	36.65
NVNT	ANT1	802.11ac(VHT40)	5755.00	68.97	36.43
NVNT	ANT1	802.11ac(VHT40)	5795.00	68.79	36.43
NVNT	ANT1	802.11ac(VHT80)	5775.00	107.96	76.08




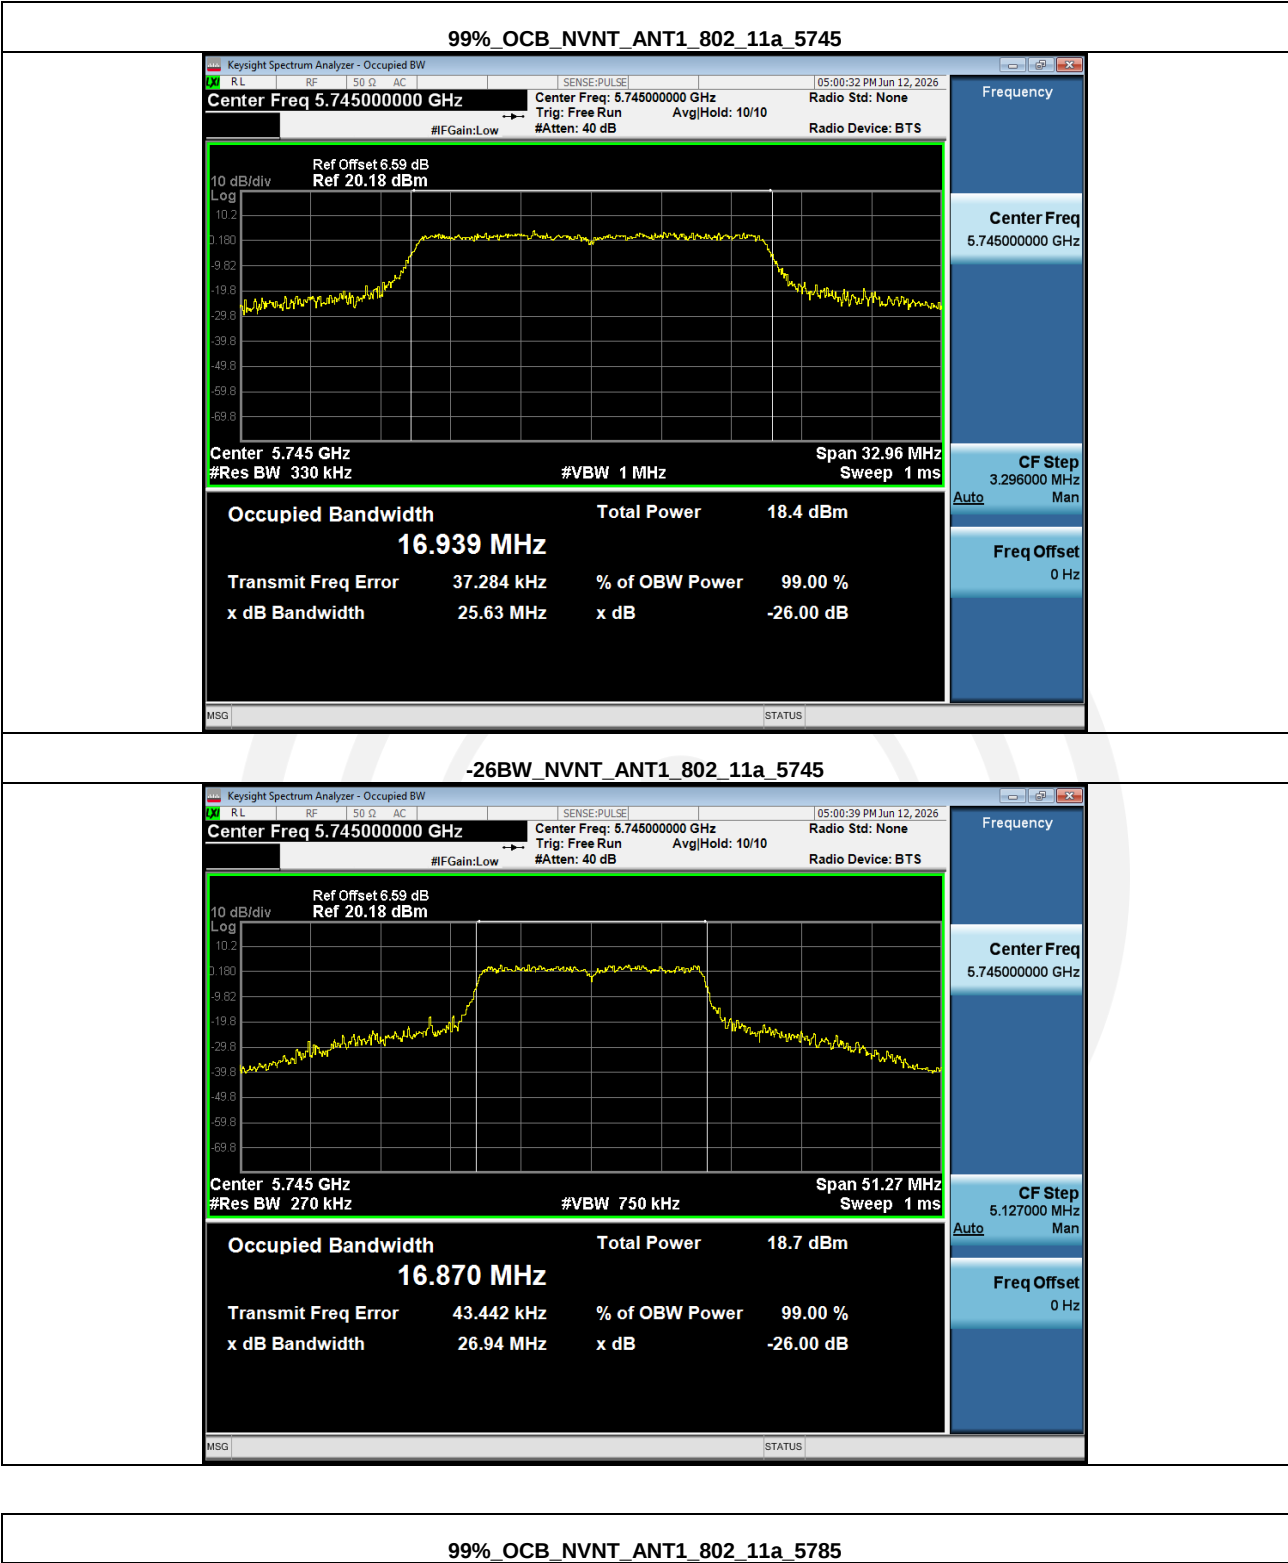

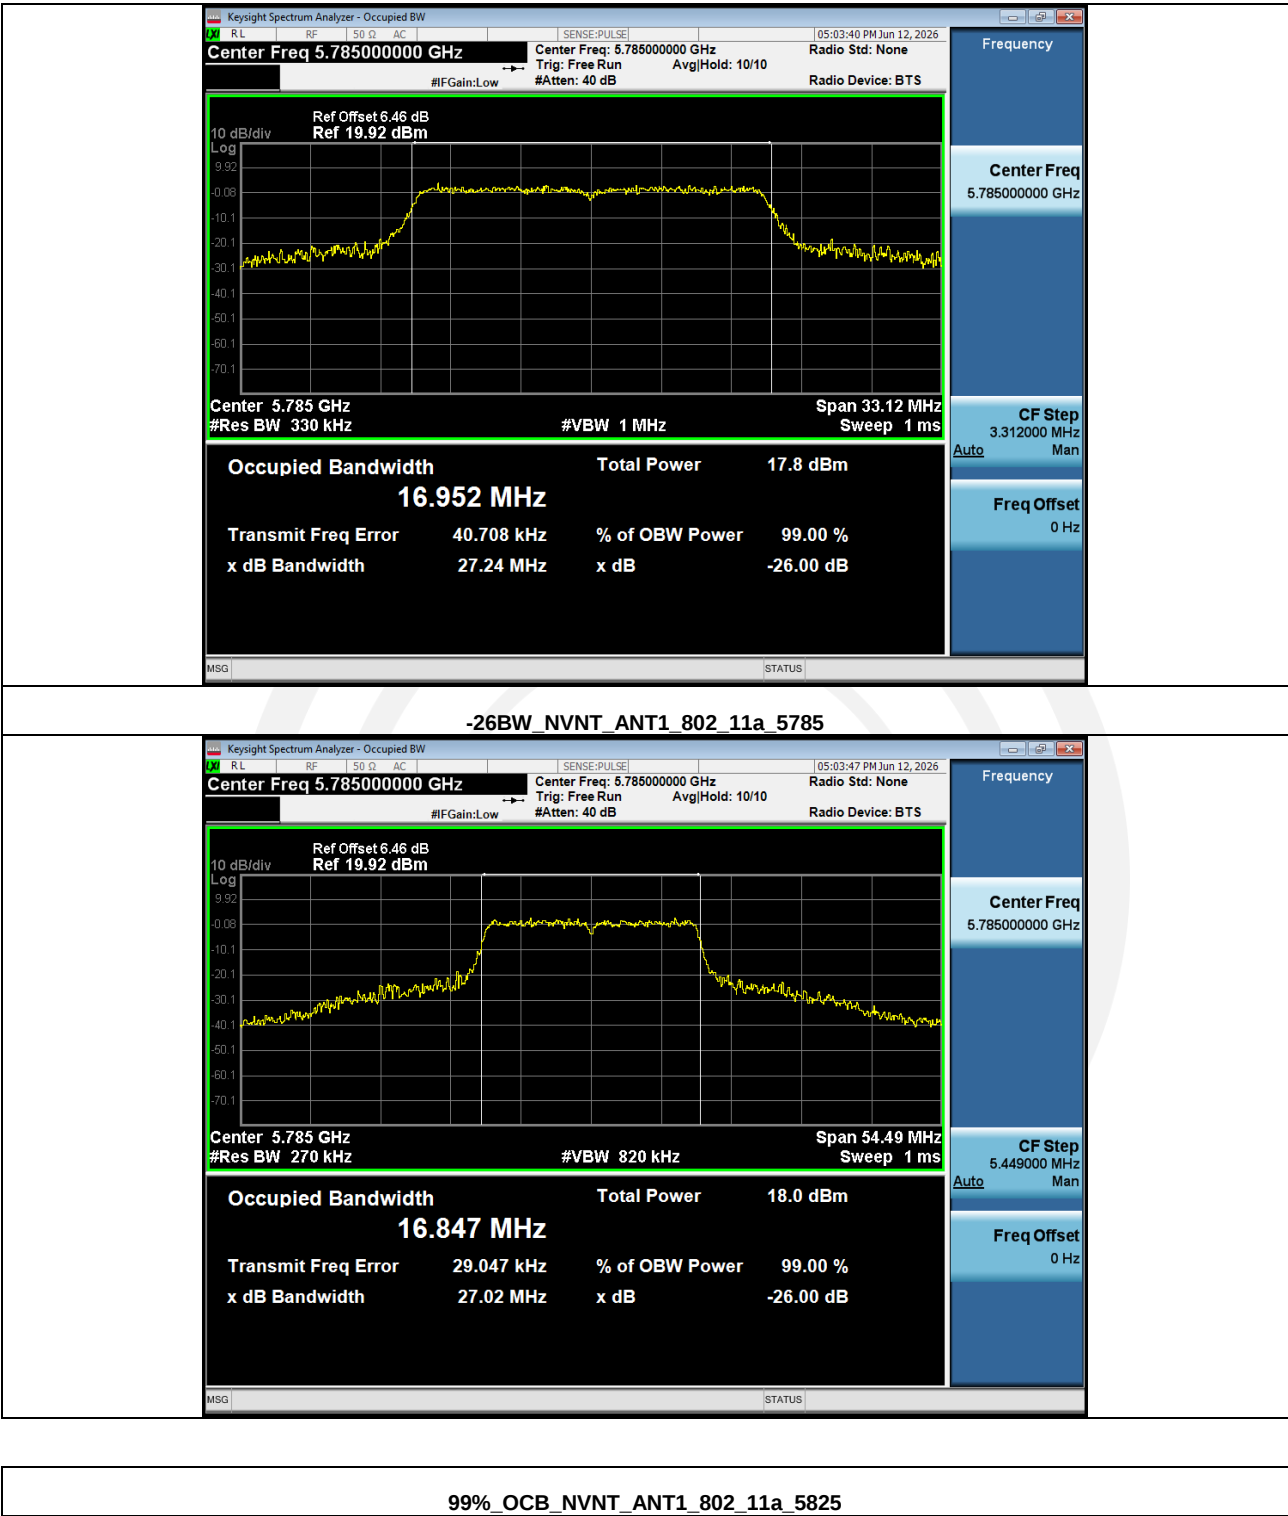


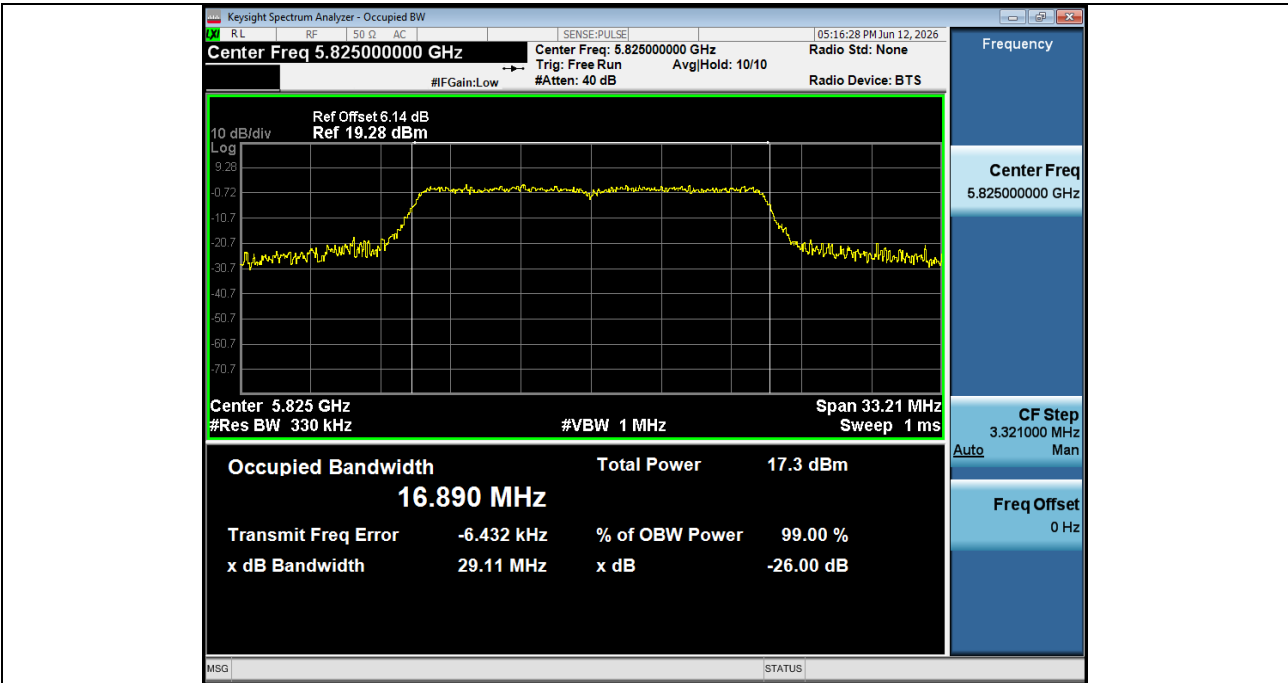


-26BW_NVNT_ANT1_802_11a_5825

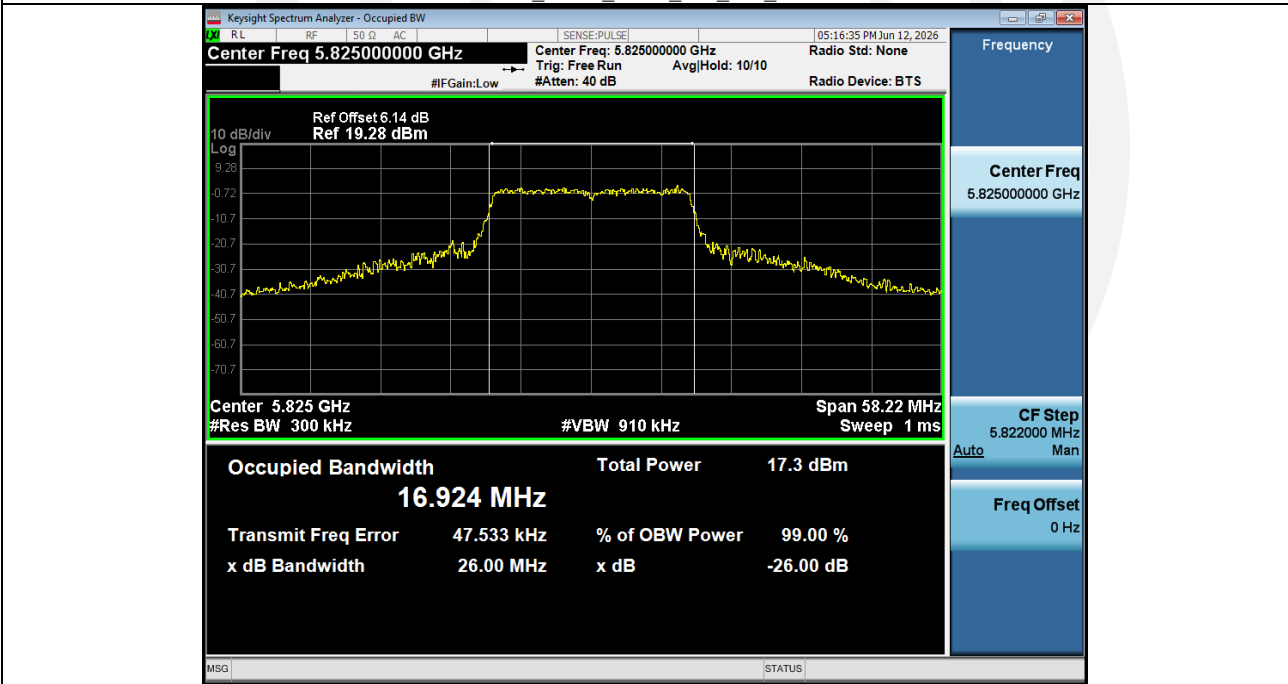


99%_OCB_NVNT_ANT1_802_11n(HT20)_5745

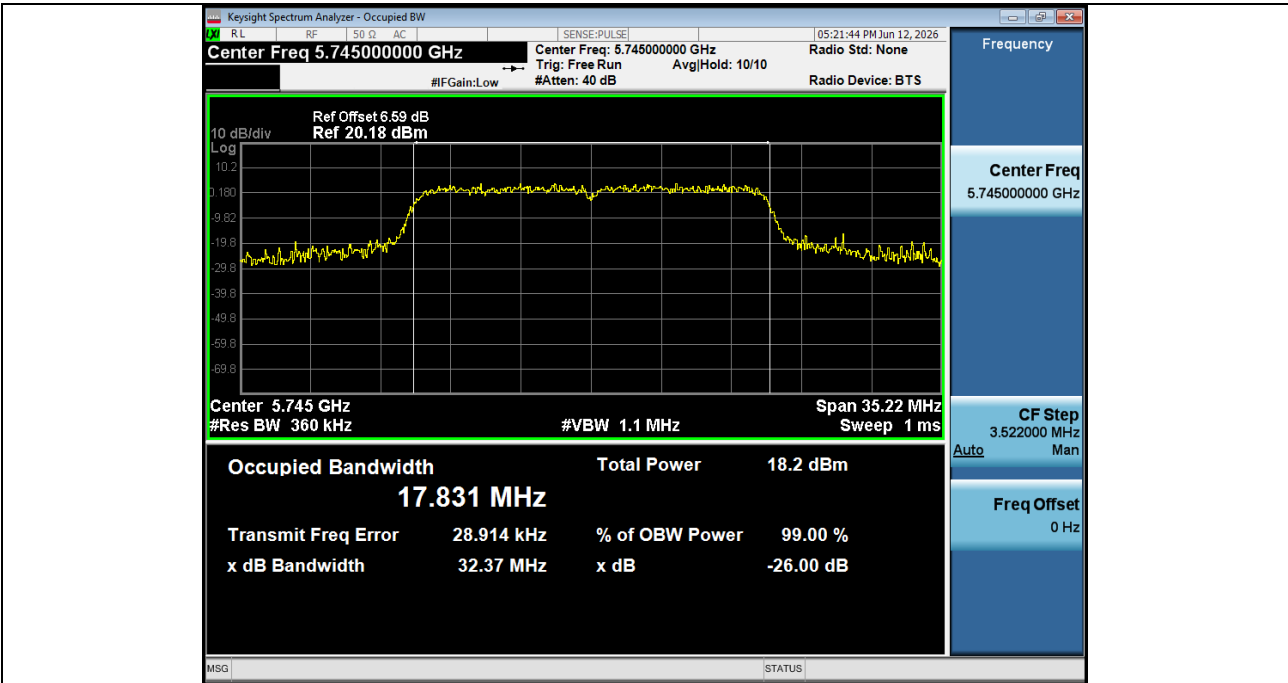


-26BW_NVNT_ANT1_802_11n(HT20)_5745

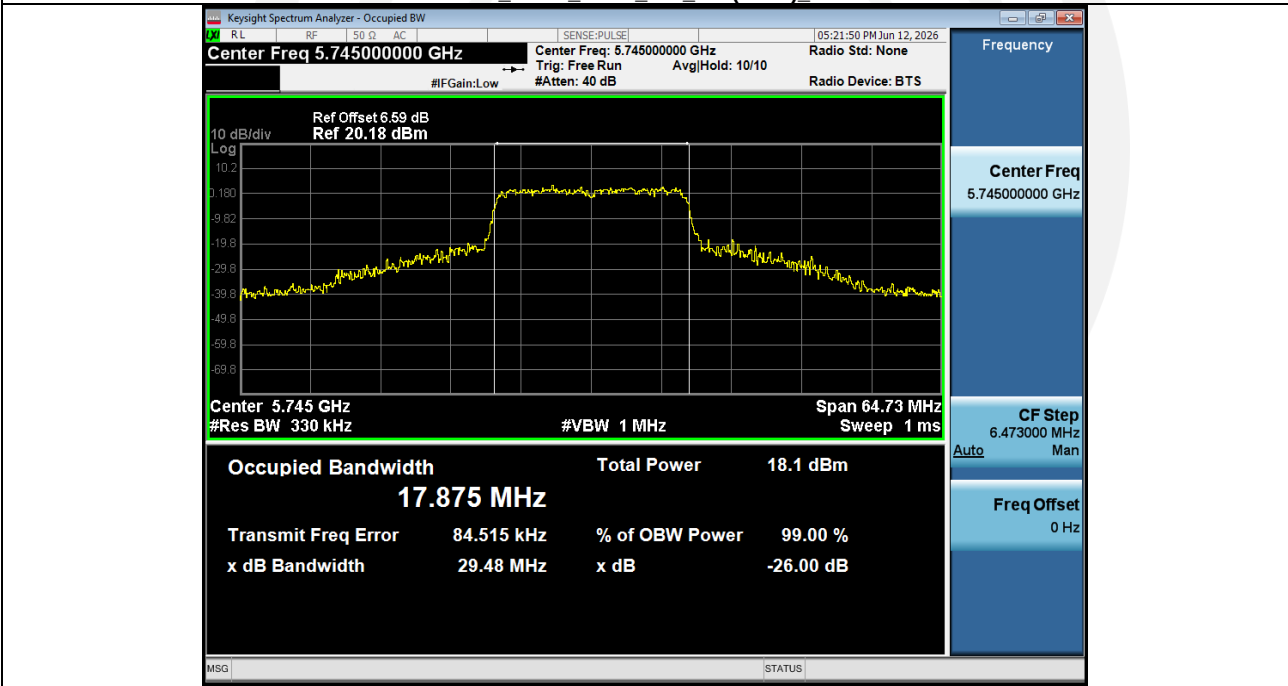


99%_OCB_NVNT_ANT1_802_11n(HT20)_5785

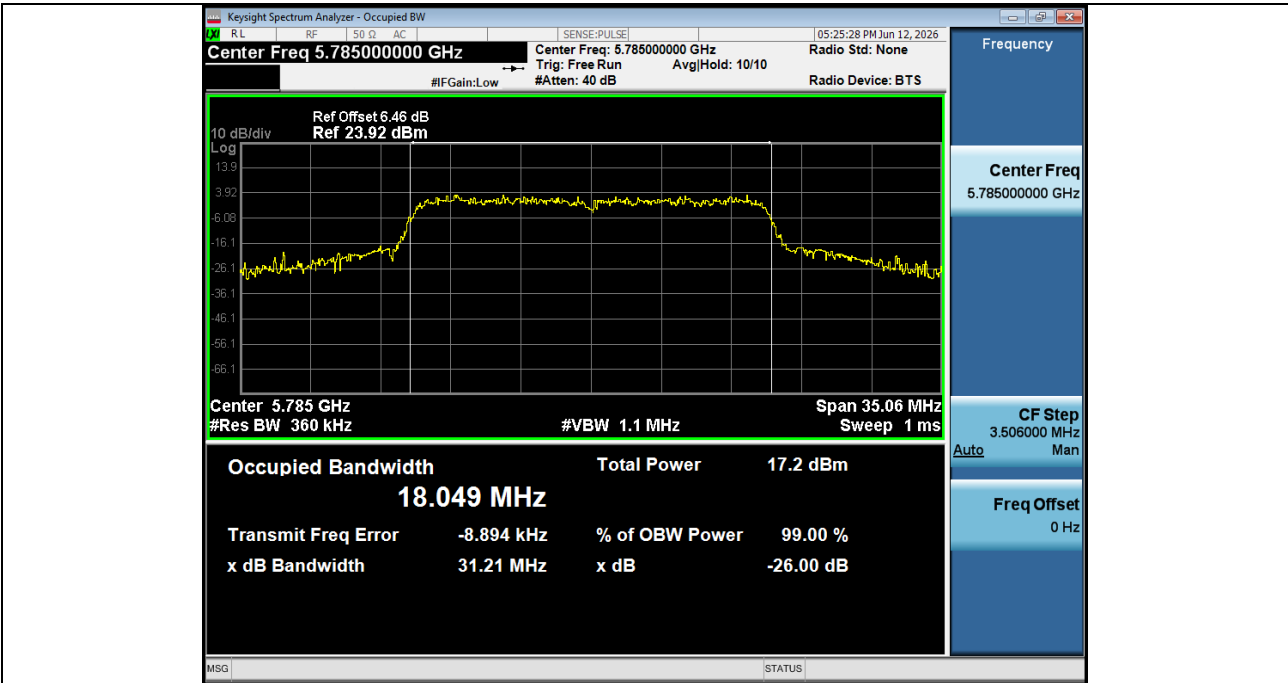


-26BW_NVNT_ANT1_802_11n(HT20)_5785

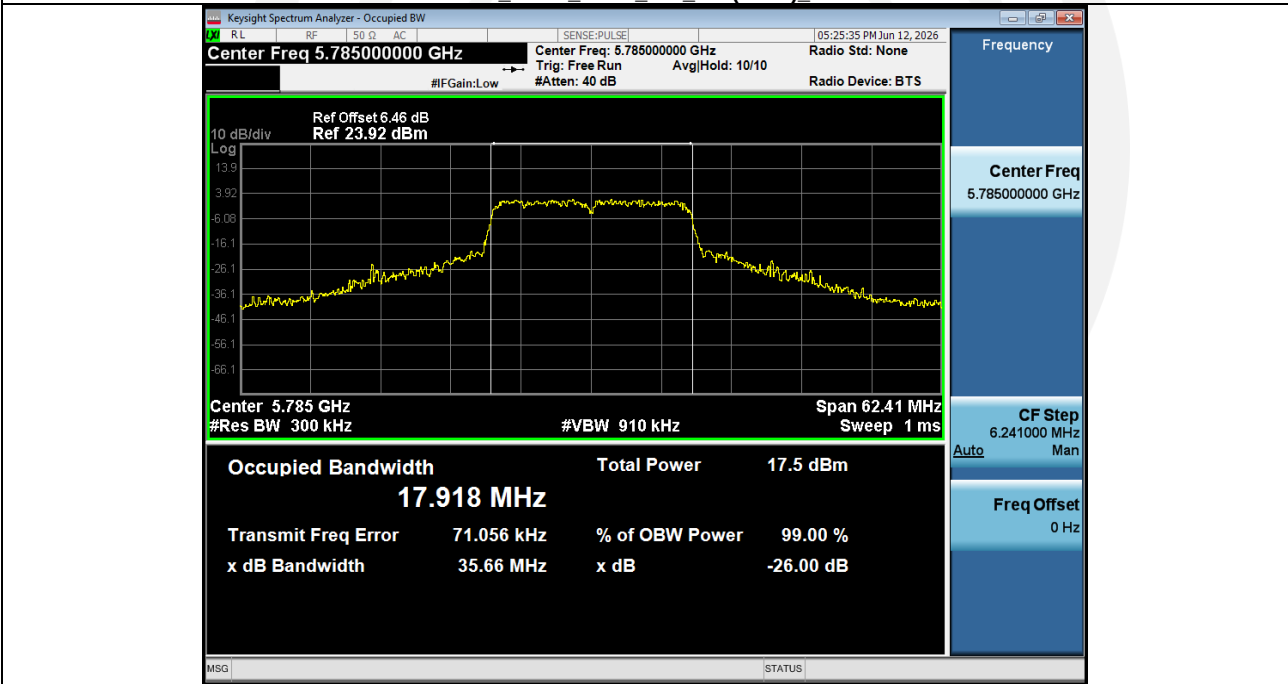


99%_OCB_NVNT_ANT1_802_11n(HT20)_5825

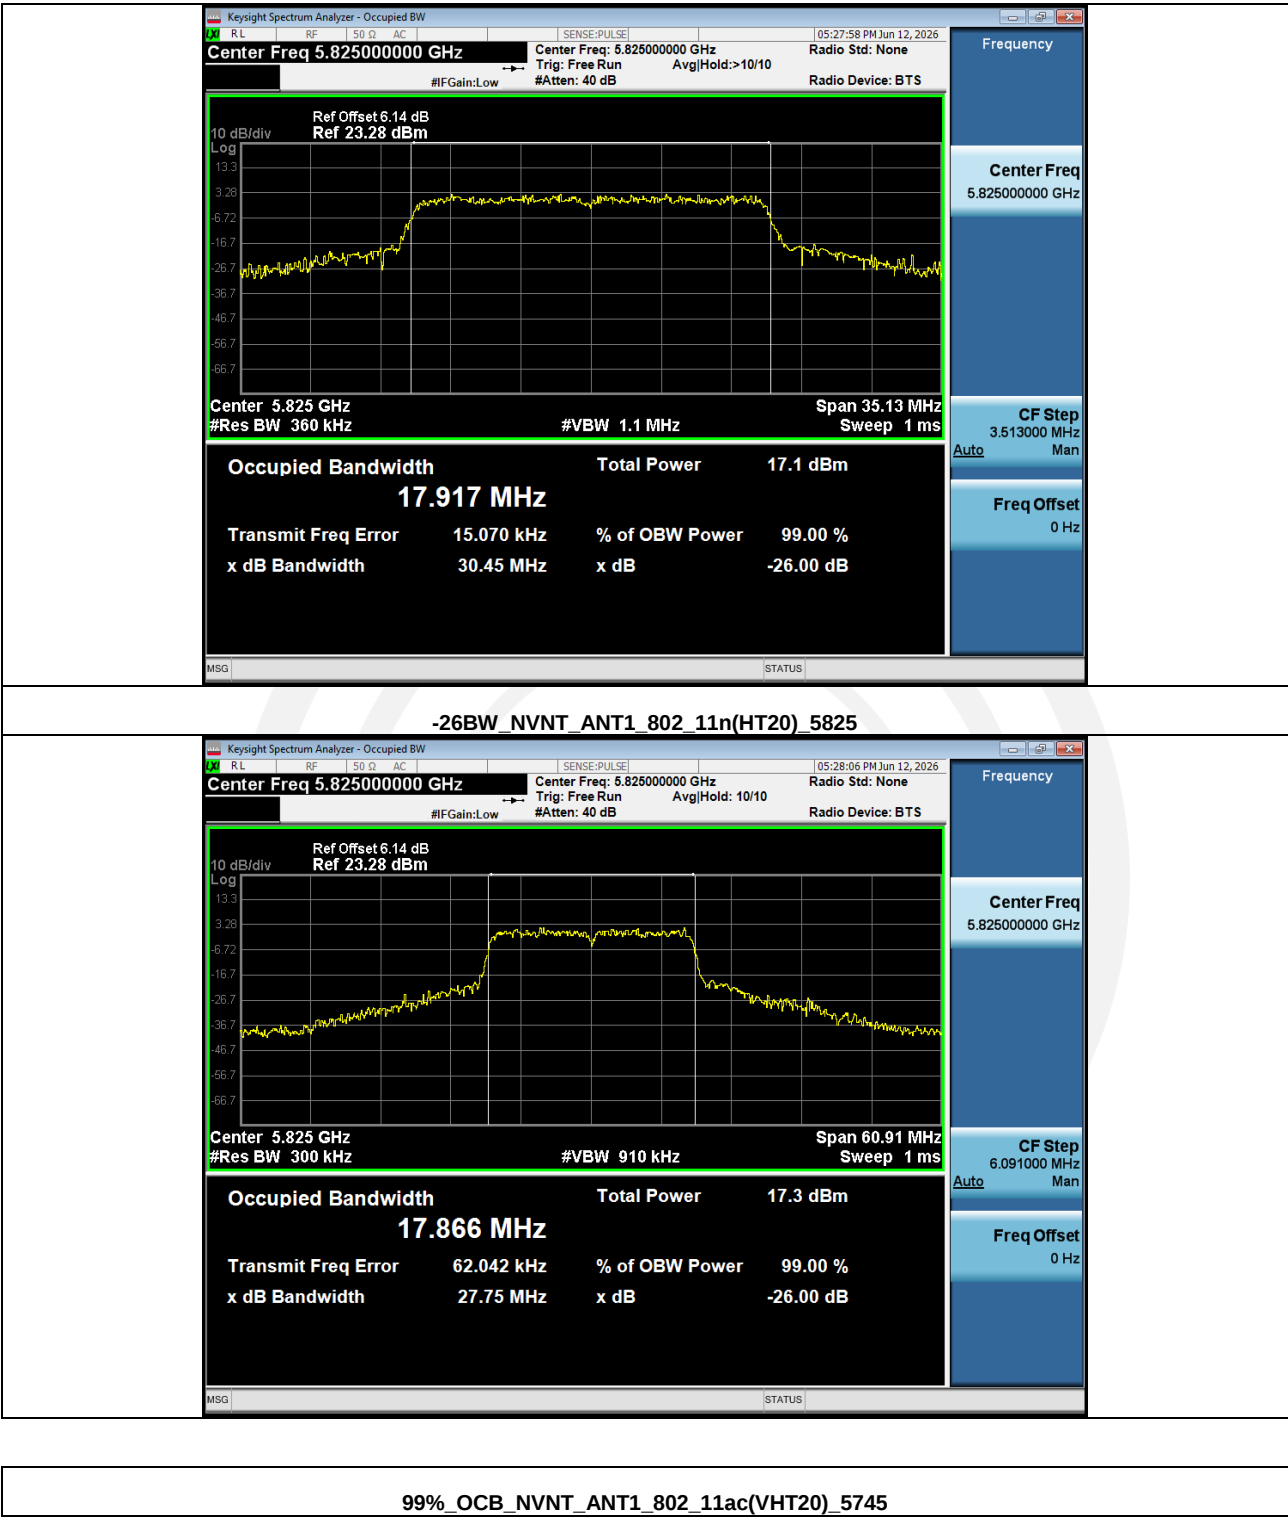


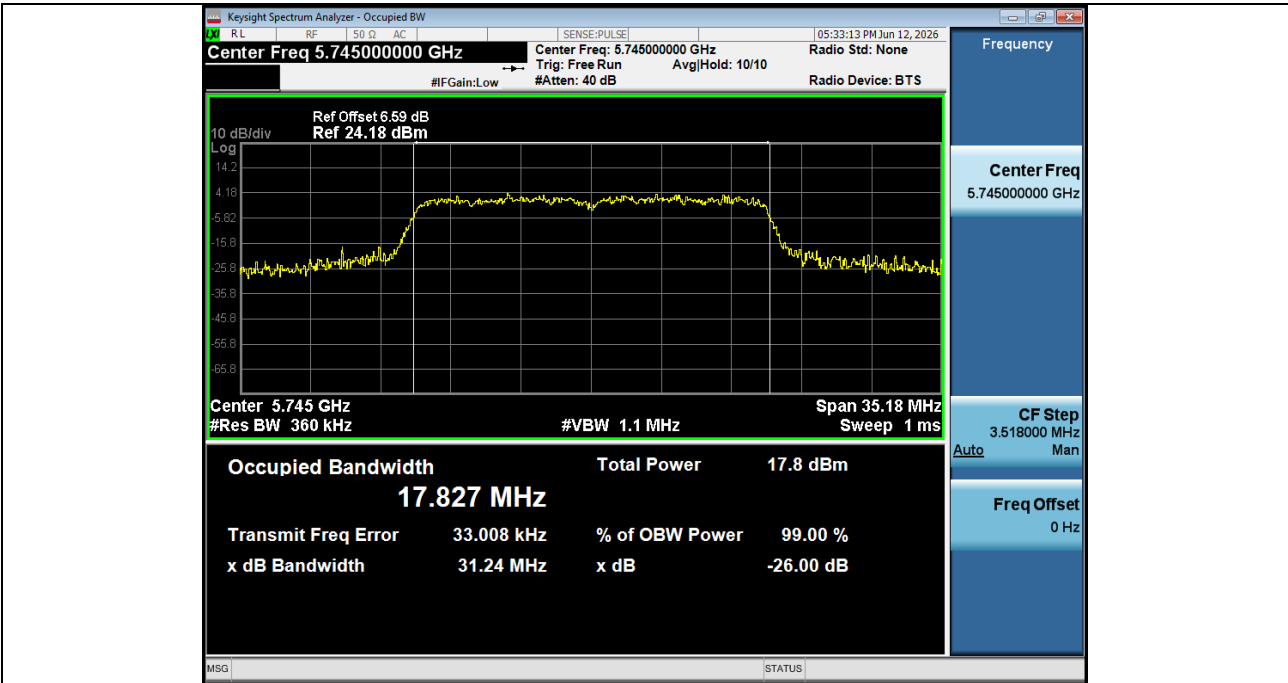


-26BW_NVNT_ANT1_802_11ac(VHT20)_5745

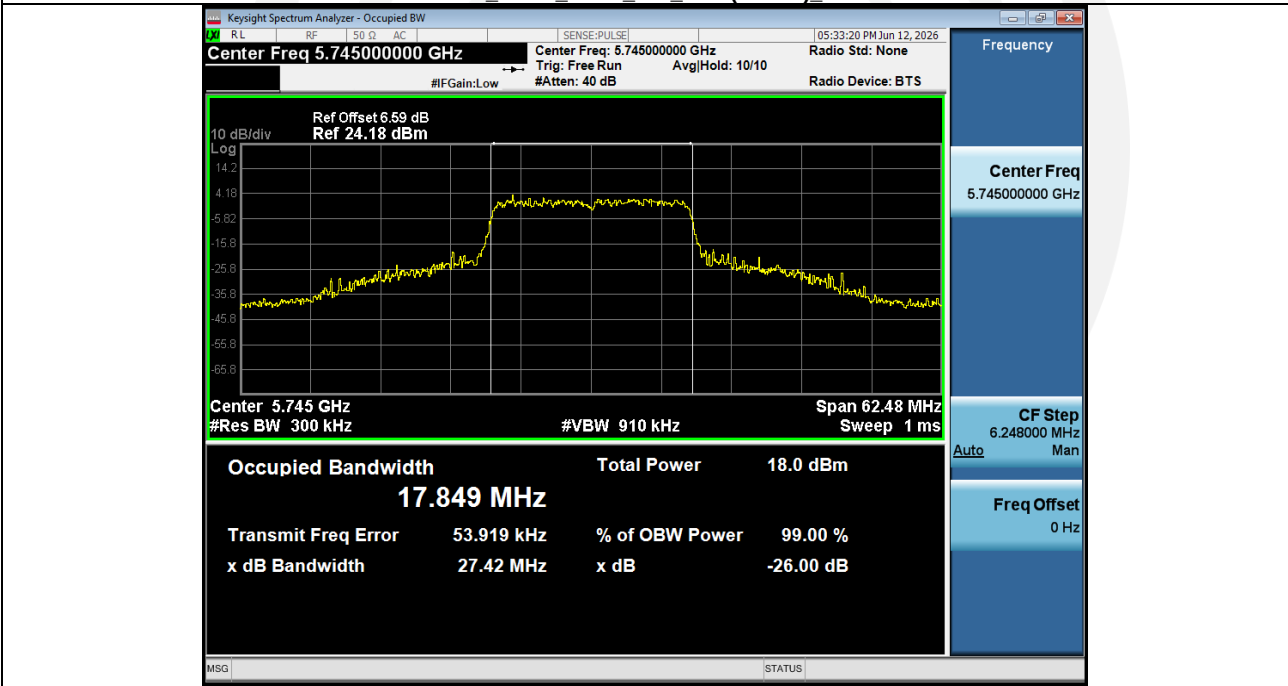


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5785

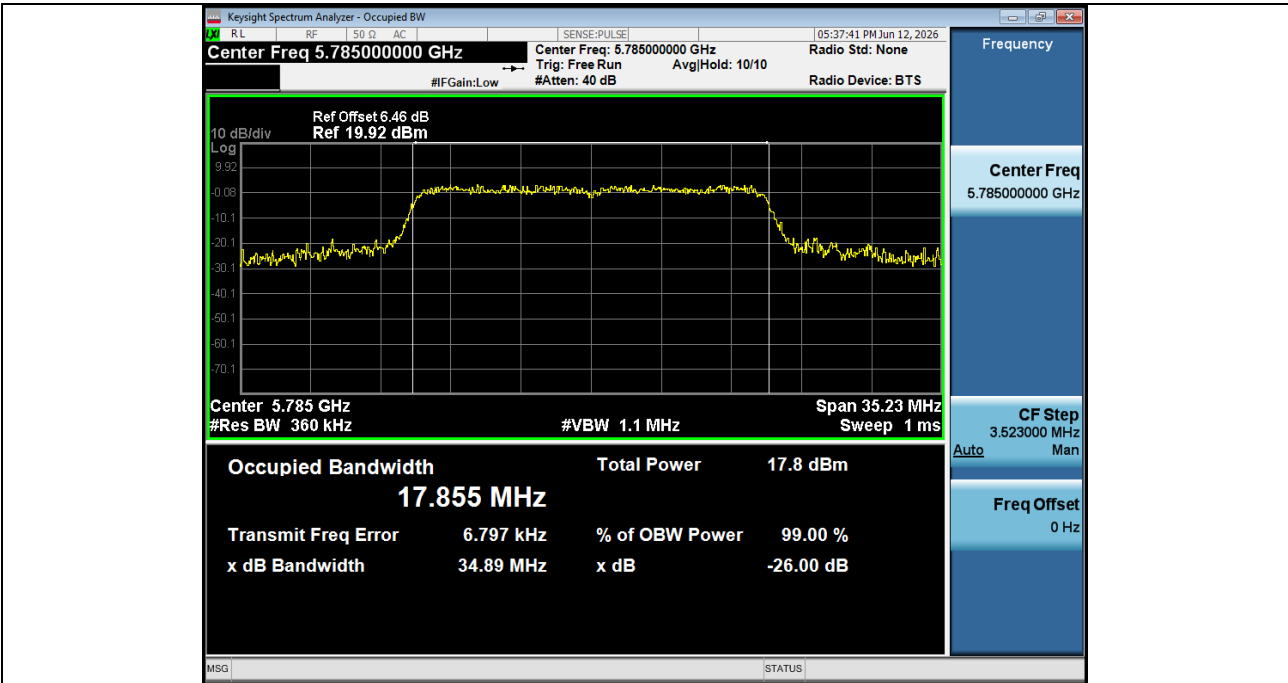


-26BW_NVNT_ANT1_802_11ac(VHT20)_5785

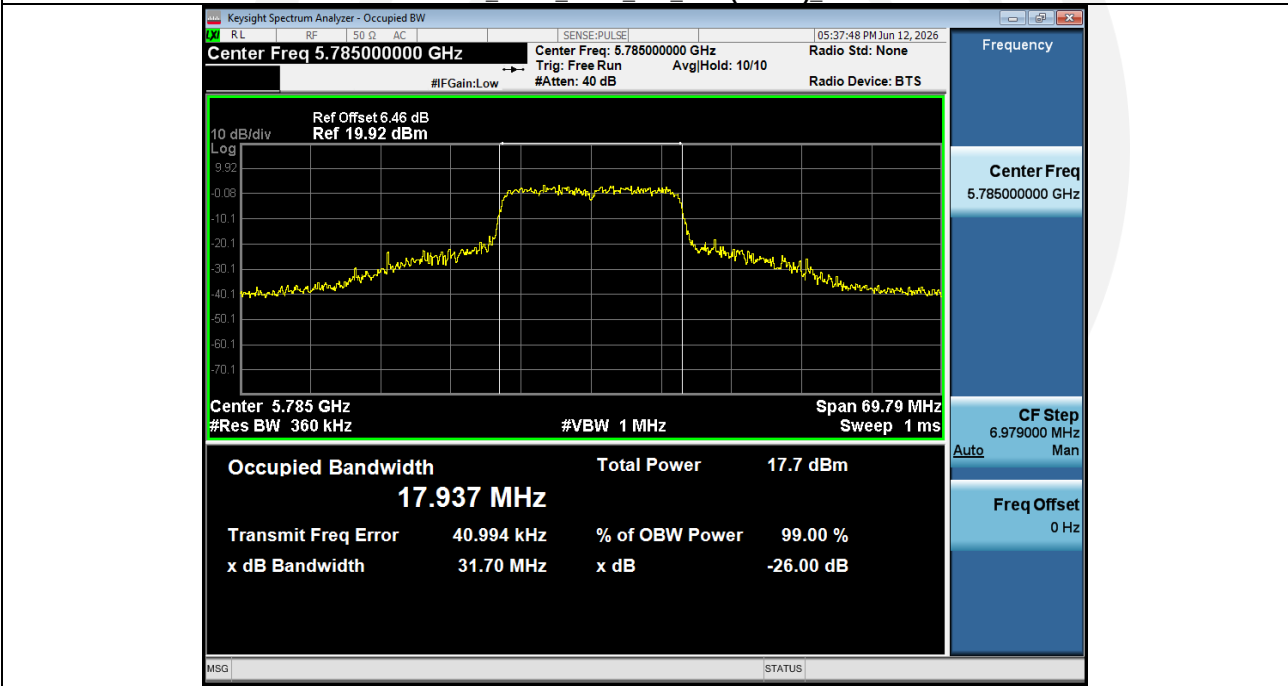


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5825

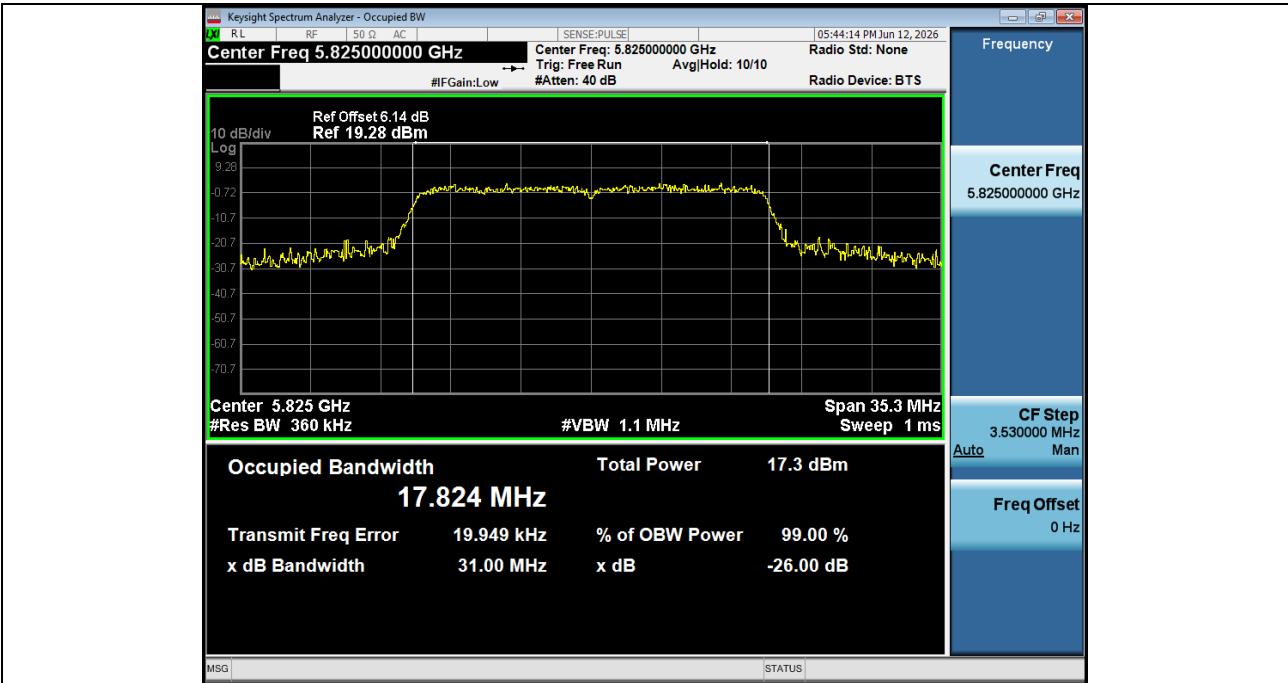


-26BW_NVNT_ANT1_802_11ac(VHT20)_5825

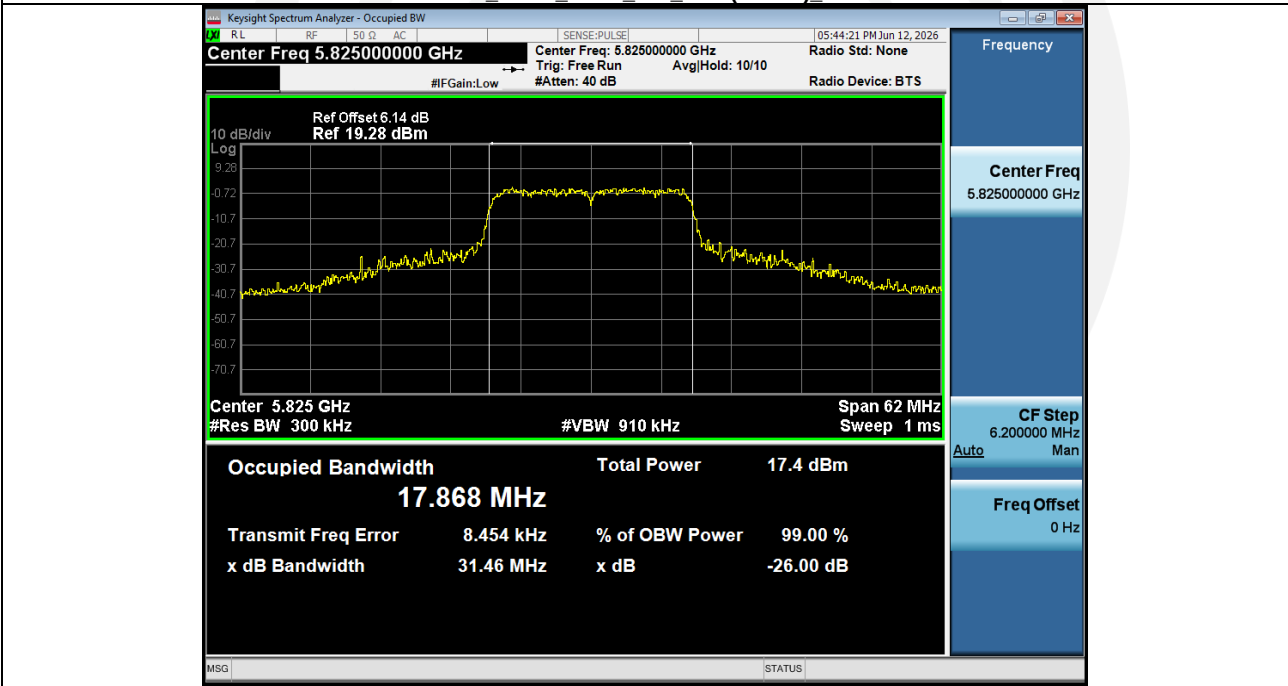


99%_OCB_NVNT_ANT1_802_11n(HT40)_5755

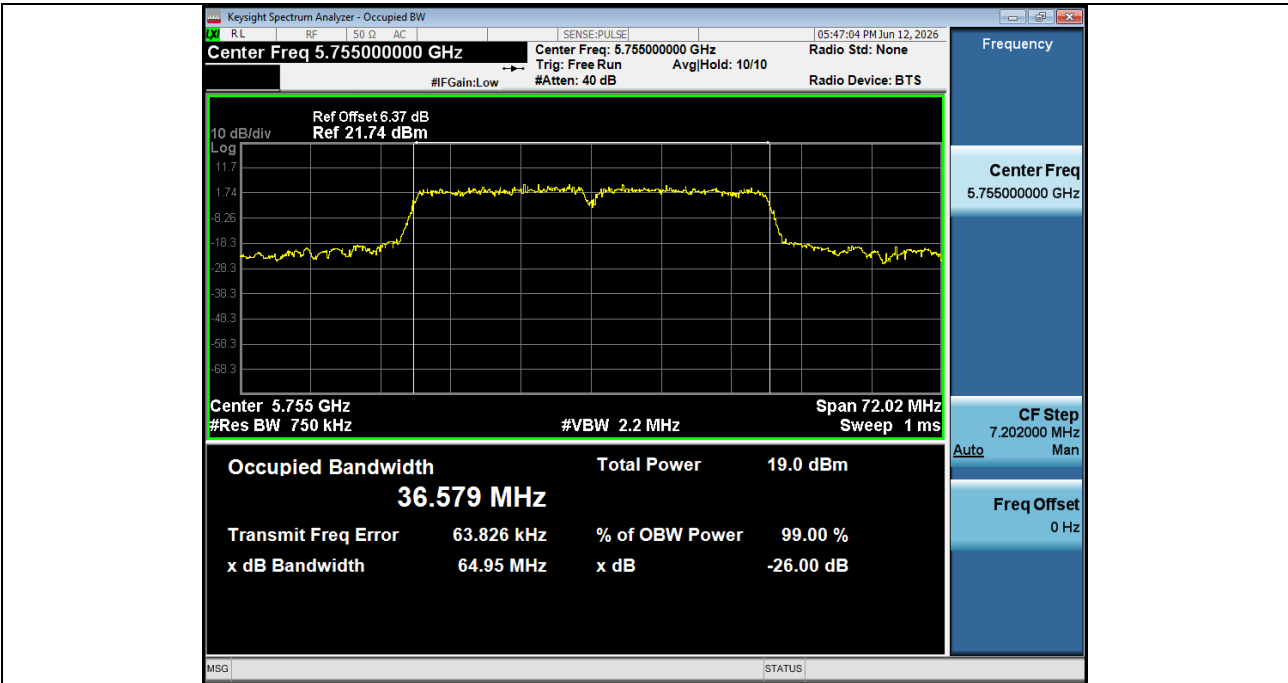


-26BW_NVNT_ANT1_802_11n(HT40)_5755

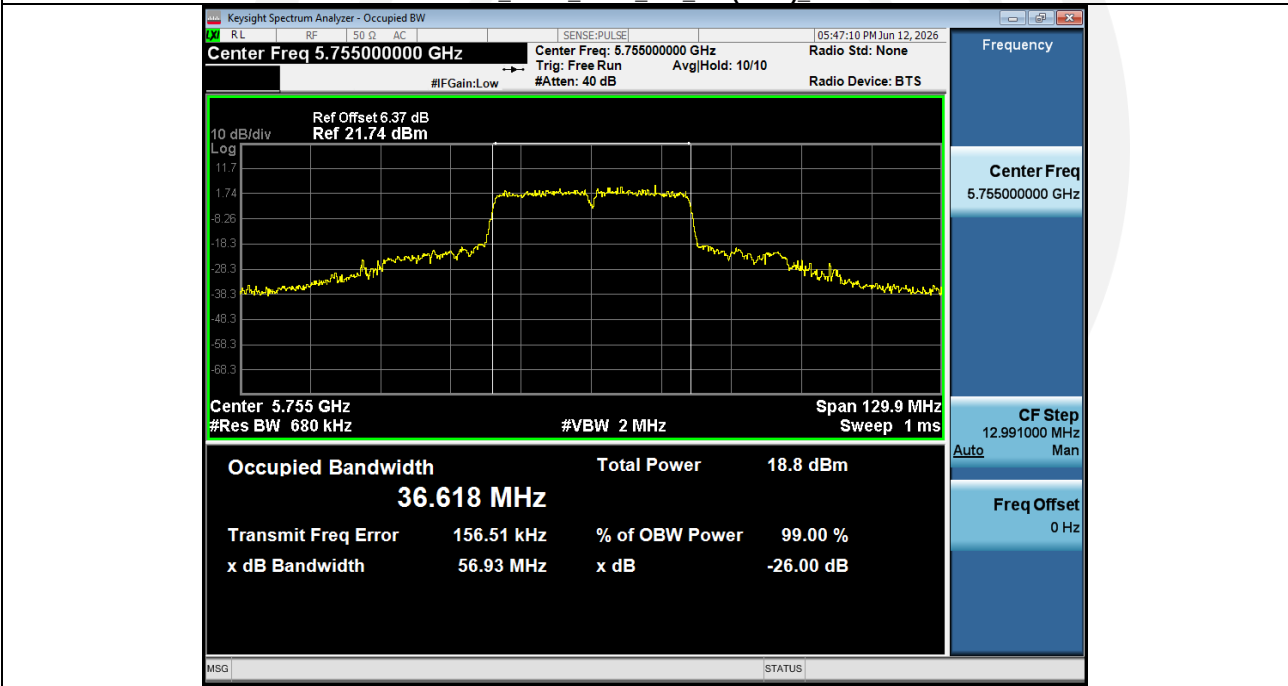


99%_OCB_NVNT_ANT1_802_11n(HT40)_5795

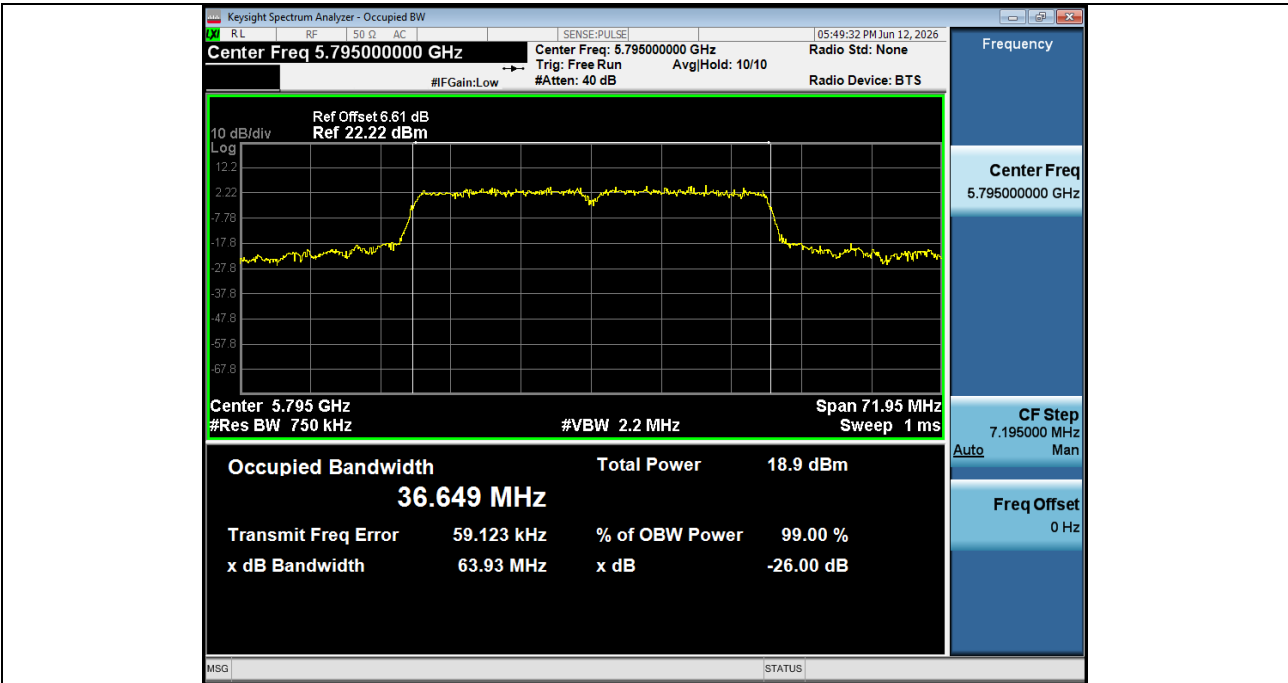

-26BW_NVNT_ANT1_802_11n(HT40)_5795

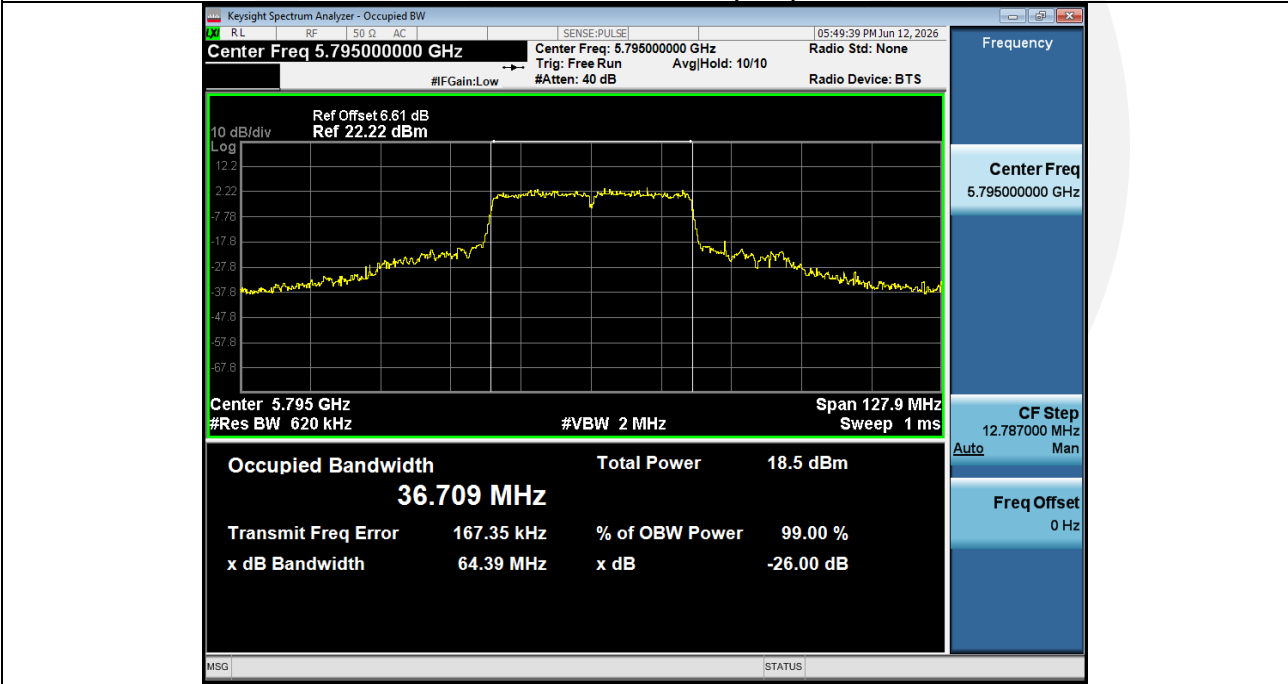

99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5755

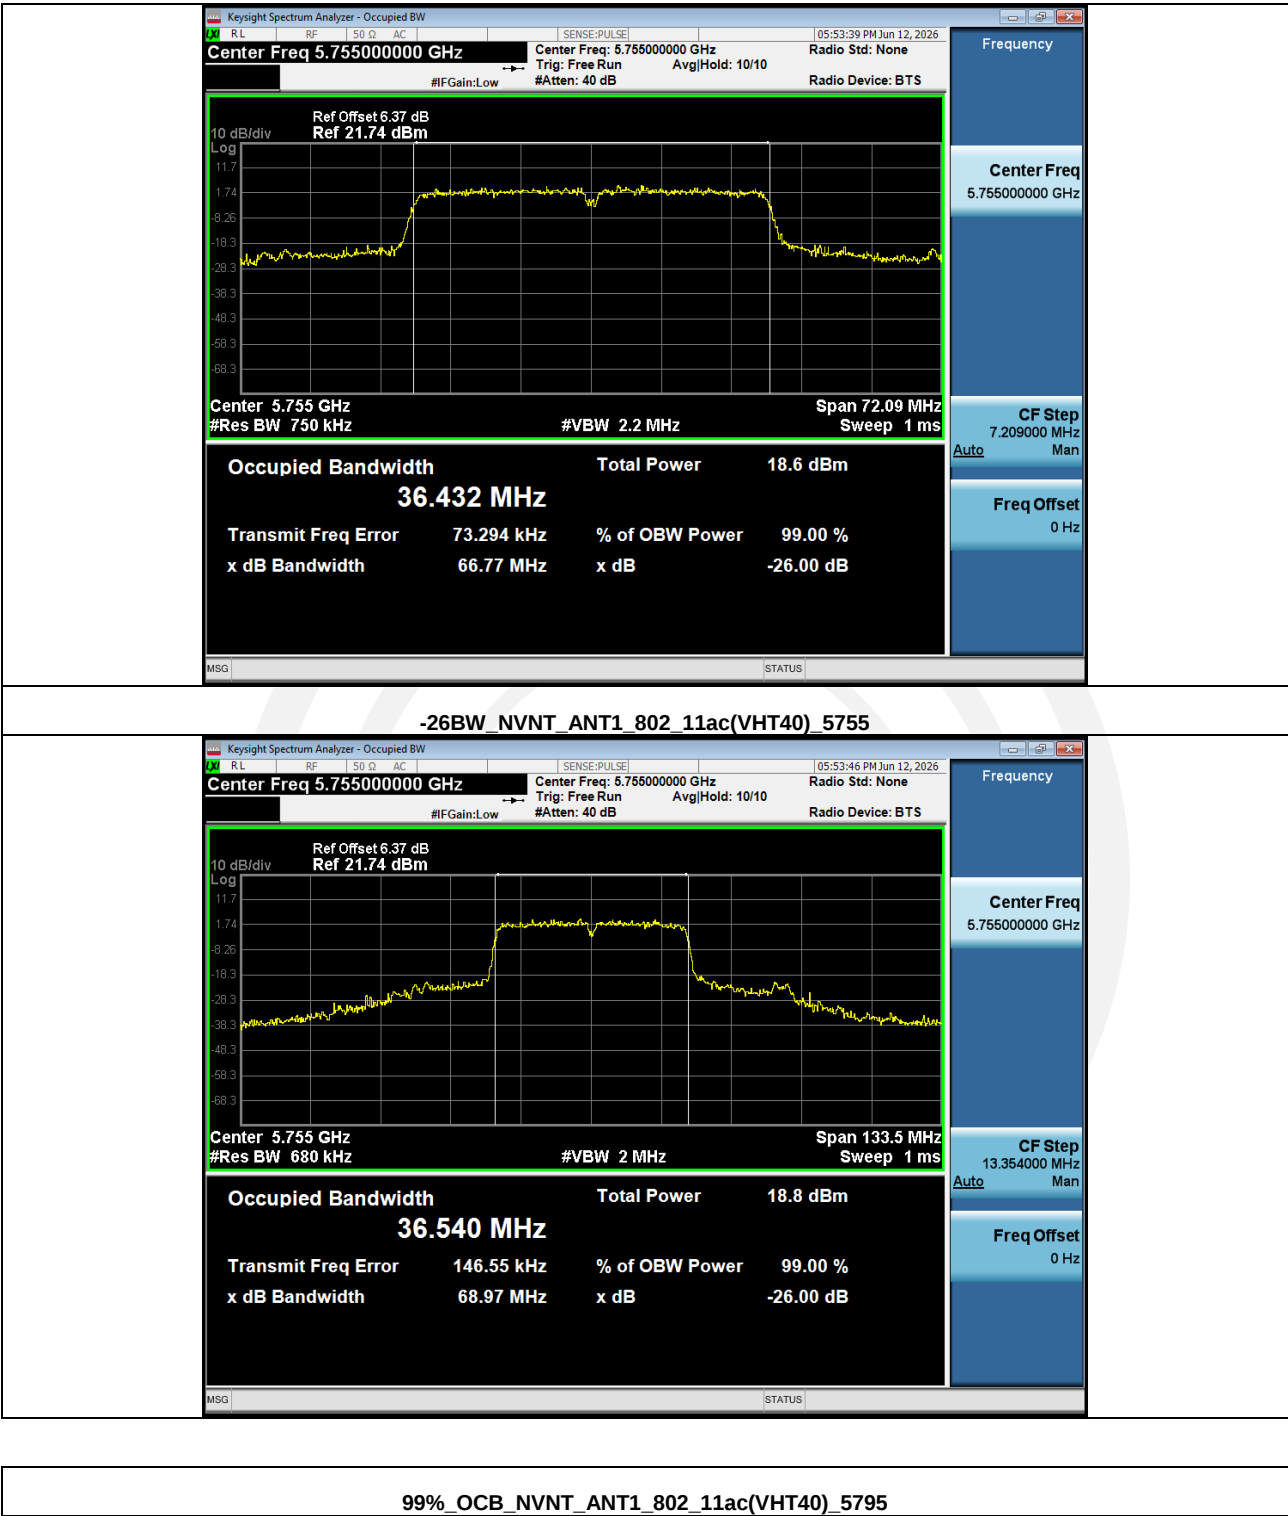

-26BW_NVNT_ANT1_802_11ac(VHT40)_5755

Keysight Spectrum Analyzer - Occupied BW

RL

RF

50 Ω

AC

SENSE:PULSE

05:53:46 PM Jun 12, 2026

Center Freq 5.75500000 GHz

Center Freq: 5.755000000 GHz

Radio Std: None

#FGain:Low

Trig: Free Run

Avg/Hold: 10/10

Radio Device: BTS

Ref Offset 6.37 dB

Ref 21.74 dBm

10 dB/div

Log

11.7

1.74

-8.26

-18.3

-28.3

-38.3

-48.3

-58.3

-68.3

Center 5.755 GHz

#Res BW 680 kHz

#VBW 2 MHz

Span 133.5 MHz

Sweep 1 ms

Occupied Bandwidth

Total Power

18.8 dBm

36.540 MHz

Transmit Freq Error

146.55 kHz

% of OBW Power

99.00 %

x dB Bandwidth

68.97 MHz

x dB

-26.00 dB

MSG

STATUS

Frequency

Center Freq

5.755000000 GHz

CF Step

13.3540000 MHz


Auto

Man


Freq Offset

0 Hz


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5755

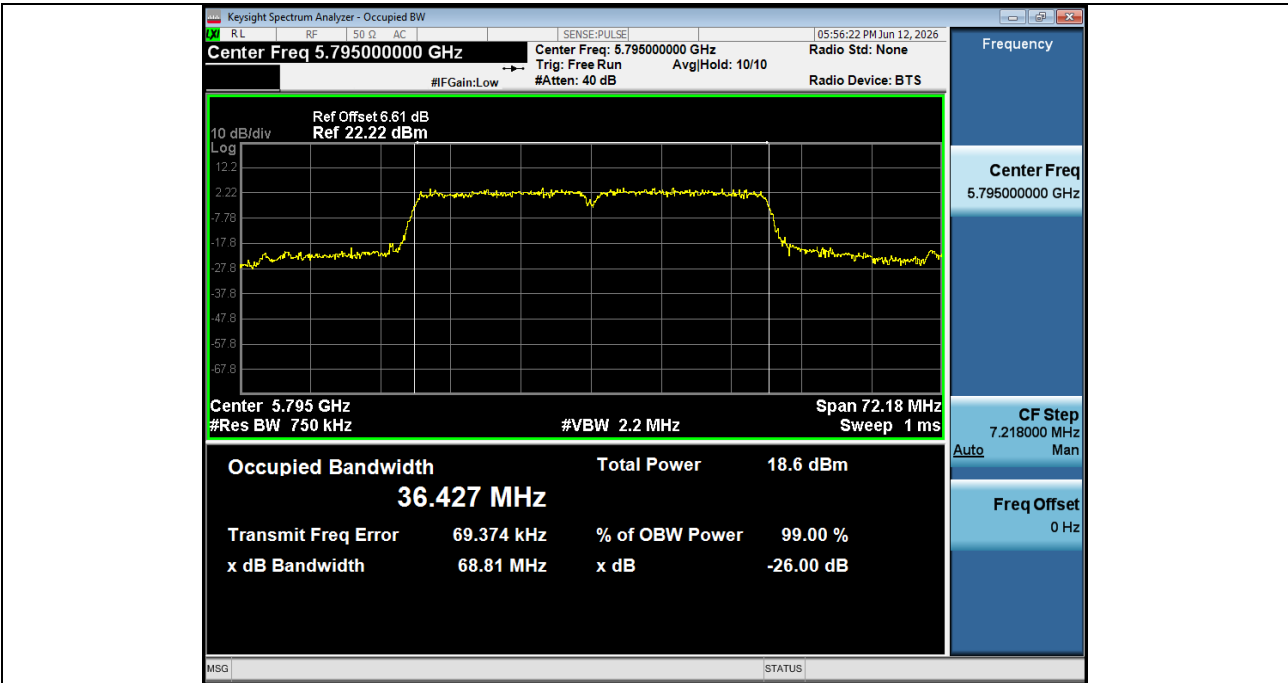


-26BW_NVNT_ANT1_802_11ac(VHT40)_5795

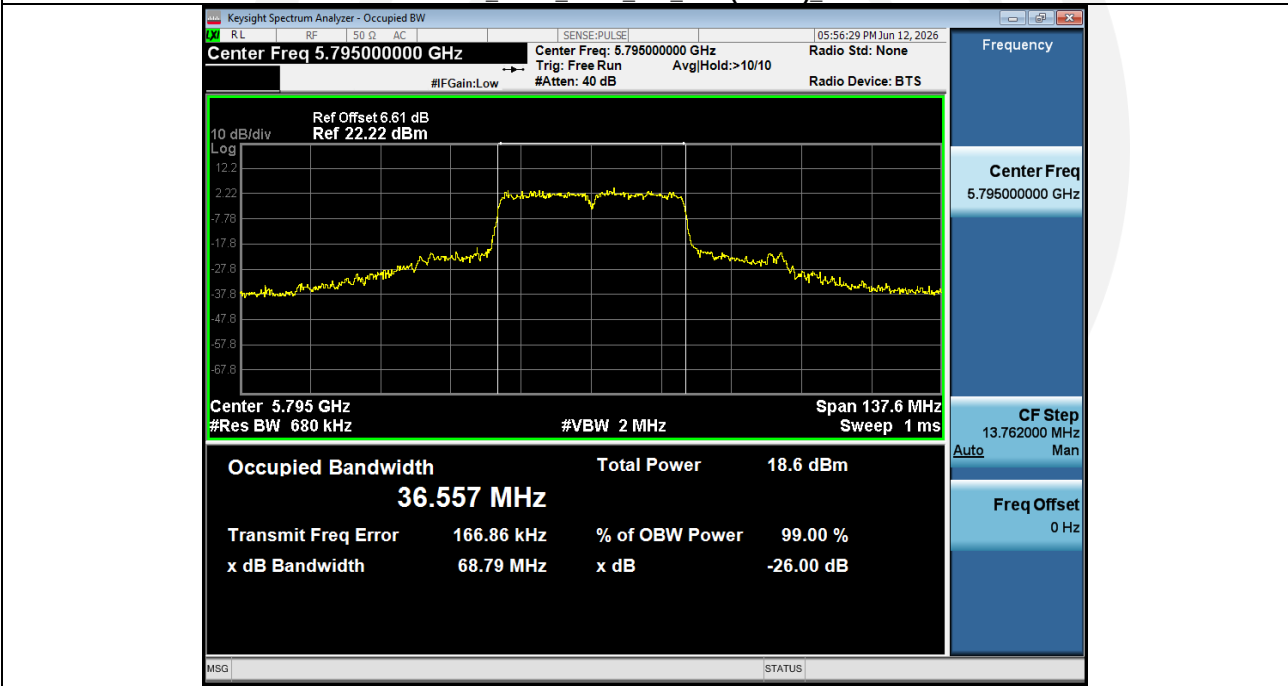

99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5775

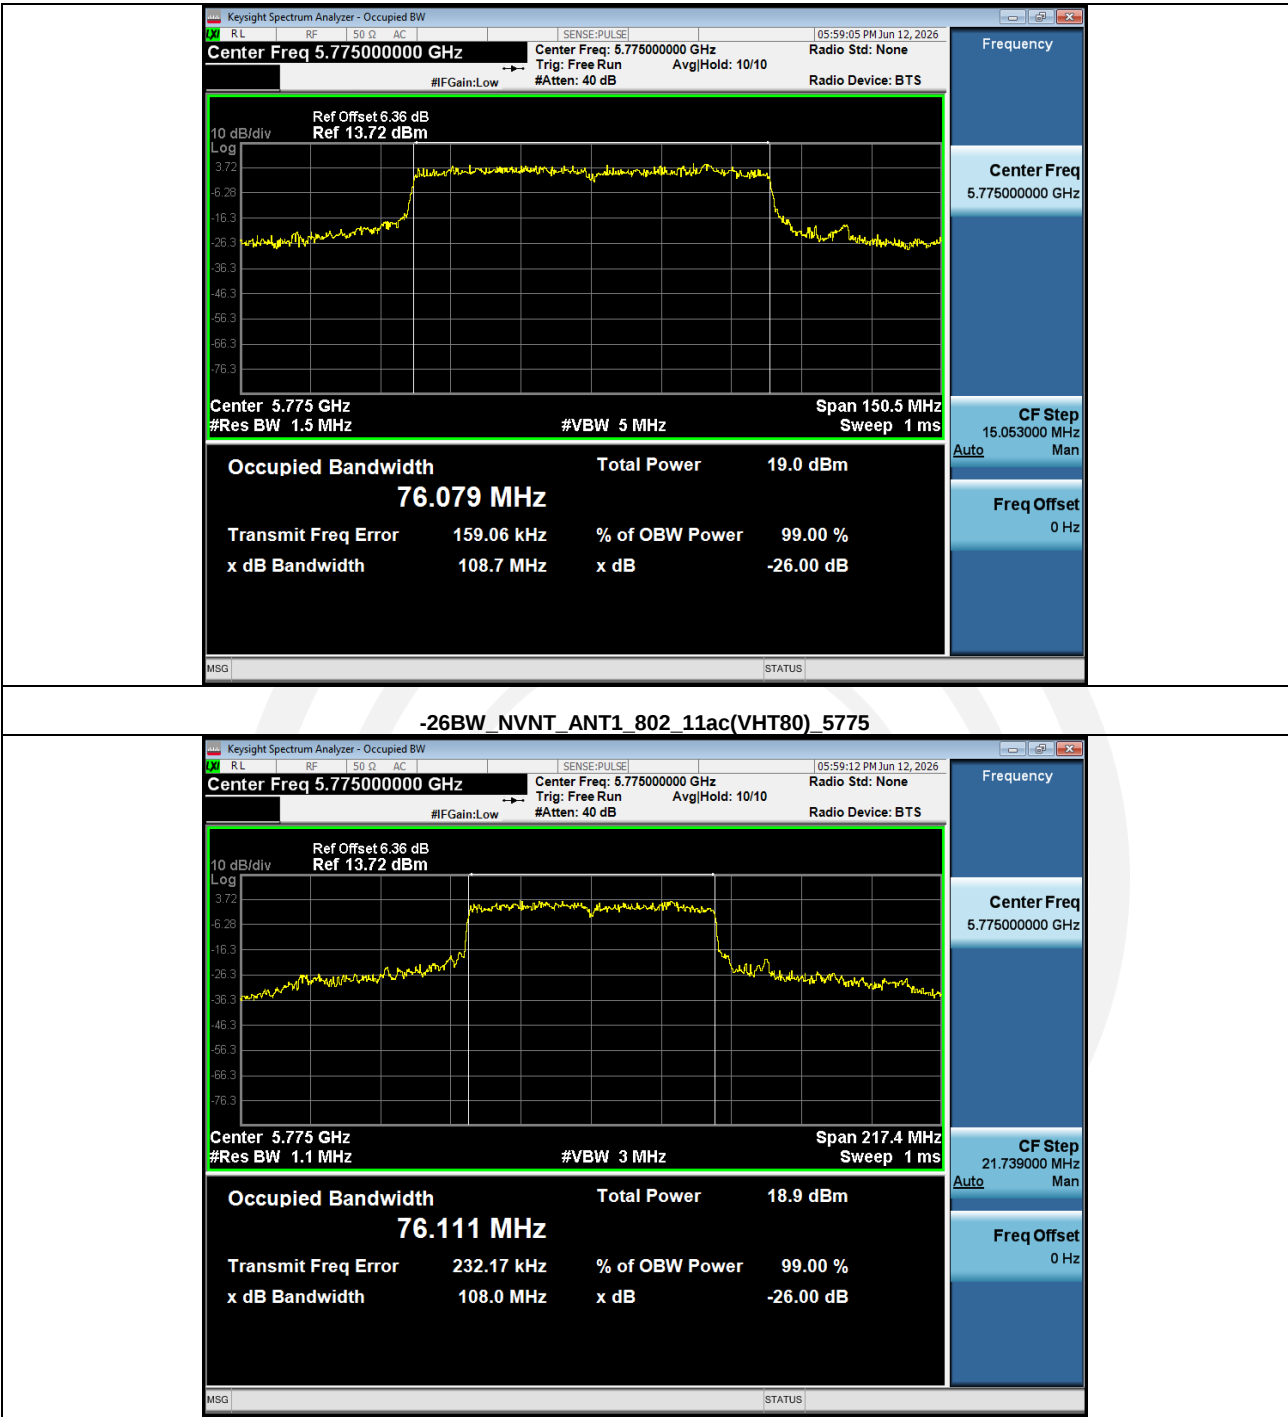

4.4 Maximum Conducted Output Power

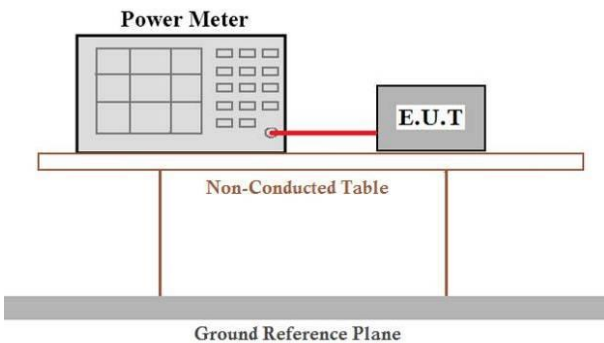Test Requirement:	FCC Part15 E Section 15.407, RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W. IC: For the 5.15–5.25 GHz band, For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. For the 5.25–5.35 GHz band, Other than devices installed in vehicles, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected via a red cable to an 'E.U.T.' (Equipment Under Test). Both are placed on a 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the

	conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass


Measurement Data

Band 4 (5725 – 5850 MHz) SISO:

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	10.45	2.55	13.00	30	Pass
NVNT	ANT1	802.11a	5785.00	9.80	2.22	12.02	30	Pass
NVNT	ANT1	802.11a	5825.00	9.41	2.04	11.45	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	10.11	0.00	10.11	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	9.56	2.55	12.11	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	9.00	1.76	10.76	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	9.80	1.76	11.56	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	9.25	1.76	11.01	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	9.43	2.22	11.65	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	9.31	2.43	11.74	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	9.00	3.68	12.68	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	9.14	2.43	11.57	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	9.02	2.43	11.45	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	8.43	3.01	11.44	30	Pass

Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
ANT1	802.11a	5745.00	55.56	2.55
ANT1	802.11a	5785.00	60.00	2.22
ANT1	802.11a	5825.00	62.50	2.04
ANT1	802.11n(HT20)	5745.00	66.67	1.76
ANT1	802.11n(HT20)	5785.00	55.56	2.55
ANT1	802.11n(HT20)	5825.00	66.67	1.76
ANT1	802.11ac(VHT20)	5745.00	66.67	1.76
ANT1	802.11ac(VHT20)	5785.00	66.67	1.76
ANT1	802.11ac(VHT20)	5825.00	60.00	2.22
ANT1	802.11n(HT40)	5755.00	57.14	2.43
ANT1	802.11n(HT40)	5795.00	42.86	3.68
ANT1	802.11ac(VHT40)	5755.00	57.14	2.43
ANT1	802.11ac(VHT40)	5795.00	57.14	2.43
ANT1	802.11ac(VHT80)	5775.00	50.00	3.01


4.5 Power Spectral Density

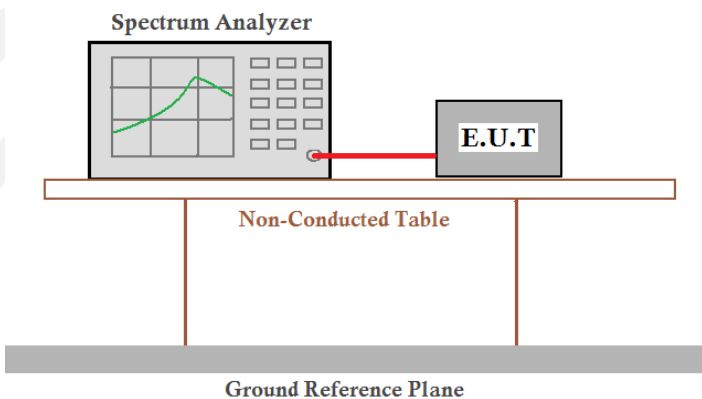Test Requirement:	FCC Part15 E Section 15.407, RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	FCC: 1. $\leq 11.00 \text{ dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz 2. $\leq 30.00 \text{ dBm/500KHz}$ for 5725MHz-5850MHz IC: 1. For the 5.15-5.25 GHz, The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. 2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 4 (5725 – 5850 MHz) SISO:**

Condition	Antenna	Modulation	Frequency (MHz)	PSD_SA(dBm/RBW)	Duty factor(dB)	RB factor(dB)	PSD(dBm/500kHz)	limit(dBm/500kHz)	Result
NVNT	ANT1	802.11a	5745.00	-4.52	2.55	-0	-2.06	30	Pass
NVNT	ANT1	802.11a	5785.00	-5.60	2.22	-0	-3.47	30	Pass
NVNT	ANT1	802.11a	5825.00	-4.45	2.04	-0	-2.49	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	-4.97	1.76	-0	-3.30	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	-4.53	2.55	-0	-2.07	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	-5.05	1.76	-0	-3.38	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	-4.53	1.76	-0	-2.86	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	-4.53	1.76	-0	-2.85	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	-5.09	2.22	-0	-2.96	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	-7.15	2.43	-0	-4.81	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	-8.75	3.68	-0	-5.16	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	-8.85	2.43	-0	-6.51	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	-9.16	2.43	-0	-6.82	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	-12.49	3.01	-0	-9.57	30	Pass


Power_Spectral_Density_NVNT_ANT1_802_11a_5745

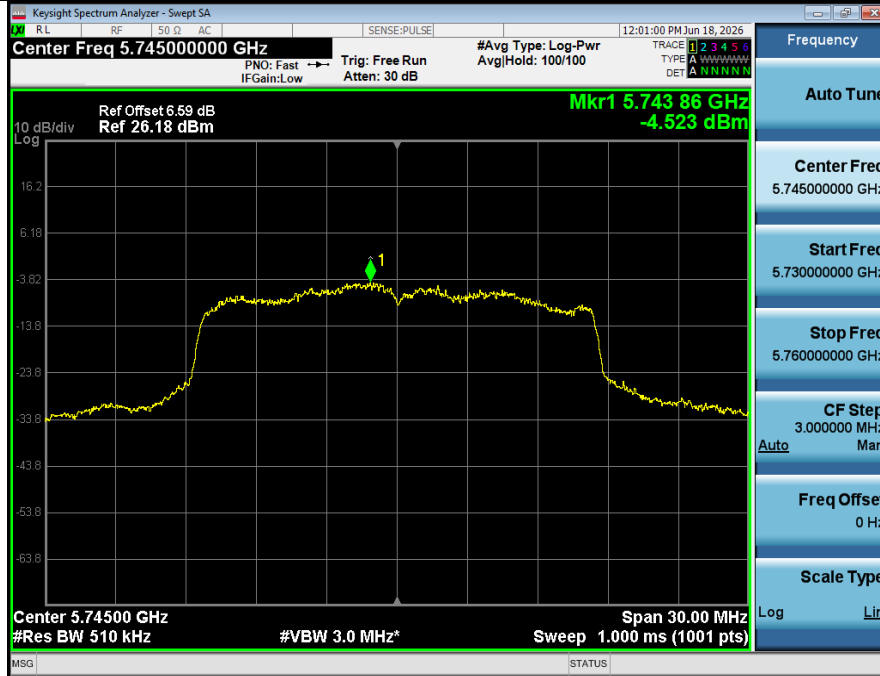

Power_Spectral_Density_NVNT_ANT1_802_11a_5785



Power_Spectral_Density_NVNT_ANT1_802_11a_5825

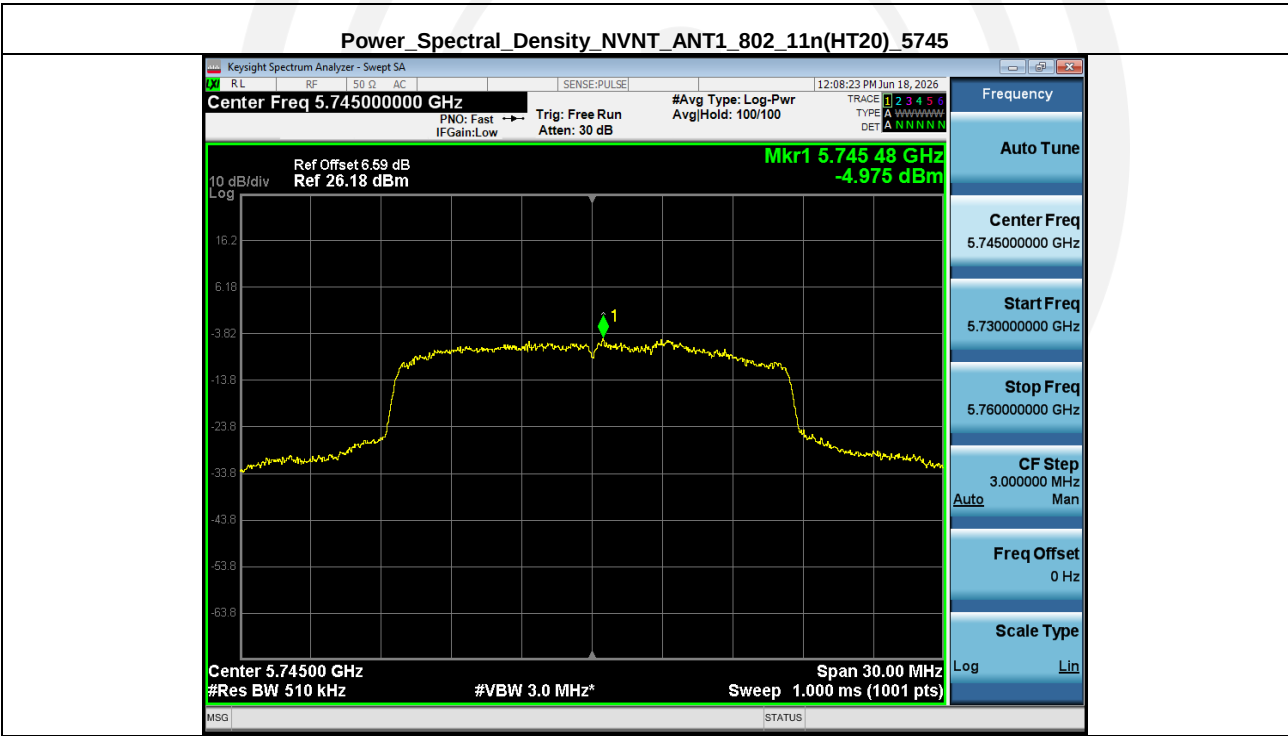


Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5785




Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5825




Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5745

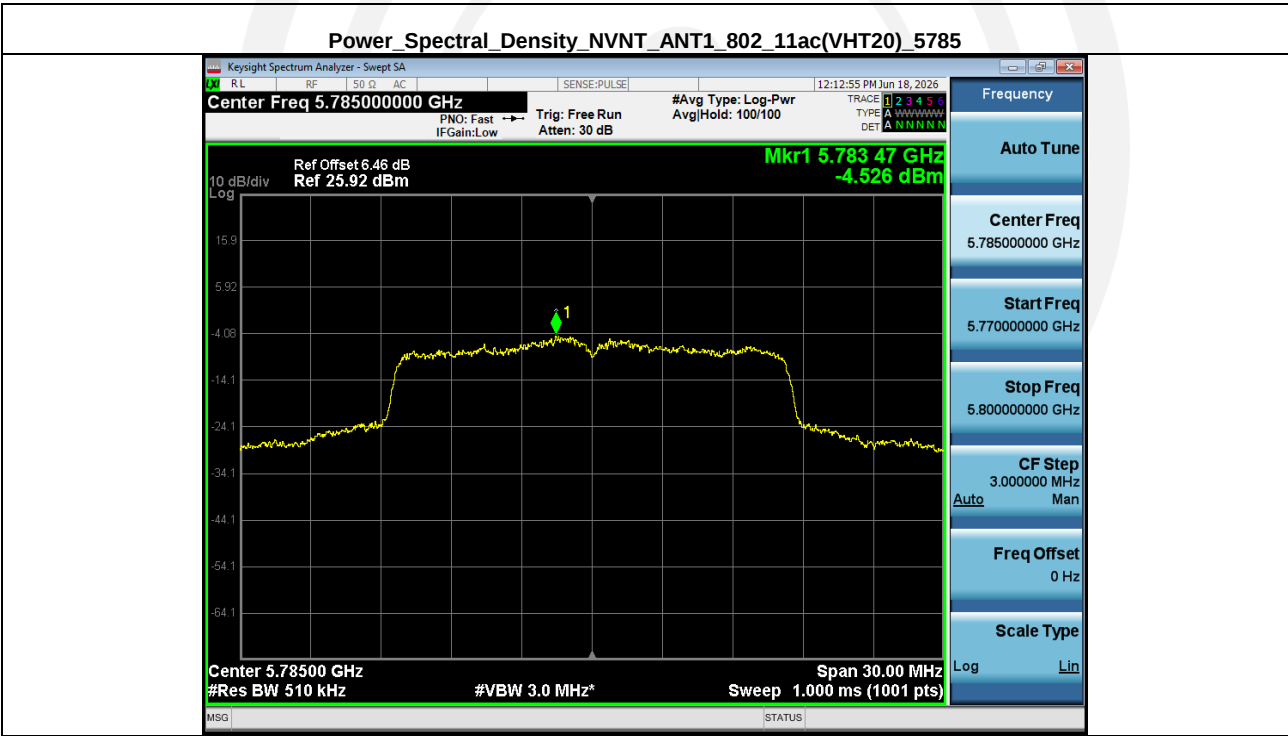


Power Spectral Density_NVNT_ANT1_802_11ac(VHT20)_5825

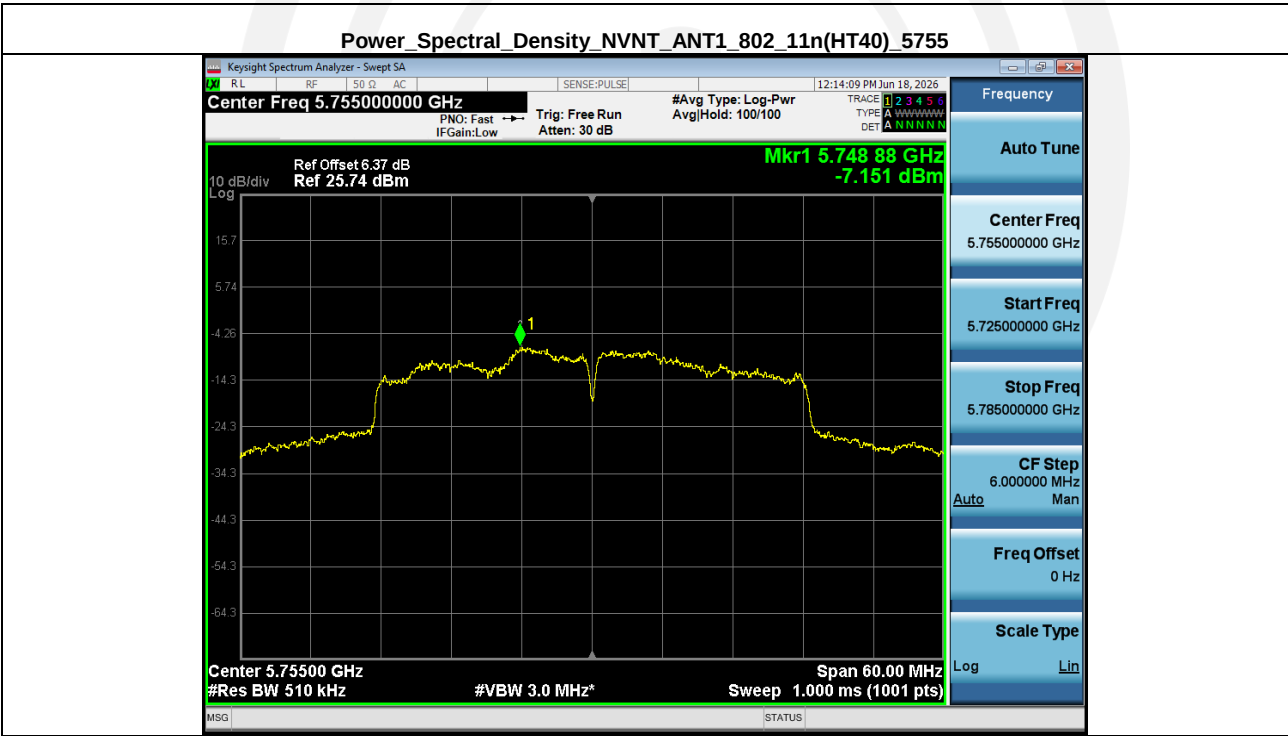

Power Spectral Density NVNT_ANT1_802_11n(HT40)_5795

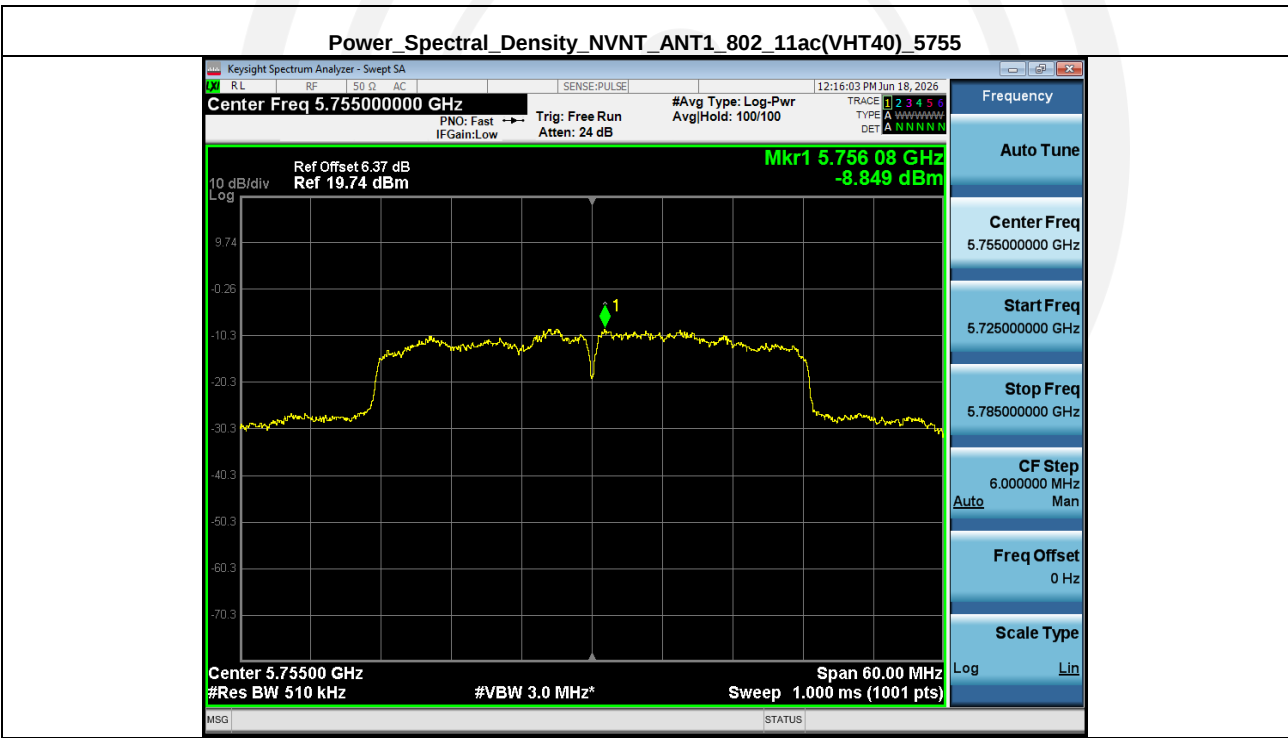


Power Spectral Density_NVNT_ANT1_802_11ac(VHT40)_5795

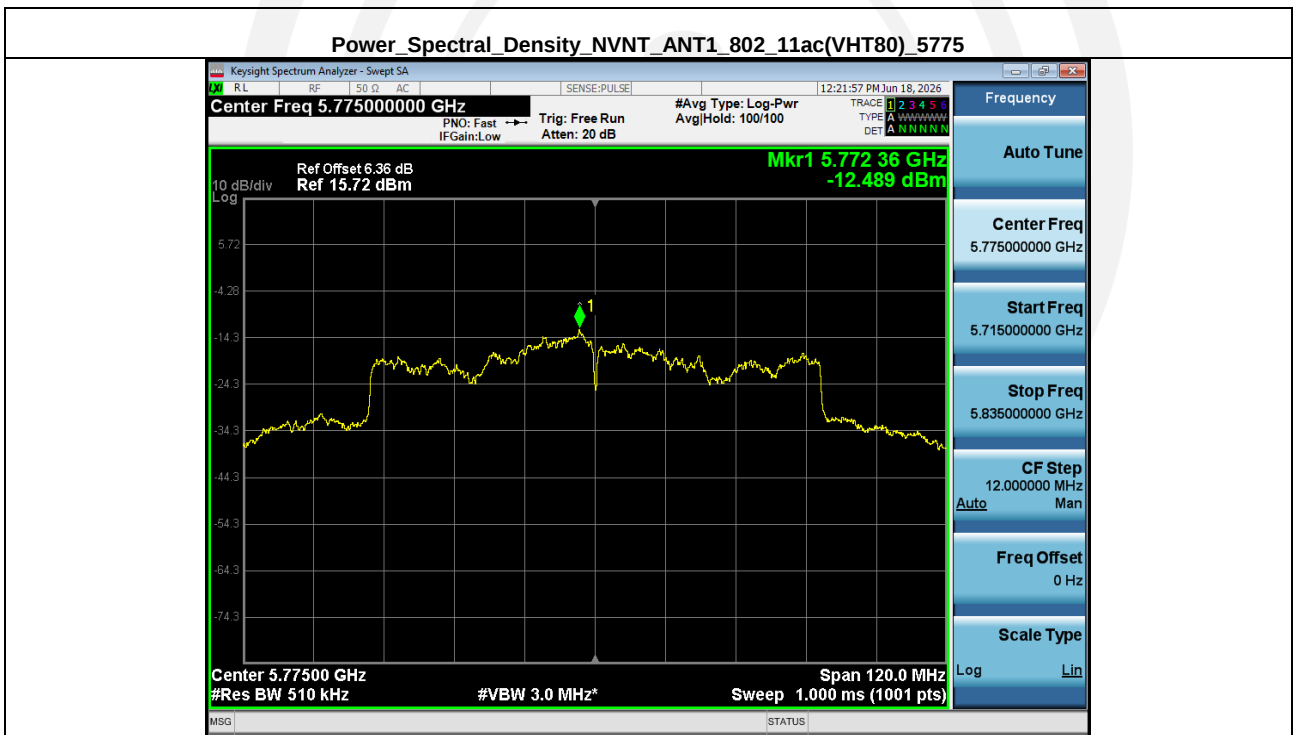

4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205, RSS-Gen §8.9																								
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values																								

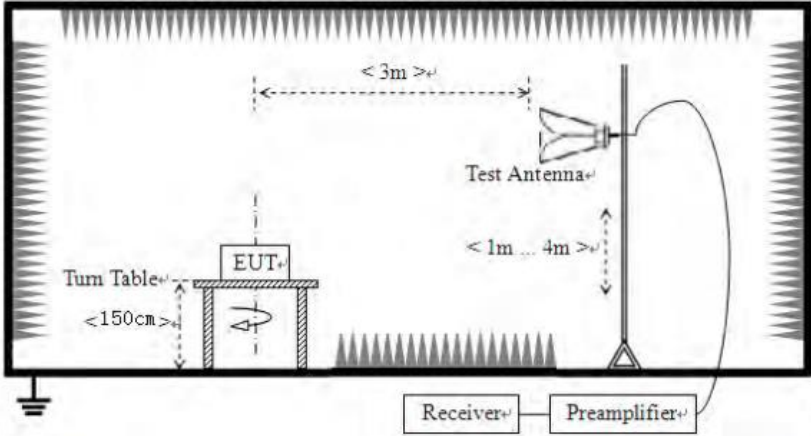	of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test setup:	Above 1GHz 
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$

For example, if $\text{EIRP} = -27\text{dBm}$



$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$

Except for mode a, other modes test the MIMO status.



The test result of SISO mode reflects the worst data between antenna 1 and antenna 2.

Measurement Data:**Band4**



Condition	Antenna	Modulation	TX_Frequency (MHz)	Frequency Area(MHz)	Frequency(MHz)	Amplitude(dBm)	Limit(dBm)	Result
NVNT	ANT1	802.11a	LCH	5565-5655	5601.810	-50.63	-27.00	Pass
NVNT	ANT1	802.11a	LCH	5655-5700	5692.530	-48.84	3.86	Pass
NVNT	ANT1	802.11a	LCH	5700-5720	5718.240	-39.71	15.11	Pass
NVNT	ANT1	802.11a	LCH	5720-5725	5722.590	-32.29	21.51	Pass
NVNT	ANT1	802.11a	HCH	5850-5855	5852.540	-39.08	21.21	Pass
NVNT	ANT1	802.11a	HCH	5855-5875	5855.840	-41.33	15.36	Pass
NVNT	ANT1	802.11a	HCH	5875-5920	5900.875	-50.13	-11.27	Pass
NVNT	ANT1	802.11a	HCH	5920-6005	5970.320	-47.17	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5565-5655	5605.860	-50.72	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5655-5700	5686.005	-49.77	-1.51	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5700-5720	5717.220	-39.51	14.82	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5720-5725	5721.420	-30.66	18.84	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5850-5855	5851.830	-38.09	22.83	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5855-5875	5855.820	-42.03	15.37	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5875-5920	5905.870	-49.87	-15.38	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5920-6005	5954.085	-46.18	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5565-5655	5645.370	-50.24	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5655-5700	5693.160	-48.97	4.38	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5700-5720	5719.840	-38.80	15.56	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5720-5725	5722.670	-30.64	21.69	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5850-5855	5850.885	-38.23	24.98	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5855-5875	5857.760	-43.05	14.83	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5875-5920	5916.130	-50.00	-23.82	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5920-6005	5936.320	-46.44	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5595-5655	5649.060	-50.08	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5655-5700	5697.885	-41.75	8.26	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5700-5720	5716.020	-28.49	14.49	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5720-5725	5721.885	-27.05	19.90	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5850-5855	5852.890	-39.87	20.41	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5855-5875	5859.920	-43.43	14.22	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5875-5920	5893.585	-47.96	-5.28	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5920-5955	5941.000	-45.97	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5595-5655	5604.360	-50.39	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5655-5700	5697.750	-41.24	8.15	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5700-5720	5719.540	-29.95	15.47	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5720-5725	5723.170	-26.93	22.83	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5850-5855	5852.555	-40.57	21.17	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5855-5875	5863.360	-43.56	13.26	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5875-5920	5894.980	-48.55	-6.43	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5920-5955	5933.650	-45.14	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5650-5655	5650.965	-46.39	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5655-5700	5693.565	-33.81	4.71	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5700-5720	5711.000	-33.06	13.08	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5720-5725	5720.450	-31.47	16.63	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5850-5855	5852.320	-33.31	21.71	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5855-5875	5872.060	-36.67	10.82	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5875-5920	5879.365	-42.37	6.41	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5920-5925	5922.145	-41.02	-27.00	Pass

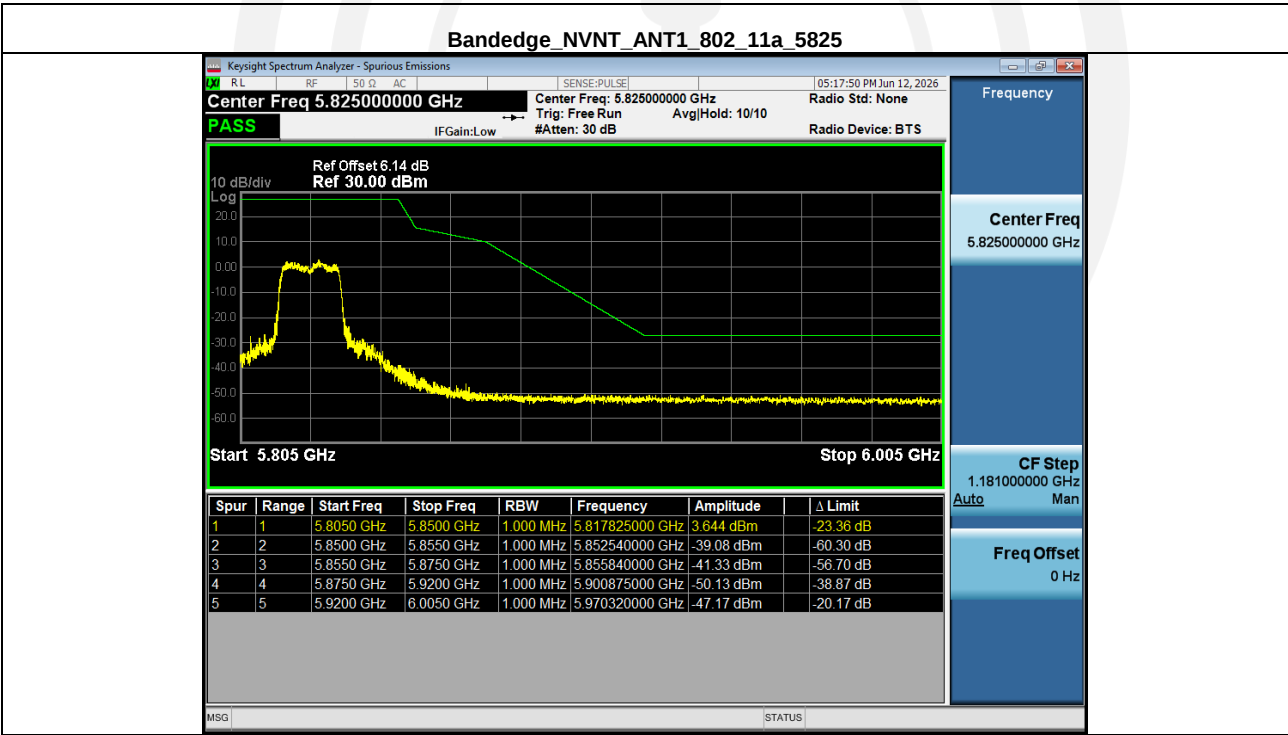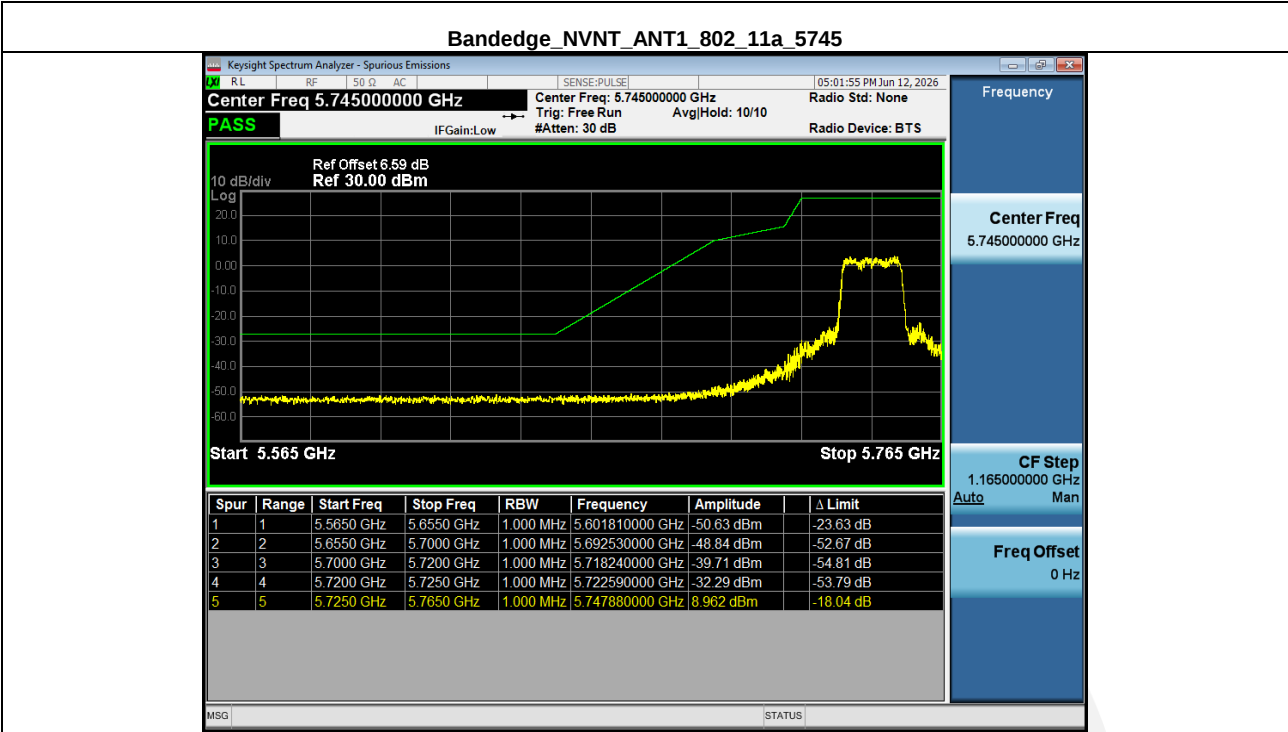



Bandedge_NVNT_ANT1_802_11n(HT20)_5745

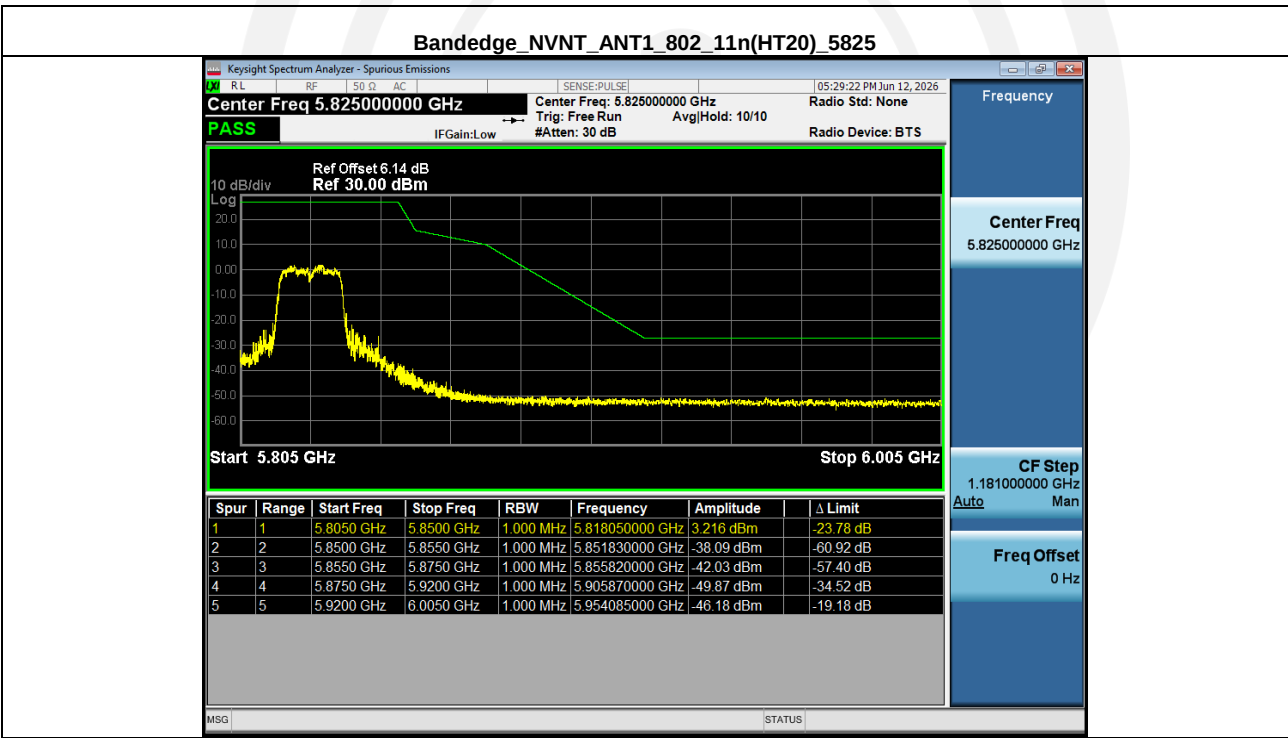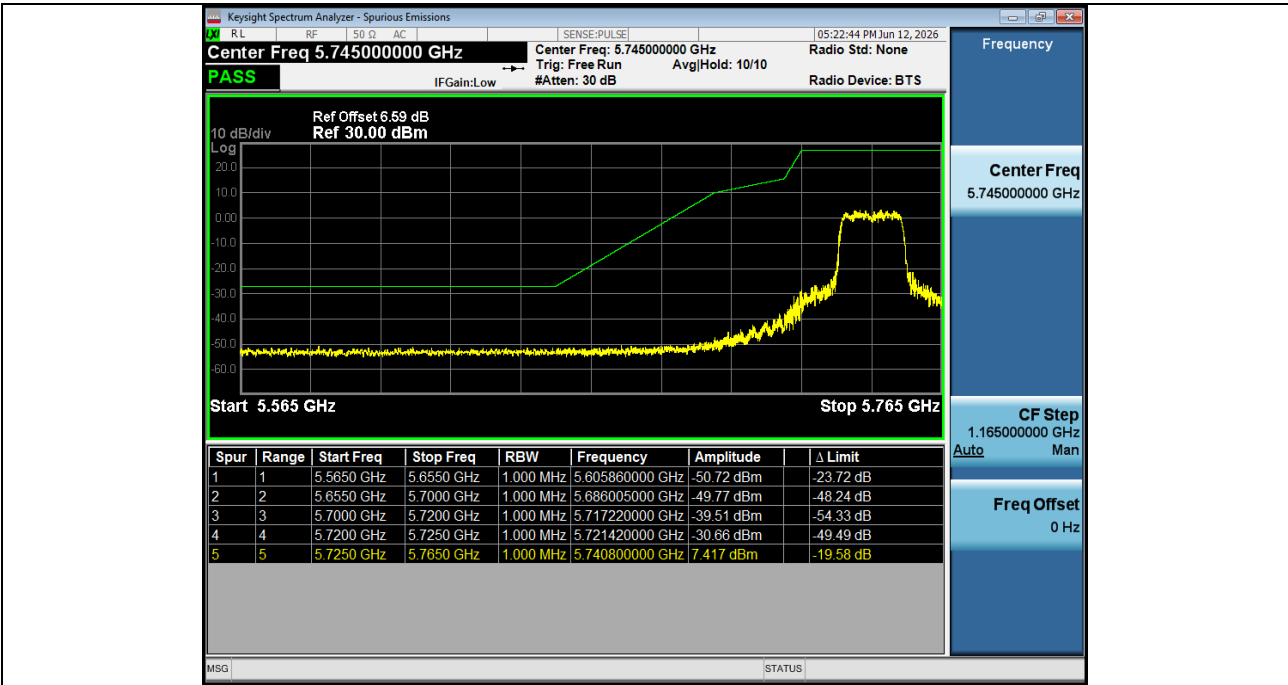



Bandedge_NVNT_ANT1_802_11ac(VHT20)_5745

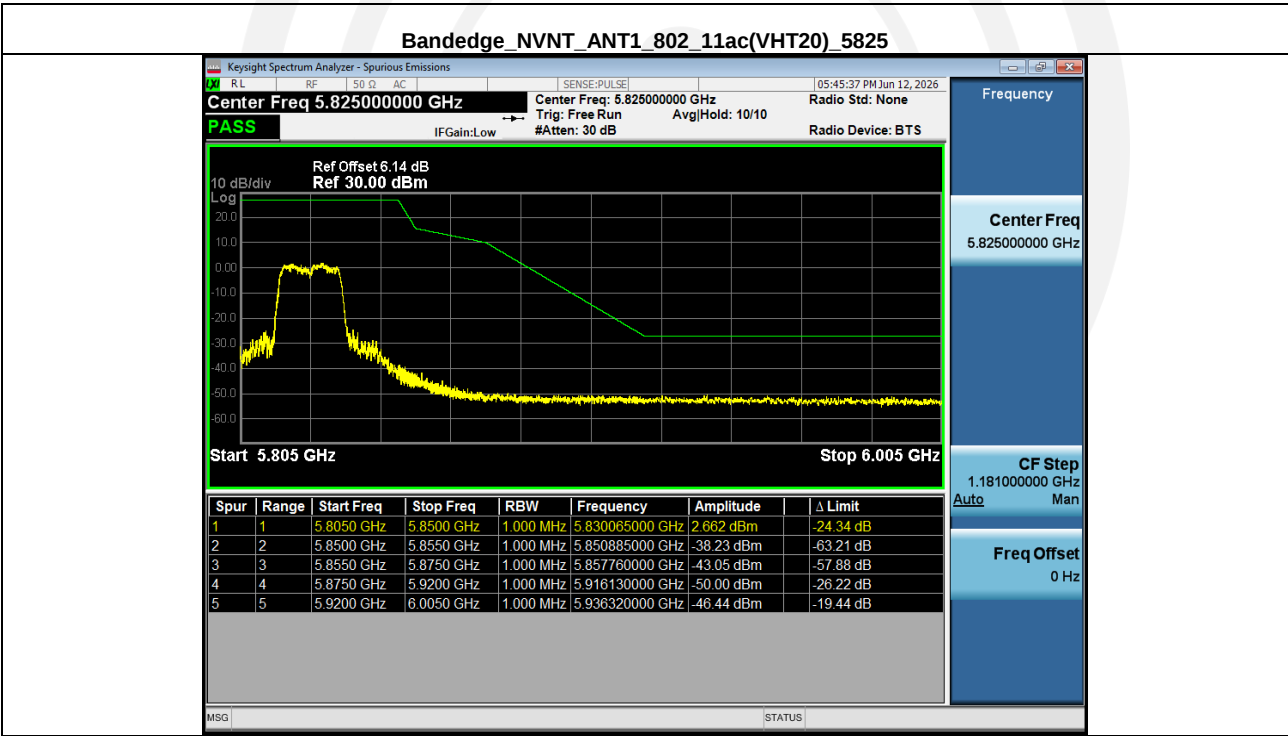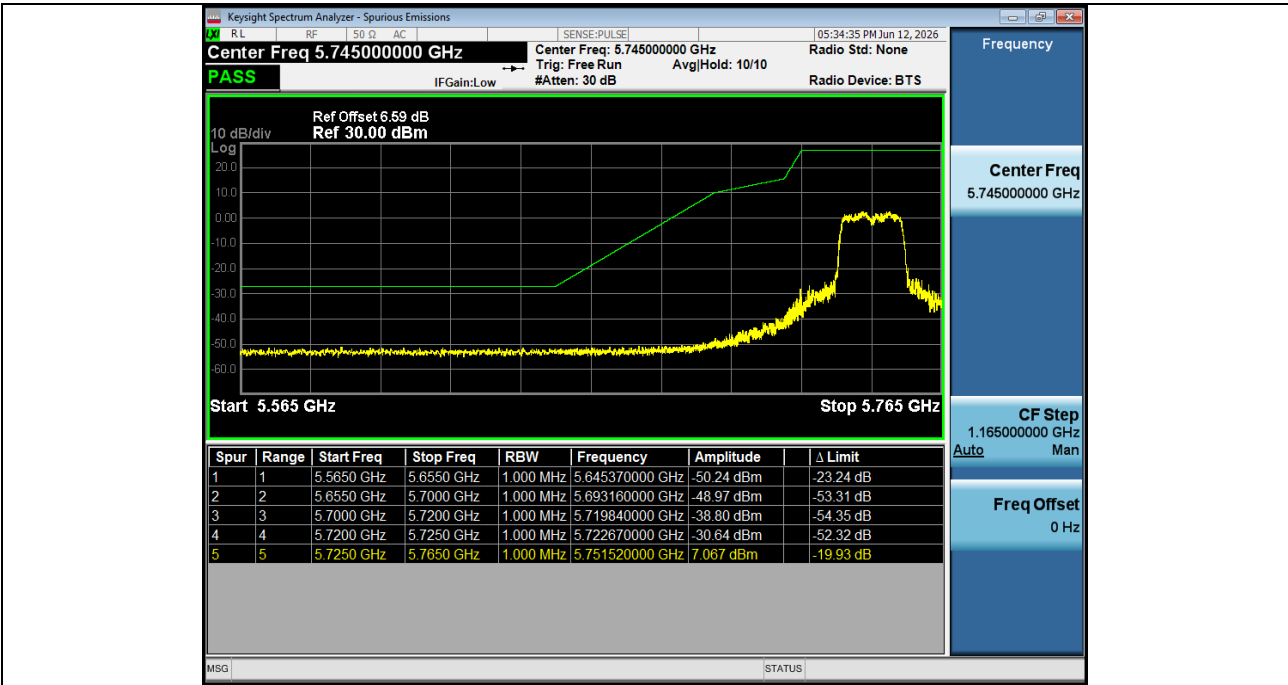


Bandedge_NVNT_ANT1_802_11n(HT40)_5755

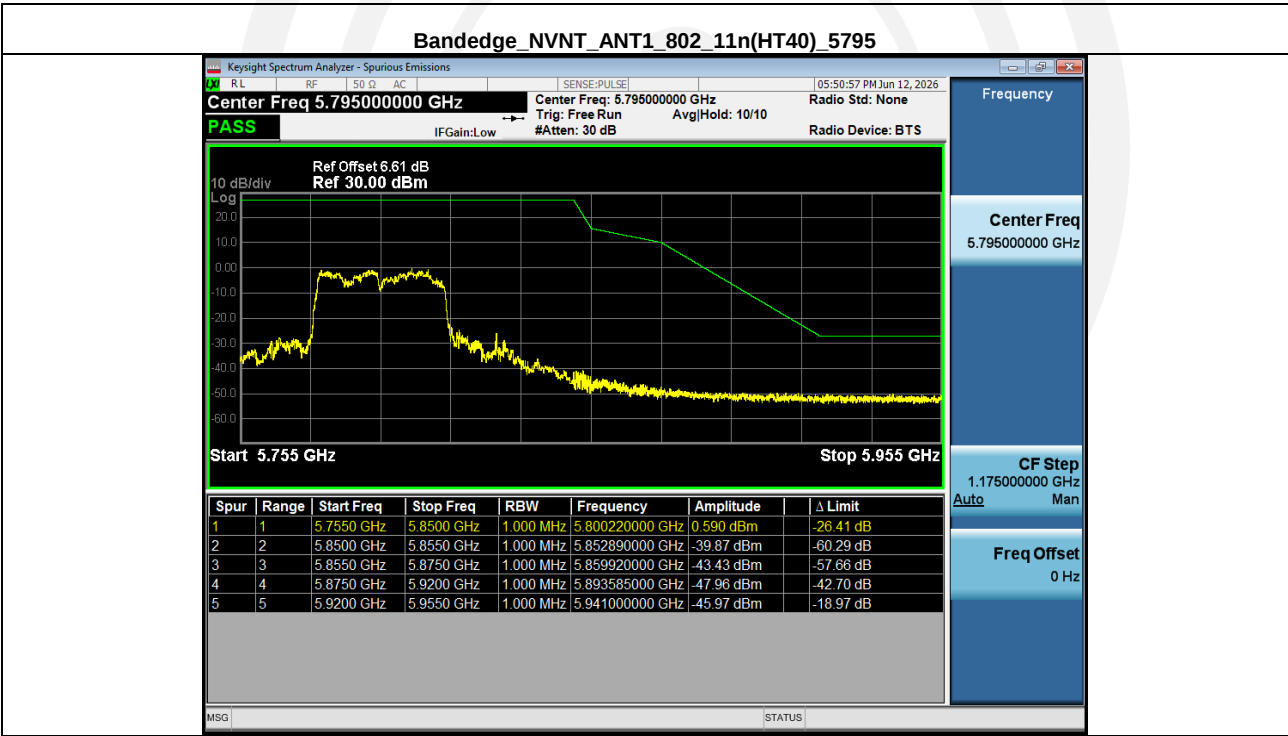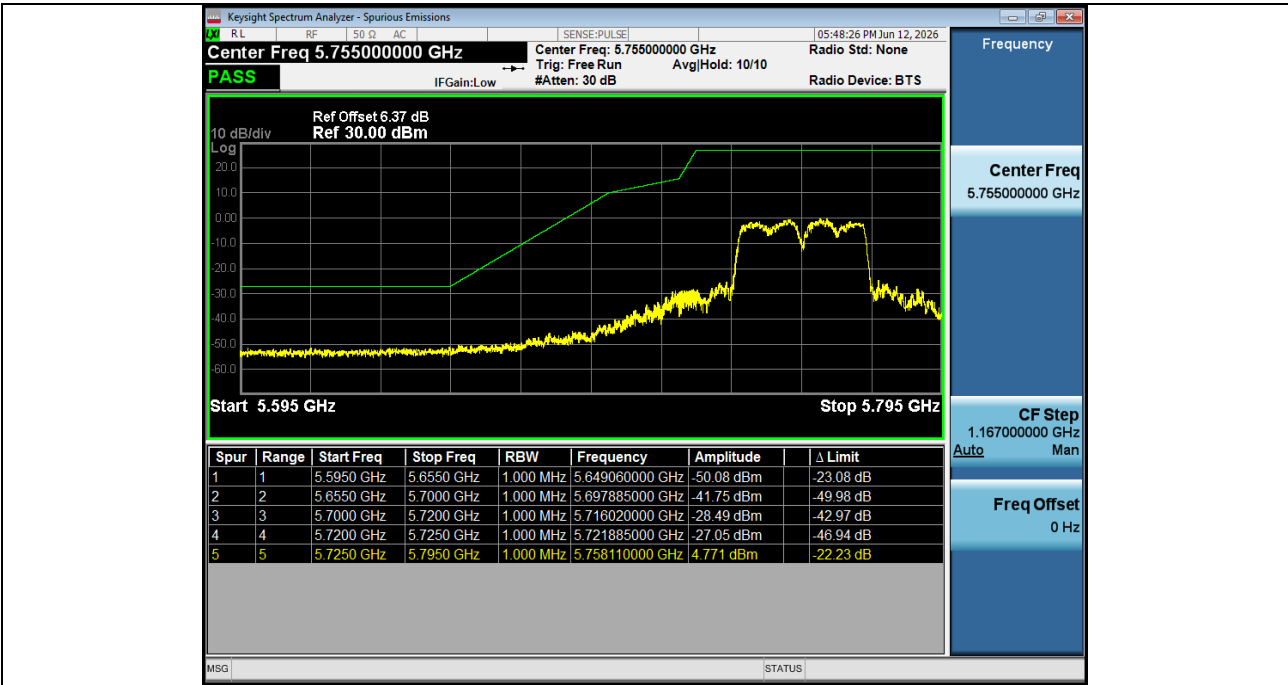

Bandedge_NVNT_ANT1_802_11ac(VHT40)_5755

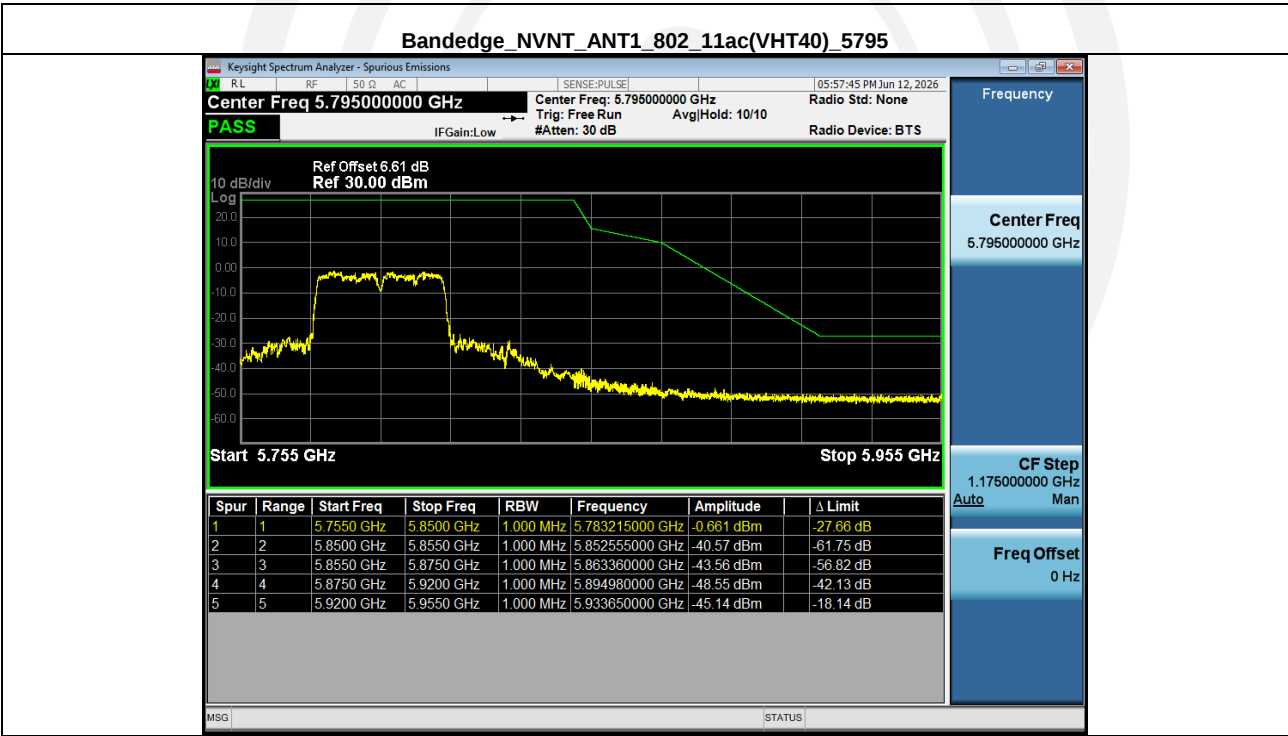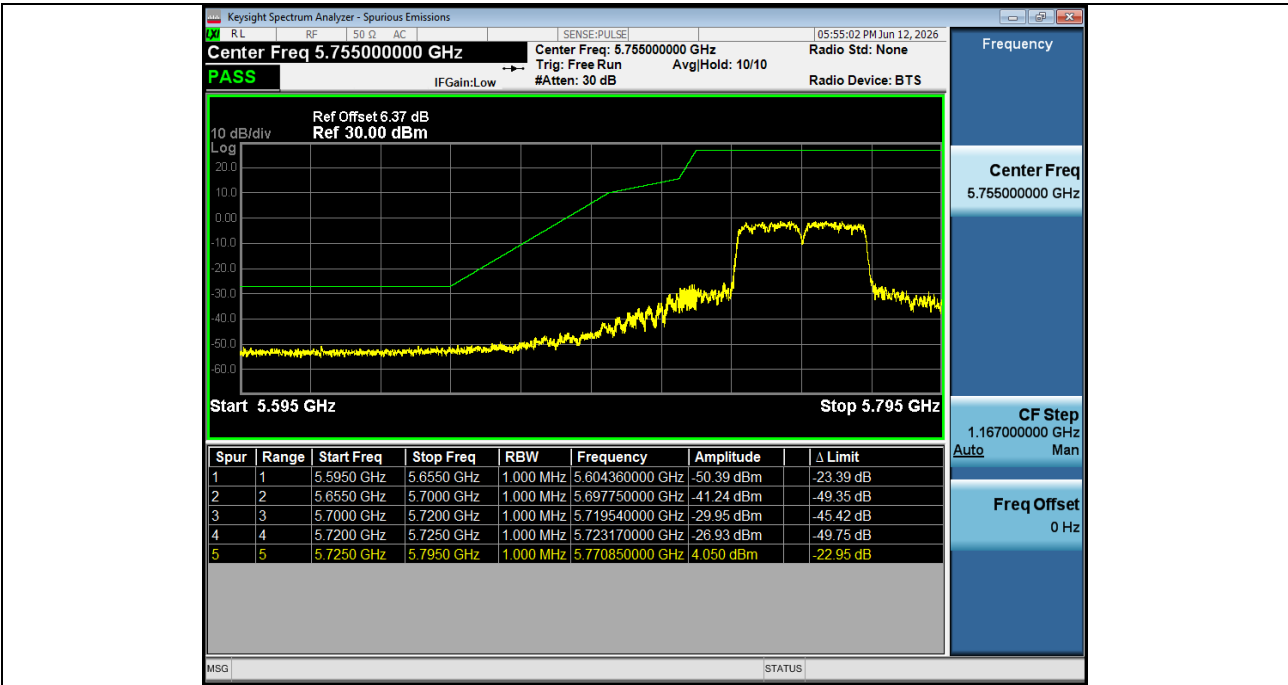



Bandedge_NVNT_ANT1_802_11ac(VHT80)_5775_low

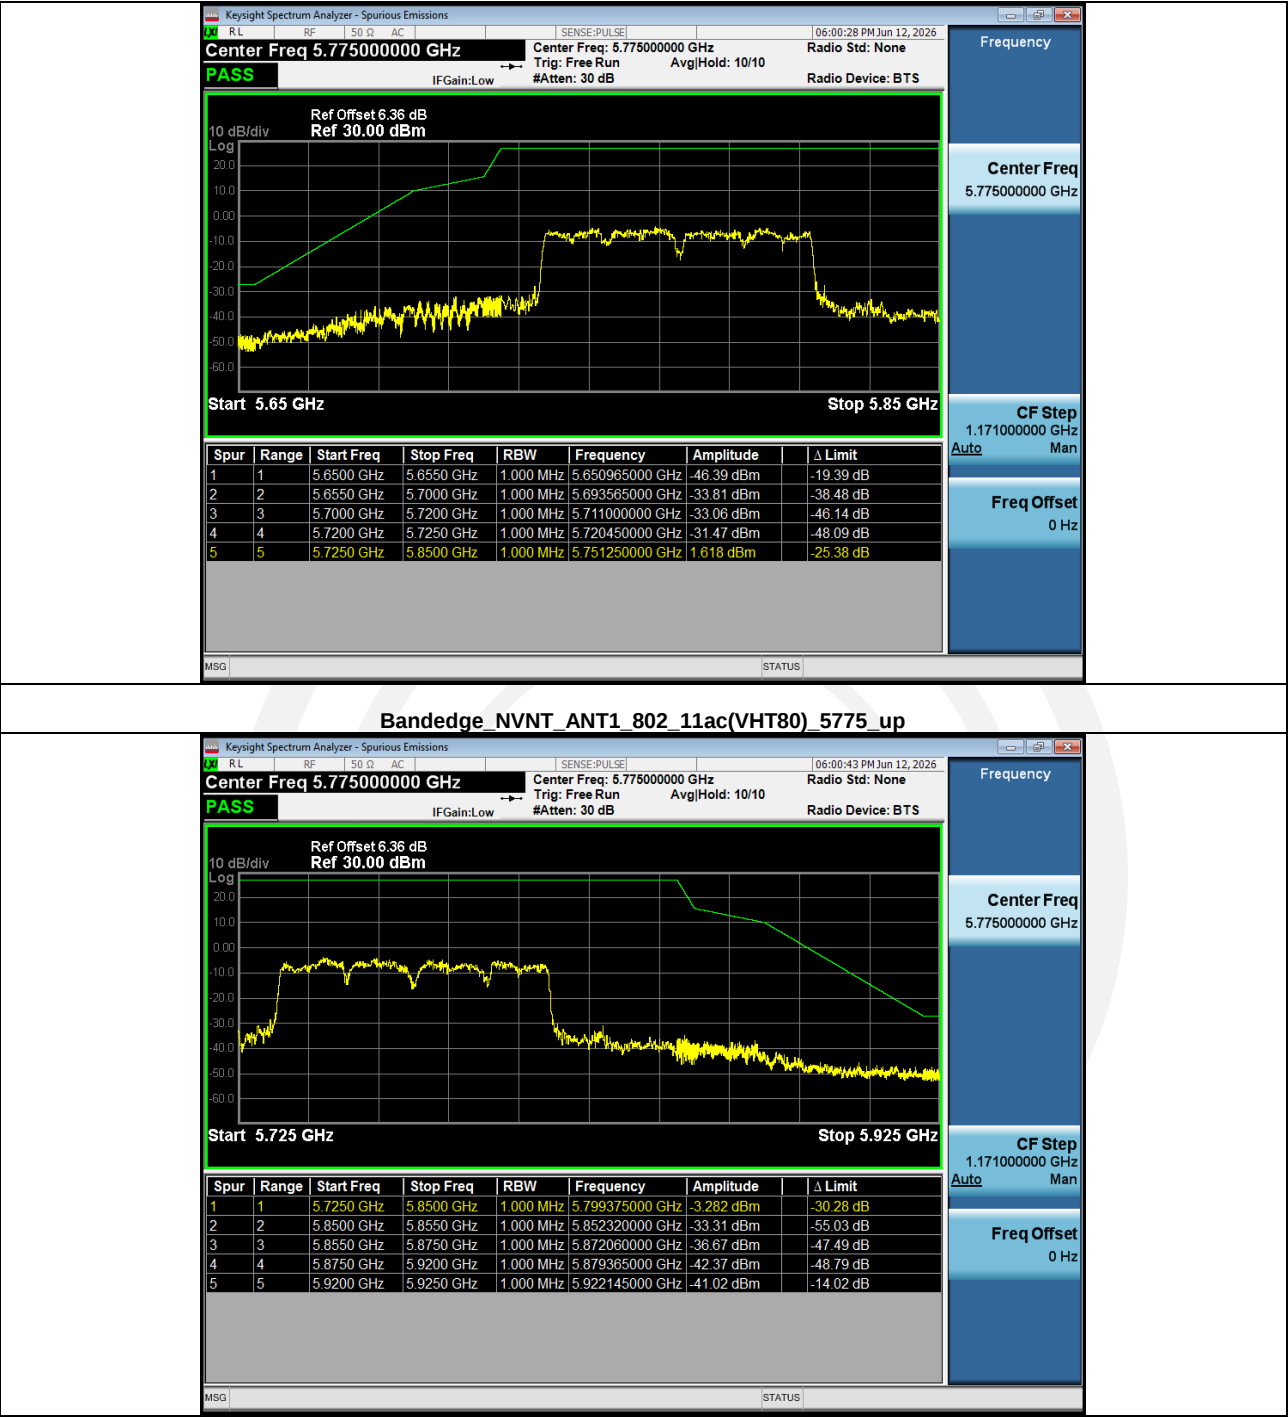

4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205, RSS-Gen §8.9				
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
54.0			Average Value		
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below:				
	1>.Below 1GHz test procedure:				
	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
	2>.Above 1GHz test procedure:				
	1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the				

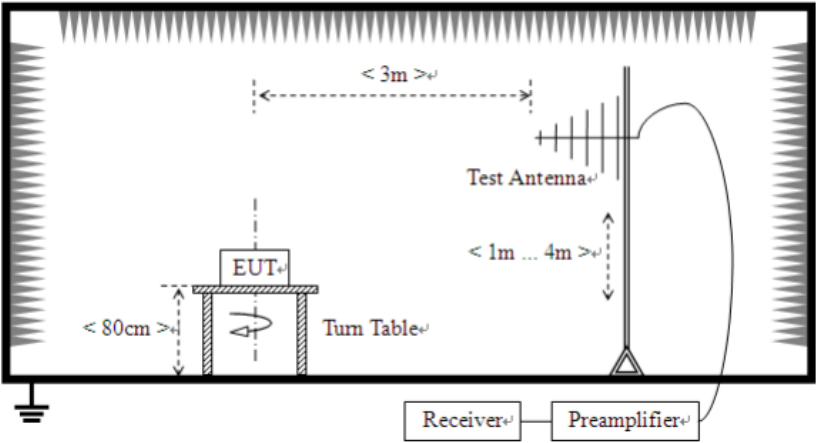	transmitter under test. - The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. - Repeat step 4 for test frequency with the test antenna polarized horizontally. - Remove the transmitter and replace it with a substitution antenna - Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. - Repeat step 7 with both antennas horizontally polarized for each test frequency. - Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

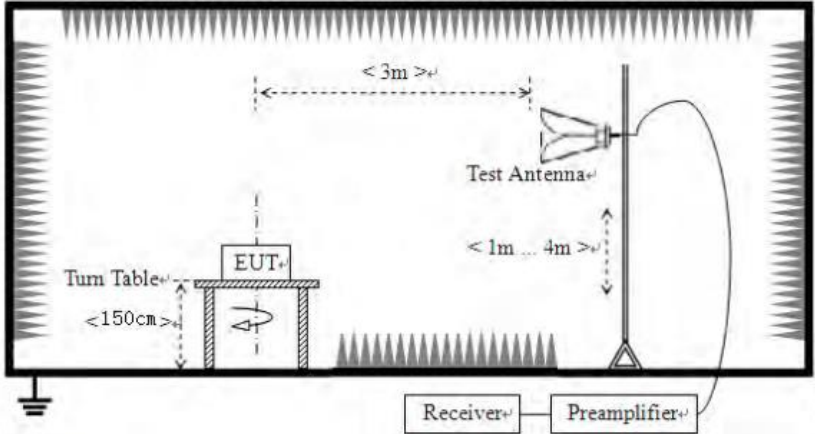	
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:**Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.90	47.82	11.47	0.81	30.30	29.80	40	-10.20	Vertical
55.37	41.33	12.05	0.93	30.08	24.23	40	-15.77	Vertical
120.68	46.61	9.70	1.66	29.87	28.10	43.5	-15.40	Vertical
172.49	43.17	8.64	1.84	29.45	24.20	43.5	-19.30	Vertical
440.93	36.93	16.55	3.31	29.67	27.12	46	-18.88	Vertical
860.06	33.51	22.27	5.13	29.58	31.33	46	-14.67	Vertical
64.76	35.94	8.91	1.08	30.07	15.86	40	-24.14	Horizontal
100.34	33.94	11.84	1.30	29.81	17.27	43.5	-26.23	Horizontal
270.11	45.51	12.94	2.63	30.20	30.88	46	-15.12	Horizontal
350.55	36.91	14.90	3.02	30.13	24.70	46	-21.30	Horizontal
627.35	36.36	19.54	3.94	29.38	30.46	46	-15.54	Horizontal
955.85	40.77	22.97	5.49	29.53	39.70	46	-6.30	Horizontal

Above 1GHz:

U-NII-3							
Test Mode: IEEE 802.11ac 20M							
Test channel: Low CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11490.00	65.12	-10.56	54.56	68.20	-13.64	V	Peak
17235.00	60.77	-5.21	55.56	68.20	-12.64	V	Peak
11490.00	64.05	-10.56	53.49	68.20	-14.71	H	Peak
17235.00	60.97	-5.21	55.76	68.20	-12.44	H	Peak
11490.00	47.77	-10.56	37.21	54.00	-16.79	V	AVG
17235.00	42.31	-5.21	37.10	54.00	-16.90	V	AVG
11490.00	47.59	-10.56	37.03	54.00	-16.97	H	AVG
17235.00	42.60	-5.21	37.39	54.00	-16.61	H	AVG
Test channel: Middle CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11570.00	66.40	-10.50	55.90	68.20	-12.30	V	Peak
17355.00	61.25	-5.28	55.97	68.20	-12.23	V	Peak
11570.00	64.86	-10.50	54.36	68.20	-13.84	H	Peak
17355.00	59.08	-5.28	53.80	68.20	-14.40	H	Peak
11570.00	47.82	-10.50	37.32	54.00	-16.68	V	AVG
17355.00	43.40	-5.28	38.12	54.00	-15.88	V	AVG
11570.00	47.68	-10.50	37.18	54.00	-16.82	H	AVG
17355.00	41.96	-5.28	36.68	54.00	-17.32	H	AVG
Test channel: High CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11650.00	66.62	-10.44	56.18	68.20	-12.02	V	Peak
17475.00	61.98	-5.34	56.64	68.20	-11.56	V	Peak
11650.00	65.81	-10.44	55.37	68.20	-12.83	H	Peak
17475.00	60.79	-5.34	55.45	68.20	-12.75	H	Peak
11650.00	47.25	-10.44	36.81	54.00	-17.19	V	AVG
17475.00	43.48	-5.34	38.14	54.00	-15.86	V	AVG
11650.00	46.57	-10.44	36.13	54.00	-17.87	H	AVG
17475.00	41.99	-5.34	36.65	54.00	-17.35	H	AVG

Test Mode: IEEE 802.11ac 40M							
Test channel: Low CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11510.00	65.93	-10.54	55.39	68.20	-12.81	V	Peak
17265.00	61.68	-5.24	56.44	68.20	-11.76	V	Peak
11510.00	64.66	-10.54	54.12	68.20	-14.08	H	Peak
17265.00	60.19	-5.24	54.95	68.20	-13.25	H	Peak
11510.00	46.11	-10.54	35.57	54.00	-18.43	V	AVG
17265.00	43.76	-5.24	38.52	54.00	-15.48	V	AVG
11510.00	46.00	-10.54	35.46	54.00	-18.54	H	AVG
17265.00	41.70	-5.24	36.46	54.00	-17.54	H	AVG
Test channel: High CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11550.00	66.22	-10.51	55.71	68.20	-12.49	V	Peak
17325.00	60.82	-5.26	55.56	68.20	-12.64	V	Peak
11550.00	64.51	-10.51	54.00	68.20	-14.20	H	Peak
17325.00	59.77	-5.26	54.51	68.20	-13.69	H	Peak
11550.00	46.85	-10.51	36.34	54.00	-17.66	V	AVG
17325.00	42.44	-5.26	37.18	54.00	-16.82	V	AVG
11550.00	47.67	-10.51	37.16	54.00	-16.84	H	AVG
17325.00	42.38	-5.26	37.12	54.00	-16.88	H	AVG

Test Mode: IEEE 802.11ac 80M							
Test channel: Low CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
11060.00	65.15	-10.85	54.30	68.20	-13.90	V	Peak
16590.00	61.04	-5.67	55.37	68.20	-12.83	V	Peak
11060.00	64.33	-10.85	53.48	68.20	-14.72	H	Peak
16590.00	60.01	-5.67	54.34	68.20	-13.86	H	Peak
11060.00	46.74	-10.85	35.89	54.00	-18.11	V	AVG
16590.00	43.46	-5.67	37.79	54.00	-16.21	V	AVG
11060.00	47.83	-10.85	36.98	54.00	-17.02	H	AVG
16590.00	42.08	-5.67	36.41	54.00	-17.59	H	AVG

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

4.8 Frequency stability

Test Standard	15.407(f), RSS-Gen §6.11
Test limit	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test results:	Pass

Measurement Data:

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	DC 10.8V	5744.995	5	5824.998	2
	DC 12V	5744.993	7	5824.991	9
	DC 13.2V	5744.994	6	5824.998	2

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	-10°C	5744.994	6	5824.991	9
	0°C	5744.998	2	5824.993	7
	+10°C	5744.997	3	5824.995	5
	+20°C	5744.992	8	5824.997	3
	+30°C	5744.999	1	5824.999	1
	+40°C	5744.992	8	5824.992	8
	+50°C	5744.993	7	5824.998	2

5 Photos Of Test Setup

Reference to the test report psi2605214-C01-R01 **appendix I Test Setup Photo** for details.

6 Photos Of EUT

Reference to the test report psi2605214-C01-R01 **appendix II external photos** and **appendix III internal photos** for details.

-----END OF REPORT-----

