

Letter of Acceptance

SPECIFICATION FOR APPROVAL

visitor House:
CUSTOMER:

Customer
Number: CUST P/
N:

Matsushima Ing-
redients List:

FINE P/N:

Product Model
Number:
DESC:

sun designa-
ted time :
DATE:

Page stem or
root of plants :
Version:

G43.5-6.5μH single coil, dimensions: 0.08×24×2P×10TS

Φ43.5 mm × 5.3 mm × 0.6 mm double-groove magnetic disc

2024/01/08

A.0

Assumption PREPARED BY	Review CHECKED BY	Ratify APPROVED BY	Customer Has Approved (CU- STOMER APPROVE)
Huang Yanming	Ning Yuan'an	Huang Jinhua	

Shenzhen Songdao Technology Co., Ltd.

Factory Address: 8th Floor, Building 2, Sanjia High-Tech Industrial Park, No.123 Junfa Third Road, Dongkeng Town, Dongguan City

TEL: 13728755750


FAX: 0755-84526500

E-mail: 506388681@qq.com

SPECIFICATION

Product Model Number:	Φ	Version	Customer CUST:	XXX
DESC	20.5x38.5-6.5uH-0.08x24*2P-40mm-43.	Rev: A.0	Customer Part Number CUST P/N:	
	5C			

1. Dimension (DIMENSION): (mm)

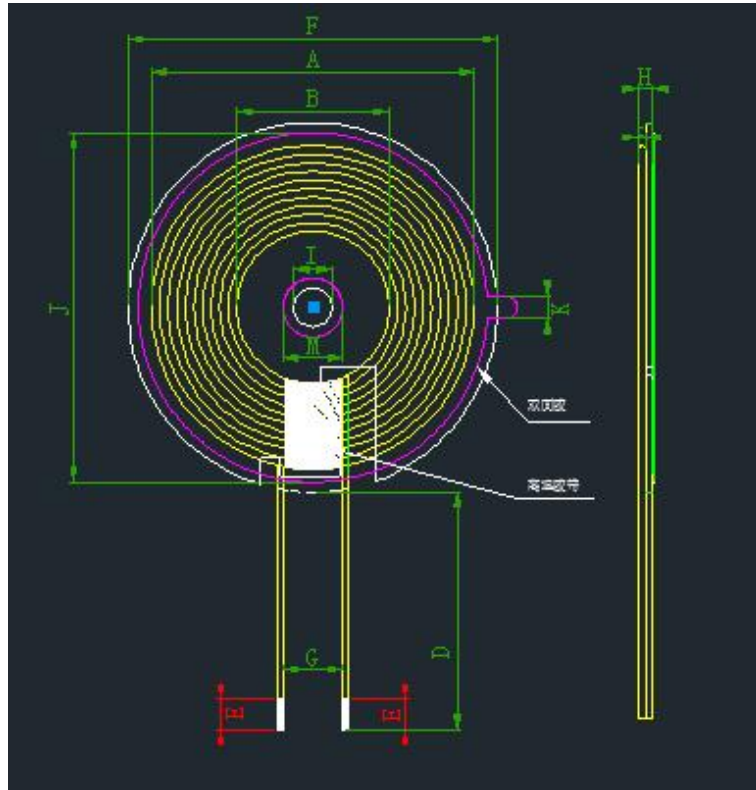


A	38.5 ± 0.5
B	20.5 ± 0.5
C	1.25 Max
D	65 ± 2
E	3 ± 2
F	43 ± 0.6
G	8 ± 2
H	1.5 ± 0.2 Ion-exchange paper
I	5.3 ref
M	8.0 ref
J	40.5 ± 1
K	3.0 ± 1

Pour :

1. Cross-out;
2. Use 7 mm (ref) wide high-temperature adhesive tape in a 1-2 pack for securing the outlet position.
3. The coil is mounted on a circular rigid magnetic strip with grooves; the magnetic strip dimensions are 43 ± 0.6 mm, with an internal hole.

Magnetic sheet with a diameter of 5.3 mm and thickness of 0.6 ± 0.2 mm, featuring adhesive backing

II. Schematic Diagram:

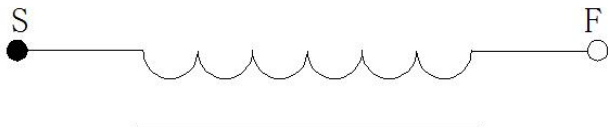

III. Winding Specifications:

Order number NO.	Terminal TERMINAL		Wire Diameter	Number of turns Turns	Direction of winding Winding Direction
1	S	F	Self-adhesive enameled wire 0.08*24*2P	10Ts	CCW

IV. Electrical Characteristics (ELECTRICAL CHARACTERISTICS):

Temperature: 25 ± 10°C; Relative Humidity: 65 ± 20%

Order number NO.	Project ITEM	Terminal TERMINAL	Standard SPECIFICATION	Test condition TEST FREQUENCY	Measuring and test instruments TEST EQUIPMENTS
1	IND.	S-F	3.8 μ H ± 20% single coil	100KHz/0.25V	UC2836
2	IND.	S-F	6.5 μ H ± 10% with magnetic insert	100KHz/0.25V	UC2836
3	DCR	S-F	≤ 84m Ω	100KHz/0.25V	UC2836
4	Q	S-F	4	100KHz/0.25V	UC2836