



RoHS Compliant

REV	DATE	DESCRIPTION	NAME
A0			
A1			

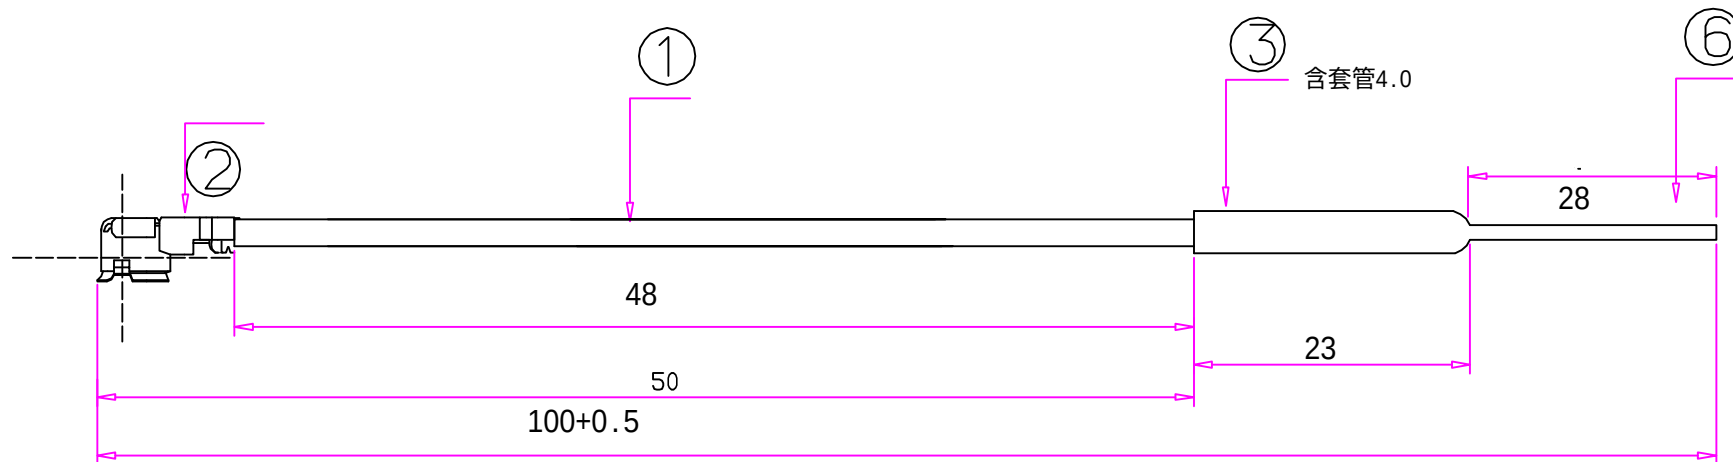

频率范围(FREQUENCY RANGE)	2400-2500 MHz
增益 X Gain	2dBi
电压驻波比(VSWR)	<2.5: 1
极化 (Polarization)	Linear.Vertical
负载功率(Load impedance)	30 W
特性阻抗 (Impedance)	50 OHM

No.	Name	Description	Q'ty	Part No.
1	线材	1.13次-48-银-FEP L= 100mm	1	1301-0012
2	IPEX	20278-111R-13-插头	1	1113-0004
3	铜件	23*4.0 2.46铜管	1	1701-0002
			1	1203-0022
			1	1203-0055
			1	1203-0056

	零件名称 (PART NAME) 组立图		单位 (UNIT) mm	比例 (SCALE)	版本 (REV) A0	幅面 (SIZE) A4
	客户料号 (CUS NO.)		产品名称 (PRODUCT NAME) 113黑单银线-铜管-IPEX-L=100mm		产品料号 (PRODUCT NO.)	
设计 DS.		第1页,共1页			第1版日期 (ORIGINAL DATE) 2012-2-17	
审核 CHK.		Shenzhen Huasheng Electronics Co., Ltd.				
核准 APPD.						

放大尺寸 	主要尺寸 
一般公差 (GENERAL TOLERANCE)	
直线尺寸 (DIMENSION)	角度 (ANGLES)
0~1 ± 0.1	X ° ±1° X, X° ±0.5°
1~10 ±0.3	
10~30 ±0.6	
30~100 ±1	
100~300 ±2	

控制尺寸	主要尺寸
一般公差 (GENERAL TOLERANCE)	
直线尺寸 (DIMENSION)	
角度 (ANGLES)	
0~1	± 0.1
1~10	± 0.3
10~30	± 0.8
30~100	± 1
100~300	± 2
X°	±1°
X, X°	±0.5°