





FCC EMC Test Report

FCC ID: 2BWNC-M1

Project No. : 2606C022
Equipment : Vision Perception Exoskeleton
Brand Name : IRMO
Model Name : M1 Pure
Applicant : IRMO BOT LIMITED
Address : RM 2C-P11, 2/F, HUNG TO CTR.,94-96 HOW MING ST., KWUN TONG HONG KONG
Manufacturer : Shenzhen Shenmo Robot Co., Ltd.
Address : Room 1105B, Building 3, Meinian International Plaza, No. 1115 Nanhai Avenue, Taohuayuan Community, Zhaoshang Subdistrict, Nanshan District, Shenzhen, Guangdong Province, P.R. China
Date of Receipt : Jun. 03, 2026
Date of Test : Jun. 03, 2026 ~ Jul. 03, 2026
Issued Date : Jul. 16, 2026
Test Sample : Engineering Sample No.: DG920260602271, DG920260602270
Standard(s) : FCC CFR Title 47, Part 15, Subpart B

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : 
 Promise Yin

Approved by : 
 Kang Zhang

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 EUT OPERATING CONDITIONS	9
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.5 DESCRIPTION OF SUPPORT UNITS	10
3 . EMC EMISSION TEST	11
3.1 AC POWER LINE CONDUCTED EMISSIONS TEST	11
3.1.1 LIMIT	11
3.1.2 MEASUREMENT INSTRUMENTS LIST	11
3.1.3 TEST PROCEDURE	12
3.1.4 DEVIATION FROM TEST STANDARD	12
3.1.5 TEST SETUP	12
3.1.6 TEST RESULTS	12
3.2 RADIATED EMISSIONS 30 MHZ TO 1 GHZ	15
3.2.1 LIMIT	15
3.2.2 MEASUREMENT INSTRUMENTS LIST	15
3.2.3 TEST PROCEDURE	16
3.2.4 DEVIATION FROM TEST STANDARD	16
3.2.5 TEST SETUP	16
3.2.6 TEST RESULTS	16
3.3 RADIATED EMISSIONS ABOVE 1 GHZ	19
3.3.1 LIMIT	19
3.3.2 MEASUREMENT INSTRUMENTS LIST	19
3.3.3 TEST PROCEDURE	20
3.3.4 DEVIATION FROM TEST STANDARD	20
3.3.5 TEST SETUP	20
3.3.6 TEST RESULTS	21
4 . EUT TEST PHOTO	24

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCE-1-2606C022	R00	Original Report.	Jul. 08, 2026	Invalid
BTL-FCCE-1-2606C022	R01	This report only added the registration and designation number in chapter 1.1. It is a revision of the report BTL-FCCE-1-2606C022 R00. This is a newly released report, replacing the BTL-FCCE-1-2606C022 R00 report.	Jul. 14, 2026	Valid

1. SUMMARY OF TEST RESULTS

Emission		
Standard(s)	Test Item	Result
FCC CFR Title 47, Part 15, Subpart B ANSI C63.4-2014	AC Power Line Conducted Emissions	PASS
	Radiated Emissions 30 MHz to 1 GHz	PASS
	Radiated Emissions Above 1 GHz	PASS

1.1 TEST FACILITY

1# For Radiated emissions test item:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

2# For Conducted emissions test item:

The test facilities used to collect the test data in this report is at the location of Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U , (dB)
DGGDC01-1	CISPR	150kHz ~ 30MHz	2.68

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
DGDLCB02 (3m)	CISPR	30MHz ~ 200MHz	V	4.96
		30MHz ~ 200MHz	H	4.80
		200MHz ~ 1,000MHz	V	5.22
		200MHz ~ 1,000MHz	H	4.80

Test Site	Method	Measurement Frequency Range	U , (dB)
DGDLCB02 (3m)	CISPR	1GHz ~ 6GHz	4.36
		6GHz ~ 18GHz	5.24

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By	Test Date
AC Power Line Conducted Emissions	25°C	58%	White Gan	Jun. 16, 2026
Radiated emissions 30 MHz to 1 GHz	23°C	50%	Siege Li	Jul. 02, 2026
Radiated emissions above 1 GHz	23°C	50%	Siege Li	Jul. 02, 2026

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Vision Perception Exoskeleton
Brand Name	IRMO
Test Model	M1 Pure
Model Name	M1 Pure
Model Difference(s)	N/A
Identification No. of EUT(S/N)	N/A
Component unit of EUT	☒ Single unit ☐ Multiple unit
Sample Status	☒ Engineering sample ☐ Final shipment prototype
Power Source	1# Supplied from Battery. Model: NZ212 2# Battery is powered by the adapter. (support unit).
Power Rating	1# Nominal Voltage: 21.60V Rated Capacity: 3000mAh Rated Energy: 64.8Wh 2# DC 20V/3A
Connecting I/O Port(s)	Please refer to EUT photos.
Classification of EUT	Class B
Highest Internal Frequency(Fx)	2480 MHz

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging
Mode 2	Energy-saving Mode(2.4G WIFI+BT)
Mode 3	Nap Mode(2.4G WIFI+BT)
Mode 4	Training Model(2.4G WIFI+BT)
Mode 5	Extreme mode(2.4G WIFI+BT)
Mode 6	Standby

AC Power Line Conducted Emissions Test	
Final Test Mode	Description
Mode 1	Charging

Radiated Emissions 30 MHz to 1 GHz Test	
Final Test Mode	Description
Mode 3	Nap Mode(2.4G WIFI+BT)

Radiated emissions above 1 GHz Test	
Final Test Mode	Description
Mode 1	Charging

Note:

1. For Radiated emissions: Pretested Mode 1-Mode 6, the worst case is recorded.
2. The product supports BT & 2.4G WIFI function.
The frequency exemptions is 2400-2483.5MHz.
3. Radiated emission above 1GHz tested with 2.4G filter.

2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

Mode 1:


1. The Battery (EUT) was plugged into EUT.
2. EUT connected to Adapter (A) via USB-C Cable.
3. Left Leg Bong (EUT) and Right Leg Bone connected to EUT via DC Cable.

Mode 2-6:

1. The Battery (EUT) was plugged into EUT.
2. Left Leg Bong (EUT) and Right Leg Bone connected to EUT via DC Cable.
3. EUT connected to Wireless Router (C) via 2.4G WIFI.
4. EUT connected to Mobile Phone (B) via BT.
5. Mobile Phone (B) connected to Wireless Router (C) via 2.4G WIFI.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1

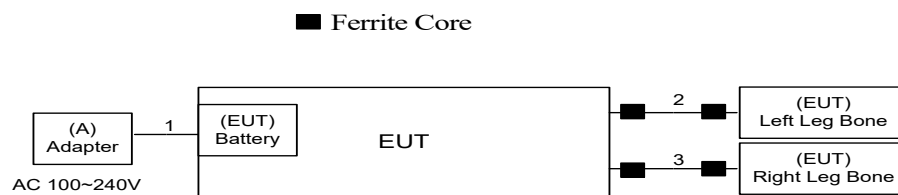


Ground Plane

Remote system

Mode 2-6

■ Ferrite Core

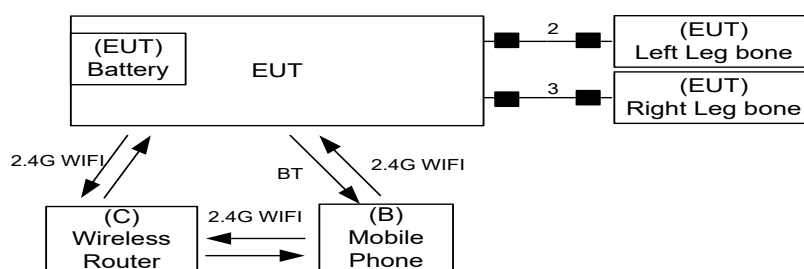

Ground Plane

Remote system

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No
A	Adapter	NA	NA	NA
B	Mobile Phone	SAMSUNG	SM-3650/DS	R28KA0BBEEE
C	Wireless Router	ASUS	RT-AC66U	E8ICGG000138

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB-C Cable	YES	NO	1m
2	DC Cable	NO	YES	1m
3	DC Cable	NO	YES	1m

3. EMC EMISSION TEST

3.1 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1.1 LIMIT

Frequency of Emission (MHz)	Class B (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value - Limit Value

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	102771	May 16, 2027
2	EMI Test Receiver	R&S	ESCI	100895	Dec. 19, 2026
3	Cable	N/A	RG400	N/A	Nov. 06, 2026
4	Measurement Software	BTL	EMI	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


3.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- Measuring frequency range from 150KHz to 30MHz.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

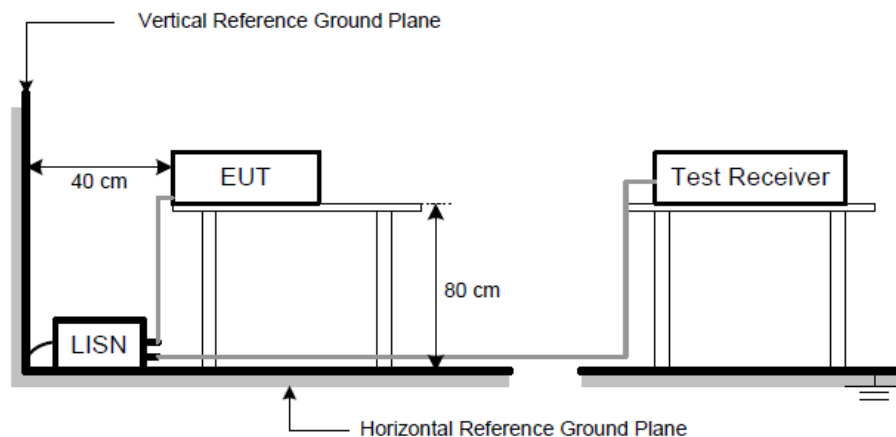


3.1.6 TEST RESULTS

Remark:


- Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9 kHz; SPA setting in RBW=10 kHz, VBW =10 kHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10 kHz, VBW=10 kHz, Swp. Time =0.3 sec./MHz.
- All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Mode 1		

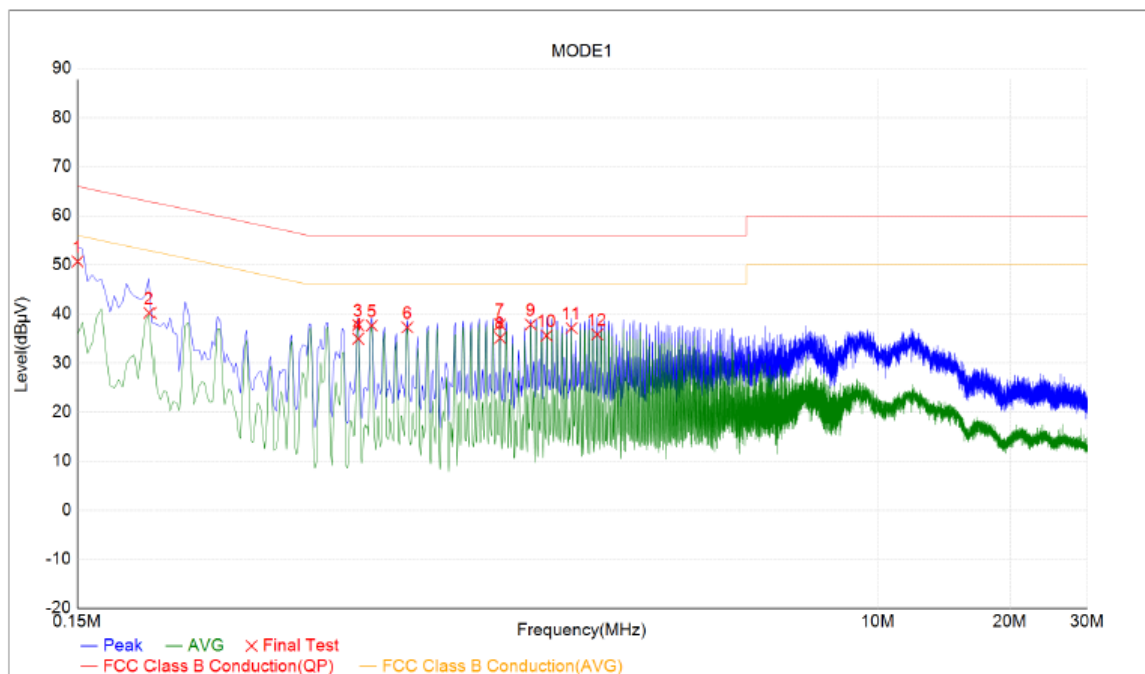

Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.15	40.52	10.17	50.69	66	-15.31	QP	
	2	0.2185	30.07	10.15	40.22	62.89	-22.68	QP	
	3	0.65	27.51	10.23	37.74	46	-8.26	AVG	
	4	0.6502	24.71	10.23	34.94	56	-21.06	QP	
	5	0.698	27.36	10.24	37.6	46	-8.4	AVG	
	6	0.842	26.97	10.28	37.25	46	-8.75	AVG	
*	7	1.37	27.45	10.39	37.84	46	-8.16	AVG	
	8	1.3704	24.7	10.39	35.09	56	-20.91	QP	
*	9	1.61	27.41	10.43	37.84	46	-8.16	AVG	
	10	1.7502	25.12	10.46	35.58	56	-20.42	QP	
	11	1.994	26.62	10.5	37.12	46	-8.88	AVG	
	12	2.2821	25.26	10.55	35.81	56	-20.19	QP	

Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Mode 1		

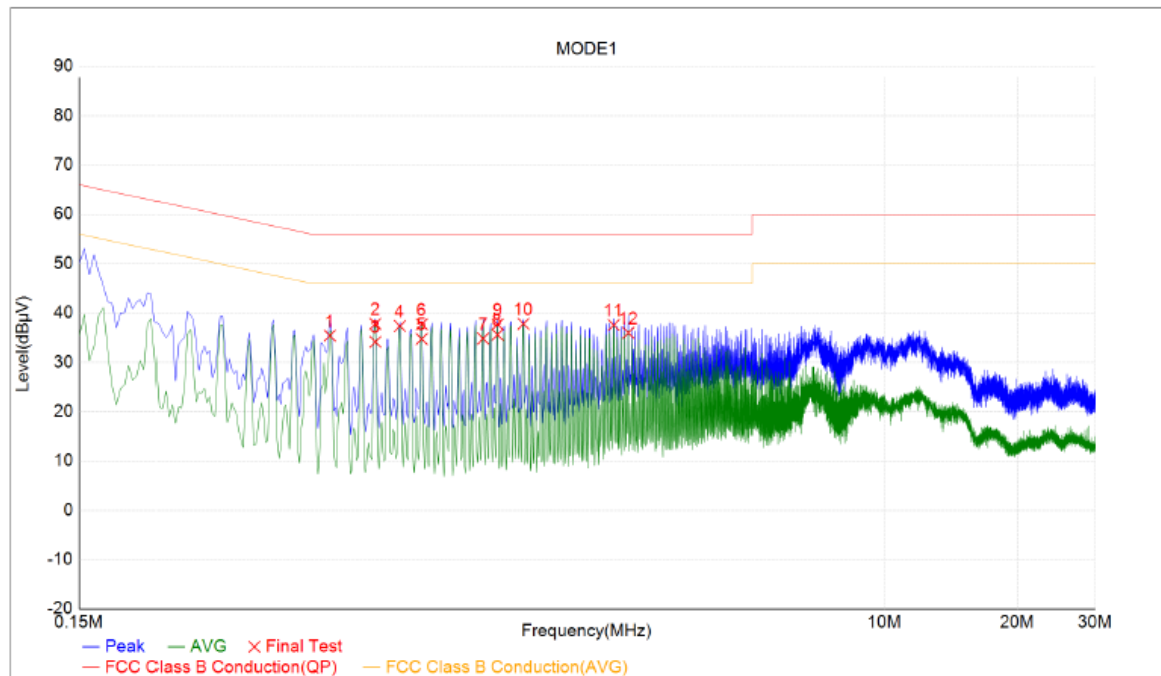

Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.5505	25.38	10.03	35.41	56	-20.59	QP	
*	2	0.698	27.73	10.08	37.81	46	-8.19	AVG	
	3	0.6984	24.07	10.08	34.15	56	-21.85	QP	
	4	0.794	27.26	10.11	37.36	46	-8.64	AVG	
	5	0.8897	24.62	10.13	34.75	56	-21.25	QP	
	6	0.89	27.61	10.13	37.74	46	-8.26	AVG	
	7	1.2262	24.62	10.21	34.83	56	-21.17	QP	
	8	1.3216	25.36	10.23	35.59	56	-20.41	QP	
	9	1.322	27.47	10.23	37.71	46	-8.29	AVG	
*	10	1.514	27.54	10.27	37.81	46	-8.19	AVG	
	11	2.426	27.11	10.46	37.56	46	-8.44	AVG	
	12	2.6179	25.49	10.49	35.98	56	-20.02	QP	

3.2 RADIATED EMISSIONS 30 MHZ TO 1 GHZ

3.2.1 LIMIT

Frequency (MHz)	Class B (at 3m)	
	(μ V/m) Quasi-peak	(dB μ V/m) Quasi-peak
30 - 88	100	40.00
88 - 216	150	43.52
216 - 960	200	46.02
960 - 1000	500	53.97

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dB μ V/m) = 20log Emission level (μ V/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMC INSTRUMENT	EMC001330	980989	Apr. 25, 2027
2	Cable	RW	LMR-400(30MHz-1GHz)(10m+2.5m+0.8M)	N/A	Mar. 30, 2027
3	Controller	MF	MF-7802BS	N/A	N/A
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	EMI Test Receiver	Keysight	N9038A	MY56400060	Nov. 21, 2026
6	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	587	Feb. 02, 2027
7	Attenuator	SHX	TS2-6-6-A	240124196	Feb. 02, 2027

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.2.3 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation

3.2.5 TEST SETUP

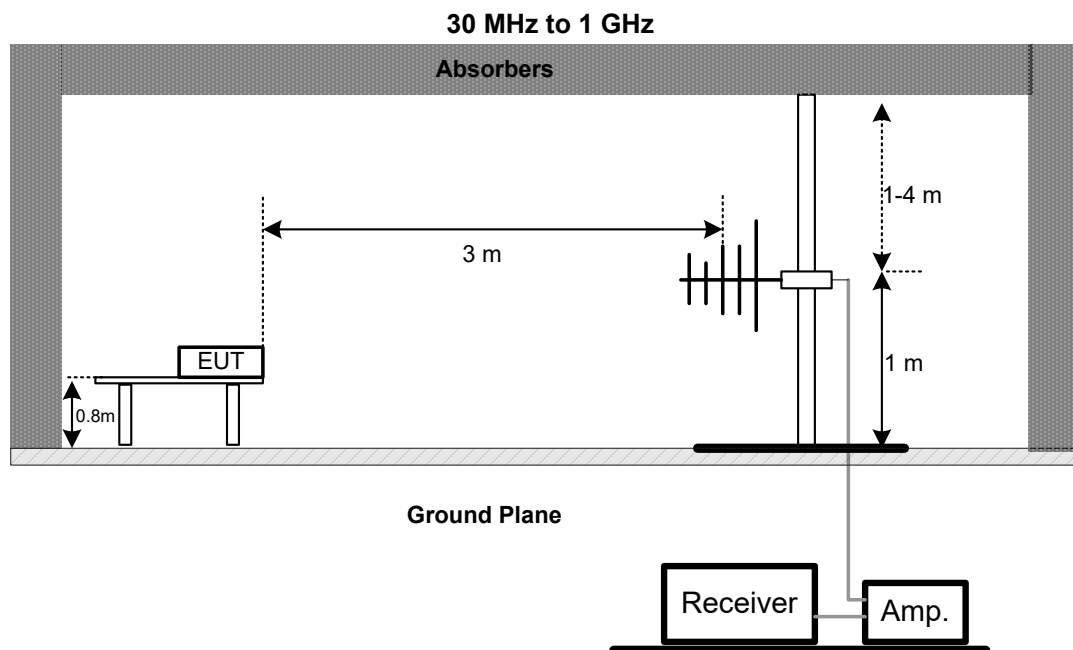


3.2.6 TEST RESULTS

Remark:


- (1) Measuring frequency range from 30 MHz to 1000 MHz
- (2) If the peak scan value lower limit more than 20 dB, then this signal data does not show in table.

Test Voltage	DC 21.6V	Polarization	Vertical
Test Mode	Mode 3		

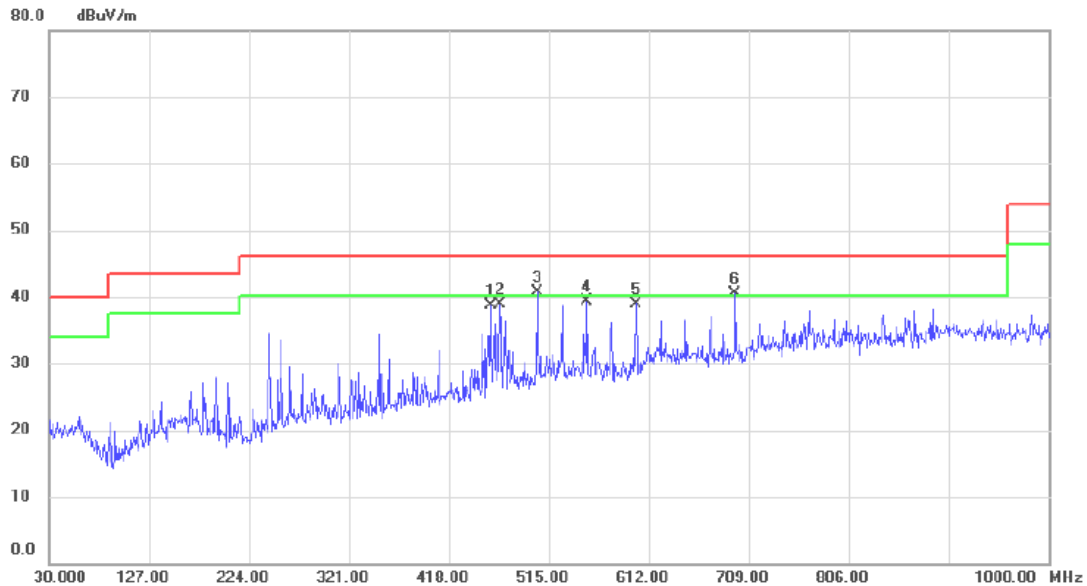

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		458.2550	45.16	-6.44	38.72	46.02	-7.30	peak	
2		467.4700	45.19	-6.20	38.99	46.02	-7.03	peak	
3	*	503.8450	45.93	-5.28	40.65	46.02	-5.37	peak	
4		551.8600	43.87	-4.51	39.36	46.02	-6.66	peak	
5		599.8750	42.90	-3.90	39.00	46.02	-7.02	peak	
6	!	695.9050	42.88	-2.39	40.49	46.02	-5.53	peak	

Test Voltage	DC 21.6V	Polarization	Horizontal
Test Mode	Mode 3		

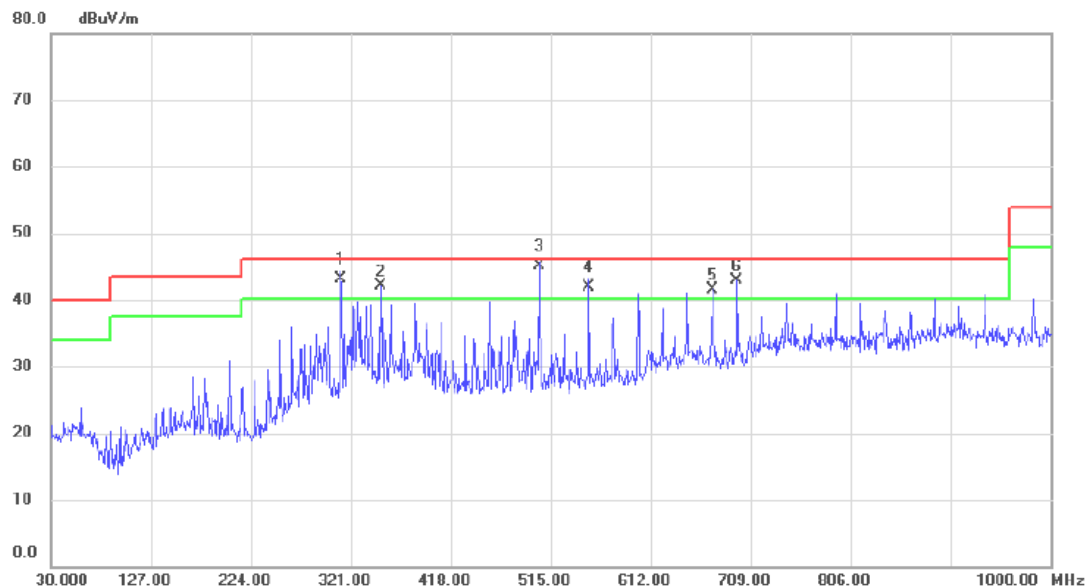

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	311.7850	53.43	-10.23	43.20	46.02	-2.82	QP	
2	!	350.1000	51.52	-9.40	42.12	46.02	-3.90	peak	
3	*	503.8450	50.32	-5.28	45.04	46.02	-0.98	QP	
4	!	551.8600	46.35	-4.51	41.84	46.02	-4.18	QP	
5	!	672.1400	43.92	-2.32	41.60	46.02	-4.42	peak	
6	!	695.9050	45.38	-2.39	42.99	46.02	-3.03	peak	

3.3 RADIATED EMISSIONS ABOVE 1 GHZ

3.3.1 LIMIT

Frequency (MHz)	Class B	
	(dB μ V/m) (at 3m)	
	Peak	Average
Above 1000	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest internal frequency (F _x)	Highest measurement frequency (F _M)
F _x ≤ 108 MHz	1 GHz
108 MHz < F _x ≤ 500 MHz	2 GHz
500 MHz < F _x ≤ 1 GHz	5 GHz
F _x > 1 GHz	5 x F _x up to a maximum of 40 GHz
Note: F _x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dB μ V/m) = 20log Emission level (uV/m).
1m Emission level = 3m Emission level + 20log(3m/1m).
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Horn Antenna	ARA	DRG-118A	16554	May 24, 2027
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	9801002	Apr. 25, 2027
3	Cable	RW	RWLP50-4.0A-NMRASM-12M	N/A	Jun. 16, 2027
4	Cable	EMC INSTRUMENT	EMC104-SM-SM-1000	140911	Jun. 16, 2027
5	Controller	MF	MF-7802BS	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	EMI Test Receiver	Keysight	N9038A	MY56400060	Nov. 21, 2026

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

3.3.3 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

3.3.4 DEVIATION FROM TEST STANDARD

No deviation

3.3.5 TEST SETUP

Above 1 GHz

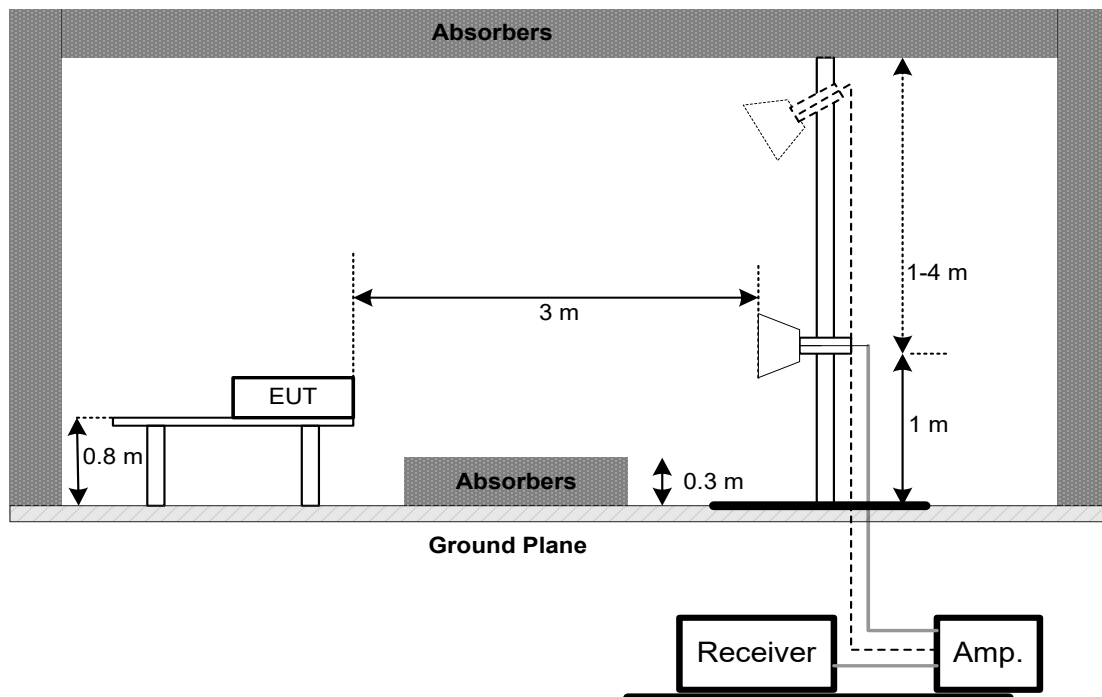


3.3.6 TEST RESULTS

Remark:


- (1) Radiated emissions measured in frequency range above 1000 MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (2) Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp was used for this test in order to provide sufficient measurement sensitivity.

Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Mode 1		

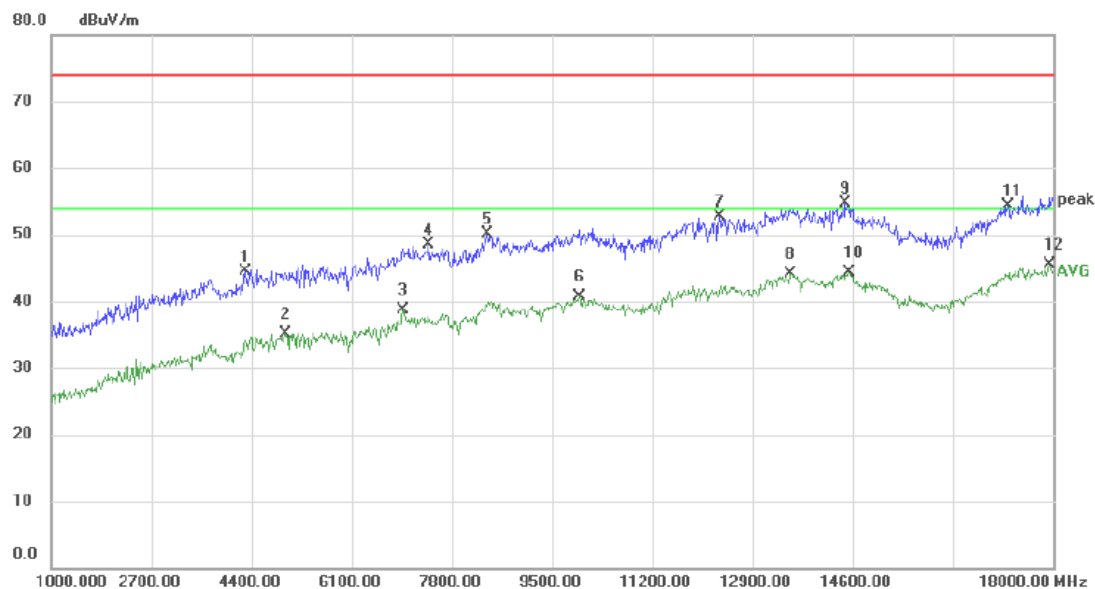

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4306.500	39.76	4.74	44.50	74.00	-29.50	peak	
2		4978.000	28.69	6.38	35.07	54.00	-18.93	AVG	
3		6967.000	28.45	10.35	38.80	54.00	-15.20	AVG	
4		7409.000	38.01	10.52	48.53	74.00	-25.47	peak	
5		8403.500	38.11	11.96	50.07	74.00	-23.93	peak	
6		9959.000	28.44	12.20	40.64	54.00	-13.36	AVG	
7		12339.000	40.69	11.97	52.66	74.00	-21.34	peak	
8		13554.500	30.49	13.64	44.13	54.00	-9.87	AVG	
9		14481.000	41.36	13.35	54.71	74.00	-19.29	peak	
10		14532.000	30.95	13.29	44.24	54.00	-9.76	AVG	
11		17243.500	41.54	12.69	54.23	74.00	-19.77	peak	
12	*	17949.000	32.09	13.44	45.53	54.00	-8.47	AVG	



Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Mode 1		

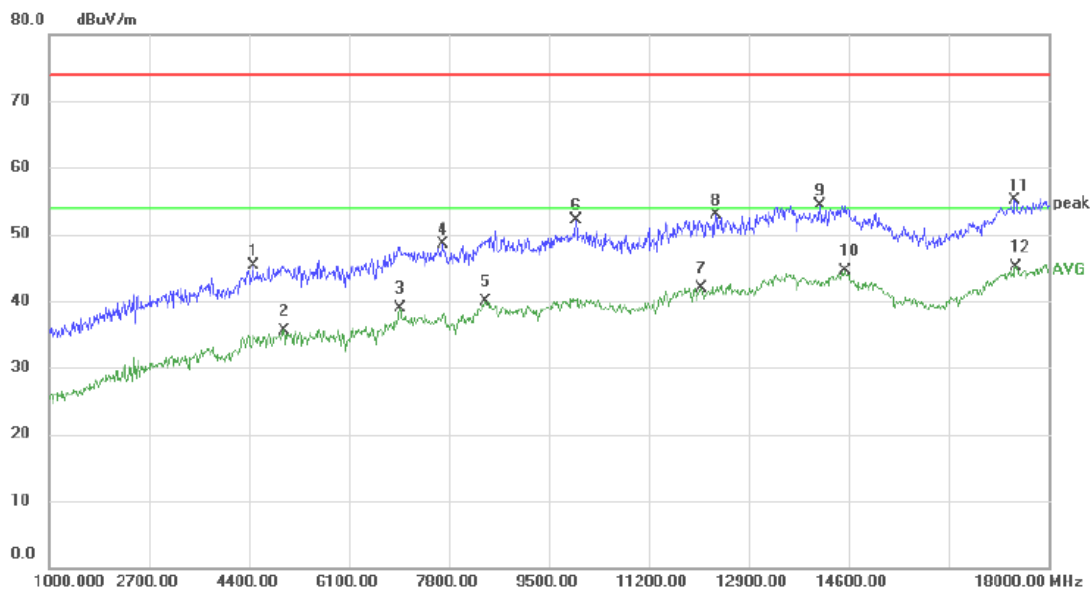


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4476.500	39.62	5.62	45.24	74.00	-28.76	peak	
2		4995.000	29.20	6.40	35.60	54.00	-18.40	AVG	
3		6975.500	28.57	10.39	38.96	54.00	-15.04	AVG	
4		7698.000	38.12	10.38	48.50	74.00	-25.50	peak	
5		8412.000	27.97	12.00	39.97	54.00	-14.03	AVG	
6		9959.000	39.96	12.20	52.16	74.00	-21.84	peak	
7		12101.00	29.80	12.08	41.88	54.00	-12.12	AVG	
8		12339.00	40.91	11.97	52.88	74.00	-21.12	peak	
9		14107.00	42.17	12.22	54.39	74.00	-19.61	peak	
10		14532.00	31.17	13.29	44.46	54.00	-9.54	AVG	
11		17422.00	41.95	13.15	55.10	74.00	-18.90	peak	
12	*	17439.00	31.86	13.19	45.05	54.00	-8.95	AVG	

4. EUT TEST PHOTO



AC Power Line Conducted Emissions

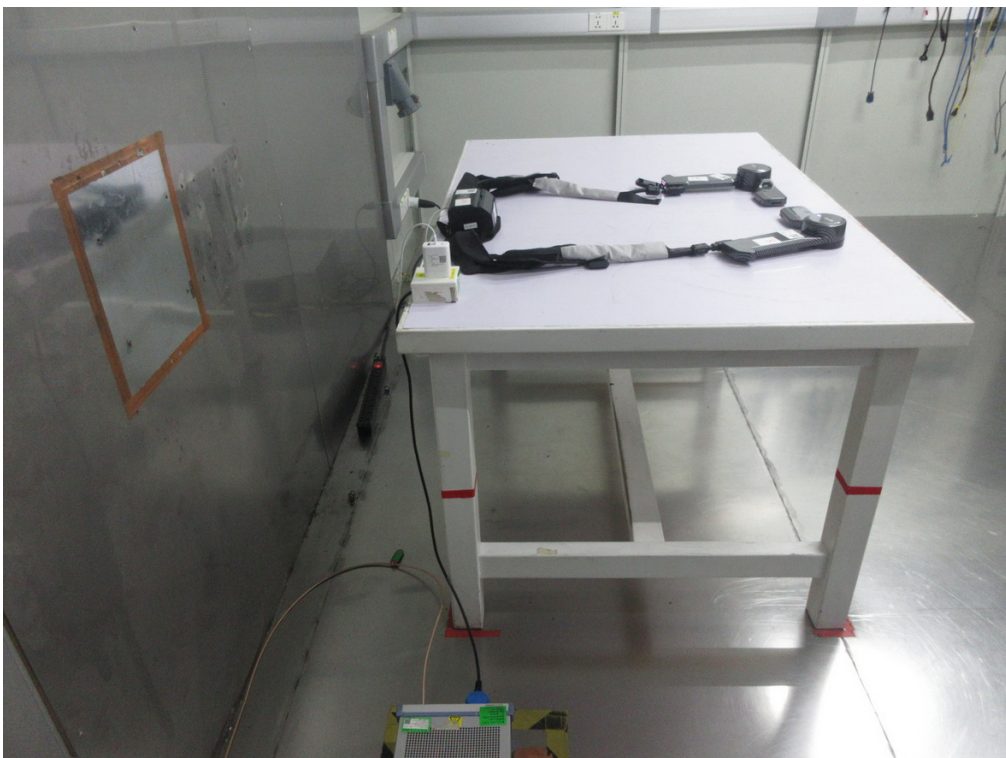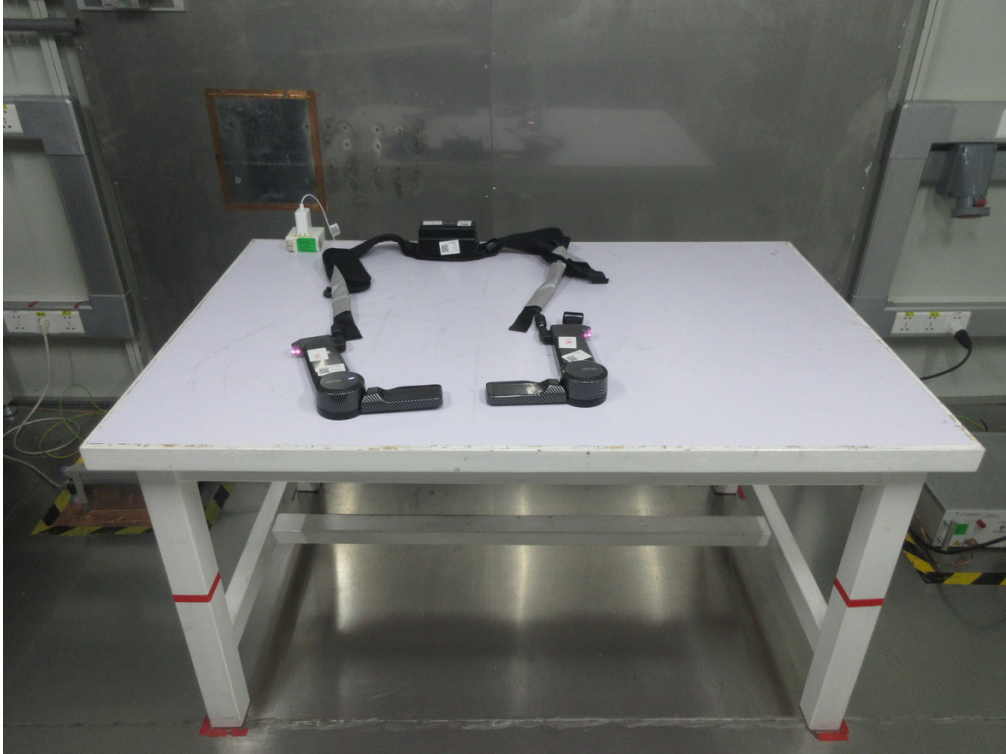

Radiated Emissions 30 MHz to 1 GHz

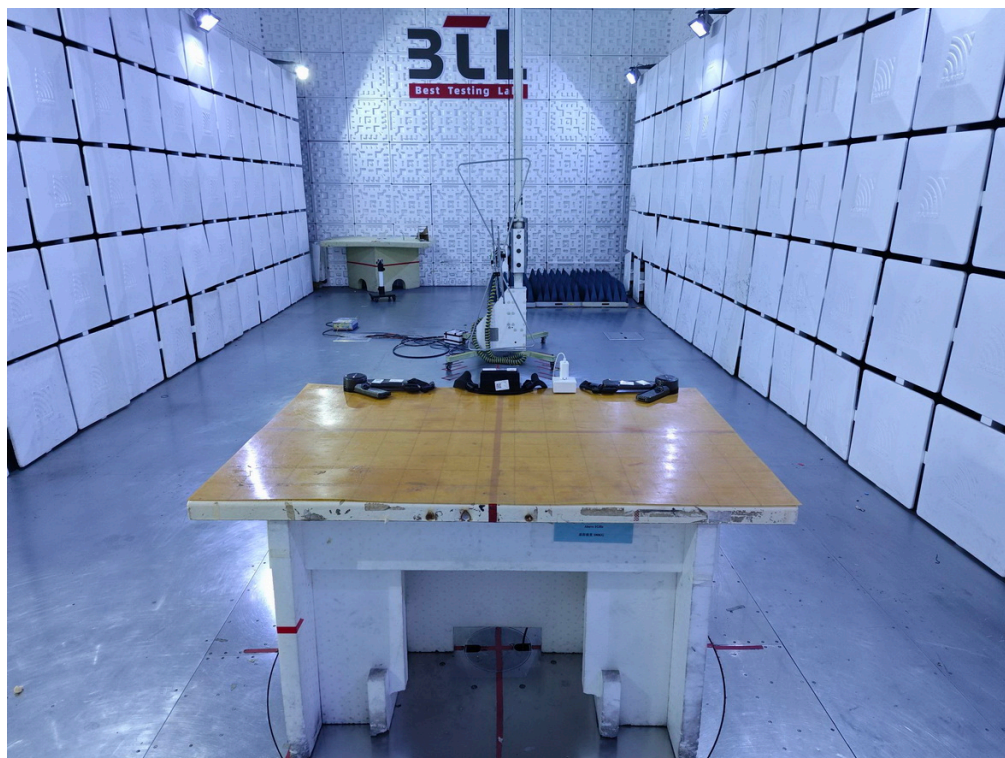

Radiated Emissions Above 1 GHz

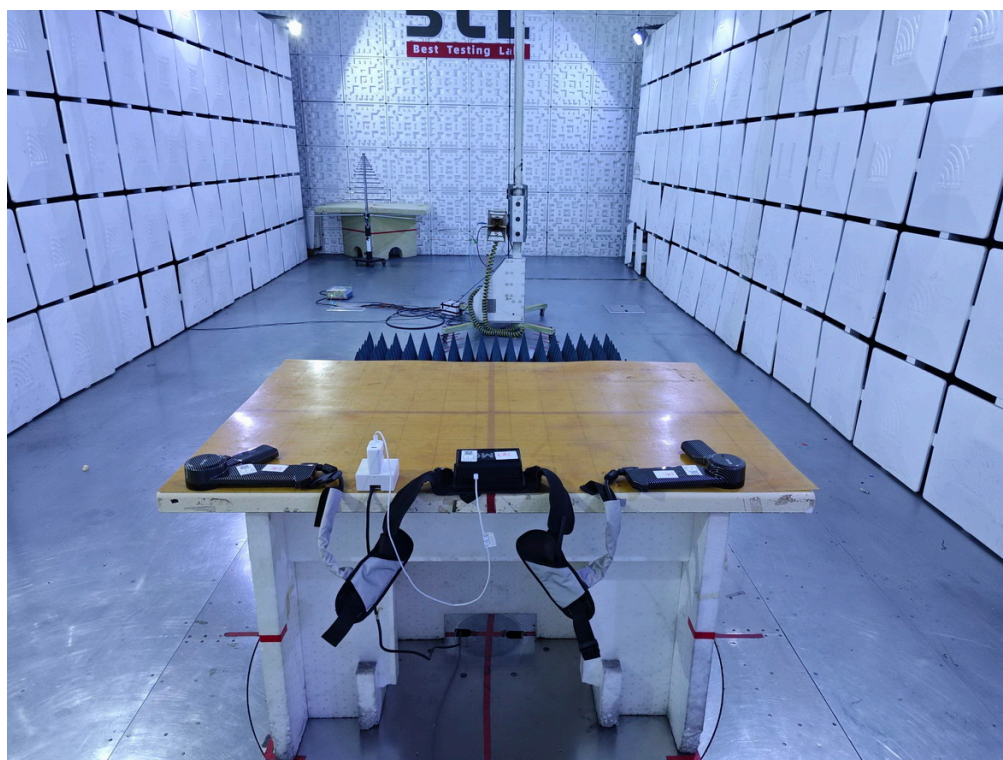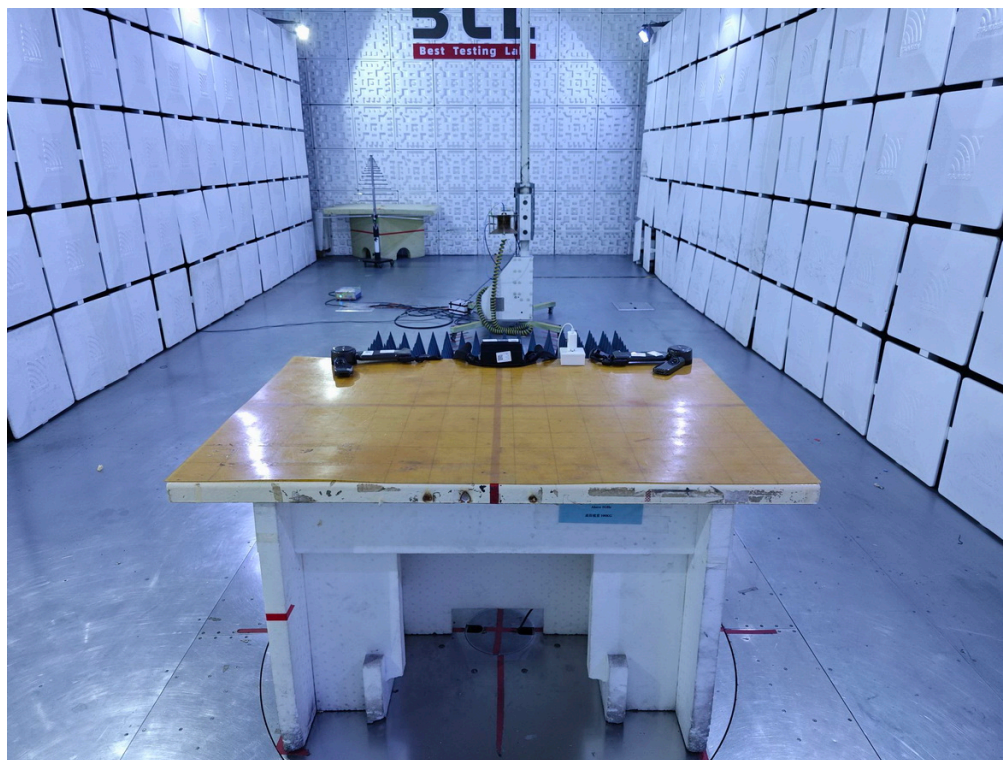**End of Test Report**