



FCC Radio Test Report

FCC ID: 2BWNC-M1

This report concerns: Original Grant

Project No. : 2606C022
Equipment : Vision Perception Exoskeleton
Brand Name : IRMO
Model Name : M1 Pure, M1 Neo, M1 Pro, M1 Ultra
Applicant : IRMO BOT LIMITED
Address : RM 2C-P11, 2/F, HUNG TO CTR.,94-96 HOW MING ST., KWUN TONG
HONG KONG
Manufacturer : Shenzhen Shenmo Robot Co., Ltd.
Address : Room 1105B, Building 3, Meinian International Plaza, No. 1115 Nanhai
Avenue, Taohuayuan Community, Zhaoshang Subdistrict, Nanshan
District, Shenzhen, Guangdong Province, P.R. China
Date of Receipt : Jun. 03, 2026
Date of Test : Jun. 03, 2026 ~ Jun. 30, 2026
Issued Date : Jul. 10, 2026
Test Sample : Engineering Sample No.: DG920260603514 for conducted,
DG920260602293 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Parker Yang
Parker Yang
Approved by : Chay Cai
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 SUPPORT UNITS	15
3.6 CUSTOMER INFORMATION DESCRIPTION	15
4 . AC POWER LINE CONDUCTED EMISSIONS	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	16
4.3 DEVIATION FROM TEST STANDARD	16
4.4 TEST SETUP	17
4.5 EUT OPERATING CONDITIONS	17
4.6 TEST RESULTS	17
5 . RADIATED EMISSIONS	18
5.1 LIMIT	18
5.2 TEST PROCEDURE	19
5.3 DEVIATION FROM TEST STANDARD	20
5.4 TEST SETUP	20
5.5 EUT OPERATING CONDITIONS	22
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	22
5.7 TEST RESULT - 30 MHZ TO 1000 MHZ	22
5.8 TEST RESULT - ABOVE 1000 MHZ	22
6 . BANDWIDTH	23
6.1 LIMIT	23

Table of Contents	Page
6.2 TEST PROCEDURE	23
6.3 DEVIATION FROM STANDARD	23
6.4 TEST SETUP	23
6.5 EUT OPERATION CONDITIONS	23
6.6 TEST RESULTS	23
7 . MAXIMUM OUTPUT POWER	24
7.1 LIMIT	24
7.2 TEST PROCEDURE	24
7.3 DEVIATION FROM STANDARD	24
7.4 TEST SETUP	24
7.5 EUT OPERATION CONDITIONS	24
7.6 TEST RESULTS	24
8 . CONDUCTED SPURIOUS EMISSION	25
8.1 LIMIT	25
8.2 TEST PROCEDURE	25
8.3 DEVIATION FROM STANDARD	26
8.4 TEST SETUP	26
8.5 EUT OPERATION CONDITIONS	26
8.6 TEST RESULTS	26
9 . POWER SPECTRAL DENSITY	27
9.1 LIMIT	27
9.2 TEST PROCEDURE	27
9.3 DEVIATION FROM STANDARD	27
9.4 TEST SETUP	27
9.5 EUT OPERATION CONDITIONS	27
9.6 TEST RESULTS	27
10 . MEASUREMENT INSTRUMENTS LIST	28
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	36
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	39
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	44
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	47
APPENDIX E - BANDWIDTH	62

Table of Contents	Page
APPENDIX F - MAXIMUM OUTPUT POWER	65
APPENDIX G - CONDUCTED SPURIOUS EMISSION	68
APPENDIX H - POWER SPECTRAL DENSITY	71

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2606C022	R00	Original Report.	Jul. 07, 2026	Invalid
BTL-FCCP-1-2606C022	R00	This report only updated the manufacturer information of the antenna on page 11. It is a revision of the report BTL-FCCP-1-2606C022 R00. This is a newly released report, replacing the BTL-FCCP-1-2606C022 R00 report.	Jul. 10, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

1# For Radiated Emissions-30 MHz-1GHz and Above 18GHz test items:

The test facilities used to collect the test data in this report is at the location of Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

2# For other test items

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	U,(dB)
DGGDCB01 (3m)	CISPR	30MHz ~ 1000MHz	3.88

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03 (3m)	CISPR	1GHz ~ 6GHz	4.16
		6GHz ~ 18GHz	4.74

Test Site	Method	Measurement Frequency Range	U,(dB)
DGGDCB01 (1m)	CISPR	18GHz ~ 40GHz	4.30

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	2.1 dB
Conducted Bandedge Emission	1.7 dB
Power Spectral Density	1.8 dB
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	54%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9 kHz to 30 MHz	23°C	55%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -30 MHz to 1000 MHz	24°C	42%	AC 120V/60Hz	Ilya Zhang
Radiated Emissions -1000MHz-18000 MHz	23°C	48%	AC 120V/60Hz	Torin Long
Radiated Emissions -Above 18000 MHz	24°C	42%	AC 120V/60Hz	Ilya Zhang
Bandwidth	24°C	59%	AC 120V/60Hz	Alex Yin
Maximum Output Power	24°C	59%	AC 120V/60Hz	Alex Yin
Conducted Spurious Emission	24°C	59%	AC 120V/60Hz	Alex Yin
Power Spectral Density	24°C	59%	AC 120V/60Hz	Alex Yin

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Vision Perception Exoskeleton
Brand Name	IRMO
Test Model	M1 Pure
Model Name	M1 Pure, M1 Neo, M1 Pro, M1 Ultra
Model Difference(s)	The only differences among all the models are: variations in the material of the case, differences in water resistance levels, and variations in the number of cameras used.
Hardware Version	3.0
Software Version	1.0
Power Source	1# Supplied from Battery. Model: NZ212 2# Battery is powered by the adapter. (support unit).
Power Rating	1# Nominal Voltage: 21.60V Rated Capacity: 3000mAh Rated Energy: 64.8Wh 2# DC 20V/3A
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps
Max. Output Power	1Mbps: 7.39 dBm (0.0055 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	SHENZHEN XINHENG YANG TECHNOLOGY CO., LTD	CP.21.000510	FPC	N/A	3.13

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_1Mbps Channel 39

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 3	TX Mode_1Mbps Channel 39

Radiated emissions test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 3	TX Mode_1Mbps Channel 39

Radiated emissions test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Note:

- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 1Mbps Channel 39 is found to be the worst case and recorded.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emission 1GHz to 18GHz test, both Vertical and Horizontal are evaluated, only the worst polarization is recorded.


3.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


Test Software Version	ADB		
Frequency (MHz)	2402	2440	2480
1Mbps	0X22	0X22	0X21
2Mbps	0X21	0X21	0X21

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

For AC power line conducted emissions, radiated emissions-Below 30 MHz

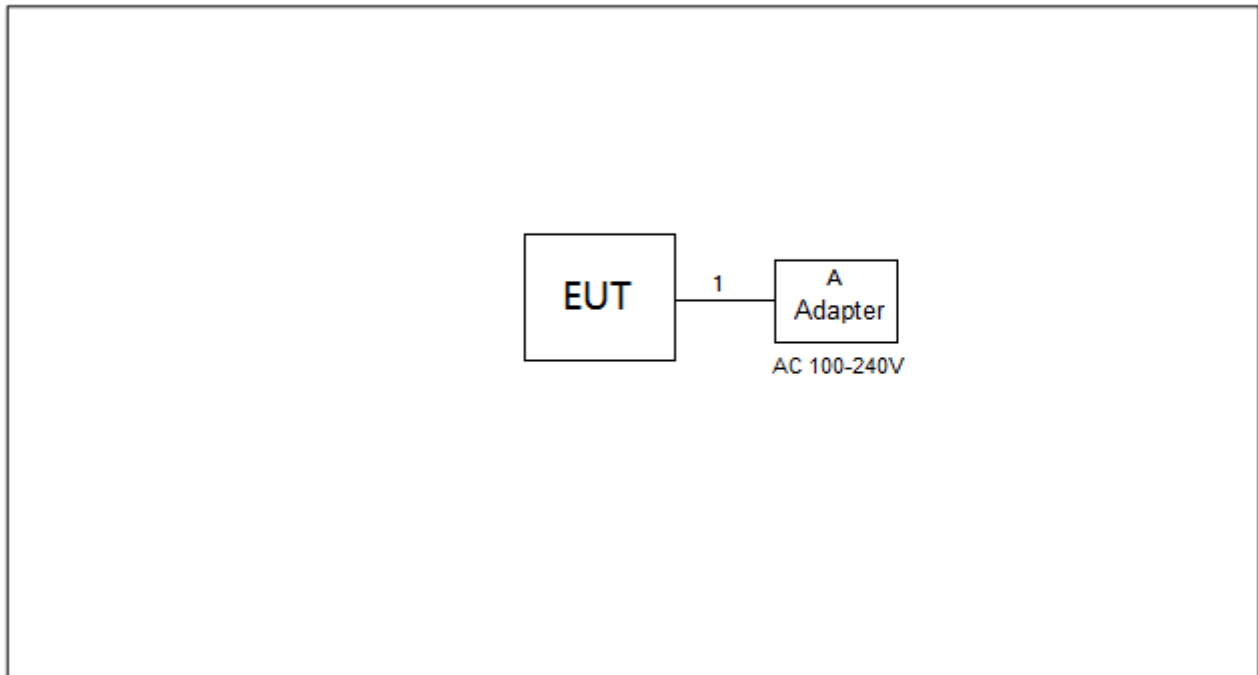

For radiated emissions-Above 30 MHz

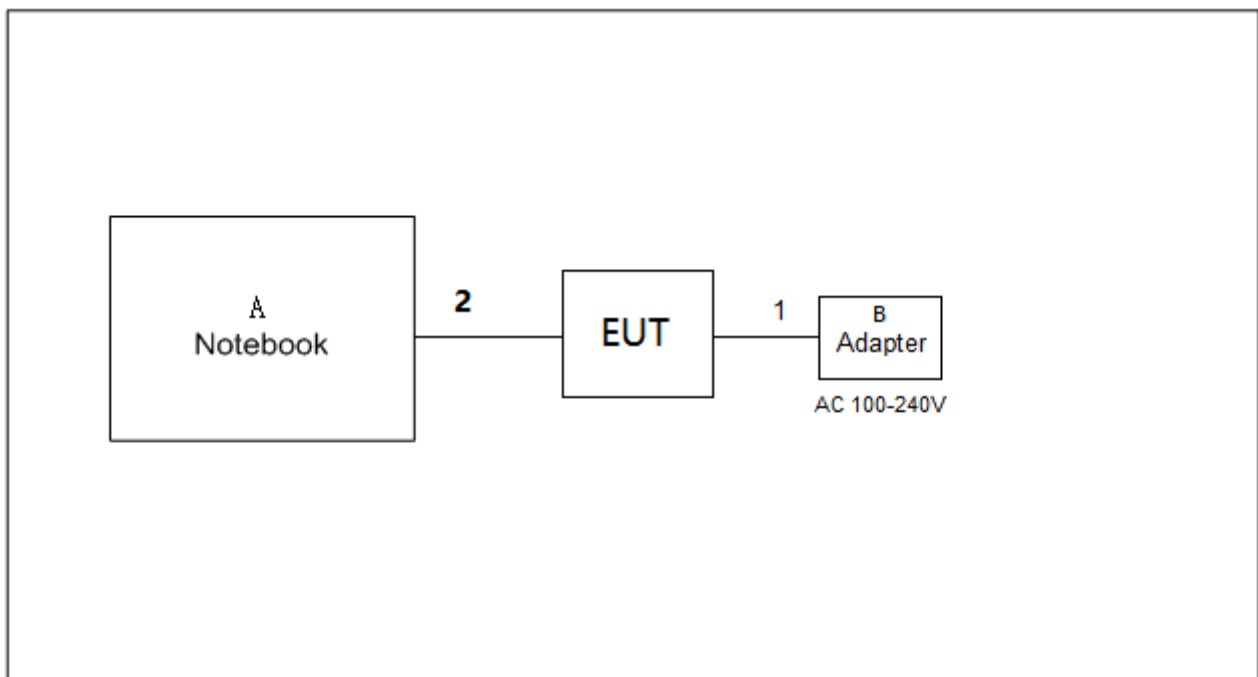

3.5 SUPPORT UNITS

For AC power line conducted emissions and radiated emissions- Below 30 MHz

Item	Equipment	Brand	Model No.	Series No.
A	Adapter	Zhuoyuekeji	HS-ZC481203000CA	A1252

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

For radiated emissions- Above 30 MHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	HUAWEI	Bof-16	N/A
B	Adapter	Zhuoyuekeji	HS-ZC481203000CA	A1252

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m
2	USB Cable	NO	NO	0.8m

3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value - Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

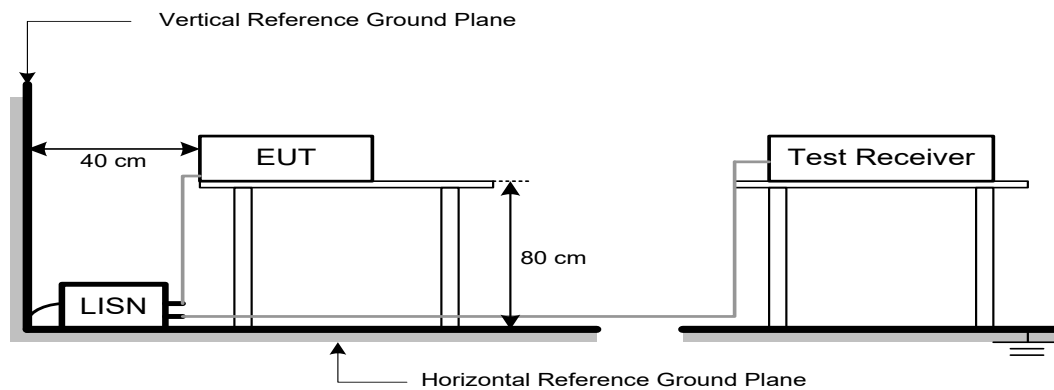

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) , then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

Note:

(1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

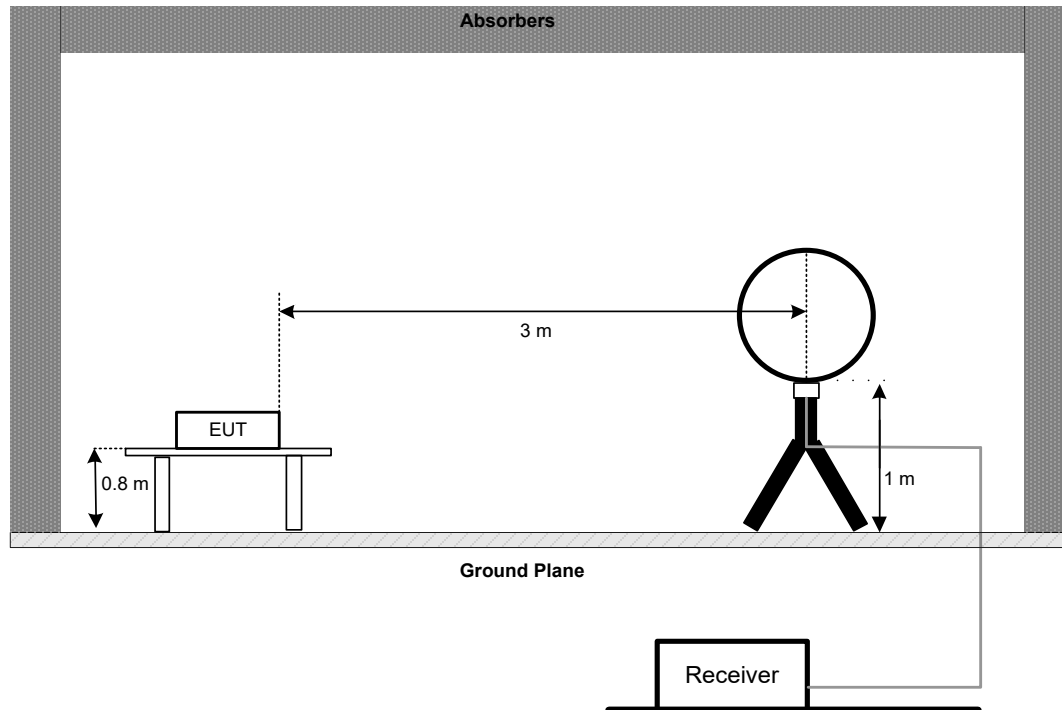


30 MHz to 1 GHz

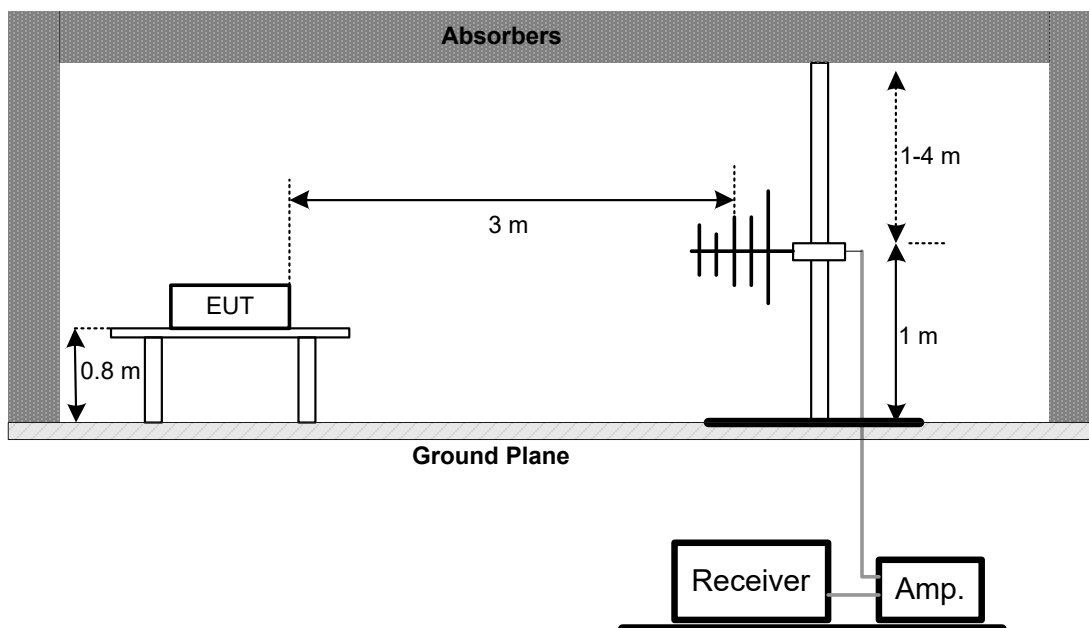

**Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)**

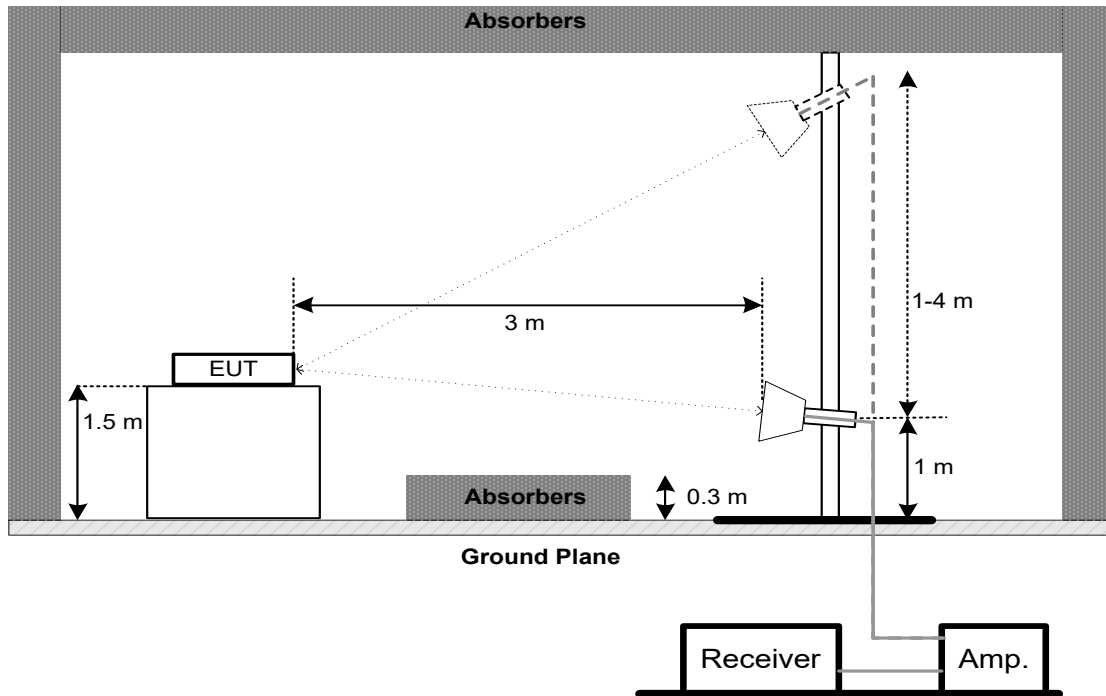

Harmonic(18 GHz to 26.5 GHz)

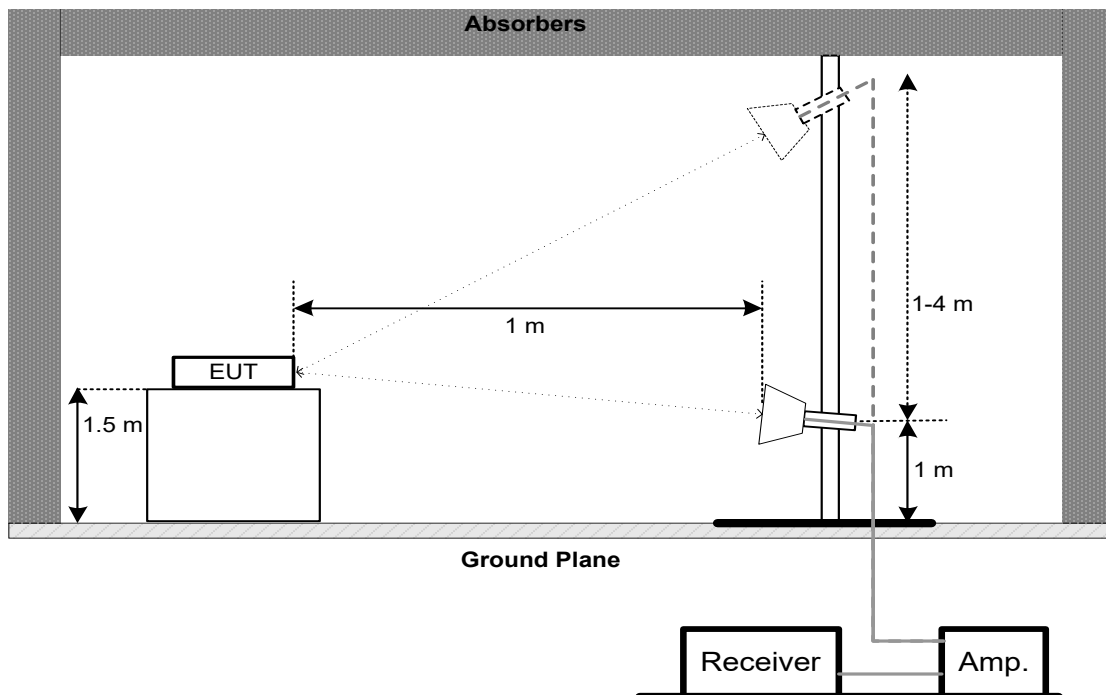

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

5.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	$>$ Measurement Bandwidth
RBW	shall be in the range of 1% to 5% of the OBW but not less than 100 kHz
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	10 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSION

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For Reference Level:

Spectrum Parameters	Setting
Span	≥ 1.5 times the bandwidth.
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Band edge:


Spectrum Parameters	Setting
Start Frequency	2300 MHz
Stop Frequency	2690 MHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Harmonic:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

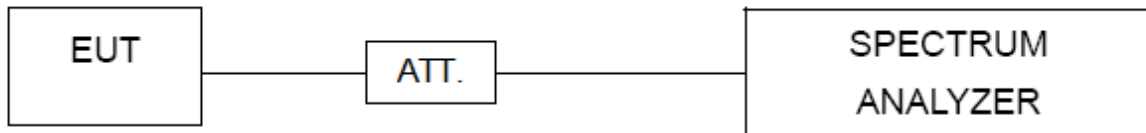8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	1.5 times the DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

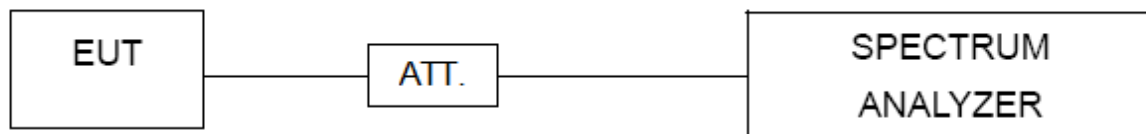

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Jun. 26, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL_RE_System	BTL	BTL_RE_System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Jun. 11, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 14, 2027
2	Receiver	Agilent	N9038A	MY52130039	Apr. 25, 2027
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 22, 2027
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 22, 2027
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 14, 2027

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Jun. 10, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXE EMI Receiver	KEYSIGHT	N9038B	MY62210123	Oct. 24, 2026
2	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	0 1702	Jun. 19, 2026
3	Attenuator	EMC INSTRUMENT	6806_N-50-1	N/A	Jun. 19, 2026
4	Preamplifier	EMC INSTRUMENT	EMC001330	980986	Dec. 19, 2026
5	Cable	EMC INSTRUMENT	EMCCFD400-NM-NM-2500	N/A	Jun. 12, 2026
6	Cable	RegalWay	LMR400-NMNM-7m	N/A	Jun. 12, 2026
7	Cable	EMC INSTRUMENT	EMCCFD400-NM-NM-3000	N/A	Jun. 12, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	Tai He	9*6*6(NSA&VSWR)	N/A	May 17, 2027

Radiated Emissions - 1 GHz - 18 GHz
(Test Date: Jun. 09, 2026)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Feb. 01, 2027
2	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Feb. 01, 2027
3	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Feb. 01, 2027
4	966 Chamber room	CM	9*6*6	N/A	May 14, 2027
5	Filter	STI	STI15-9912	N/A	May 16, 2027
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Receiver	Agilent	N9038A	MY52130039	Apr. 25, 2027
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 17, 2026
10	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 03, 2027
11	Attenuator	RegalWay	RWA-201-S-10	N/A	Apr. 25, 2027


Radiated Emissions - Above 18 GHz
(Test Date: Jun. 10, 2026)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	966 Chamber room	Tai He	9*6*6(NSA&VSWR)	N/A	May 17, 2027
2	MXA Signal Analyze	KEYSIGHT	N9020B	MY63430227	May 16, 2027
3	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980911	May 18, 2027
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	0 1046	Jul. 18, 2026
5	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 06, 2027
6	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 06, 2027
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

**Bandwidth &
Maximum Output Power &
Power Spectral Density &
Conducted Spurious Emission**
(Test Date: Jun. 16, 2026)


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyze	R&S	FSP40	100185	Apr. 25, 2027
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	May 16, 2027



Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

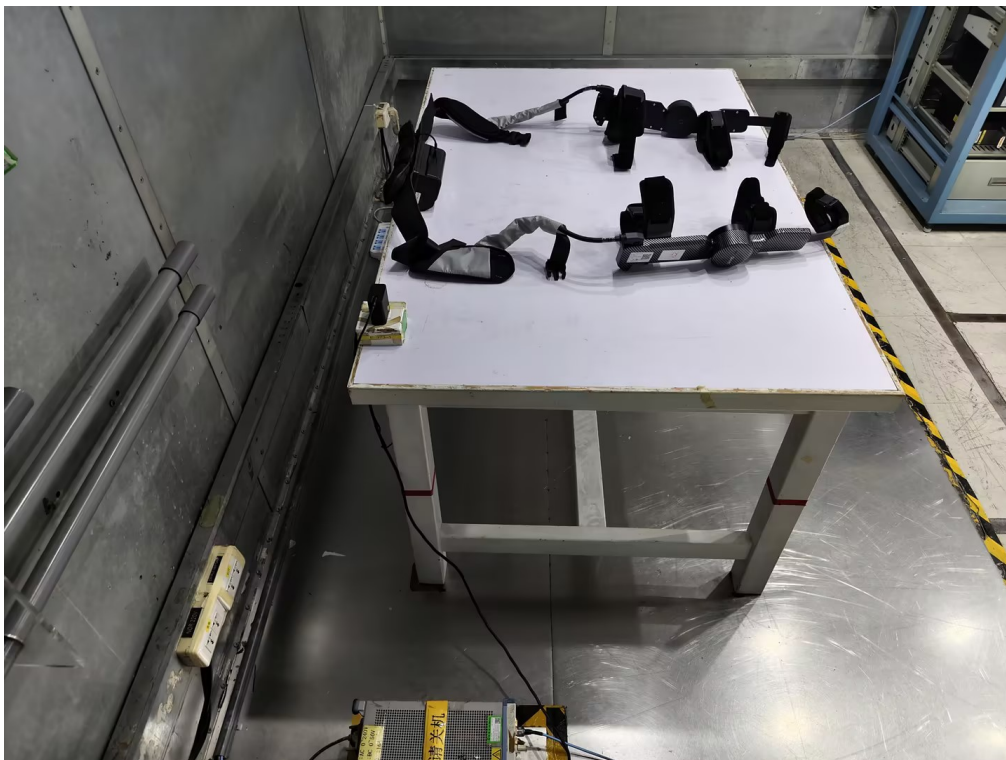10.1. EUT TEST PHOTO**AC Power Line Conducted Emissions Test Photos**

Radiated Emissions Test Photos



9 kHz to 30 MHz

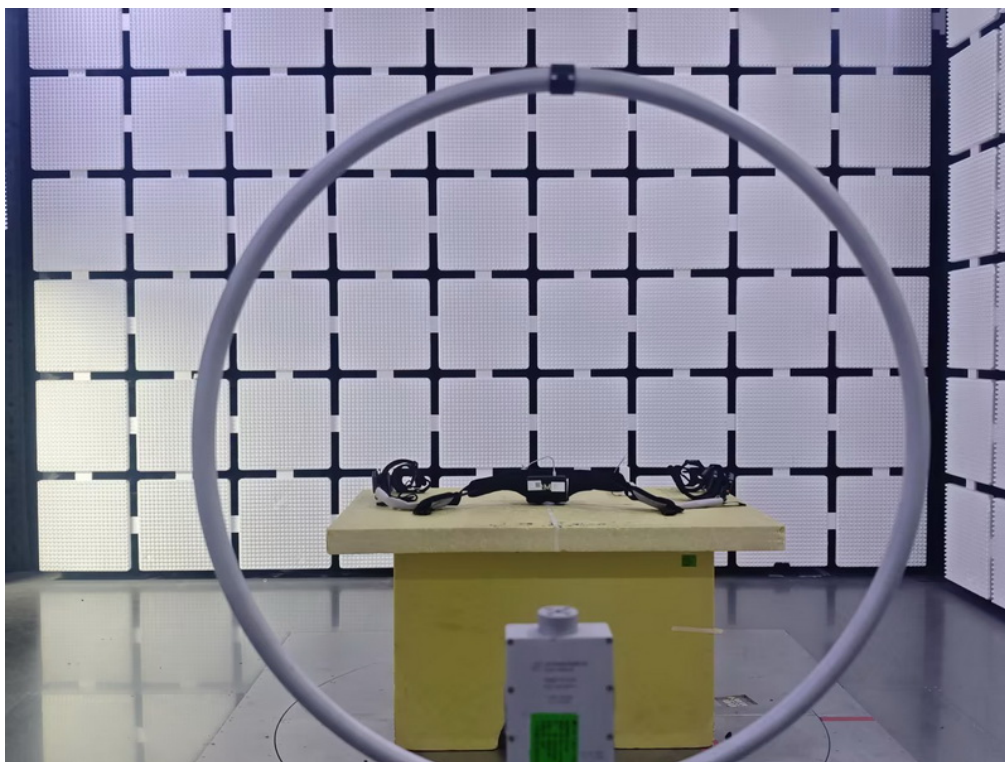

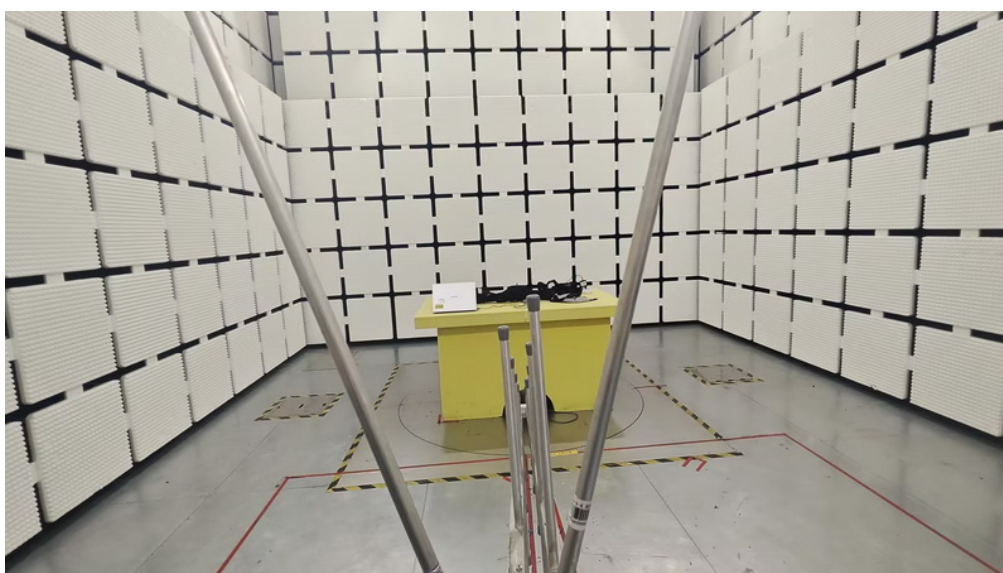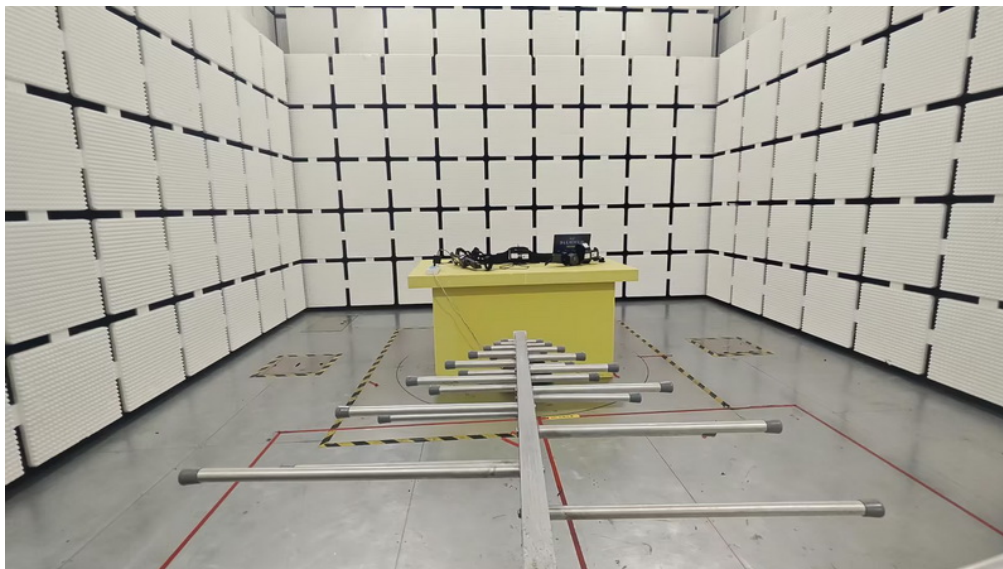Radiated Emissions Test Photos**30 MHz to 1000 MHz**


Radiated Emissions Test Photos

Band edge & Harmonic(1 GHz to 18 GHz)

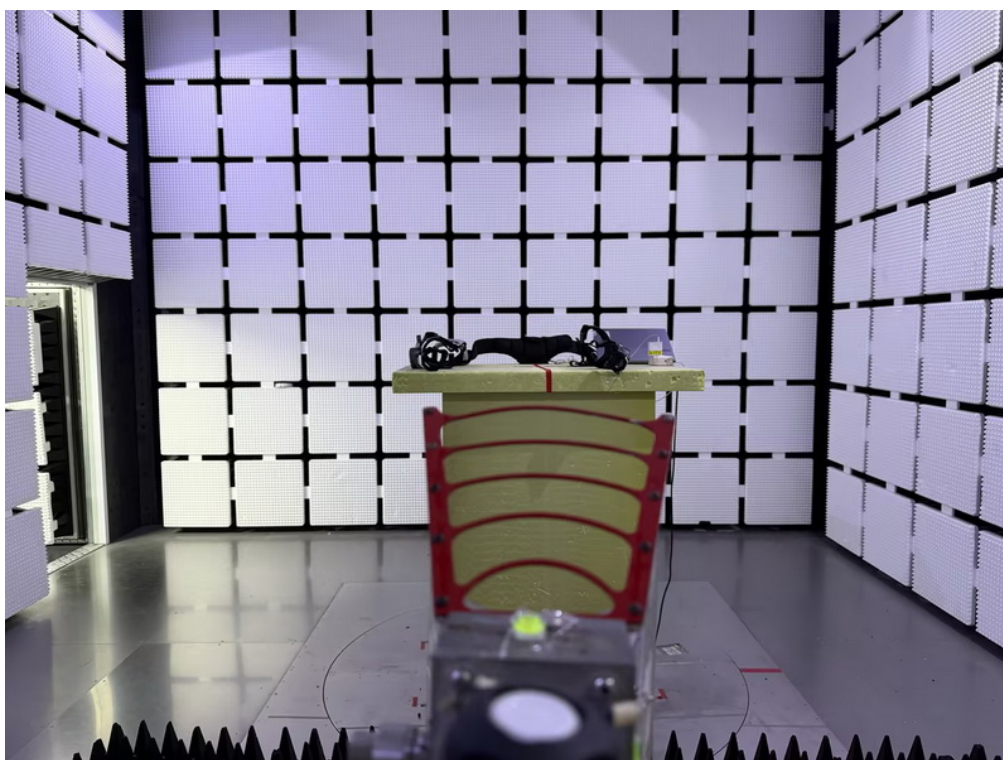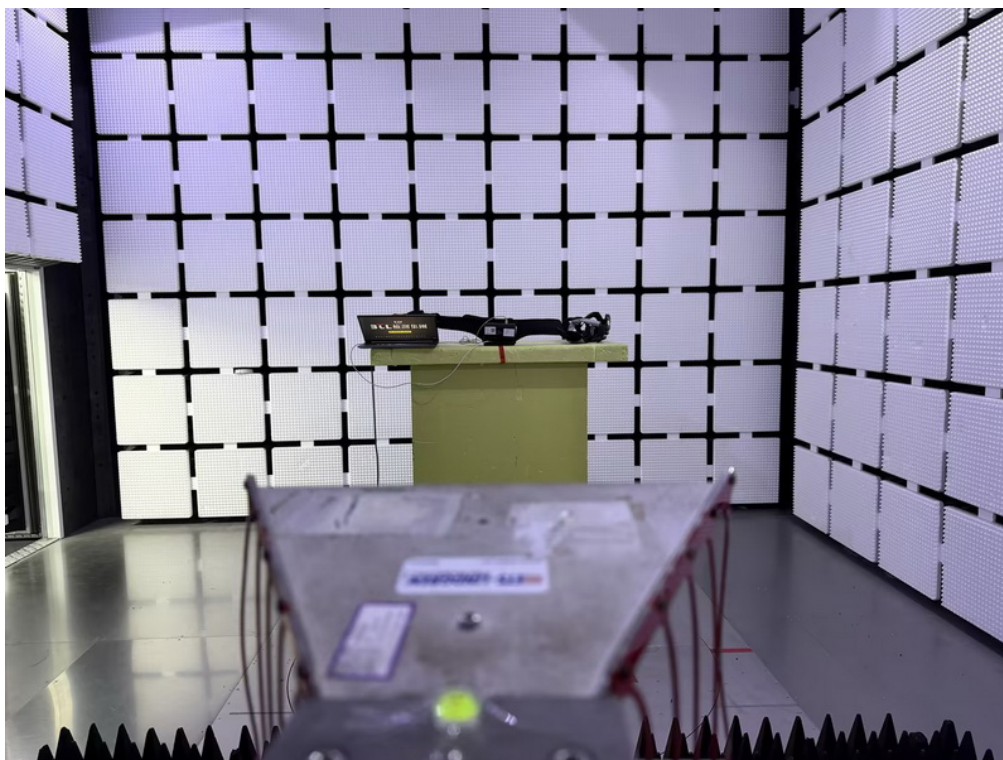


Radiated Emissions Test Photos**Harmonic(18 GHz to 26.5 GHz)**

Conducted Test Photos

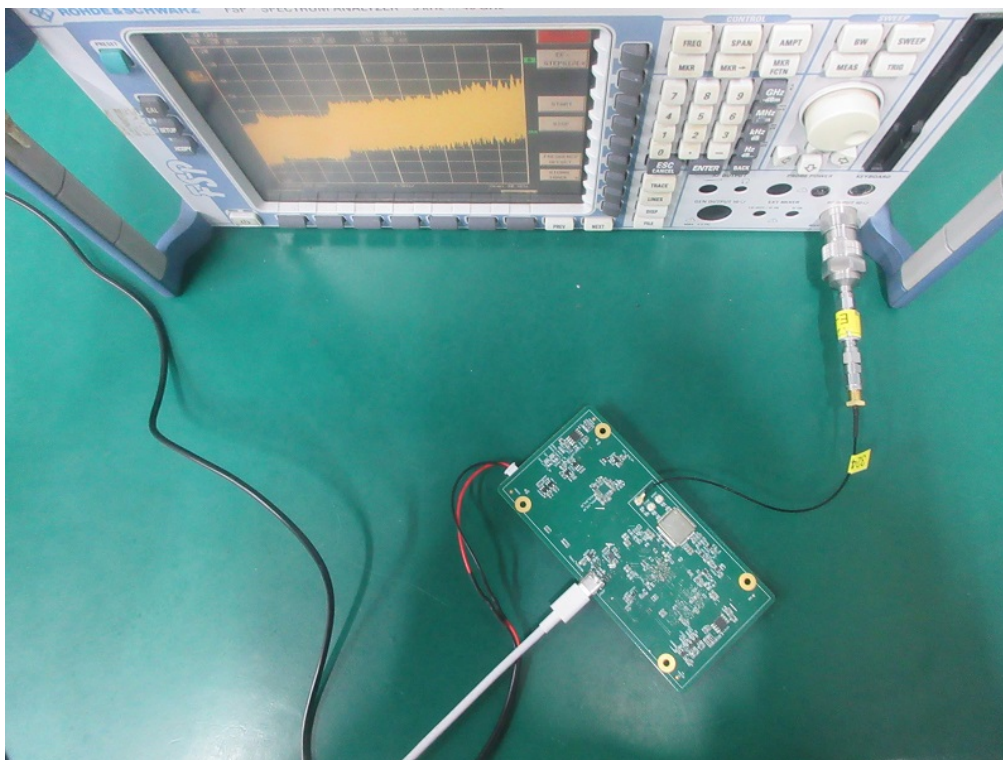

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode Channel 39_1Mbps	Phase	Line
-----------	--------------------------	-------	------

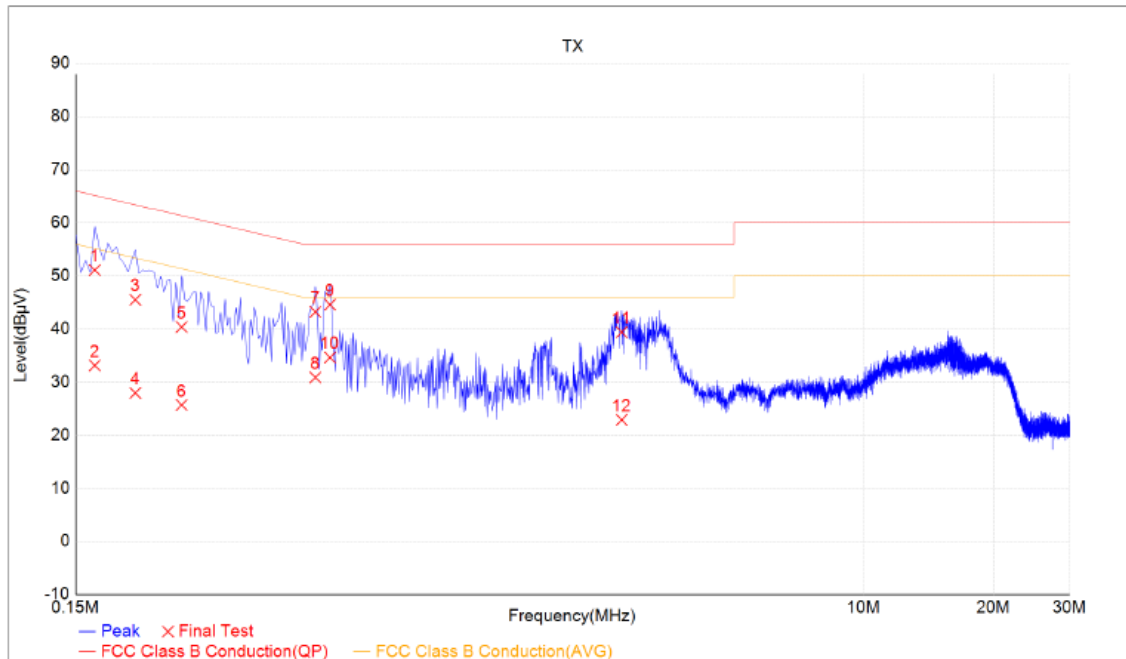


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.1659	40.72	10.37	51.1	65.16	-14.06	QP	
	2	0.1659	22.76	10.37	33.14	55.16	-22.02	AVG	
	3	0.206	35.11	10.4	45.52	63.37	-17.85	QP	
	4	0.206	17.56	10.4	27.96	53.37	-25.4	AVG	
	5	0.2617	29.94	10.43	40.38	61.37	-20.99	QP	
	6	0.2617	15.27	10.43	25.7	51.37	-25.67	AVG	
	7	0.5344	32.74	10.49	43.23	56	-12.77	QP	
	8	0.5344	20.4	10.49	30.89	46	-15.11	AVG	
	9	0.578	34.1	10.5	44.59	56	-11.41	QP	
*	10	0.578	24.16	10.5	34.65	46	-11.35	AVG	
	11	2.7423	28.71	10.71	39.42	56	-16.58	QP	
	12	2.7423	12.19	10.71	22.9	46	-23.1	AVG	

REMARKS:

- (1) Level = Reading + Factor.
(2) Margin = Level - Limit.

Test Mode	TX Mode Channel 39_1Mbps	Phase	Neutral
-----------	--------------------------	-------	---------

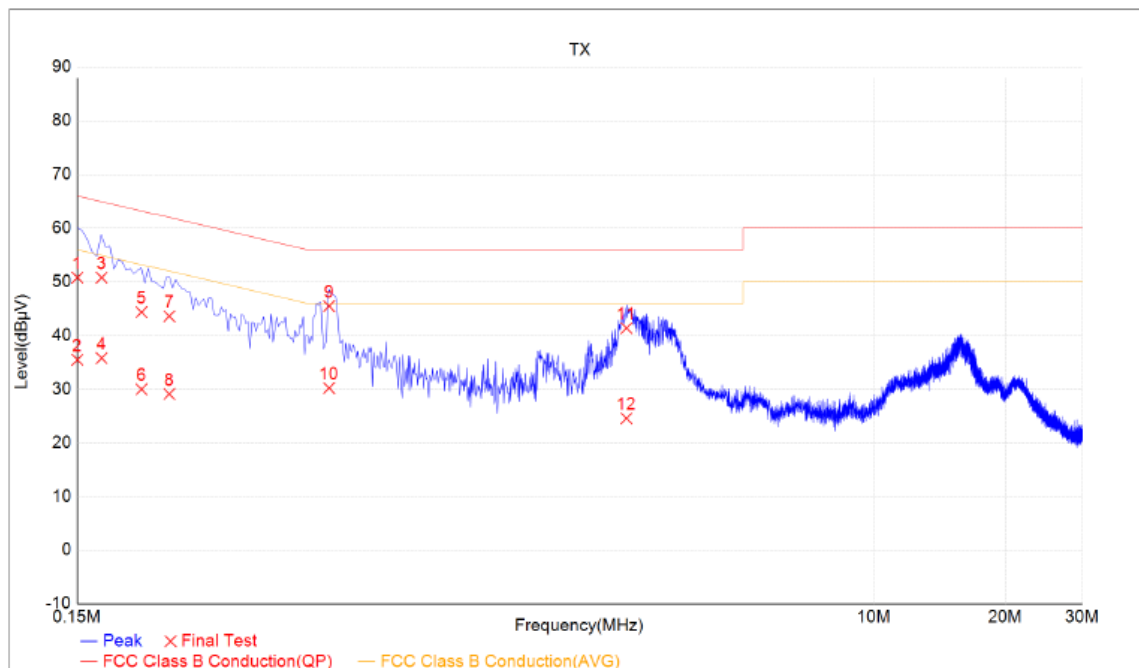


Suspected Note List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content	
1	0.15	40.38	10.42	50.8	66	-15.2	QP		
2	0.15	25.08	10.42	35.49	56	-20.51	AVG		
3	0.1705	40.36	10.43	50.79	64.96	-14.17	QP		
4	0.1705	25.37	10.43	35.8	54.96	-19.16	AVG		
5	0.2104	33.92	10.44	44.36	63.21	-18.85	QP		
6	0.2104	19.55	10.44	29.99	53.21	-23.21	AVG		
7	0.2417	33.15	10.45	43.6	62.03	-18.42	QP		
8	0.2417	18.65	10.45	29.1	52.03	-22.93	AVG		
*	9	0.562	10.52	45.49	56	-10.51	QP		
10	0.562	19.7	10.52	30.22	46	-15.78	AVG		
11	2.7016	30.63	10.75	41.38	56	-14.62	QP		
12	2.7016	13.81	10.75	24.56	46	-21.44	AVG		

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

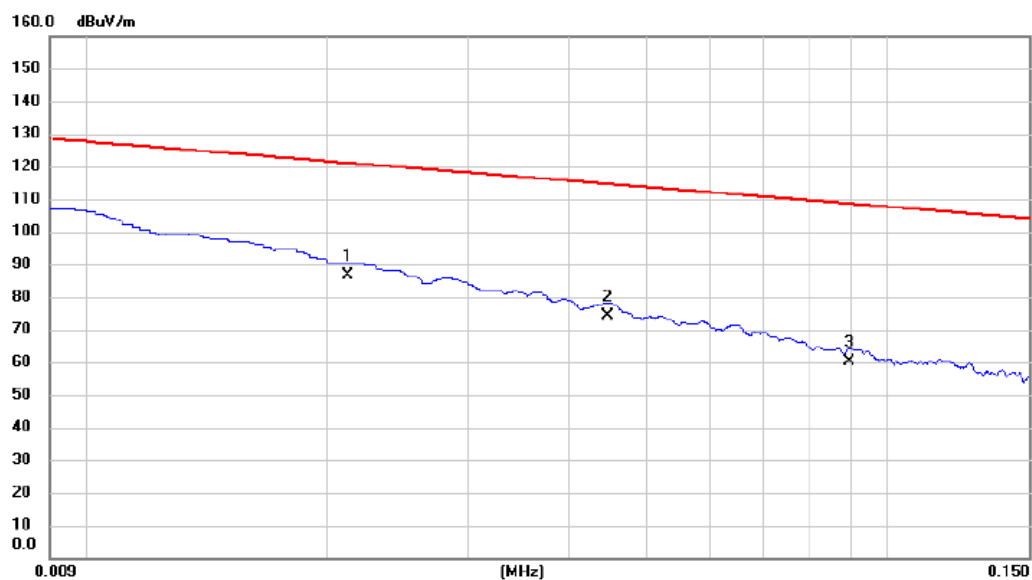


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.021	66.11	20.68	86.79	121.08	-34.29	AVG	
2		0.045	53.50	20.62	74.12	114.58	-40.46	AVG	
3		0.090	39.47	20.55	60.02	108.55	-48.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

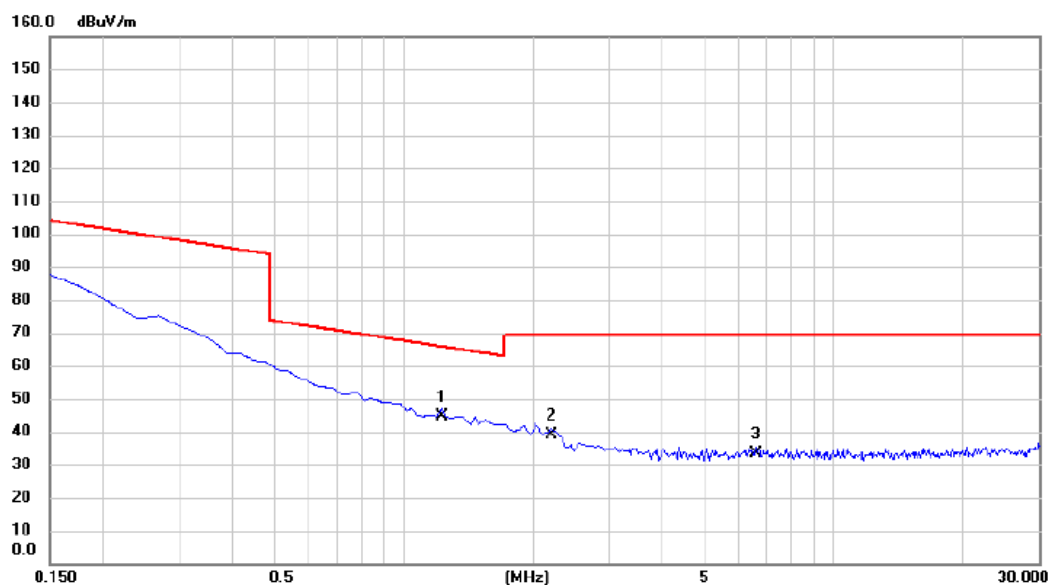


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.224	24.69	20.09	44.78	65.85	-21.07	QP	
2		2.210	18.53	20.33	38.86	69.54	-30.68	QP	
3		6.598	13.01	20.40	33.41	69.54	-36.13	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

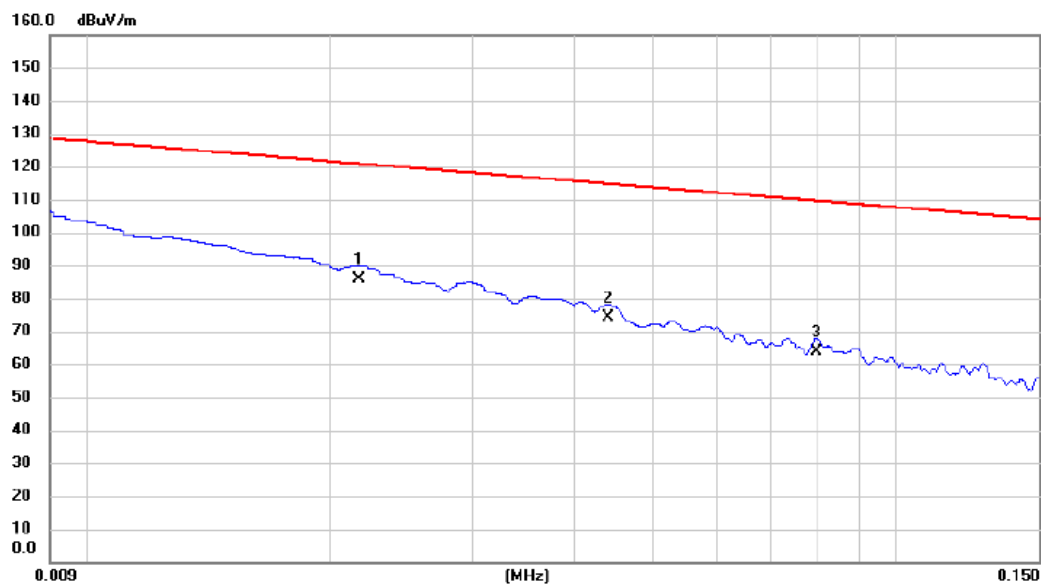


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.022	65.33	20.67	86.00	120.88	-34.88	AVG	
2	0.044	53.45	20.62	74.07	114.72	-40.65	AVG	
3	0.080	43.25	20.55	63.80	109.59	-45.79	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

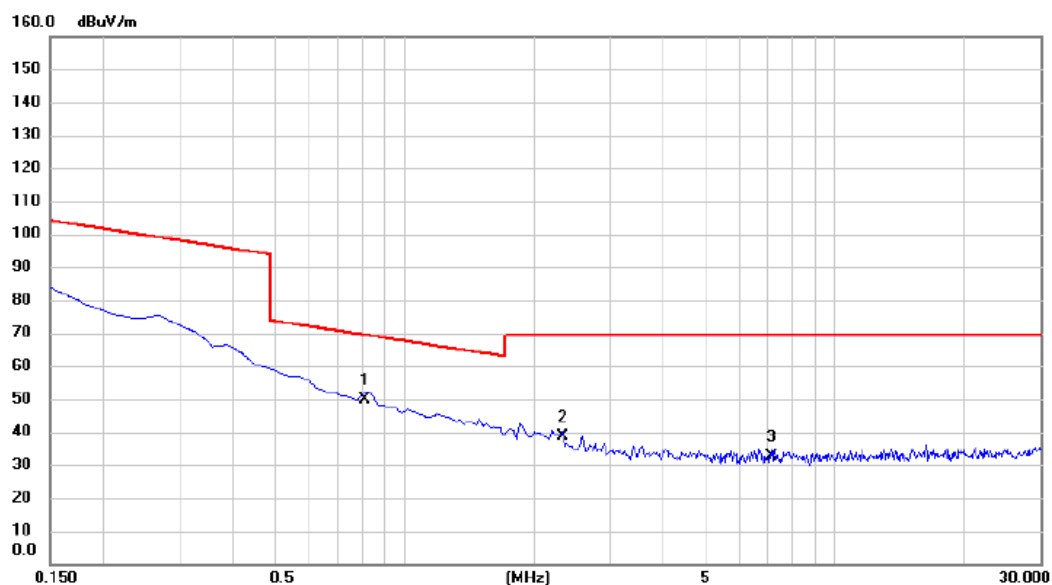

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.807	29.48	20.46	49.94	69.47	-19.53	QP	
2		2.329	18.21	20.33	38.54	69.54	-31.00	QP	
3		7.135	12.20	20.41	32.61	69.54	-36.93	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

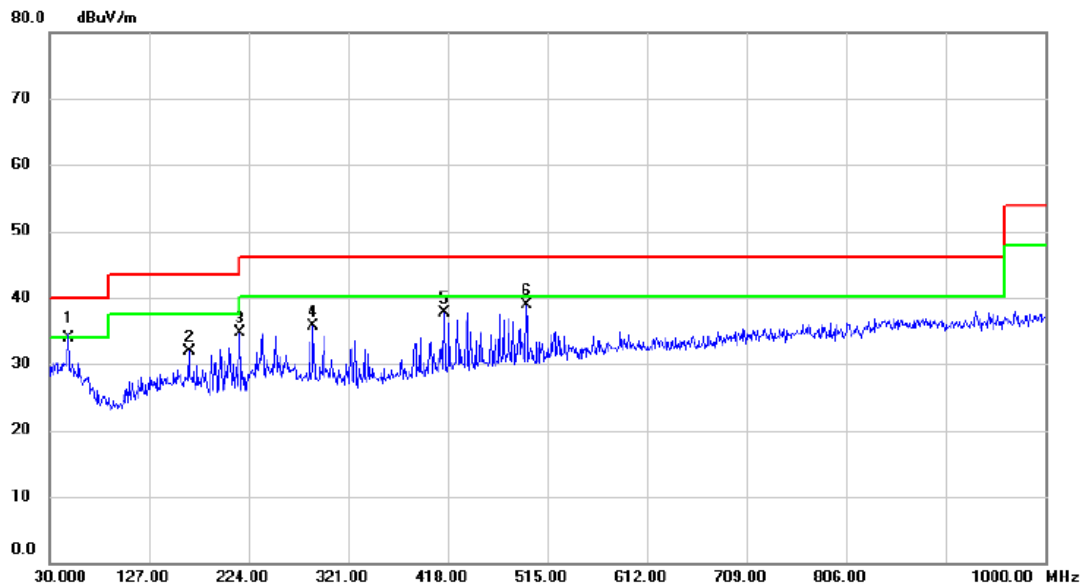


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	48.430	44.67	-10.71	33.96	40.00	-6.04	QP	
2		165.800	42.71	-10.81	31.90	43.52	-11.62	peak	
3		215.270	48.55	-13.83	34.72	43.52	-8.80	peak	
4		287.050	46.19	-10.44	35.75	46.02	-10.27	peak	
5		414.120	45.00	-7.27	37.73	46.02	-8.29	peak	
6		494.630	44.46	-5.62	38.84	46.02	-7.18	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

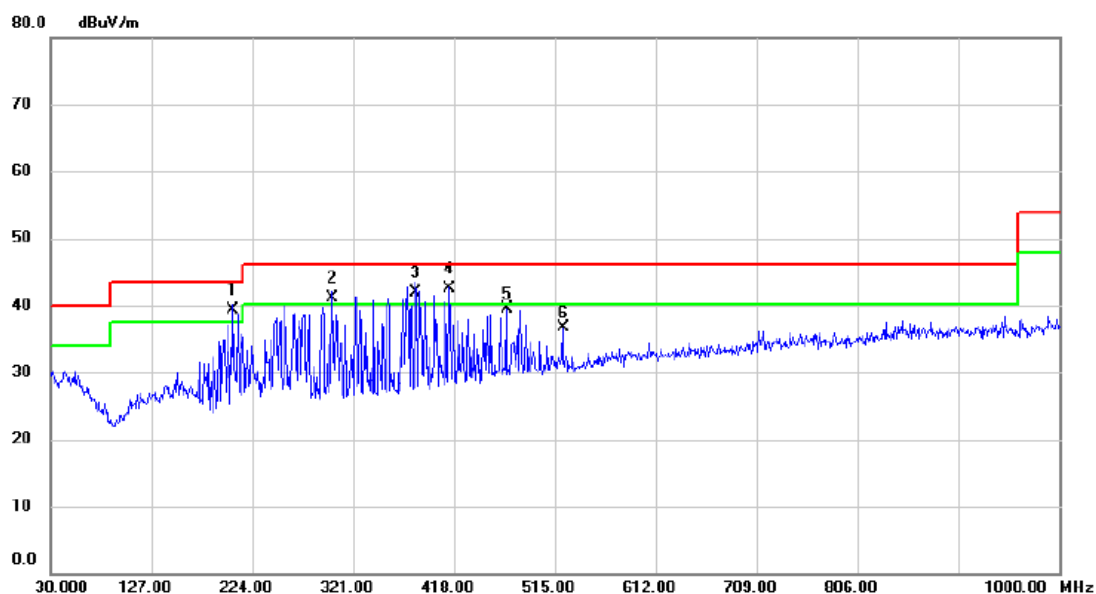

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	205.570	53.17	-13.86	39.31	43.52	-4.21	QP	
2	!	300.630	51.29	-10.18	41.11	46.02	-4.91	QP	
3	!	381.140	49.96	-8.07	41.89	46.02	-4.13	QP	
4	*	413.150	49.72	-7.31	42.41	46.02	-3.61	QP	
5		468.440	45.55	-5.98	39.57	46.02	-6.45	peak	
6		522.760	41.73	-4.98	36.75	46.02	-9.27	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

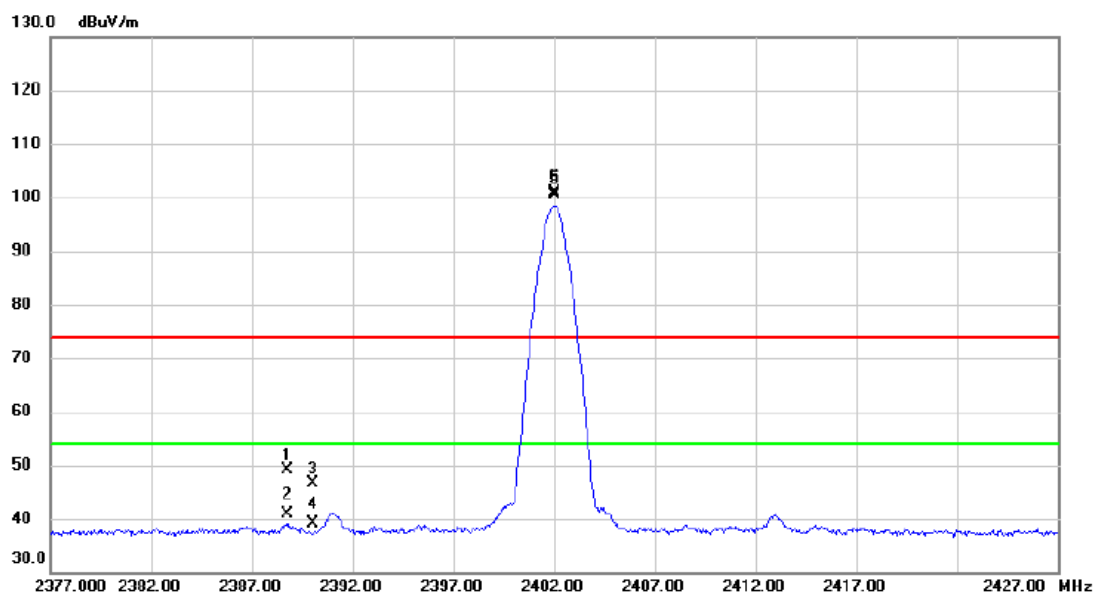


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.750	41.17	8.04	49.21	74.00	-24.79	peak	
2		2388.750	32.95	8.04	40.99	54.00	-13.01	AVG	
3		2390.000	38.51	8.05	46.56	74.00	-27.44	peak	
4		2390.000	31.05	8.05	39.10	54.00	-14.90	AVG	
5	X	2402.000	92.90	8.06	100.96	74.00	26.96	peak	No Limit
6	*	2402.000	92.37	8.06	100.43	54.00	46.43	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

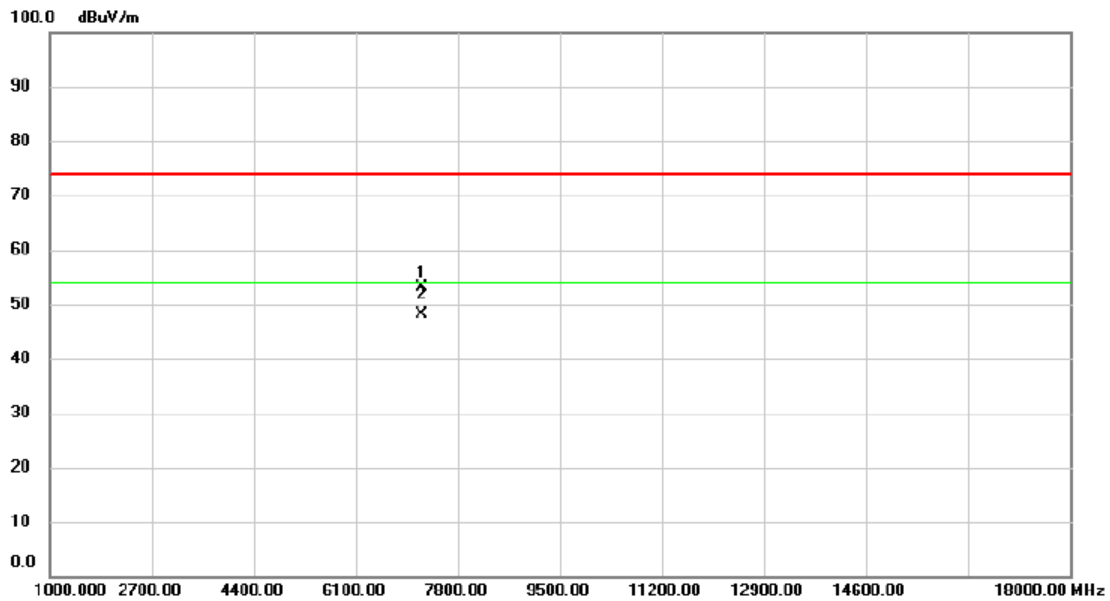


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7205.220	43.04	10.01	53.05	74.00	-20.95	peak	
2	*	7205.900	38.19	10.00	48.19	54.00	-5.81	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

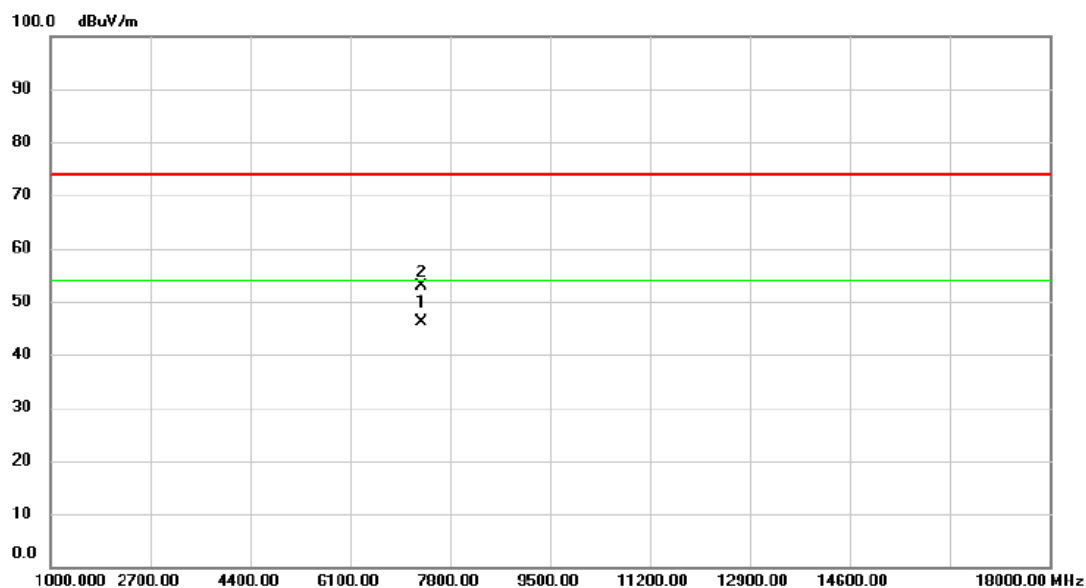


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7320.060	35.89	10.15	46.04	54.00	-7.96	AVG	
2		7320.680	42.80	10.15	52.95	74.00	-21.05	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

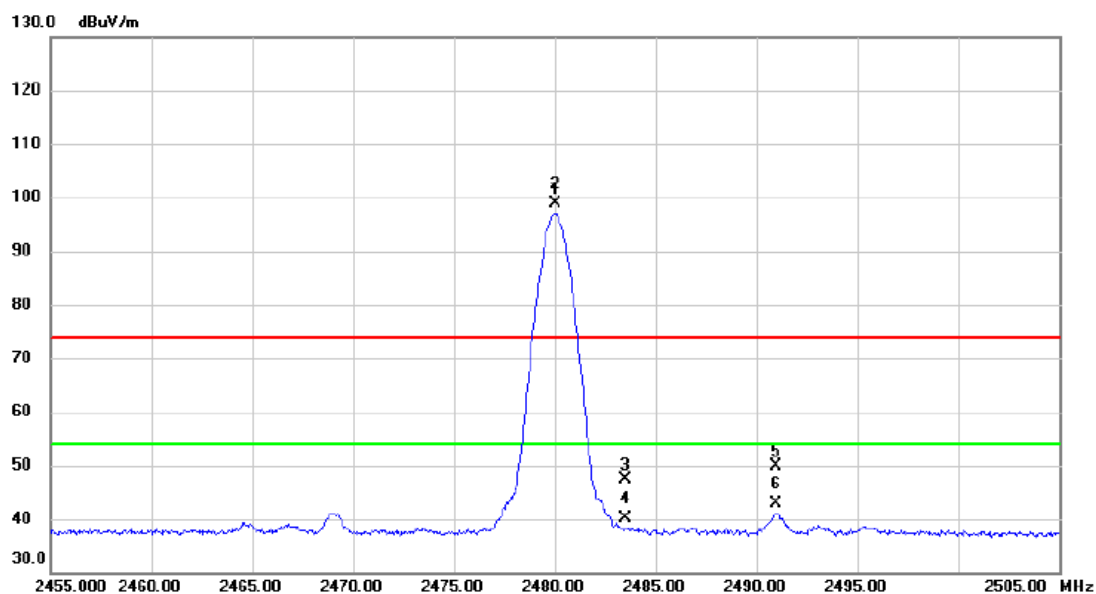


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2480.000	90.89	8.11	99.00	74.00	25.00	peak	No Limit
2	*	2480.000	90.74	8.11	98.85	54.00	44.85	AVG	No Limit
3		2483.500	39.31	8.11	47.42	74.00	-26.58	peak	
4		2483.500	32.11	8.11	40.22	54.00	-13.78	AVG	
5		2490.950	41.75	8.11	49.86	74.00	-24.14	peak	
6		2490.950	34.77	8.11	42.88	54.00	-11.12	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

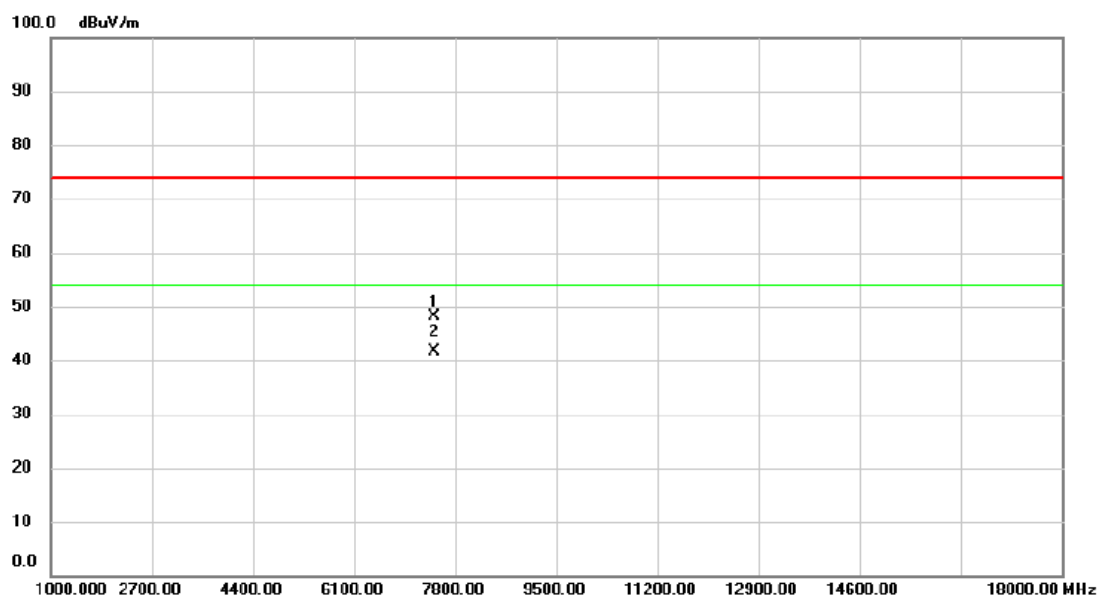


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7439.540	37.92	10.31	48.23	74.00	-25.77	peak	
2	*	7440.140	31.20	10.31	41.51	54.00	-12.49	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

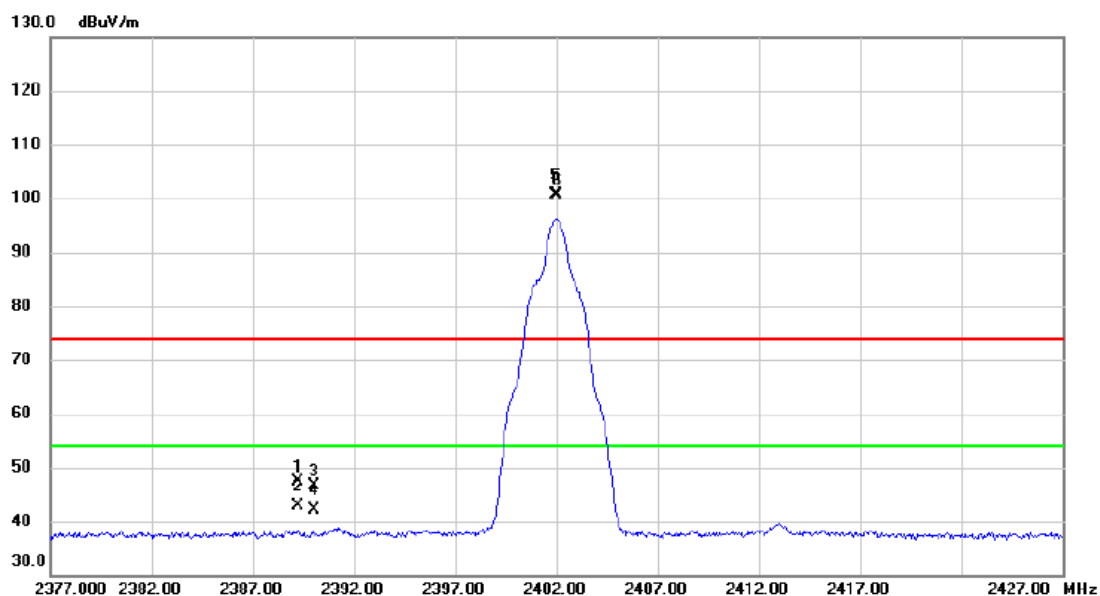


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.250	39.22	8.04	47.26	74.00	-26.74	peak	
2		2389.250	34.93	8.04	42.97	54.00	-11.03	AVG	
3		2390.000	38.60	8.05	46.65	74.00	-27.35	peak	
4		2390.000	34.01	8.05	42.06	54.00	-11.94	AVG	
5	*	2401.950	92.55	8.06	100.61	54.00	46.61	AVG	No Limit
6	X	2402.000	92.67	8.06	100.73	74.00	26.73	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

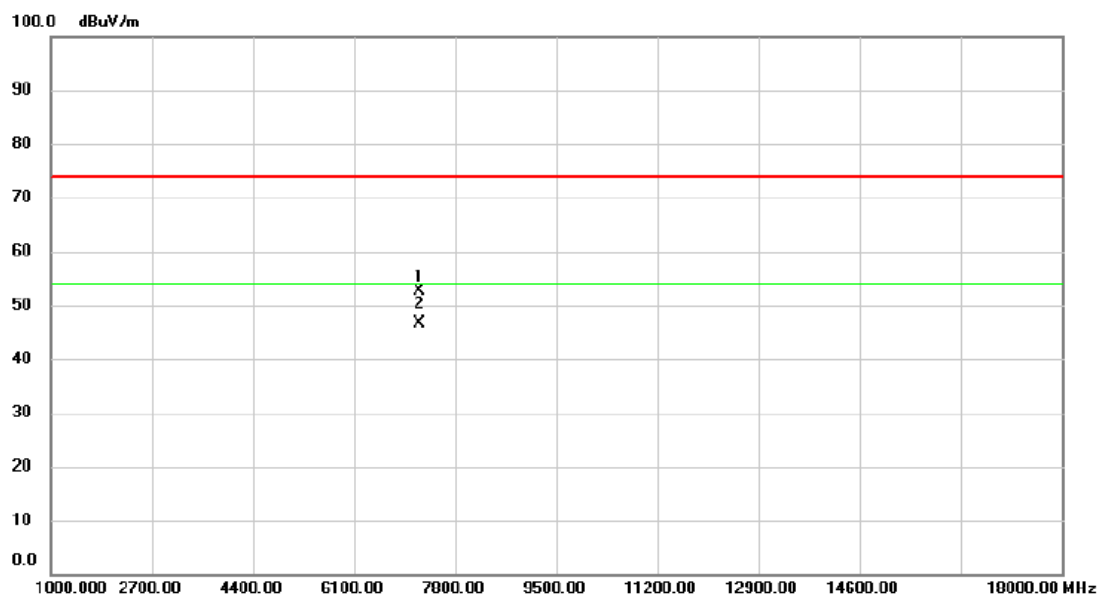


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7205.840	42.51	10.01	52.52	74.00	-21.48	peak	
2	*	7205.900	36.68	10.00	46.68	54.00	-7.32	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

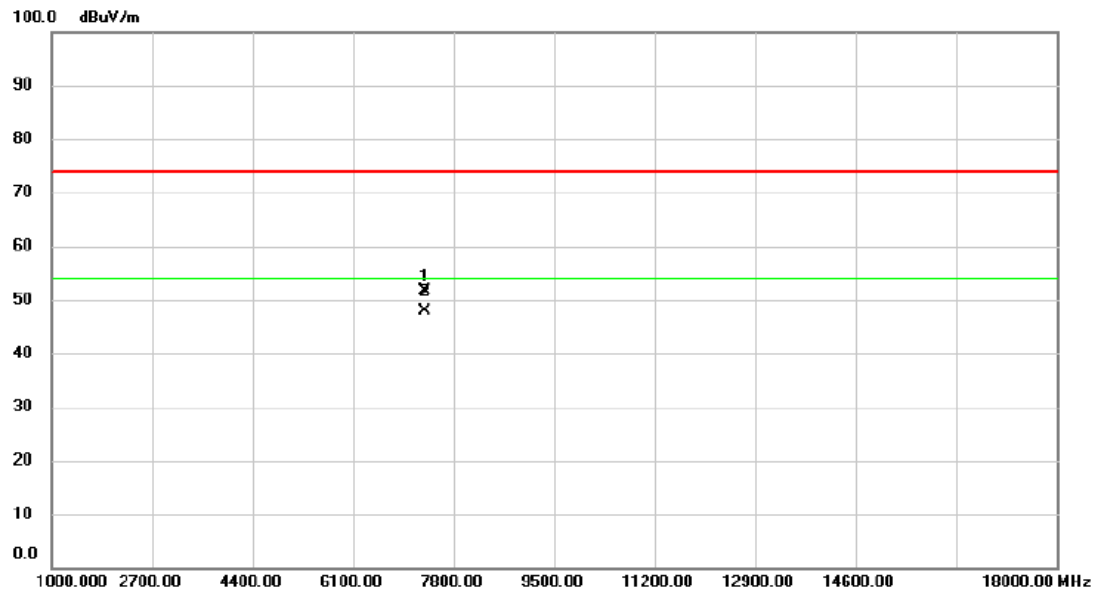


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7319.820	41.52	10.15	51.67	74.00	-22.33	peak	
2	*	7320.040	37.79	10.15	47.94	54.00	-6.06	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

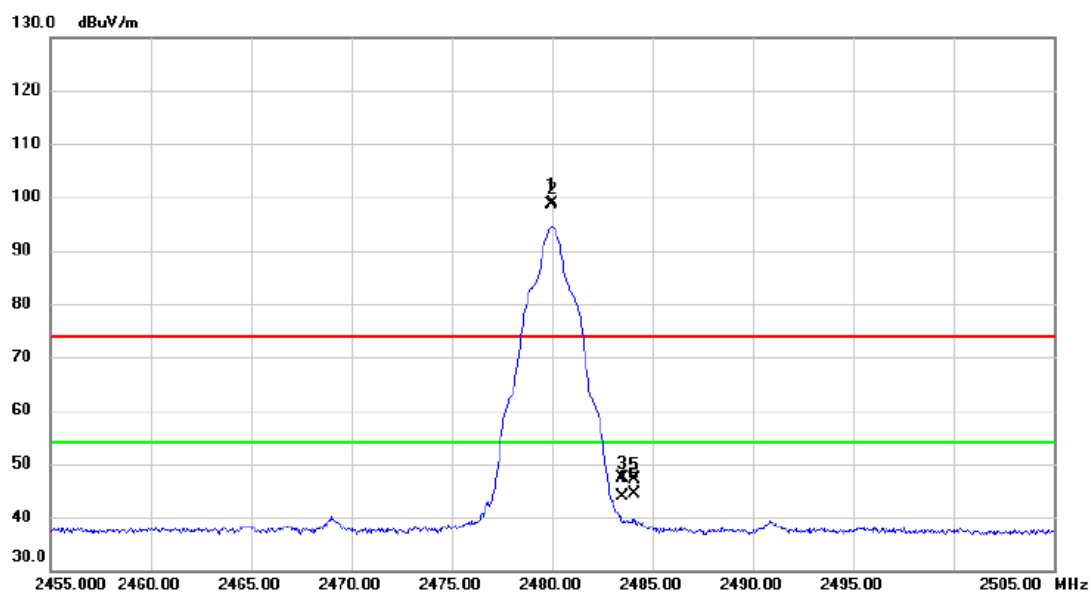


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2479.950	90.41	8.11	98.52	54.00	44.52	AVG	No Limit
2	X	2480.050	90.88	8.11	98.99	74.00	24.99	peak	No Limit
3		2483.500	39.26	8.11	47.37	74.00	-26.63	peak	
4		2483.500	35.70	8.11	43.81	54.00	-10.19	AVG	
5		2484.100	38.91	8.11	47.02	74.00	-26.98	peak	
6		2484.100	36.15	8.11	44.26	54.00	-9.74	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

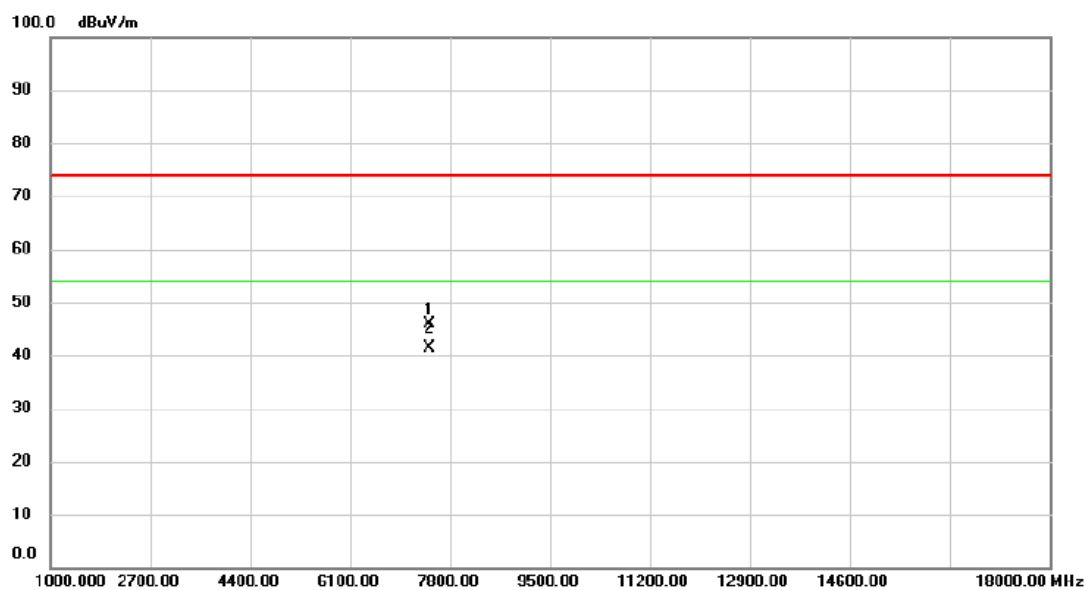


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.920	35.62	10.31	45.93	74.00	-28.07	peak	
2 *	7440.000	31.10	10.31	41.41	54.00	-12.59	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

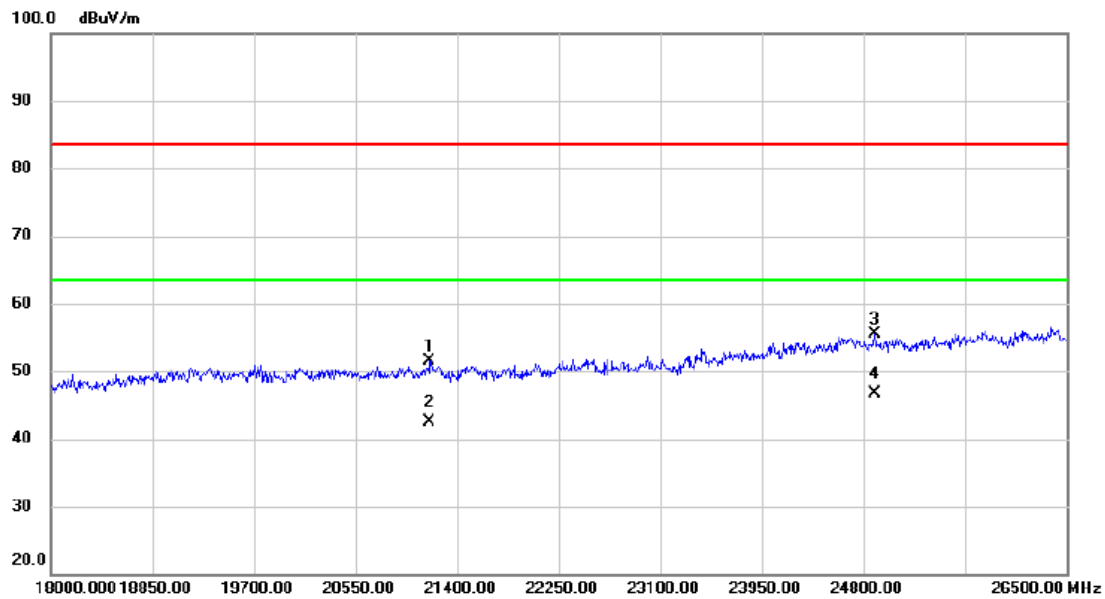


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		21170.500	48.89	2.60	51.49	83.50	-32.01	peak	
2		21170.500	39.93	2.60	42.53	63.50	-20.97	AVG	
3		24893.500	47.39	8.09	55.48	83.50	-28.02	peak	
4	*	24893.500	38.61	8.09	46.70	63.50	-16.80	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

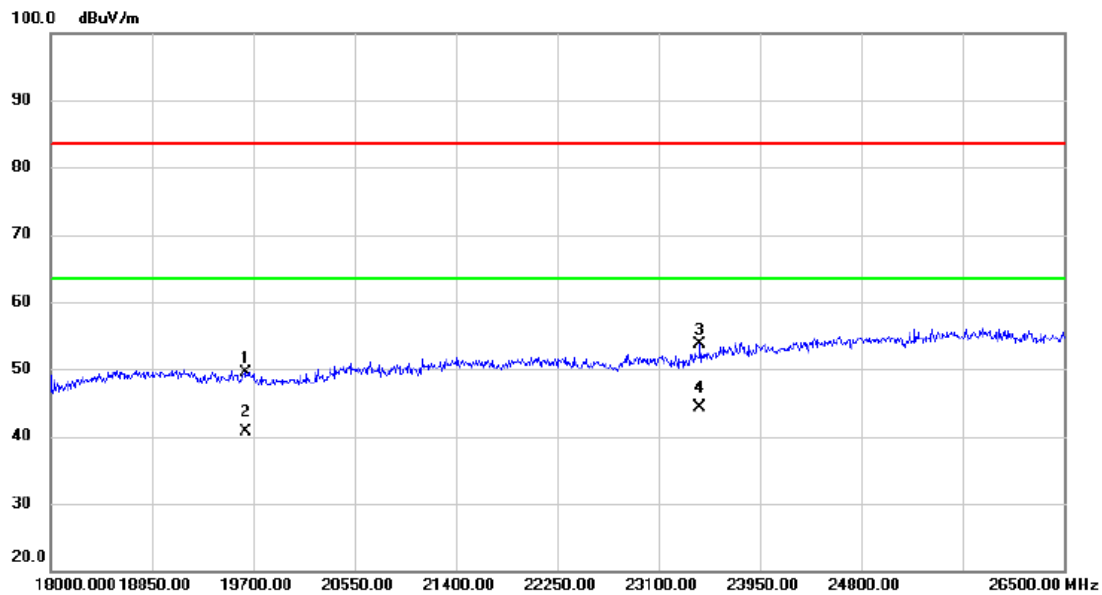

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		19632.000	48.11	1.44	49.55	83.50	-33.95	peak	
2		19632.000	39.30	1.44	40.74	63.50	-22.76	AVG	
3		23448.500	48.49	5.25	53.74	83.50	-29.76	peak	
4 *		23448.500	39.12	5.25	44.37	63.50	-19.13	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

The Worst Case:

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

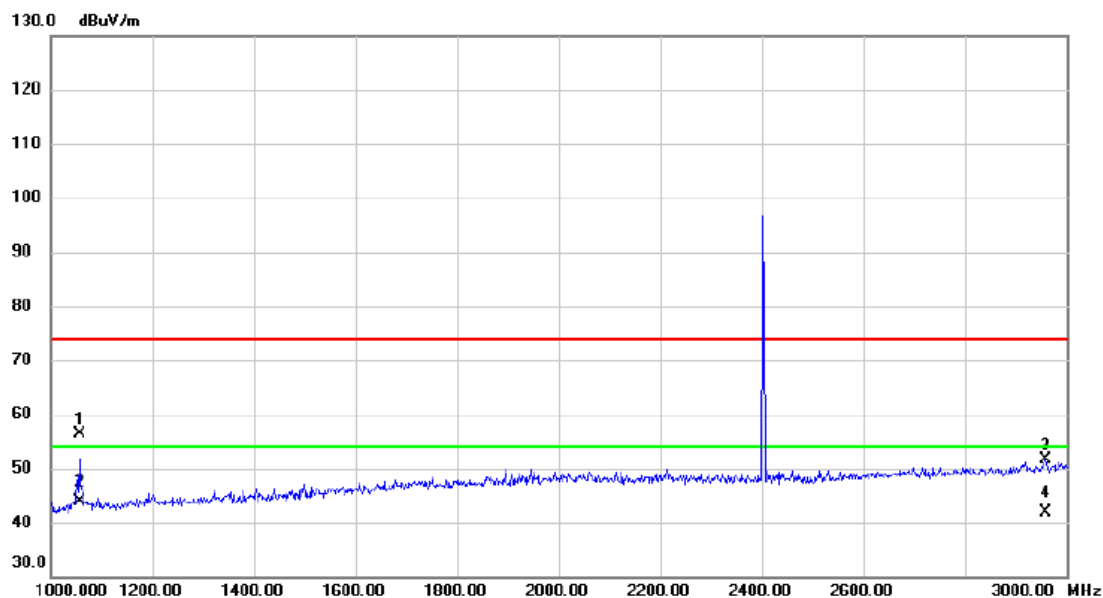


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1056.000	55.04	1.38	56.42	74.00	-17.58	peak	
2	*	1056.020	42.40	1.38	43.78	54.00	-10.22	AVG	
3		2958.000	42.16	9.43	51.59	74.00	-22.41	peak	
4		2958.000	32.48	9.43	41.91	54.00	-12.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

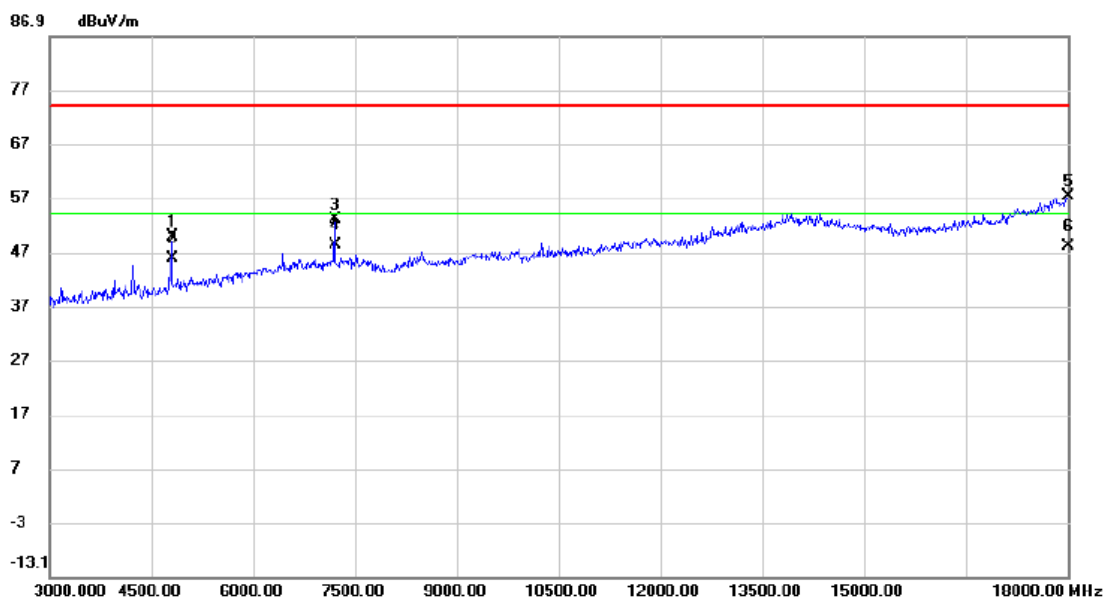

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4803.720	47.10	2.63	49.73	74.00	-24.27	peak	
2		4804.000	43.26	2.63	45.89	54.00	-8.11	AVG	
3		7205.220	44.39	8.66	53.05	74.00	-20.95	peak	
4 *		7205.900	39.54	8.65	48.19	54.00	-5.81	AVG	
5		18000.000	41.78	15.40	57.18	74.00	-16.82	peak	
6		18000.000	32.56	15.40	47.96	54.00	-6.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	TX Mode_1Mbps
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.504	1.056	0.5	Pass
19	2440	0.504	1.048	0.5	Pass
39	2480	0.504	1.048	0.5	Pass

CH00

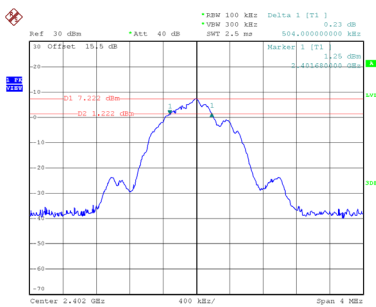


Date: 16.JUN.2026 10:00:12

CH19
6 dB Bandwidth

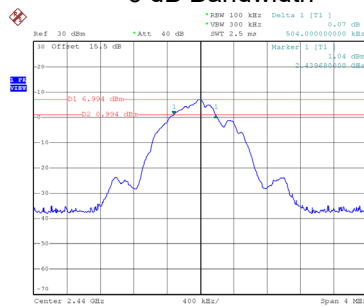


Date: 16.JUN.2026 10:09:32

CH39

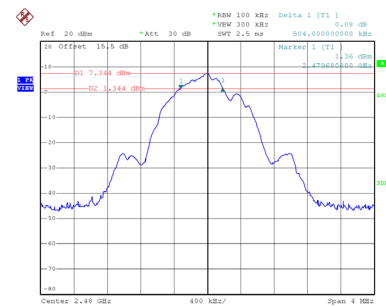


Date: 16.JUN.2026 10:46:52


99 % Occupied Bandwidth

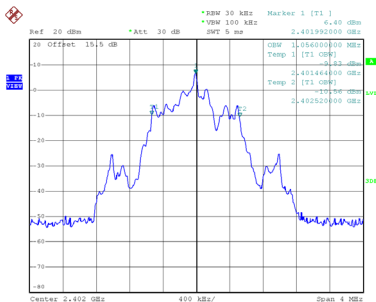

Date: 16.JUN.2026 10:00:24

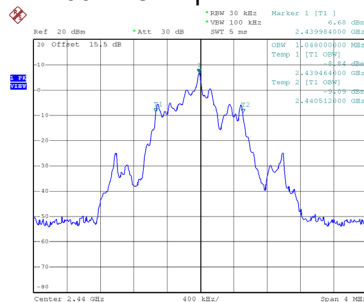

Date: 16.JUN.2026 10:09:44

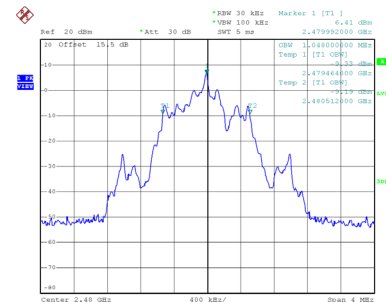


Date: 16.JUN.2026 10:47:59

APPENDIX F - MAXIMUM OUTPUT POWER


Test Mode	TX Mode_1Mbps
-----------	---------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	7.17	0.0052	30.00	1.0000	Pass
2440	7.26	0.0053	30.00	1.0000	Pass
2480	7.39	0.0055	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

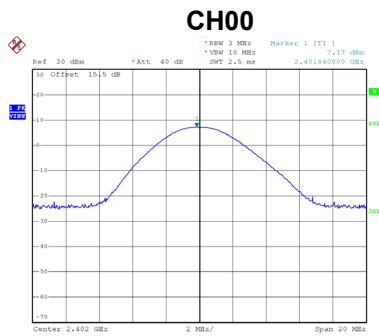

Date: 16.JUN.2026 09:59:59

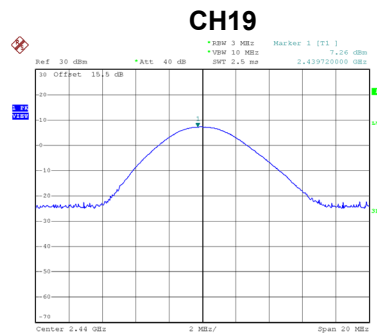

Date: 16.JUN.2026 10:07:47

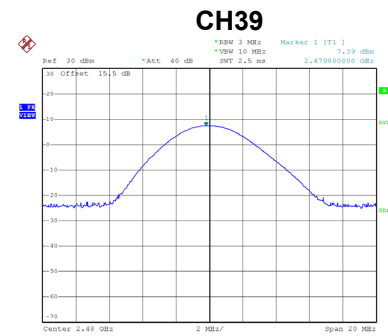


Date: 16.JUN.2026 10:29:59


Test Mode	TX Mode_2Mbps
-----------	---------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	7.20	0.0052	30.00	1.0000	Pass
2440	7.20	0.0052	30.00	1.0000	Pass
2480	6.96	0.0050	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

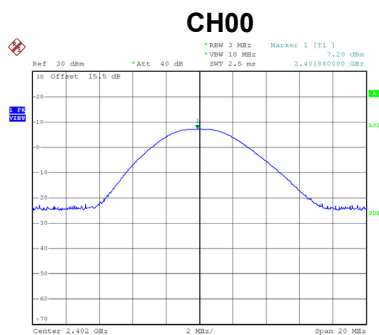

Date: 16.JUN.2026 10:50:12

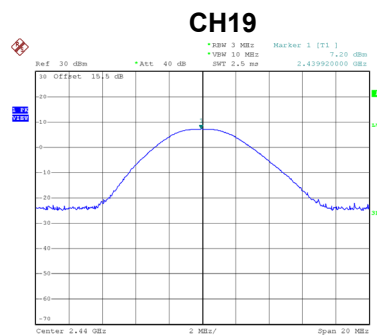

Date: 16.JUN.2026 10:53:53

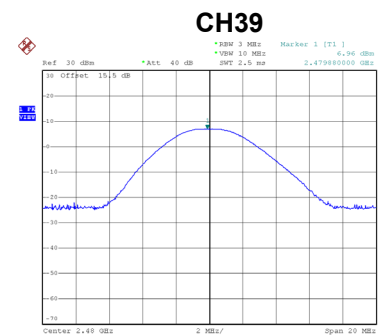


Date: 16.JUN.2026 11:02:08

APPENDIX G - CONDUCTED SPURIOUS EMISSION


Test Mode TX Mode_1Mbps

Reference Level-CH00

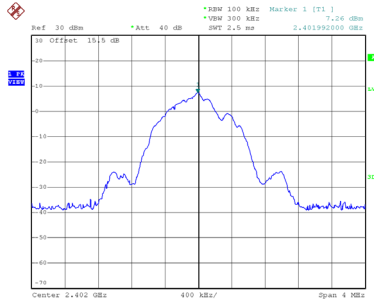


Date: 16.JUN.2026 10:01:17

Reference Level-CH19

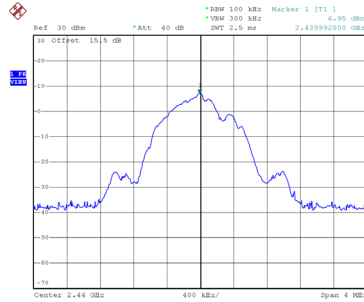


Date: 16.JUN.2026 10:10:08

Reference Level-CH39

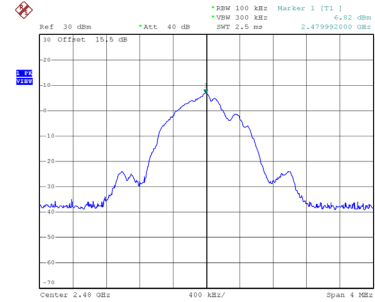


Date: 16.JUN.2026 10:48:22

Bandedge-CH00

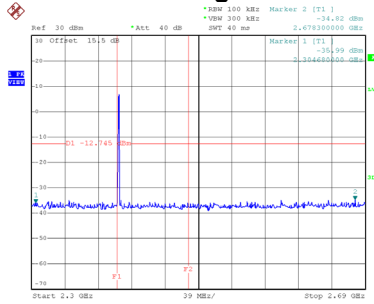


Date: 16.JUN.2026 10:01:29

Bandedge-CH39

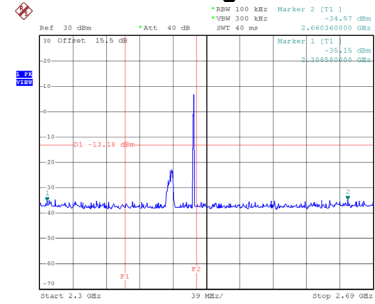


Date: 16.JUN.2026 10:48:35

Harmonic-CH00

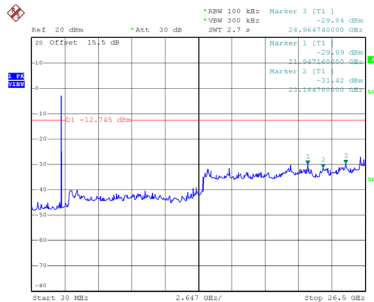


Date: 16.JUN.2026 10:02:18

Harmonic-CH19

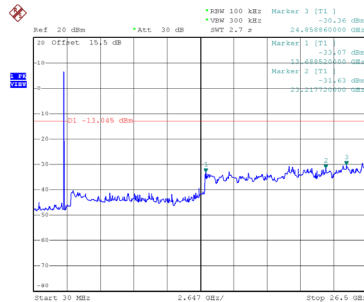

Date: 16.JUN.2026 10:10:49


Harmonic-CH39

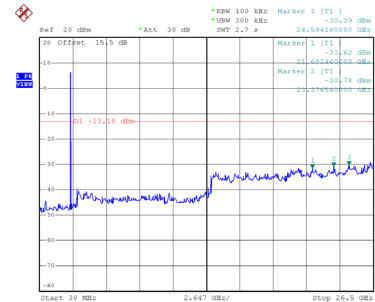

Date: 16.JUN.2026 10:48:47


Test Mode TX Mode_2Mbps

Reference Level-CH00

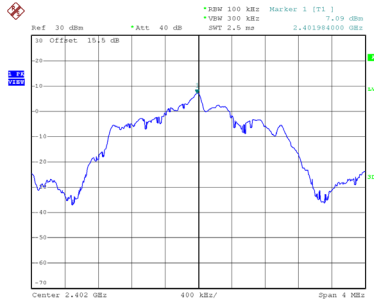


Date: 16.JUN.2026 10:51:00

Reference Level-CH19

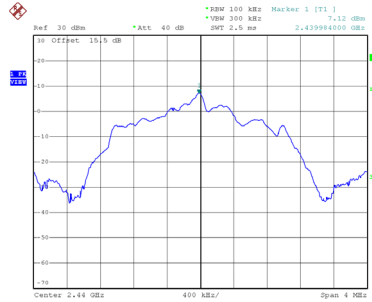


Date: 16.JUN.2026 10:59:44

Reference Level-CH39

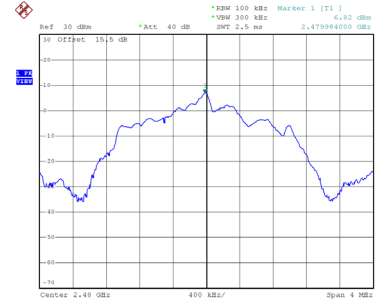


Date: 16.JUN.2026 11:02:56

Bandedge-CH00

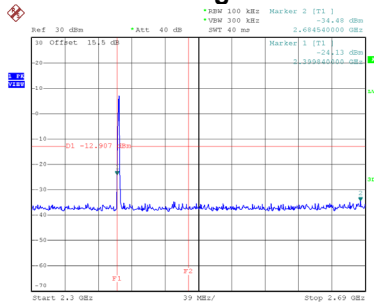


Date: 16.JUN.2026 10:51:12

Bandedge-CH39

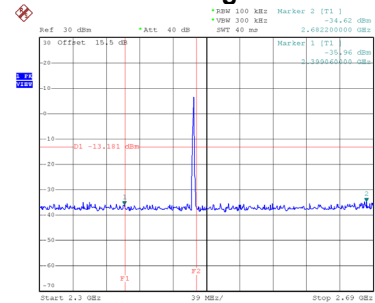


Date: 16.JUN.2026 11:03:09

Harmonic-CH00

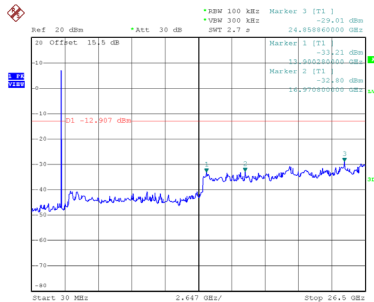


Date: 16.JUN.2026 10:51:25

Harmonic-CH19

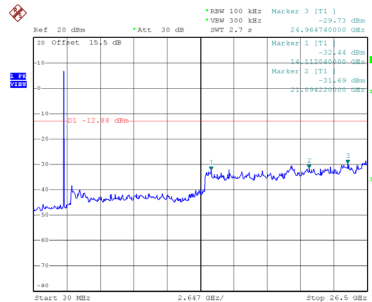

Date: 16.JUN.2026 11:01:13

Harmonic-CH39

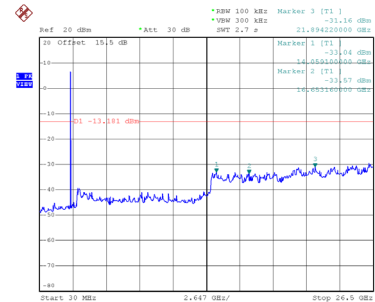


Date: 16.JUN.2026 11:03:21

APPENDIX H - POWER SPECTRAL DENSITY

Test Mode	TX Mode_1Mbps
-----------	---------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	5.51	8.00	Pass
19	2440	5.72	8.00	Pass
39	2480	5.54	8.00	Pass

CH00

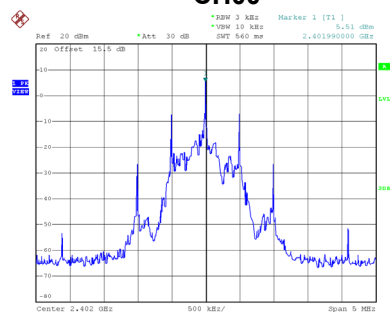


Date: 16.JUN.2026 10:01:05

CH19

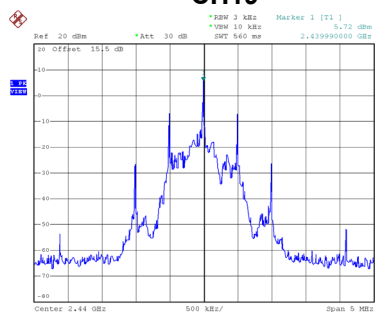

Date: 16.JUN.2026 10:09:56

CH39

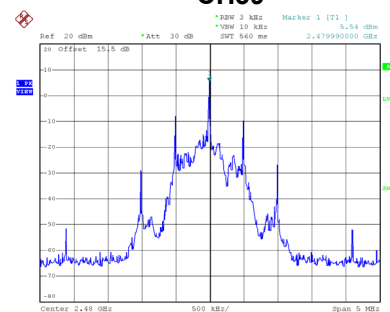


Date: 16.JUN.2026 10:48:10

Test Mode	TX Mode_2Mbps
-----------	---------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	1.37	8.00	Pass
19	2440	1.27	8.00	Pass
39	2480	0.91	8.00	Pass

CH00

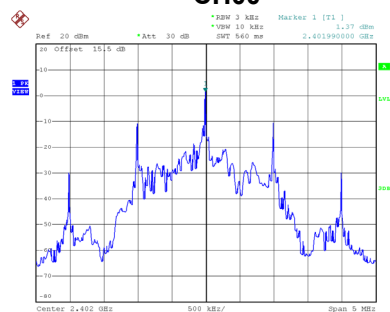

Date: 16.JUN.2026 10:50:48

CH19

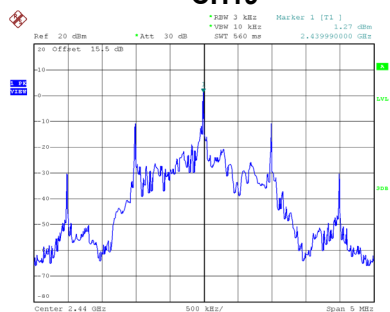

Date: 16.JUN.2026 10:54:29

CH39



Date: 16.JUN.2026 11:02:44

End of Test Report