



TEST REPORT

FCC ID: 2BWNZ-PETL2PLUS

Applicant: GOPETL LLC

Address: 10601 State St Ste # 4, Tamarac, FL 33321

Manufacturer: JIANGXI LITKCONN OPTICS CO.,LTD

Address: Shiren District, Longnan Economic and Technological Development Zone, Longnan City, Ganzhou City, Jiangxi Province

Product: PETL MagSafe Battery

Trade Mark: N/A

Model No.: PETL 2 PLUS

Date of Receipt: May 27, 2026

Test Date: May 27, 2026 - Jun. 04, 2026

Date of Report: Jun. 04, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 Subpart C
ANSI C63.10-2020+Cor 1-2023

Test Result: Pass

Report Number: DLE-260527011R

Prepared (Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

**TABLE OF CONTENT**

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY.....	3
3. GENERAL INFORMATION.....	4
4. TEST INSTRUMENT USED.....	6
5. CONDUCTED EMISSION TEST.....	7
6. RADIATION EMISSION TEST.....	11
7. BANDWIDTH TEST.....	17
8. ANTENNA REQUIREMENT.....	18
9. SETUP PHOTOGRAPHS.....	18
10. EUT PHOTOGRAPHS.....	18

**1. VERSION**

Version No.	Date	Description
00	Jun. 05, 2026	Original

2. TEST SUMMARY

EMC Emission			
Test Item	Section in CFR 47	Result	Remark
AC Power Line Conducted Emission	15.207	PASS	
Spurious Emission	15.209(a)(f)	PASS	
20dB Bandwidth	15.215	PASS	
Antenna requirement	15.203	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Test Lab: Shenzhen DL Testing Technology Co., Ltd.

101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1

Address: Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



3. GENERAL INFORMATION


3.1 Description of Device (EUT)

Product:	PETL MagSafe Battery
Trade Mark:	N/A
Model No.:	PETL 2 PLUS
Model Difference:	N/A
Serial No.:	N/A
Hardware version:	H1.0
Software version:	S1.0
Operation Frequency:	115kHz ~ 205KHz
Modulation type:	MSK
Antenna Type:	Coil Antenna
Antenna gain:	0dBi
Power Supply:	Battery Capacity: 3.85V/5000mAh USB-C Input: 5V/2A; 9V/2A Phone Wireless charger output: 5W//10W/15W Watch wireless charging output: 2.5W Earphone wireless charging output: 5W

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up

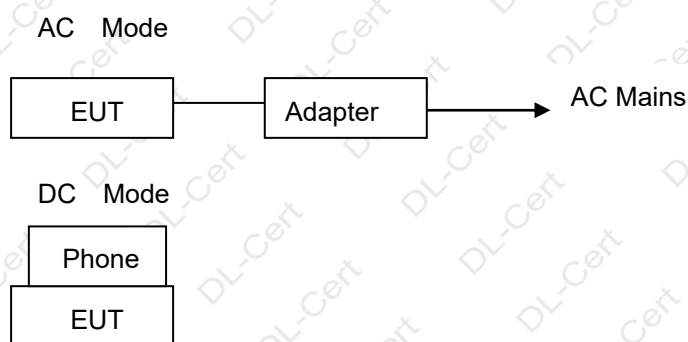



3.4 Test Mode Description

- Mode1. Type-C Input+ Wireless charger Output Mode(Full Load, 1%/50%/99%)
- Mode2. Type-C Input+ Wireless charger Output Mode(Half Load, 1%/50%/99%)
- Mode3. Type-C Input+ Wireless charger Output Mode(No Load, 1%/50%/99%)
- Mode4. Phone Wireless charger Output Mode(Full Load, 1%/50%/99%)
- Mode5. Phone Wireless charger Output Mode(Half Load, 1%/50%/99%)
- Mode6. Phone Wireless charger Output Mode(No Load, 1%/50%/99%)
- Mode7. Watch Wireless charger Output Mode(Full Load, 1%/50%/99%)
- Mode8. Watch Wireless charger Output Mode(Half Load, 1%/50%/99%)
- Mode9. Watch Wireless charger Output Mode(No Load, 1%/50%/99%)
- Mode10. Earphone Wireless charger Output Mode(Full Load, 1%/50%/99%)
- Mode11. Earphone Wireless charger Output Mode(Half Load, 1%/50%/99%)
- Mode12. Earphone Wireless charger Output Mode(No Load, 1%/50%/99%)

Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode (99%) is showed in this report.

2. All modes have been tested, and the report only shows the results of the worst mode4.

3.5 Test Auxiliary Equipment

Mobile phone (Provide by test lab):	Adapter (Provide by test lab):
Manufacturer: SAMSUNG	Manufacturer: XIAOMI
Model: Galaxy S21 5G	Model: AD65G
Watch (Provide by test lab):	Earphone (Provide by test lab):
Manufacturer: Apple	Manufacturer: Apple
Model: Watch Series 6	Model: AirPods3

3.6 Test Uncertainty

Conducted Emission Uncertainty(150KHz-30MHz)	: $\pm 2.56\text{dB}$
20dB Bandwidth	: $\pm 0.5\text{kHz}$
Radiated Emission Uncertainty(9KHz-1GHz)	: $\pm 3.24\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
Clamp	COM-POWER	CLA-050	431071	Oct. 27, 2025	Oct. 26, 2026
3-Loop Antenna	DAZE	ZN30401	13021	Oct. 27, 2025	Oct. 26, 2026
ISN T8	Schwarzbeck	NTFM 8158	101135	Oct. 25, 2025	Oct. 24, 2026
ISN T5	Schwarzbeck	NTFM 8158	101136	Oct. 25, 2025	Oct. 24, 2026
843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026
843 Cable 1#	ChengYu	CE Cable	002	Oct. 25, 2025	Oct. 24, 2026

For Radiated Emission Test (966 chamber)


Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
EMI Receiver	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
Amplifier	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
Amplifier	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Oct. 26, 2025	Oct. 25, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Oct. 26, 2025	Oct. 25, 2026
Loop Antenna	ZHINAN	ZN30900A	/	Oct. 25, 2025	Oct. 24, 2026
966 Cable 1#	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
966 Cable 2#	ChengYu	966	003	Nov. 06, 2023	Nov. 05, 2026



5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

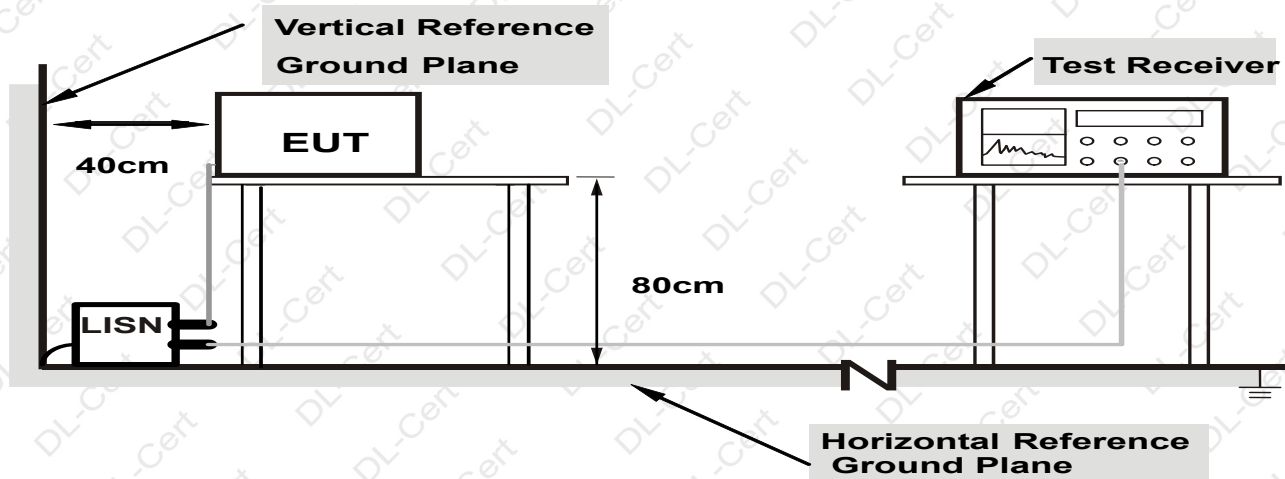

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

FCC Part 15 Subpart C

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC Part 15 Subpart C requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.10** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor

5.6 Test Result


PASS

Please refer to the following page.



Conducted Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4(Portable)

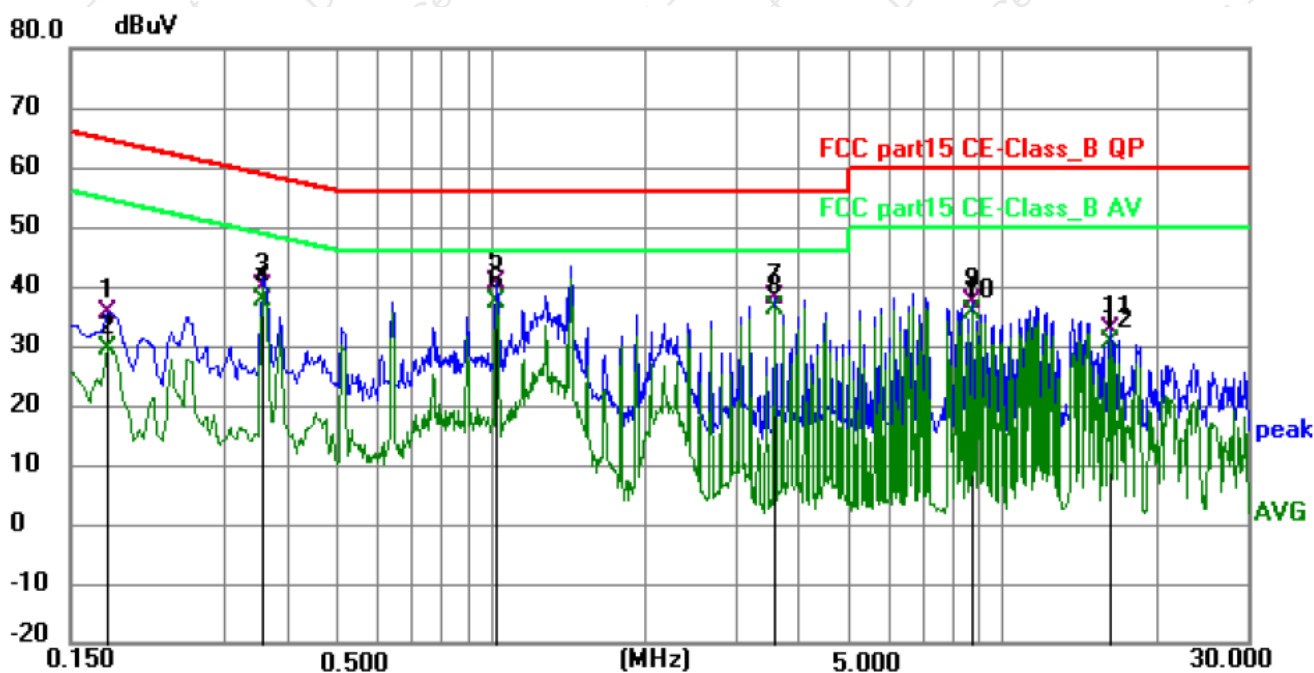


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1770	25.48	9.96	35.44	64.63	-29.19	QP	P	
2	0.1770	19.45	9.96	29.41	54.63	-25.22	AVG	P	
3	0.3570	29.88	9.91	39.79	58.80	-19.01	QP	P	
4	0.3570	27.67	9.91	37.58	48.80	-11.22	AVG	P	
5	1.0230	30.64	9.84	40.48	56.00	-15.52	QP	P	
6 *	1.0230	27.63	9.84	37.47	46.00	-8.53	AVG	P	
7	3.5835	28.06	10.08	38.14	56.00	-17.86	QP	P	
8	3.5835	26.28	10.08	36.36	46.00	-9.64	AVG	P	
9	8.7045	27.10	10.19	37.29	60.00	-22.71	QP	P	
10	8.7045	25.22	10.19	35.41	50.00	-14.59	AVG	P	
11	16.2555	22.45	10.23	32.68	60.00	-27.32	QP	P	
12	16.2555	20.32	10.23	30.55	50.00	-19.45	AVG	P	



Conducted Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4(Portable)

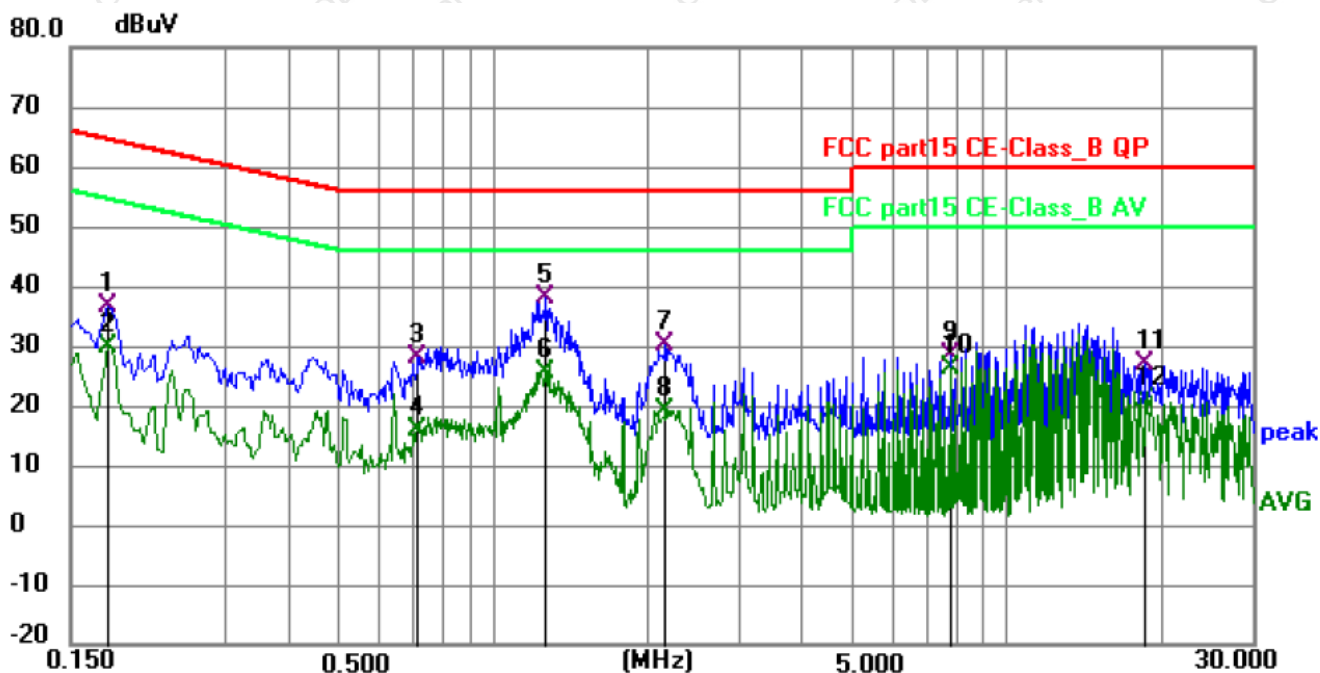


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1770	26.52	9.93	36.45	64.63	-28.18	QP	P	
2	0.1770	20.05	9.93	29.98	54.63	-24.65	AVG	P	
3	0.7125	18.25	9.88	28.13	56.00	-27.87	QP	P	
4	0.7125	6.19	9.88	16.07	46.00	-29.93	AVG	P	
5 *	1.2660	28.01	9.90	37.91	56.00	-18.09	QP	P	
6	1.2660	15.62	9.90	25.52	46.00	-20.48	AVG	P	
7	2.1570	20.08	9.97	30.05	56.00	-25.95	QP	P	
8	2.1570	9.14	9.97	19.11	46.00	-26.89	AVG	P	
9	7.8044	18.20	10.18	28.38	60.00	-31.62	QP	P	
10	7.8044	16.14	10.18	26.32	50.00	-23.68	AVG	P	
11	18.5550	16.64	10.20	26.84	60.00	-33.16	QP	P	
12	18.5550	10.66	10.20	20.86	50.00	-29.14	AVG	P	




6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

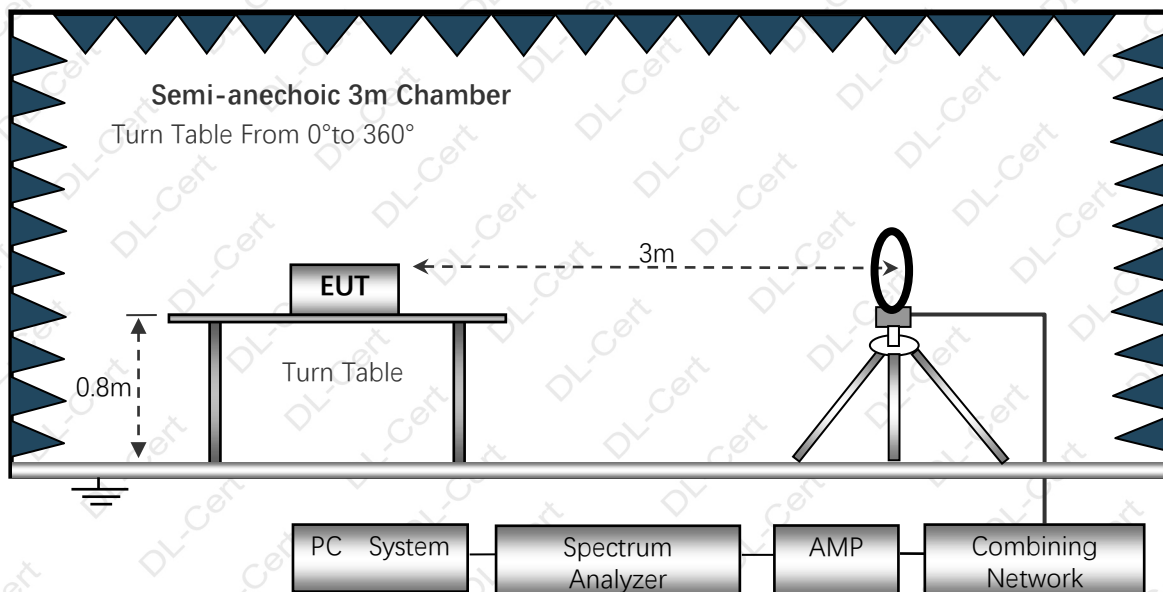

Below 1GHz

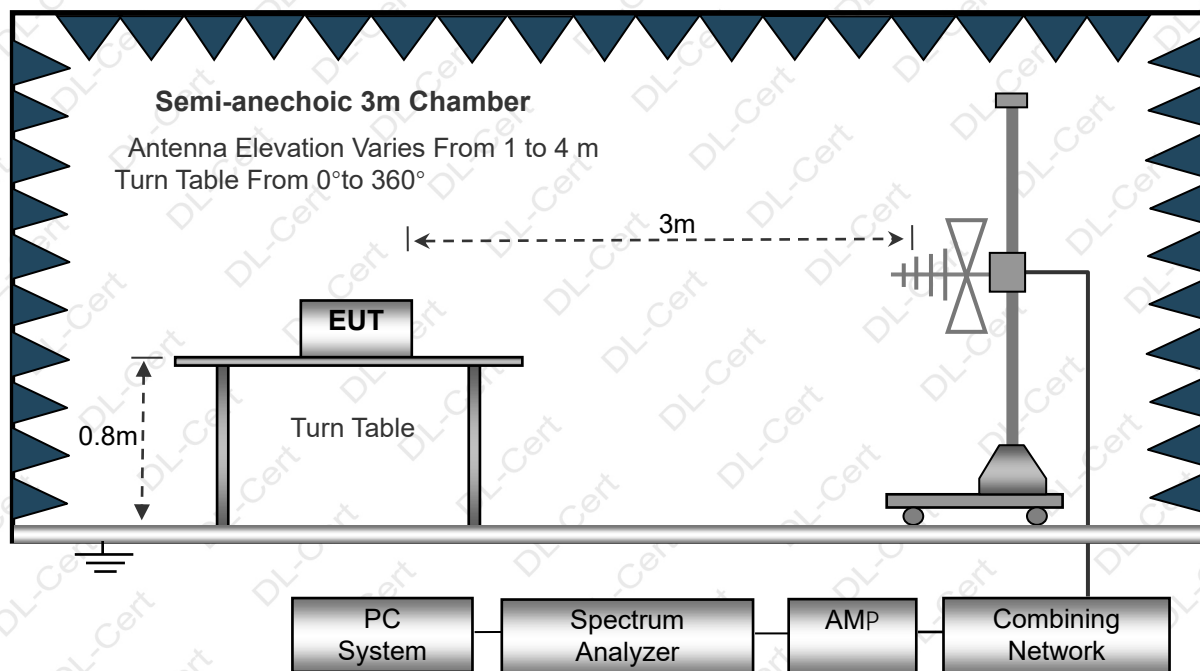

6.2 Test Standard and Limit

FCC Part 15 Subpart C



Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.090	2400/F(kHz)	300	AVERAGE
0.090-0.110	2400/F(kHz)	300	Quasi-peak Value
0.110-0.490	2400/F(kHz)	300	AVERAGE
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Above 30MHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)	Remark
30 ~ 88	3	40.0	Quasi-peak Value
88 ~ 216	3	43.5	Quasi-peak Value
216 ~ 960	3	46.0	Quasi-peak Value
960 ~ 1000	3	54.0	Quasi-peak Value
Above 1000	3	74.0	PEAK
		54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC Part 15 Subpart C regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.

6) The frequency range from 9KHz to 1000MHz is checked.

6.6 Test Result


PASS, Please refer to the following page.



All three polarization directions of the Loop antenna (Parallel, perpendicular, and ground) were pre-tested, and the results of the worst direction (Parallel) are shown in the report.

Radiation Emission Test Data 9 kHz~0.15MHz

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4(Portable)

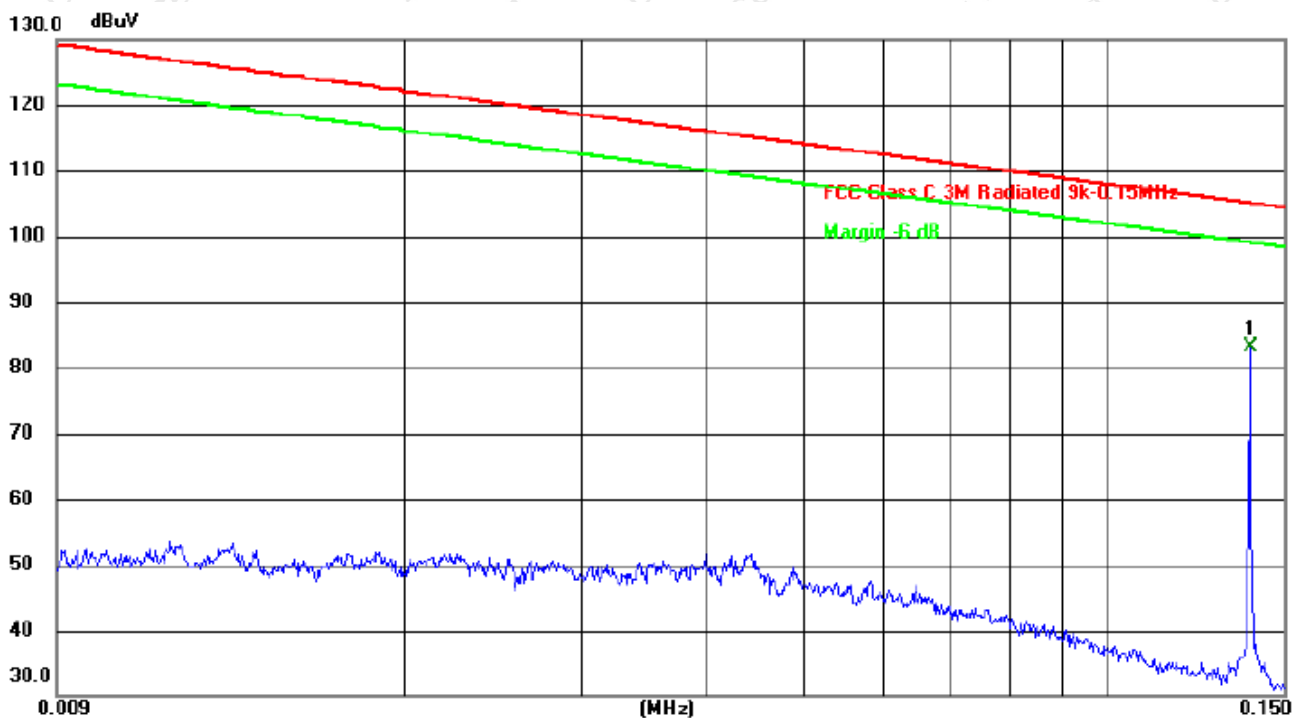

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.1386	82.71	9.13	91.84	105.04	-13.2	AVERAGE

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.

**Radiation Emission Test Data 0.15MHz~30 MHz**

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4(Portable)

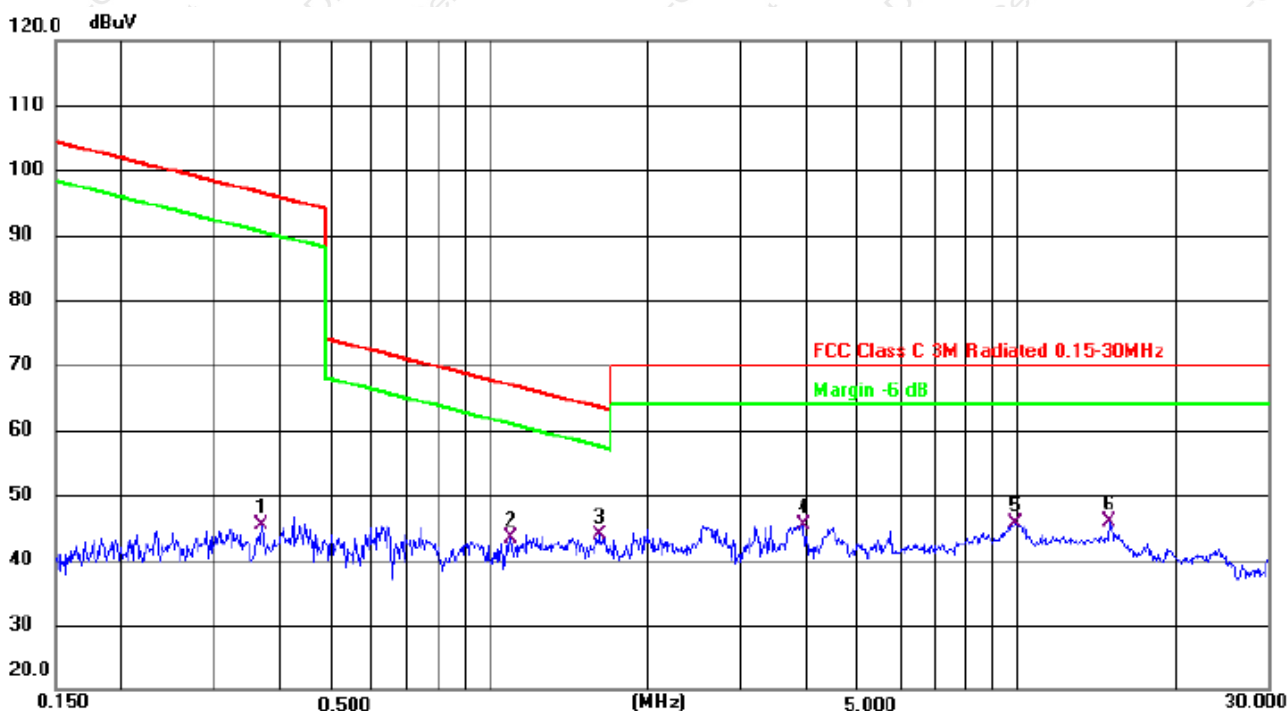

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
0.3689	44.27	9.15	53.42	96.48	-43.06	AVG
1.0938	42.87	9.72	52.59	66.92	-14.33	QP
1.6189	44.71	9.31	54.02	63.46	-9.44	QP
3.9220	46.15	9.36	55.51	70	-14.49	QP
9.9130	43.11	8.44	51.55	70	-18.45	QP
14.9068	44.89	9.52	54.41	70	-15.59	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4(Portable)

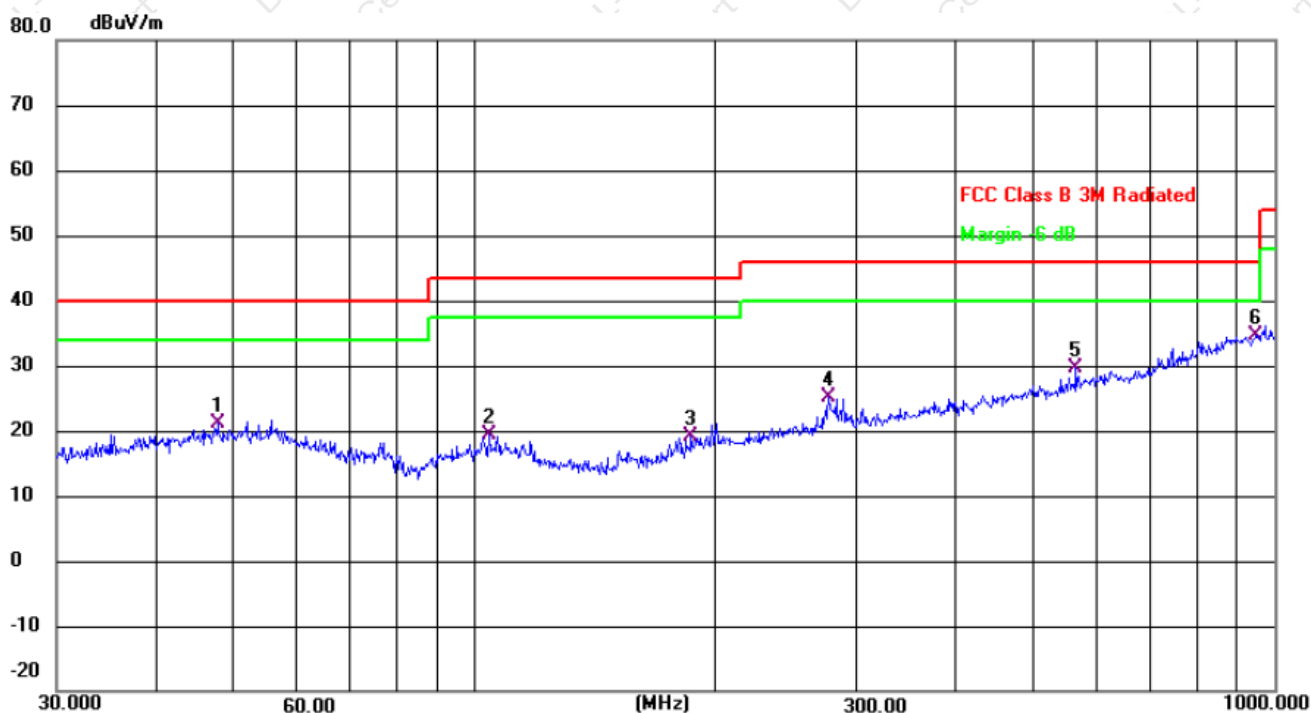


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		47.6586	28.07	-6.92	21.15	40.00	-18.85	QP
2		104.1701	28.52	-9.04	19.48	43.50	-24.02	QP
3		186.4409	28.88	-9.73	19.15	43.50	-24.35	QP
4		277.0935	31.65	-6.59	25.06	46.00	-20.94	QP
5		564.6389	29.95	-0.20	29.75	46.00	-16.25	QP
6	*	948.7610	28.08	6.65	34.73	46.00	-11.27	QP



Radiation Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 4(Portable)

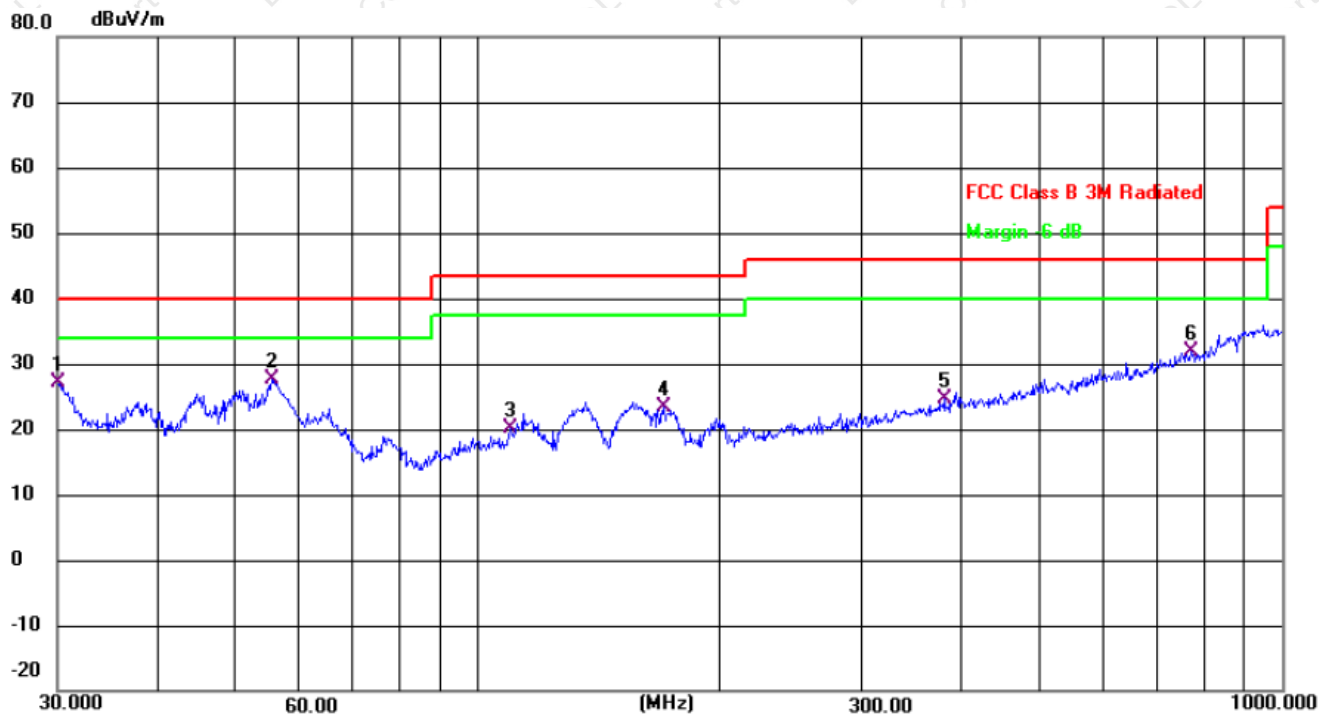

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		30.0000	36.80	-9.65	27.15	40.00	-12.85	QP
2	*	55.4147	35.17	-7.53	27.64	40.00	-12.36	QP
3		109.7960	29.19	-9.13	20.06	43.50	-23.44	QP
4		170.1948	34.85	-11.39	23.46	43.50	-20.04	QP
5		379.9141	28.35	-3.84	24.51	46.00	-21.49	QP
6		771.4486	28.18	3.60	31.78	46.00	-14.22	QP

Remarks:

- 1.Final Level =Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Preamplifier Factor)
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



7. BANDWIDTH TEST

7.1 TEST SETUP

1. Set RBW = 3kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.2 TEST SETUP



7.3 TEST Result

Frequency (KHz)	20dB bandwidth (KHz)	Result
138	8.248	Pass





8. ANTENNA REQUIREMENT

a) STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

b) EUT ANTENNA

The EUT antenna is Coil Antenna. It comply with the standard requirement.

9. SETUP PHOTOGRAPHS

Reference to the setup photo for details.

10. EUT PHOTOGRAPHS

Reference to the external and internal photo for details.

***** END OF REPORT *****