

规格承认书

Specification sheet

产品编码Customer P/N: 10009883

产品名称Product: EDIAG H351/361

规格描述Description: L*W*T=45.6*8.2*0.25MM,RF1.13 L=95MM,ROHS

产品料号Part No.: KC.IA.00793

日期Date: 2026.08.04


目 录 catalogue

1.封面 (Cover Page)	-----page(1 to 1)
2.目录(Content)	-----page(2 to 2)
3. 变更履历(ChangeHistory Sheet)	-----page(3 to 3)
4. 产品相片(Product photos)	-----page(3 to 3)
5. 机械及电气性能(Mechanics and Electrical Specification)	-----page(4 to 4)
6. 性能报告(Performance report)	-----page(5 to 7)
7. 成品图面(Customer Drawing)	-----page(8 to 8)
8. 包装规格(Packing Spec)	-----page(9 to 9)

3. 承认书变更履历（ChangeHistory Sheet）

版本（REV）	发起人（Originator）	日期（Date）	变更描述(Change Description)
A/1	LI	2026.08.04	First Version

4. 产品相片(Product photos):

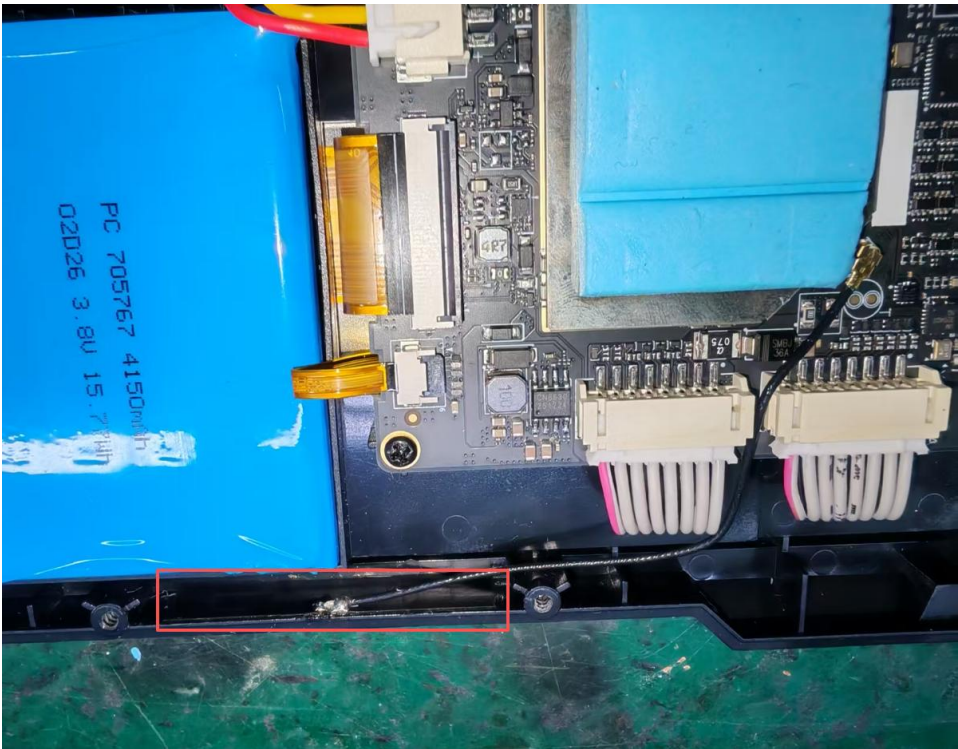


5. 机械及电气性能(Mechanics and Electrical Specification)

产品名称(Name)	EDIAG H351/361	产品型号(Model Type)	KC. IA. 00793
电 性 能 指 标 (Electrical Specifications)			
频率范围 (Frenquency Range)	2400-2500/5150-5850MHZ	极化方式(Polarization)	线极化
输入阻抗(Impedance)	50 Ω	辐射方向 (Radiation direction)	全向 omnidirectional
驻波比 (VSWR)	≦2	功率容量(Power)	10W
增益(Gain)	3.83 dBi (MAX)	带宽 (Bandwidth)	100/700MHZ
机 械 指 标 (Mechanical Specifications)			
尺寸 (Dimensions)	L*W*T=45.6*8.2*0.25MM	颜色(colour)	黑色black
连接器型号 (Connector)	IPEX-四代	引线长度(Cable Length)	95MM(RF1.13)
材料 Radome Material	FPC	防水 (waterproof)	/
工作温度 (Working Temperature)	-40℃--+85℃	存放温度 (Limit Temperature)	-40℃--+85℃
天线类型 (Antenna type)	monopole		

6 性能报告(Performance report)

6.1 测试项目及设备 Test Items and Equipment

	测试项目 Test Items	测试设备 Test Equipment
S Parameter	1. Return loss 2. VSWR	Network analyzer (Aglient E5071C)
The whole machine of Passive parameters	1. Frequency 2. Gain 3. Radiation Pattern	1.3D microwarve darkroom (4M*3M*3M) 2.Network analyzer
The whole machine of Active parameters	1. TRP 2. TIS	1.3D microwave darkroom (4M*3M*3M) 3. Comprehensive test instrument 4. (CMW500)(E7515E)
Instrument calibration	Once a year, Last calibration: 2025.10.22, Valid until:2026.10.21	

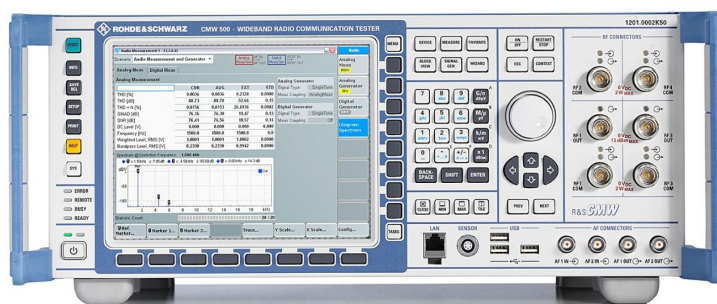

地址： 深圳市龙华区福城街道茜坑社区茜坑路 52 号


ADDRESS : 5th floor, No. 52, Xikeng Road, Xikeng community, Fucheng street, Longhua District, Shenzhen

电话 (TEL) : 0755-28199597

网址 (WEB) : www.toxutech.com

6.2 性能报告(Performance report)

6.2.1 电压驻波比（VSWR）：

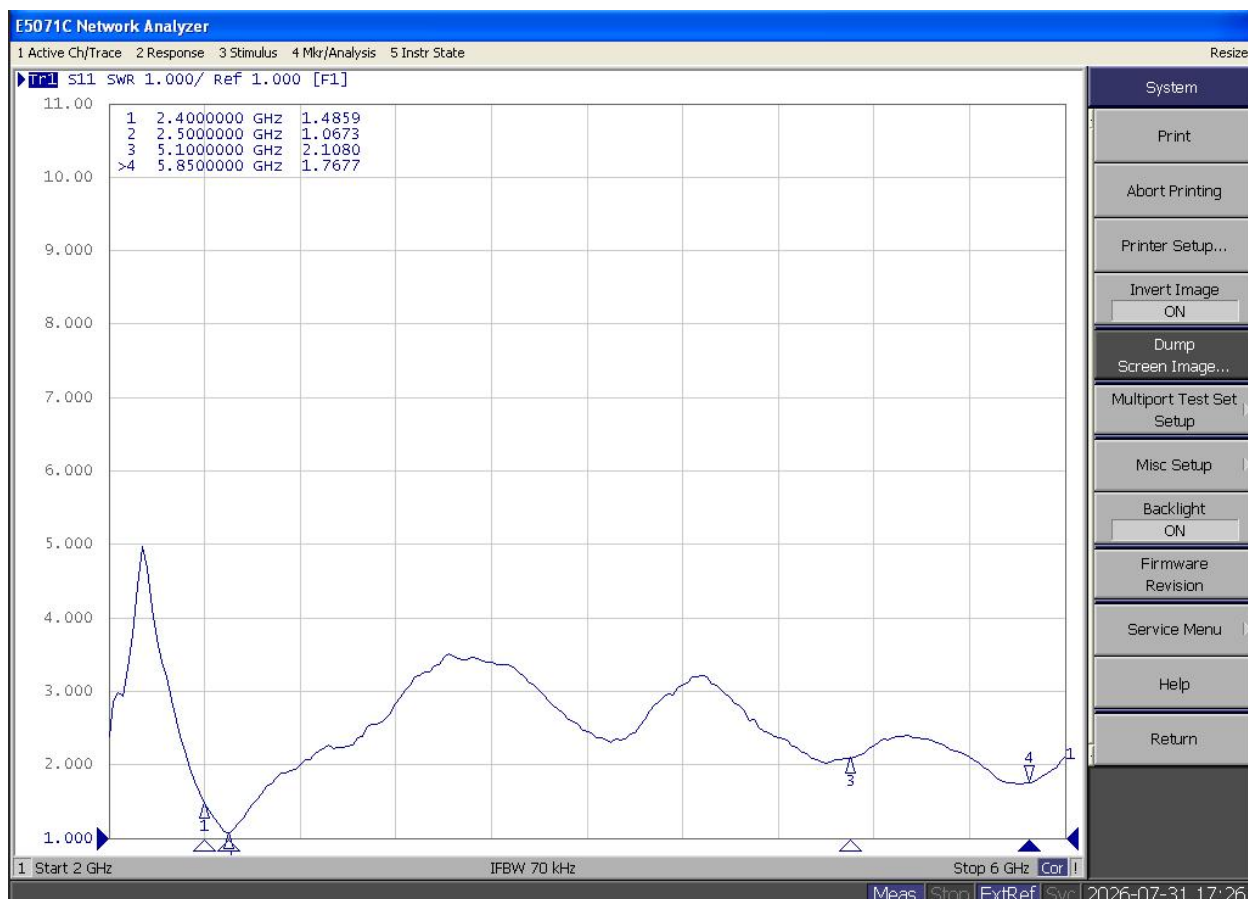

地址： 深圳市龙华区福城街道茜坑社区茜坑路 52 号

ADDRESS : 5th floor, No. 52, Xikeng Road, Xikeng community, Fucheng street, Longhua District, Shenzhen





电话 (TEL) : 0755-28199597

网址 (WEB) : www.toxutech.com

6.2.2 效率@增益（Efficiency and Gain）：

Frequency/Mhz	MaxGain/dBi	Efficiency / %	Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	3.11	45.29	5150	3.01	69.66
2410	3.47	48.08	5200	3.1	68.23
2420	3.48	49.66	5250	2.75	62.09
2430	3.17	51.52	5300	2.08	57.94
2440	3.18	48.98	5350	1.86	55.08
2450	3.67	52.36	5400	1.76	55.59
2460	3.25	50.12	5450	1.59	58.34
2470	2.84	50.58	5500	1.98	60.39
2480	3.49	54.83	5550	1.49	59.7
2490	3.3	54.95	5600	1.01	53.09
2500	3.83	58.21	5650	1.13	60.53
			5700	1.59	69.34
			5750	1.58	70.96
			5800	1.55	65.61
			5850	1.67	67.92

6.2.3 3D@2D 辐射方向（3D & 2D Radiation Pattern）：

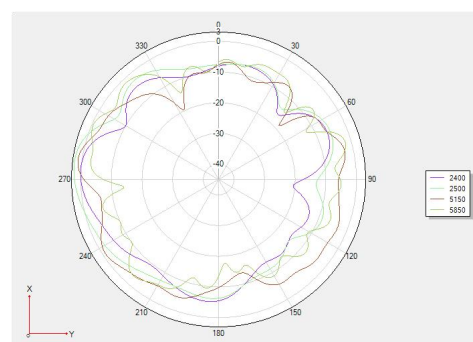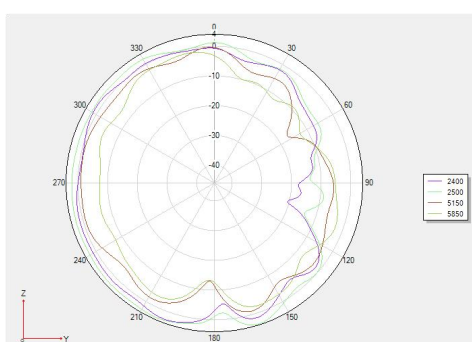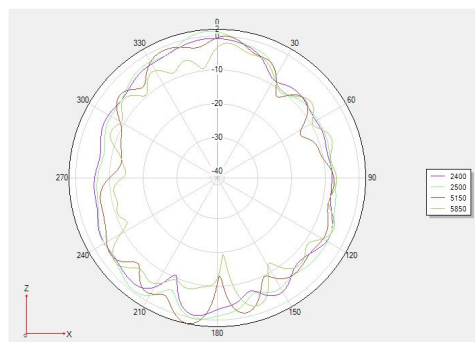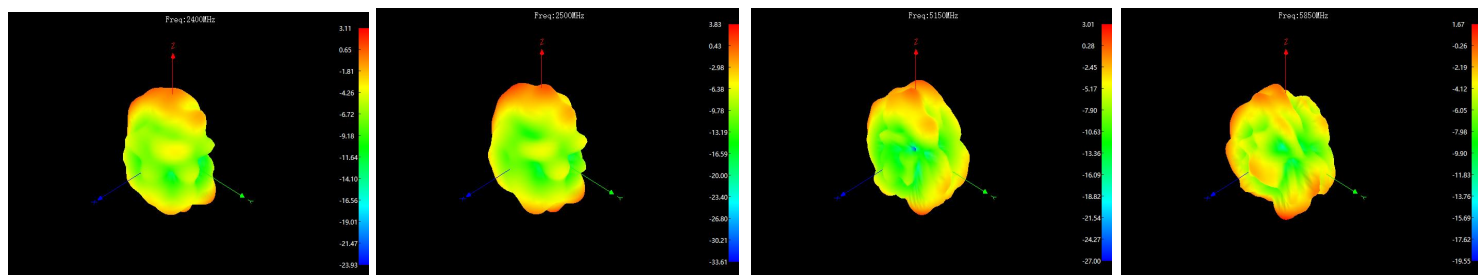


地址： 深圳市龙华区福城街道茜坑社区茜坑路 52 号

ADDRESS : 5th floor, No. 52, Xikeng Road, Xikeng community, Fucheng street, Longhua District, Shenzhen

电话 (TEL) : 0755-28199597


网址 (WEB) : www.toxutech.com

7.成品图（Customer Drawing）

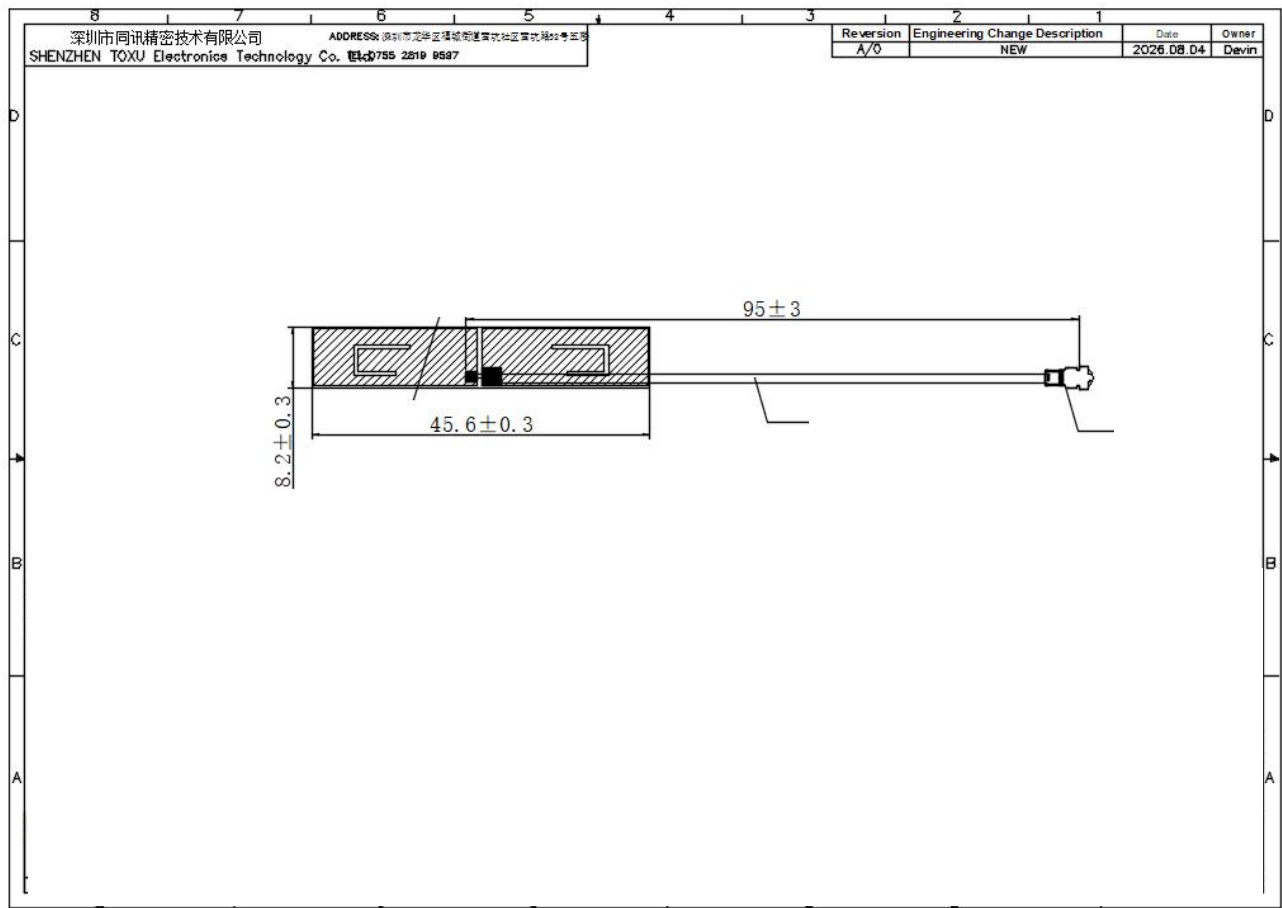

8. 包装方式（Packaging）：

Product number: XXXXX			
Product model: XXXXX			
一、Label requirements:			
Customer	XXX		
supplier	XXXXX		
Material coding	XX		
Product model	XX		
Number	XXX PCS	Factory date	X X X
Remarks			
二、Boxing:			
Job description:			
1. Inner packaging:			
XXpcs A bag			
2. External packaging:			
Xx PCS ;			
3. Matters needing attention:			
a. Whether to add partition and pearl cotton;			
b. Label attachments, such as ROHS, etc.;			

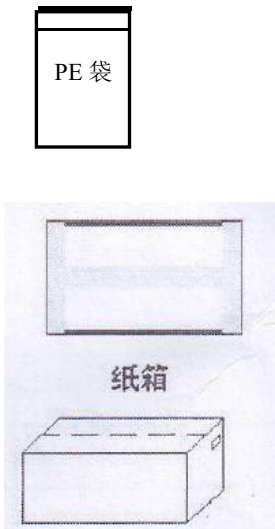

地址： 深圳市龙华区福城街道茜坑社区茜坑路 52 号

ADDRESS : 5th floor, No. 52, Xikeng Road, Xikeng community, Fucheng street, Longhua District, Shenzhen

电话 (TEL) : 0755-28199597

网址 (WEB) : www.toxutech.com