





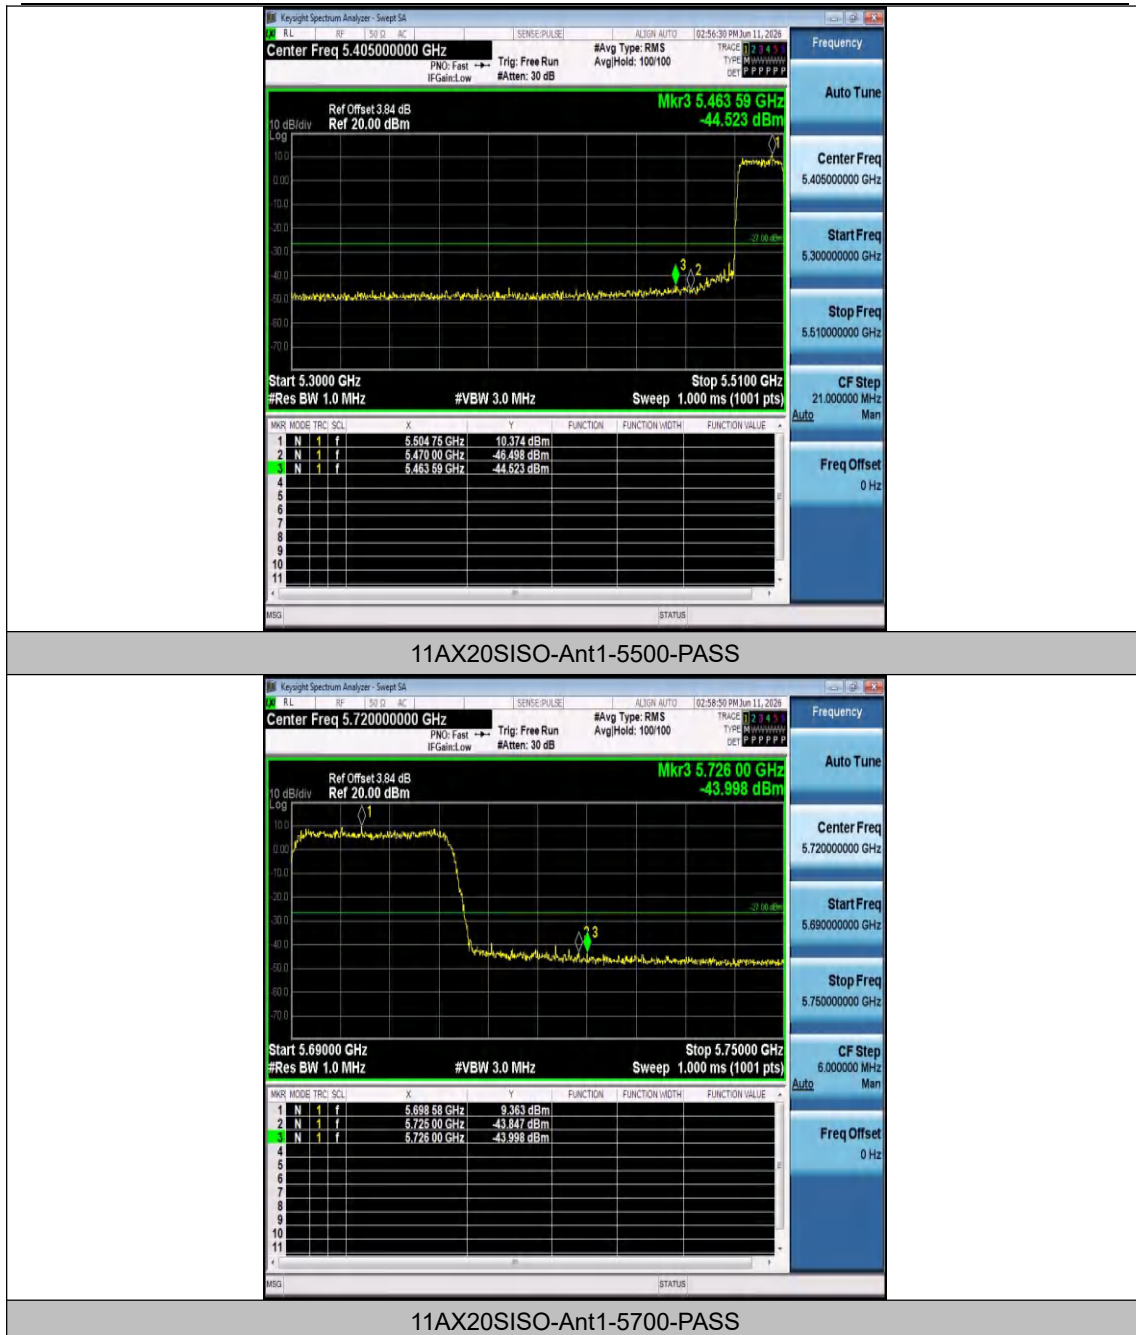


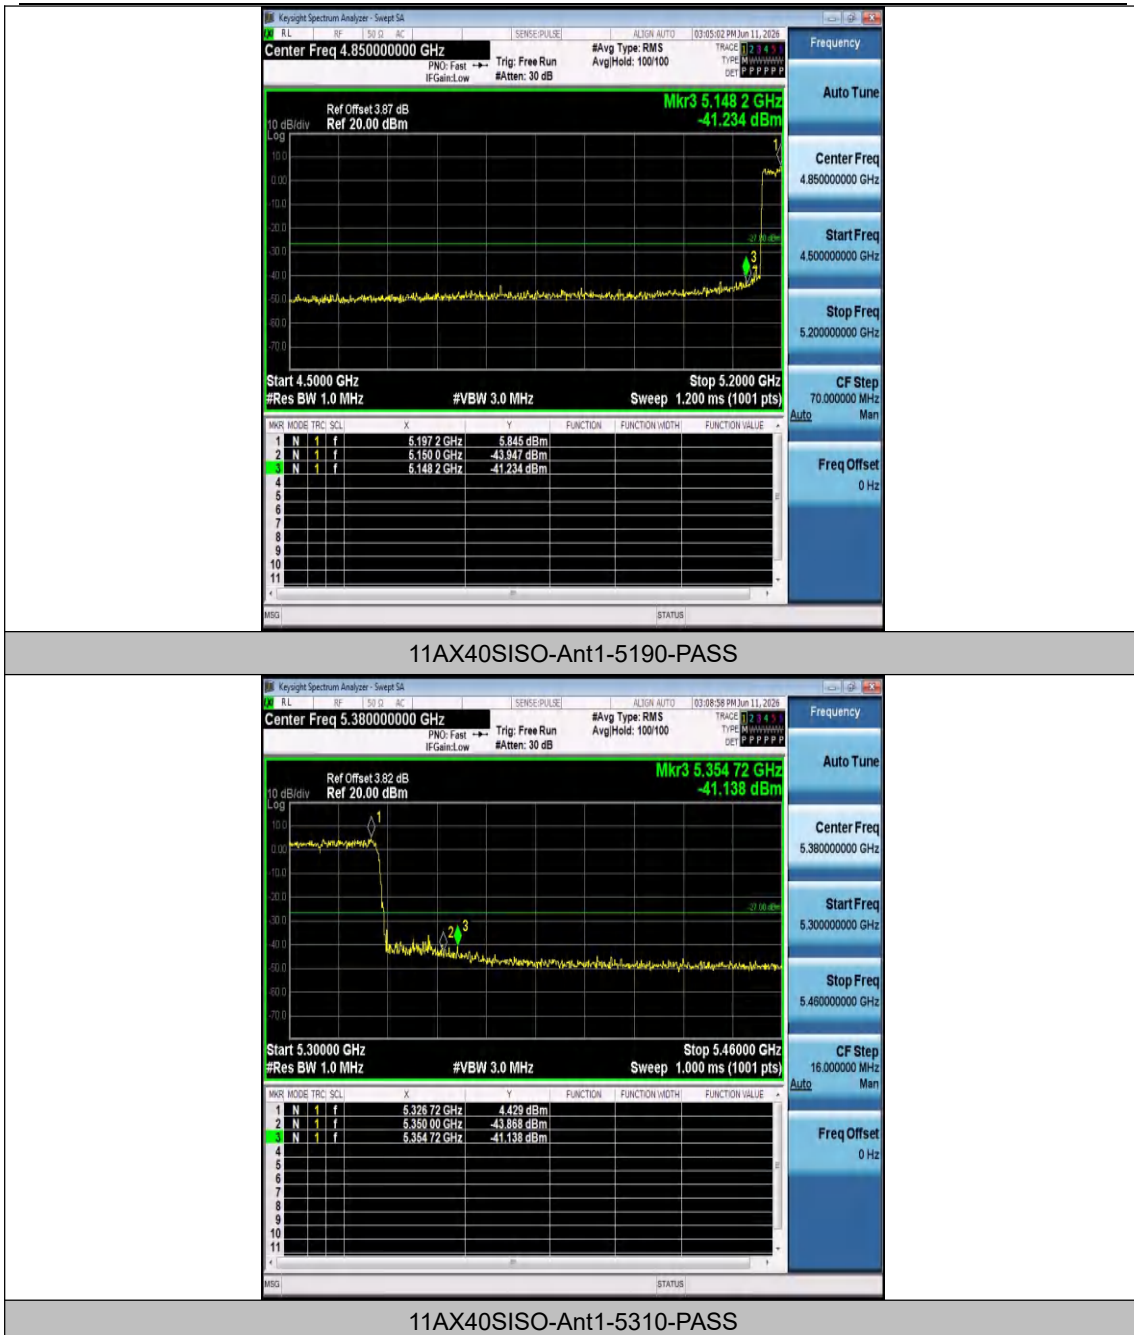


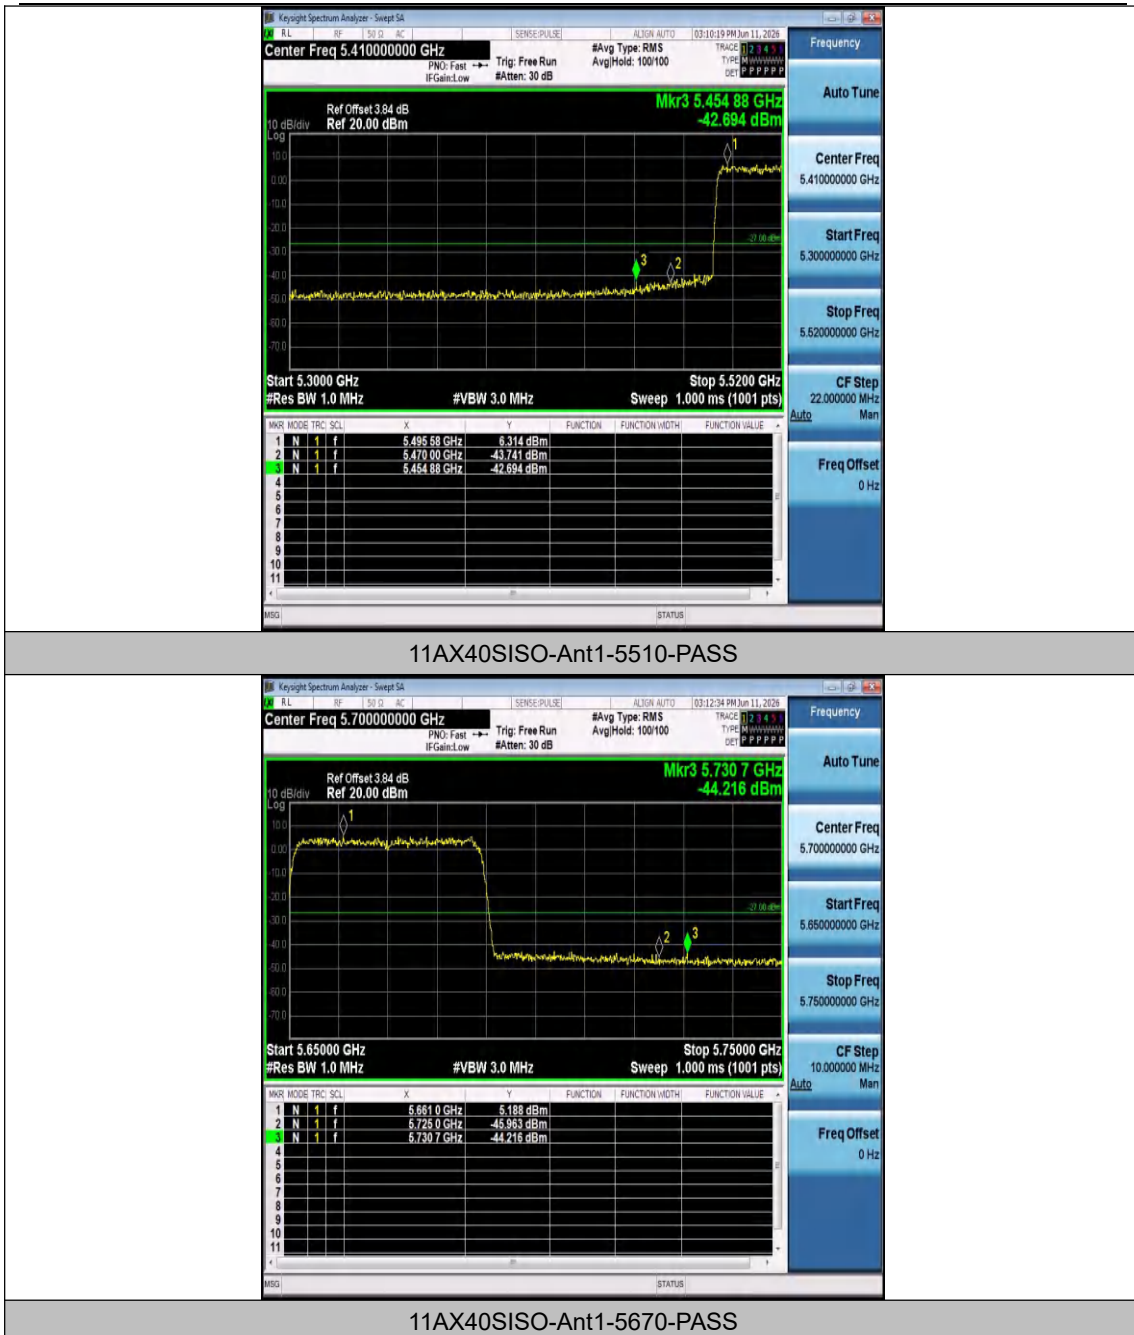



Test Graphs B4

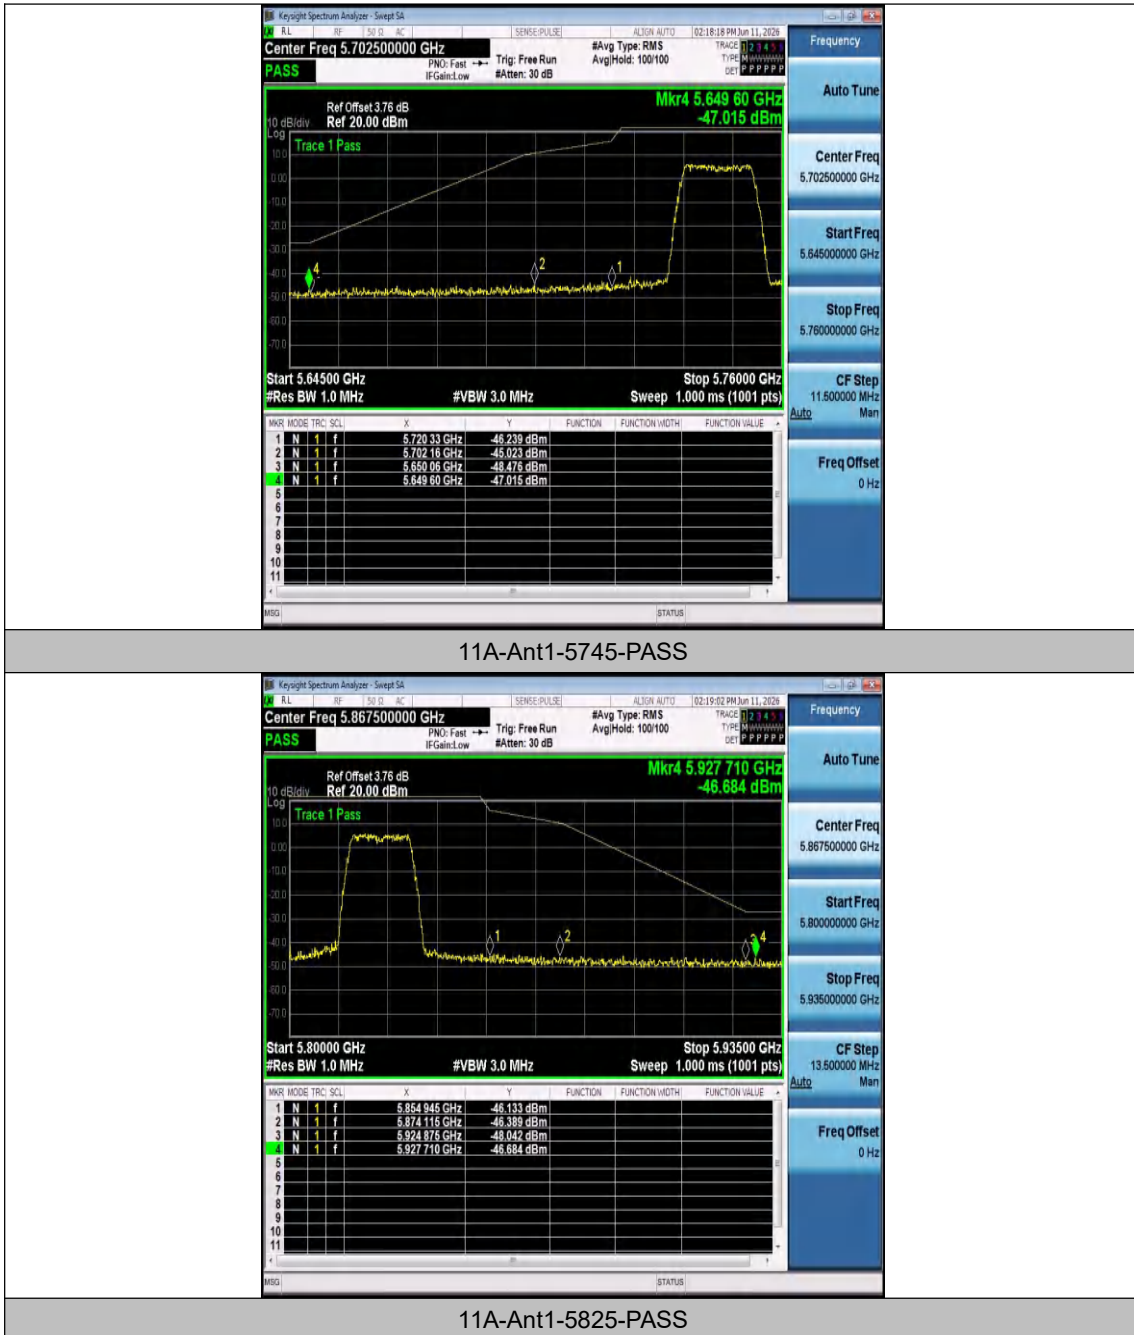

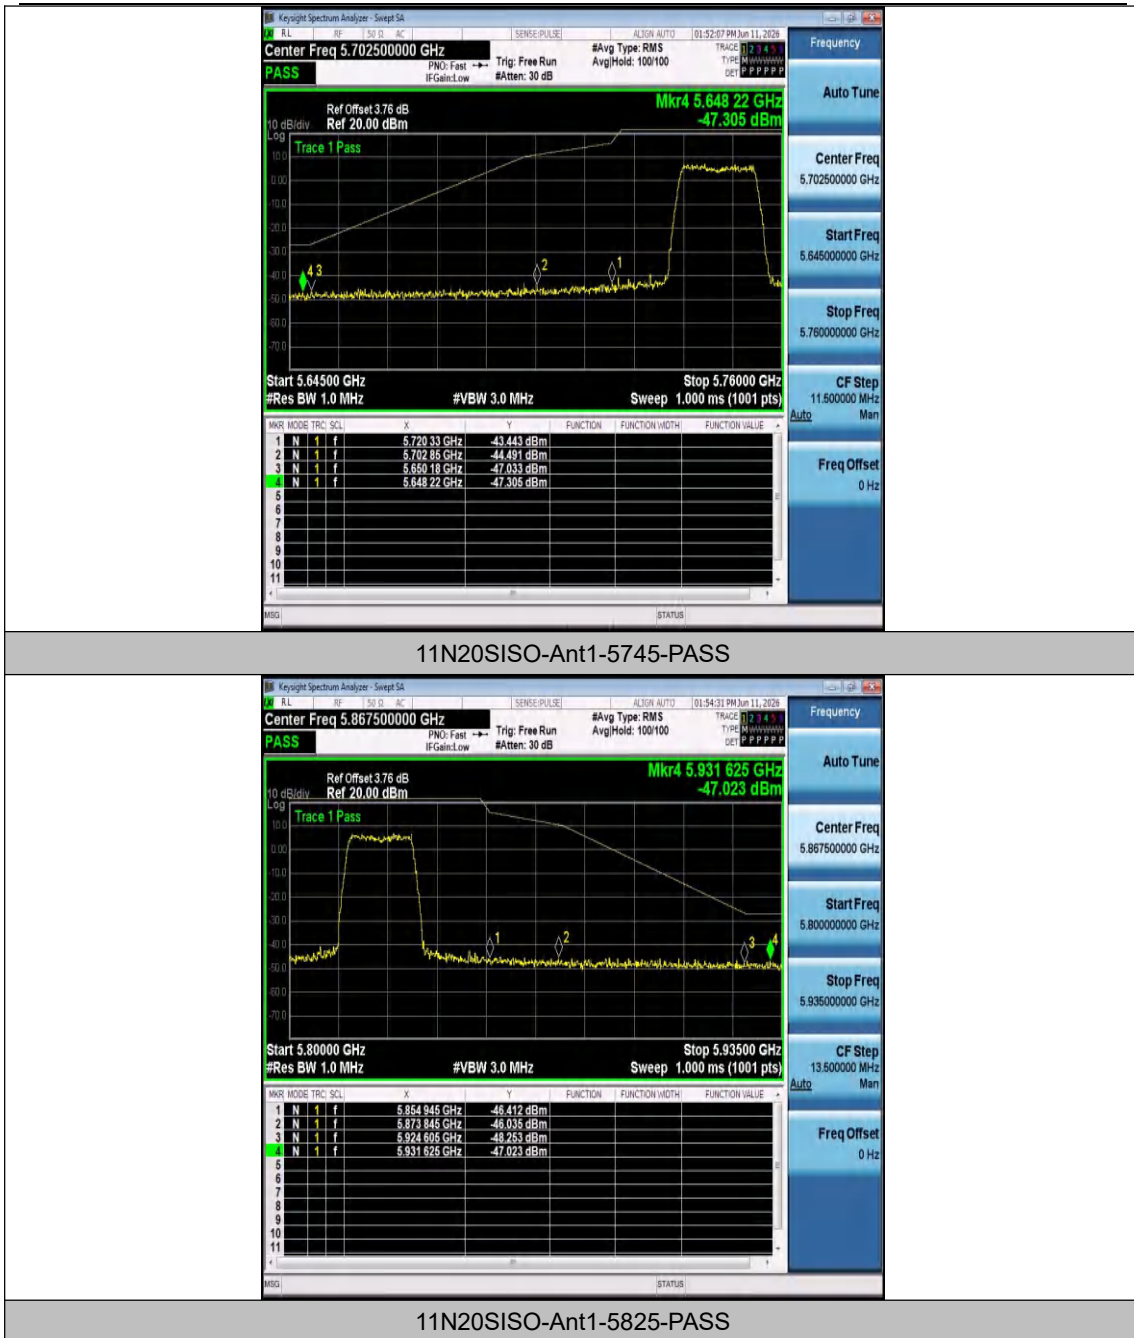

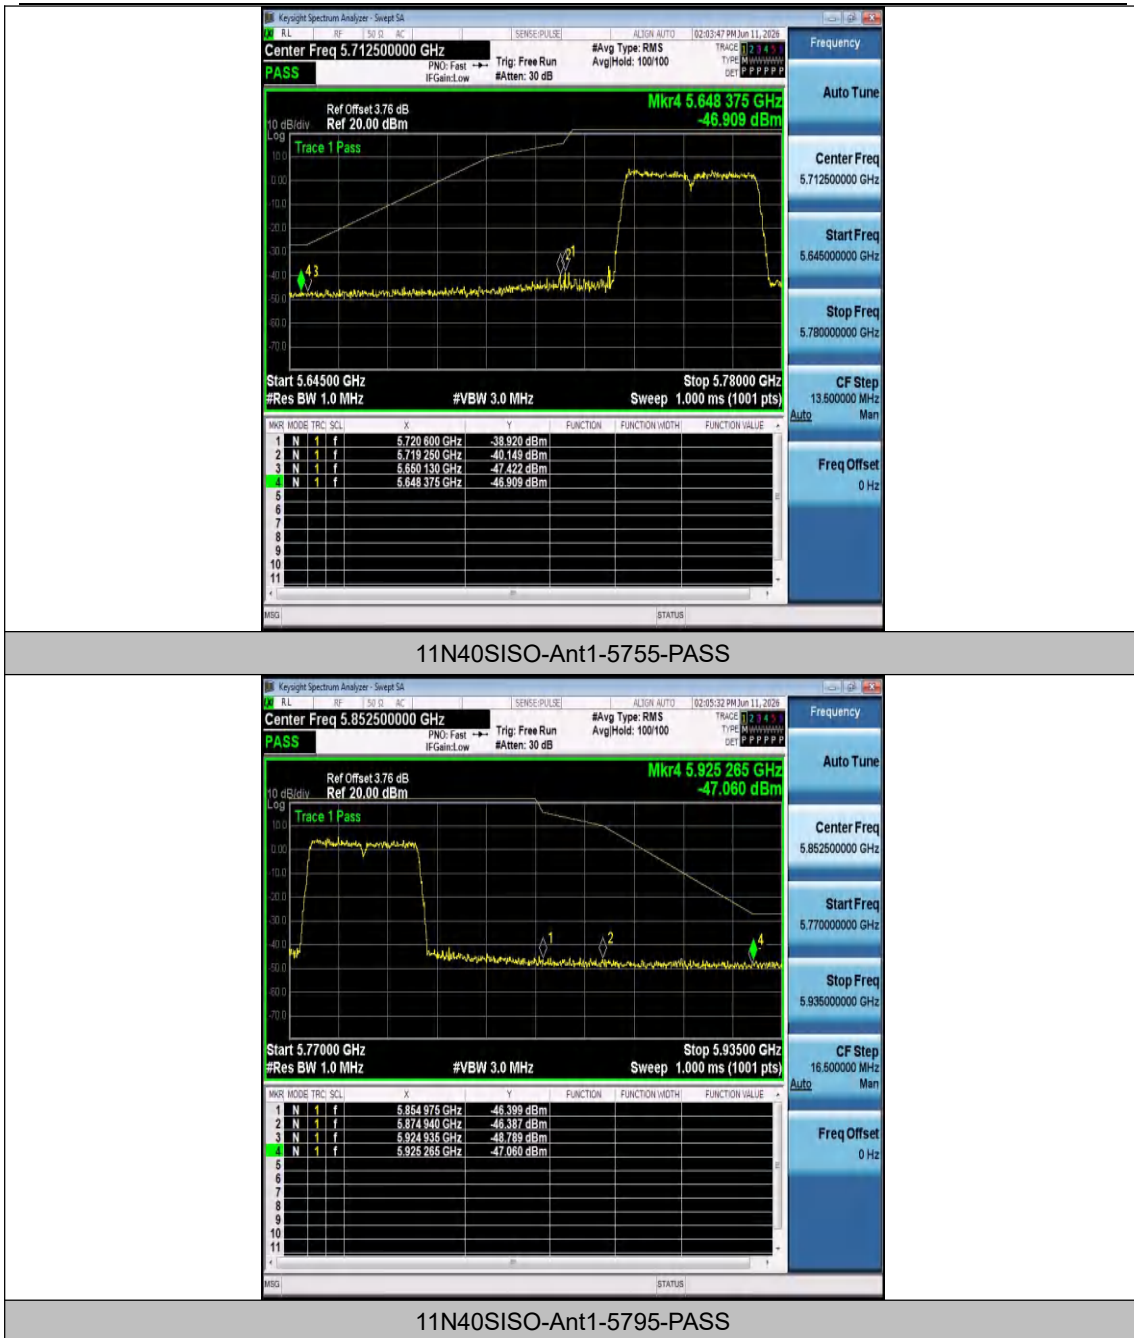

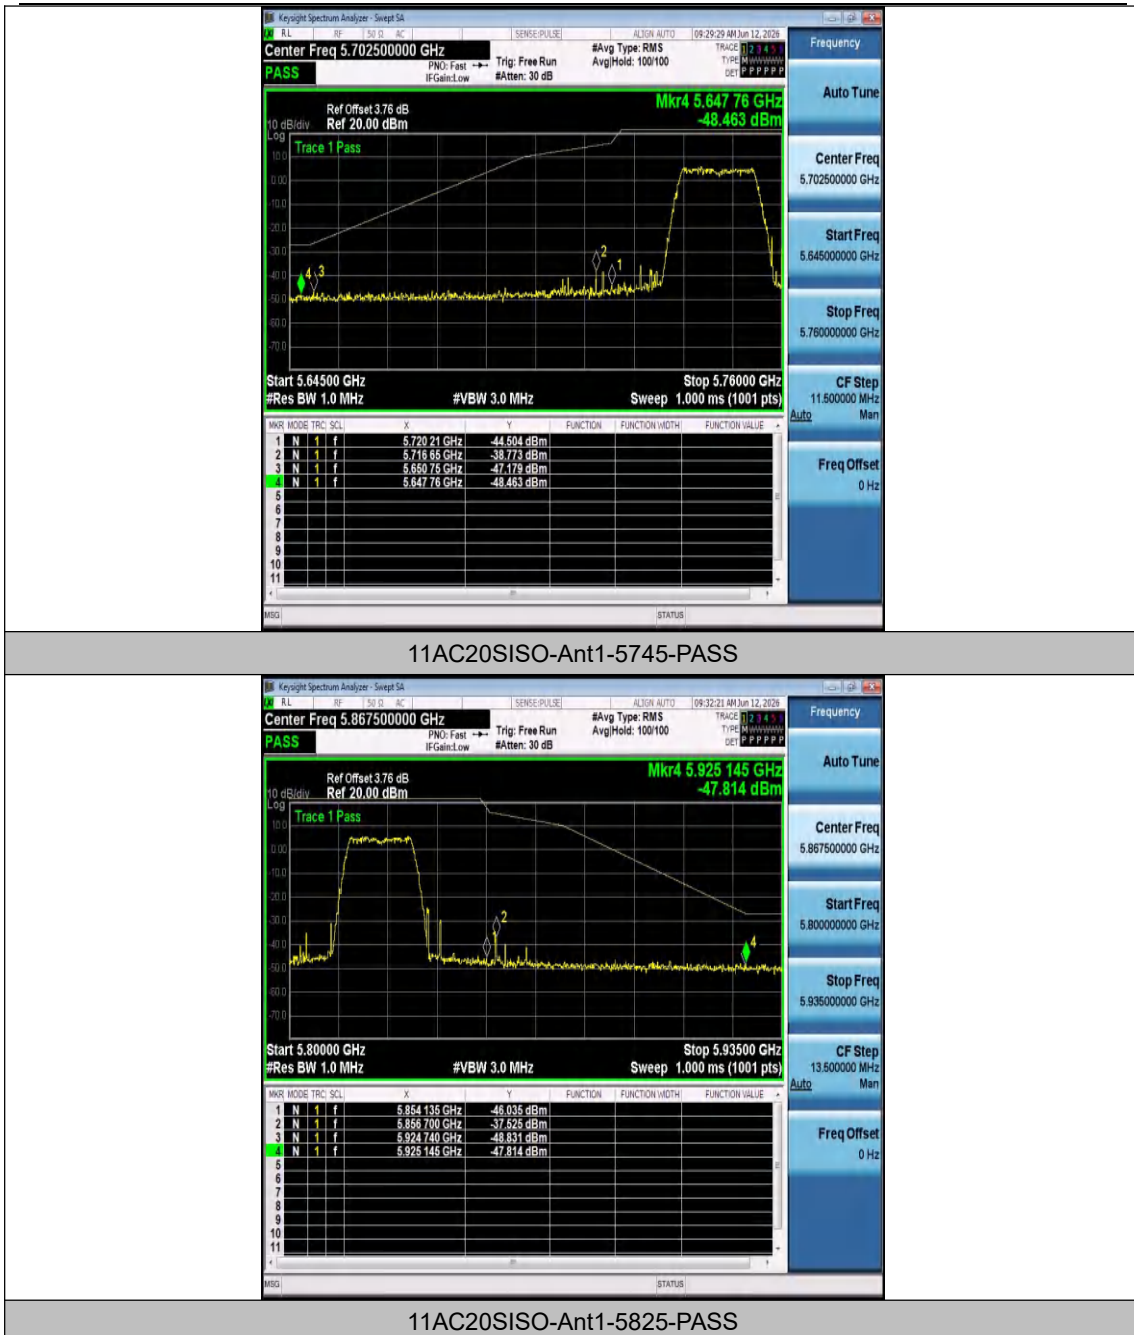


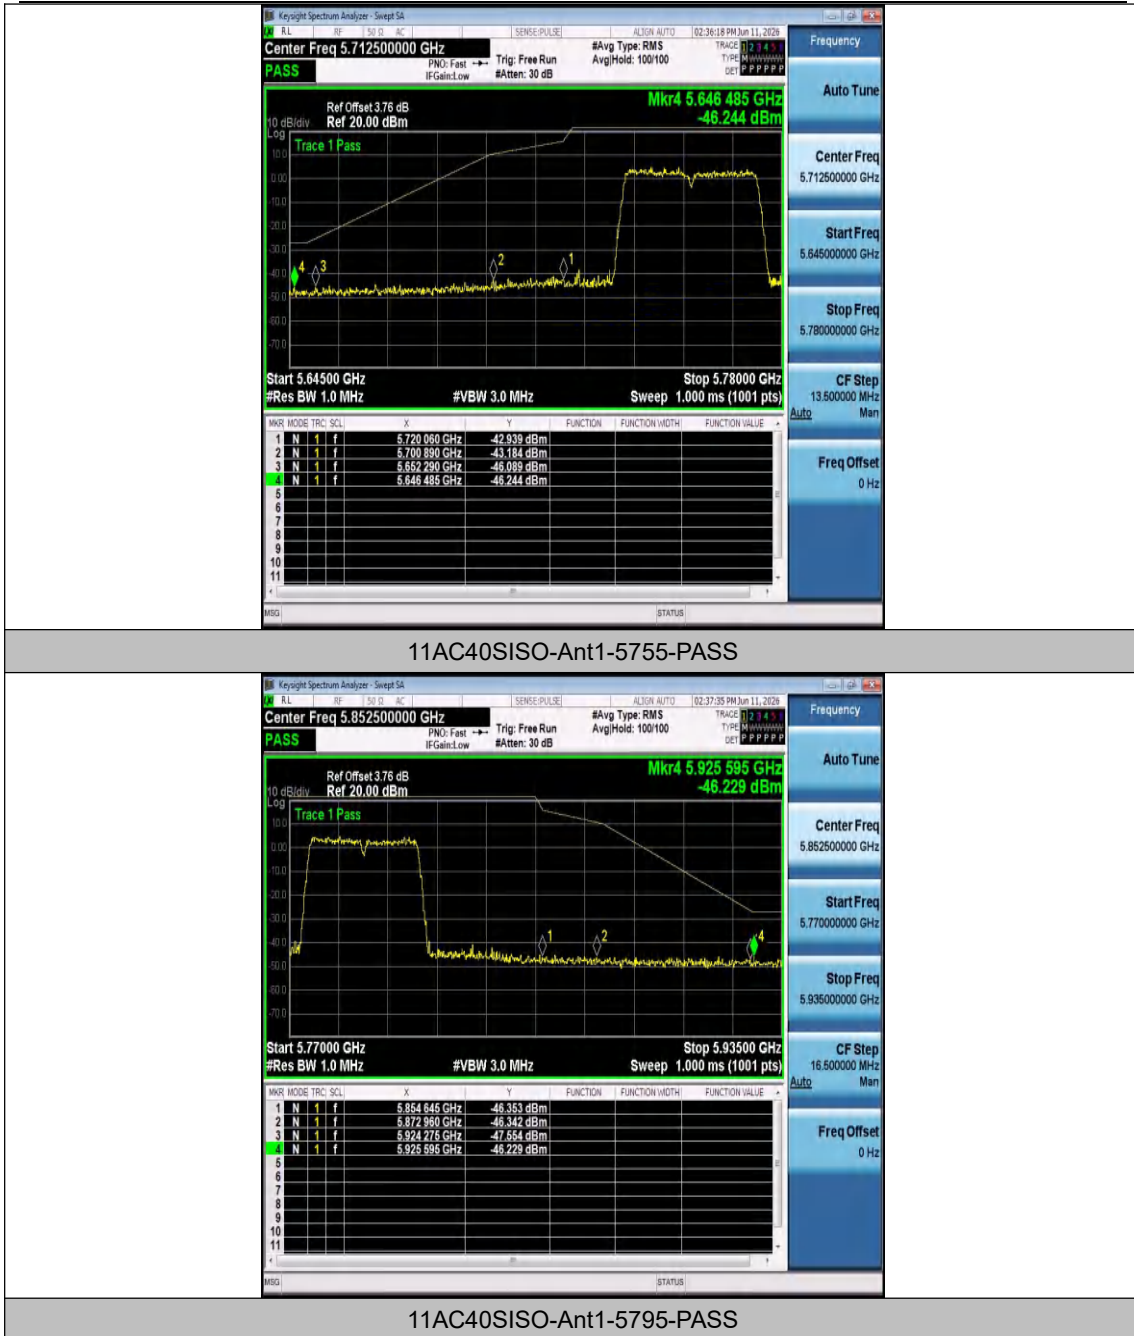


Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

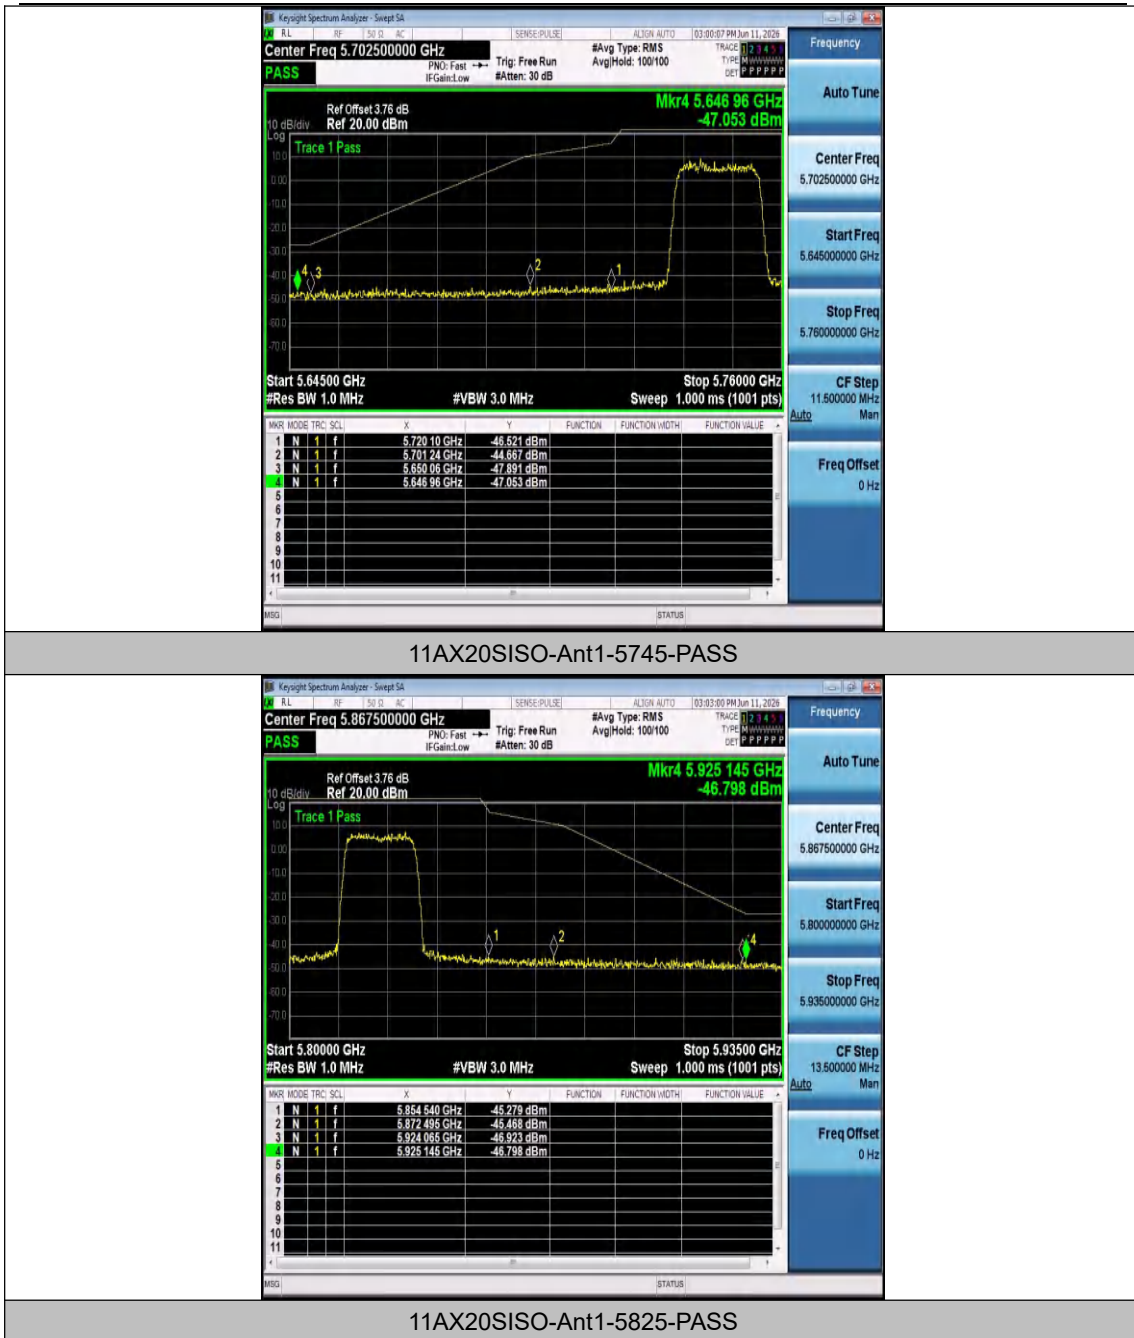

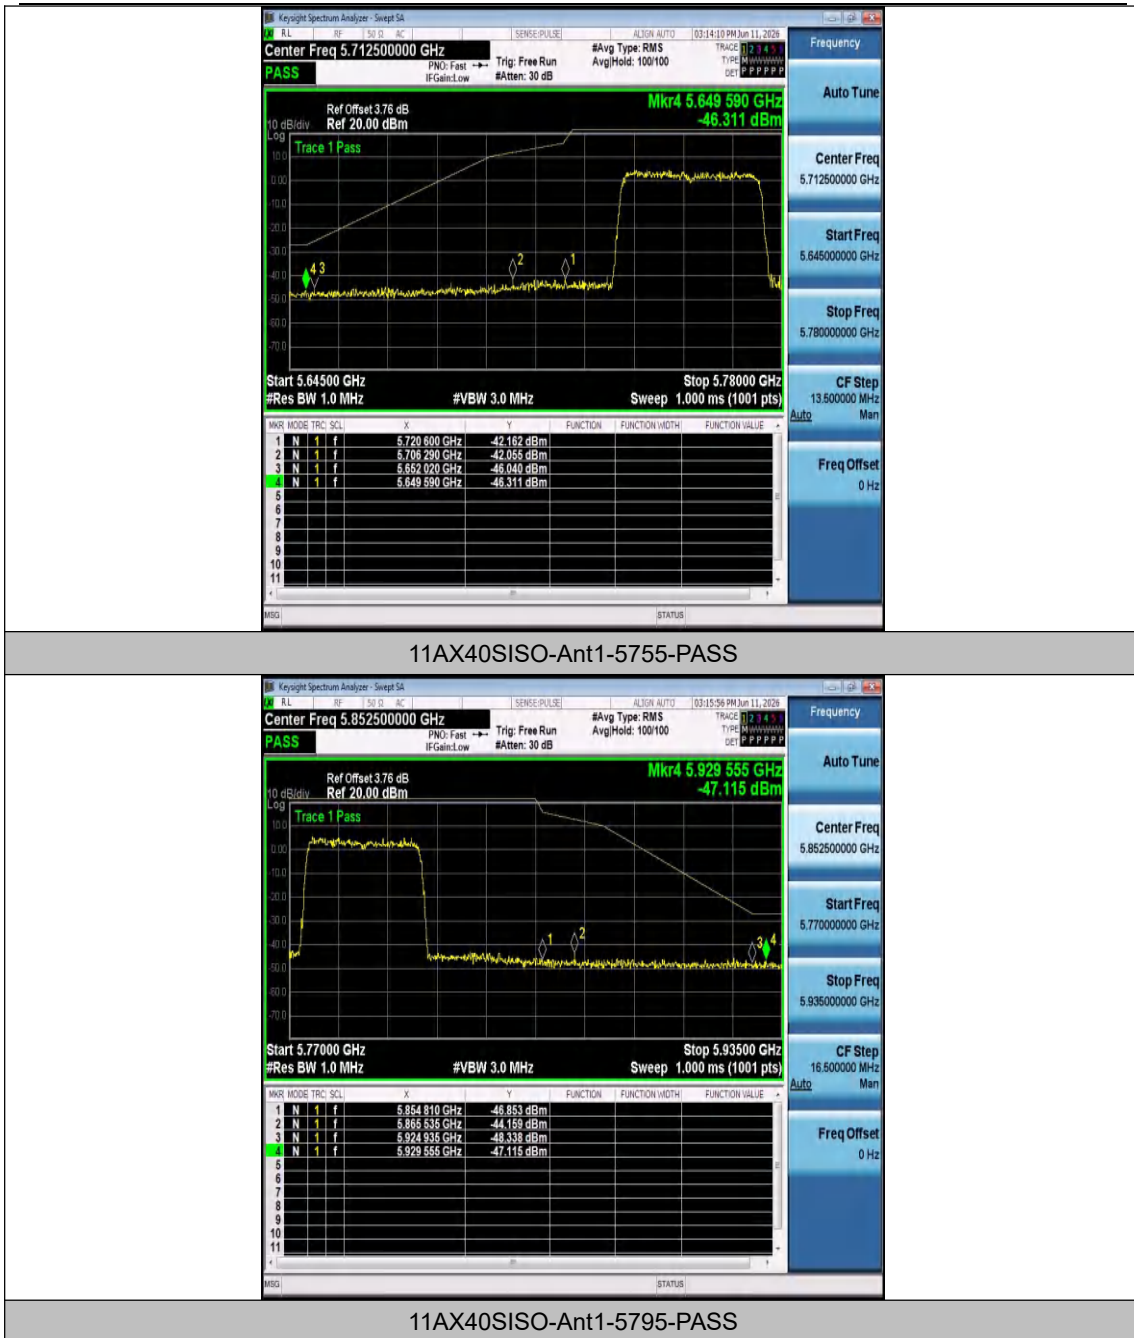


Appendix F: DFS Detection Thresholds

Test Result

TestMode	Frequency[dbm]	Radar Type	Result	Limit[dbm]	Verdict
11AX40SISO	5310	Type0	-62.35	-62.00	PASS
11AX40SISO	5550	Type0	-62.45	-62.00	PASS

Note: The antenna gain is grater than 0dBi, the experiment employed a harsher approach.

Test Graphs

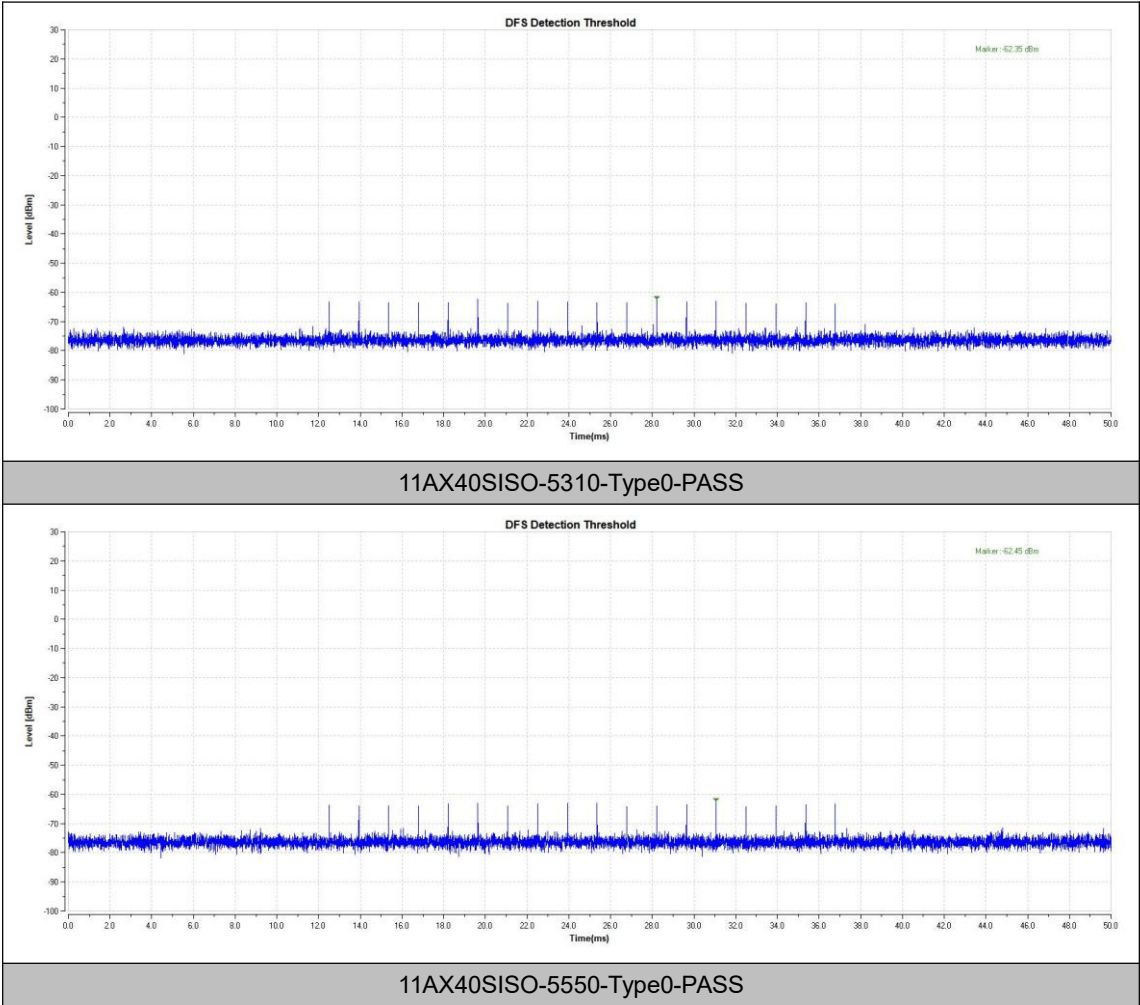


Appendix G: Channel Move Time and Channel Closing

Transmission Time


Test Result

TestMode	Frequency[MHz]	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AX40SISO	5310	200+7.8	200+60	841.1	10000	PASS
11AX40SISO	5550	200+1.3	200+60	207.9	10000	PASS

Test Graphs

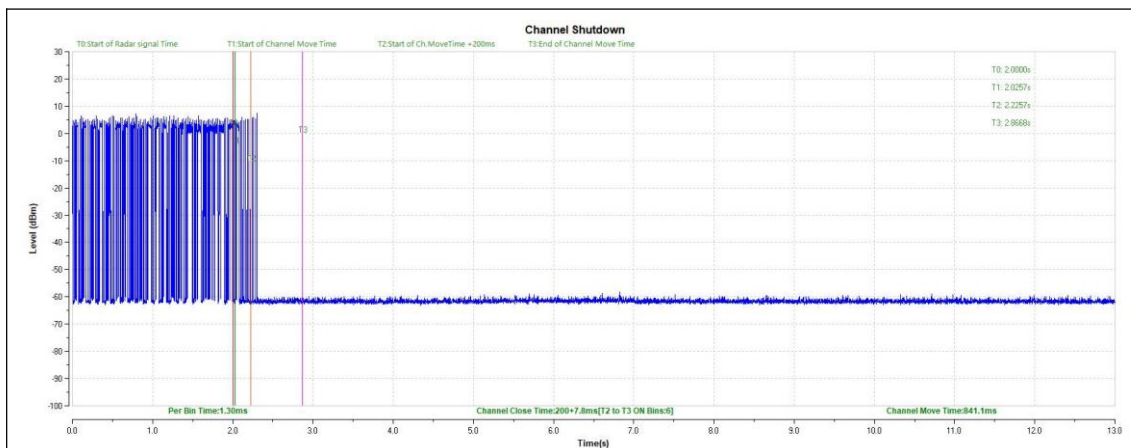

11AX40SISO-5310-Type0-PASS

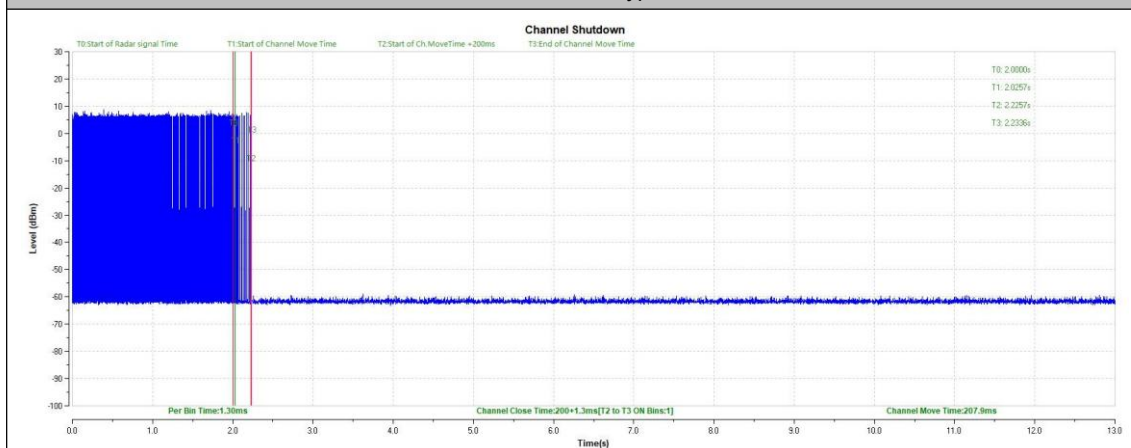


11AX40SISO-5550-Type0-PASS

Appendix H: Non-Occupancy Period

Test Result

TestMode	Frequency[MHz]	Result	Limit[s]	Verdict
11AX40SISO	5310	see test graph	≥1800	PASS
11AX40SISO	5550	see test graph	≥1800	PASS

Test Graphs

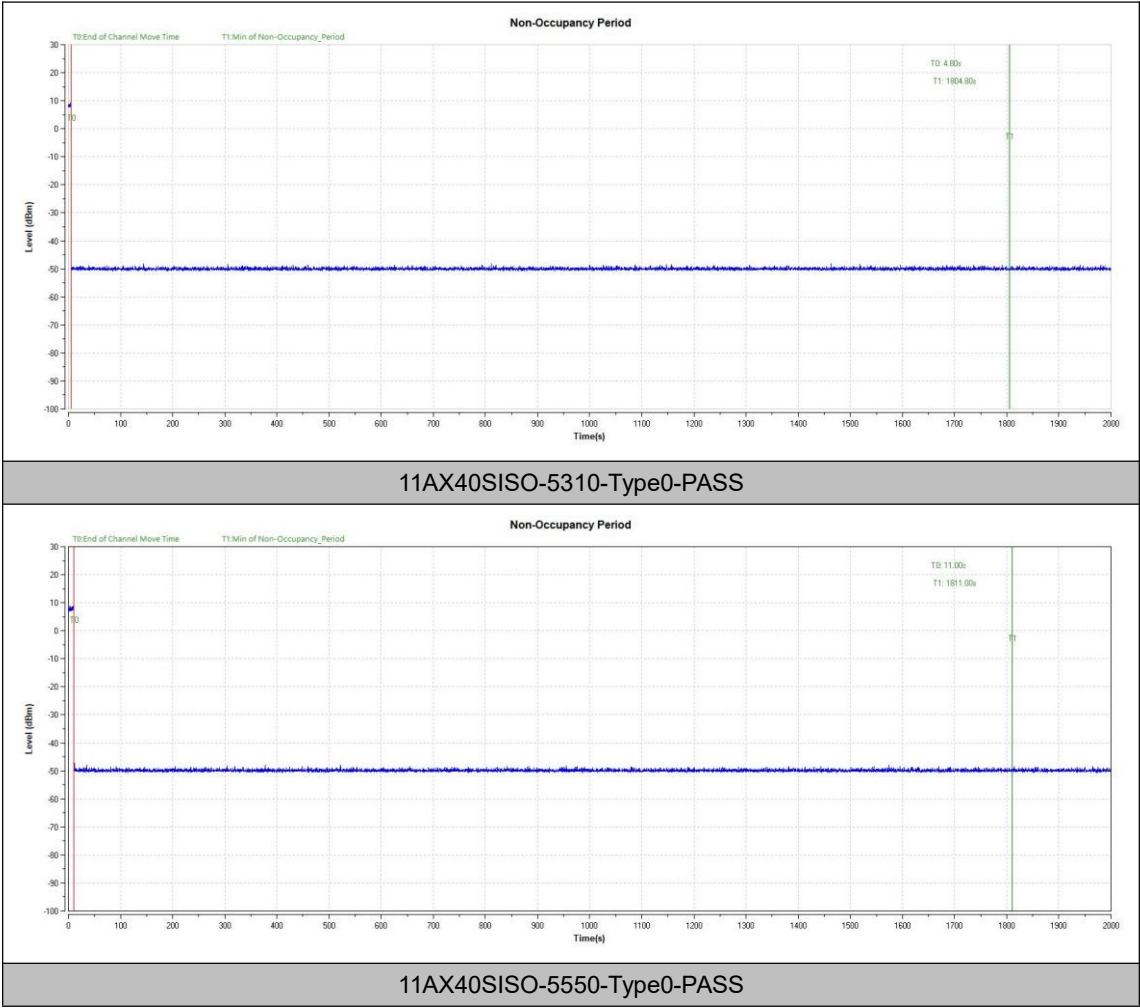

---END---