

# TEST REPORT

Report No. ....: CTC2026417002  
 FCC ID.....: 2BWSN-GVC1  
 IC .....: 35828-GVC1  
 HVIN .....: GVC1  
 Applicant .....: Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.  
 Address.....: No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region  
 Manufacturer.....: Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.  
 Address.....: No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region  
 Product Name .....: Smart Glasses Charging Case  
 Trade Mark .....: /  
 Model/Type reference.....: GVC1  
 Listed Model(s).....: H6Pro Box, GV1 Box, H6-CC  
 Standard .....: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
 RSS-247 Issue 4  
 Test Report Form No .....: CTC-TR-057\_A5  
 Master TRF.....: Dated 2026-06-01  
 Date of receipt of test sample.....: Aug. 14, 2026  
 Date of testing.....: Aug. 14, 2026 ~ Sept. 15, 2026  
 Date of issue.....: Sept. 15, 2026  
 Result.....: PASS

Compiled by:

(Printed name+signature) Jim Jiang

*Jim Jiang*

Supervised by:

(Printed name+signature) Eric Zhang

*Eric Zhang*

Approved by:

(Printed name+signature) Totti Zhao

*Totti Zhao*

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

| Table of Contents                                       | Page      |
|---------------------------------------------------------|-----------|
| <b>1. TEST SUMMARY .....</b>                            | <b>3</b>  |
| 1.1. TEST STANDARDS.....                                | 3         |
| 1.2. REPORT VERSION .....                               | 3         |
| 1.3. TEST DESCRIPTION.....                              | 4         |
| 1.4. TEST FACILITY .....                                | 5         |
| 1.5. MEASUREMENT UNCERTAINTY .....                      | 6         |
| 1.6. ENVIRONMENTAL CONDITIONS.....                      | 6         |
| <b>2. GENERAL INFORMATION .....</b>                     | <b>7</b>  |
| 2.1. CLIENT INFORMATION .....                           | 7         |
| 2.2. GENERAL DESCRIPTION OF EUT .....                   | 7         |
| 2.3. ACCESSORY EQUIPMENT INFORMATION .....              | 8         |
| 2.4. OPERATION STATE .....                              | 9         |
| 2.5. MEASUREMENT INSTRUMENTS LIST .....                 | 10        |
| <b>3. TEST ITEM AND RESULTS .....</b>                   | <b>11</b> |
| 3.1. CONDUCTED EMISSION.....                            | 11        |
| 3.2. RADIATED EMISSION.....                             | 14        |
| 3.3. BAND EDGE EMISSIONS (RADIATED) .....               | 31        |
| 3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) ..... | 48        |
| 3.5. DTS BANDWIDTH.....                                 | 61        |
| 3.6. PEAK OUTPUT POWER .....                            | 71        |
| 3.7. POWER SPECTRAL DENSITY .....                       | 72        |
| 3.8. DUTY CYCLE .....                                   | 78        |
| 3.9. ANTENNA REQUIREMENT.....                           | 80        |

# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 4](#): Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands

[RSS-Gen Issue 6](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2020](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

[ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.2. Report Version

| Revised No. | Report No.    | Date of issue  | Description |
|-------------|---------------|----------------|-------------|
| 01          | CTC2026417002 | Sept. 15, 2026 | Original    |
|             |               |                |             |
|             |               |                |             |

### 1.3. Test Description

| FCC Part 15 Subpart C (15.247) / RSS-247 Issue 4 |                         |                         |        |      |
|--------------------------------------------------|-------------------------|-------------------------|--------|------|
| Test Item                                        | Standard Section        |                         | Result | Note |
|                                                  | FCC                     | ISED                    |        |      |
| Antenna Requirement                              | 15.203                  | RSS-Gen 6.8             | Pass   | /    |
| Conducted Emission                               | 15.207                  | RSS-Gen 8.8             | Pass   | /    |
| Conducted Band Edge and Spurious Emissions       | 15.247(d)               | RSS-247 6.6             | Pass   | /    |
| Radiated Band Edge and Spurious Emissions        | 15.205&15.209&15.247(d) | RSS-247 6.6             | Pass   | /    |
| 6dB Bandwidth                                    | 15.247(a)(2)            | RSS-247 6.3.1(a)        | Pass   | /    |
| Occupied Bandwidth                               | /                       | RSS-Gen 6.7             | Pass   | /    |
| Conducted Max Output Power                       | 15.247(b)(3)            | RSS-247 6.3.2           | Pass   | /    |
| Power Spectral Density                           | 15.247(e)               | RSS-247 6.3.1(b)        | Pass   | /    |
| Transmitter Radiated Spurious                    | 15.209&15.247(d)        | RSS-247 6.6&RSS-Gen 8.9 | Pass   | /    |

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.

## 1.4. Test Facility

### Address of the report laboratory

#### CTC Laboratories, Inc.

Add: Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luh Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

| Test Items                                      | Measurement Uncertainty                                 | Notes |
|-------------------------------------------------|---------------------------------------------------------|-------|
| DTS Bandwidth                                   | $\pm 0.0196\%$                                          | (1)   |
| Maximum Conducted Output Power                  | $\pm 0.686$ dB                                          | (1)   |
| Maximum Power Spectral Density Level            | $\pm 0.743$ dB                                          | (1)   |
| Band-edge Compliance                            | $\pm 1.328$ dB                                          | (1)   |
| Unwanted Emissions In Non-restricted Freq Bands | 9kHz-1GHz: $\pm 0.746$ dB<br>1GHz-26GHz: $\pm 1.328$ dB | (1)   |
| Conducted Emissions 9kHz~30MHz                  | $\pm 3.08$ dB                                           | (1)   |
| Radiated Emissions 30~1000MHz                   | $\pm 4.51$ dB                                           | (1)   |
| Radiated Emissions 1~18GHz                      | $\pm 5.84$ dB                                           | (1)   |
| Radiated Emissions 18~40GHz                     | $\pm 6.12$ dB                                           | (1)   |

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |                |
|--------------------|----------------|
| Temperature:       | 15 °C to 35 °C |
| Relative Humidity: | 20 % to 75 %   |
| Air Pressure:      | 101 kPa        |

## 2. GENERAL INFORMATION

### 2.1. Client Information

|               |                                                                             |
|---------------|-----------------------------------------------------------------------------|
| Applicant:    | Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.                            |
| Address:      | No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region |
| Manufacturer: | Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.                            |
| Address:      | No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region |
| Factory:      | /                                                                           |
| Address:      | /                                                                           |

### 2.2. General Description of EUT

|                       |                                                                                                                             |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Product Name:         | Smart Glasses Charging Case                                                                                                 |
| Trade Mark:           | /                                                                                                                           |
| Model/Type reference: | GVC1                                                                                                                        |
| Listed Model(s):      | H6Pro Box, GV1 Box, H6-CC                                                                                                   |
| Model Difference:     | All these models are identical in the same PCB, layout, electrical circuit and enclosure. The difference is the model name. |
| Sample ID:            | CTC-GC260720-004-S001, CTC-GC260720-004-S002                                                                                |
| Power Supply:         | Input: 5V=== 2A<br>3.6V 2500mAh from li-ion battery                                                                         |
| Hardware Version:     | H6 BOX-MB-V3.0                                                                                                              |
| Software Version:     | H6_CASE_v1.01                                                                                                               |
| <b>2.4G Wi-Fi</b>     |                                                                                                                             |
| Modulation:           | 802.11b: DSSS (CCK, DQPSK, DBPSK)<br>802.11g/ n: OFDM (BPSK, QPSK, 16QAM, 64QAM)                                            |
| Operation Frequency:  | 802.11b/ g/ n(HT20): 2412MHz~2462MHz<br>802.11n(HT40): 2422MHz~2452MHz                                                      |
| Channel Number:       | 802.11b/ g/ n(HT20): 11 channels<br>802.11n(HT40): 7 channels                                                               |
| Channel Separation:   | 5MHz                                                                                                                        |
| Antenna Type:         | PCB Antenna                                                                                                                 |
| Antenna Gain:         | -2.4 dBi                                                                                                                    |

## 2.3. Accessory Equipment Information

| Equipment Information     |                     |              |              |
|---------------------------|---------------------|--------------|--------------|
| Name                      | Model               | S/N          | Manufacturer |
| Laptop                    | ThinkBook 14 G3 ACL | MP246QDR     | Lenovo       |
| Power Adapter             | A2167               | /            | Apple        |
| Cable Information         |                     |              |              |
| Name                      | Shielded Type       | Ferrite Core | Length       |
| USB-C Cable               | Unshielded          | NO           | 100cm        |
| Test Software Information |                     |              |              |
| Name                      | Version             | /            | /            |
| EspRFTTestTool            | V5.2                | /            | /            |

## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

| Channel | Frequency (MHz) |
|---------|-----------------|
| 01      | 2412            |
| 02      | 2417            |
| 03      | 2422            |
| 04      | 2427            |
| 05      | 2432            |
| 06      | 2437            |
| 07      | 2442            |
| 08      | 2447            |
| 09      | 2452            |
| 10      | 2457            |
| 11      | 2462            |

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40).

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is the worsted case mode.

| Test Mode                     | Data Rate (worst mode) |
|-------------------------------|------------------------|
| 802.11b                       | 1Mbps                  |
| 802.11g                       | 6Mbps                  |
| 802.11n(HT20) / 802.11n(HT40) | HT-MCS0                |

Test Mode:

|                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| For RF test items:                                                                                                                                                                                                       |
| The engineering test program was provided and enabled to make EUT continuous transmit.                                                                                                                                   |
| For AC power line conducted emissions:                                                                                                                                                                                   |
| The EUT is charged via a power adapter.                                                                                                                                                                                  |
| For Radiated spurious emissions test item:                                                                                                                                                                               |
| The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report. |

## 2.5. Measurement Instruments List

| RF Test System - SRD |                                     |              |           |            |                  |
|----------------------|-------------------------------------|--------------|-----------|------------|------------------|
| Item                 | Test Equipment                      | Manufacturer | Model No. | Serial No. | Calibrated Until |
| 1                    | Spectrum Analyzer                   | R&S          | FSV40-N   | 101654     | Dec. 12, 2026    |
| 2                    | MXA Signal Analyzer                 | Keysight     | N9020A    | MY52091402 | Dec. 12, 2026    |
| 3                    | EXG Analog Signal Generator         | Keysight     | N5173B    | MY59100842 | Dec. 12, 2026    |
| 4                    | MXG Vector Signal Generator         | Keysight     | N5182B    | MY59100212 | Dec. 12, 2026    |
| 5                    | Wideband Radio Communication Tester | R&S          | CMW500    | 102414     | Dec. 12, 2026    |
| 6                    | RF Control Unit                     | Tonscend     | JS0806-2  | /          | Dec. 12, 2026    |
| 7                    | Test Software                       | Tonscend     | JS1120-3  | V3.3.38    | /                |

| Radiated emission |                              |              |            |            |                  |
|-------------------|------------------------------|--------------|------------|------------|------------------|
| Item              | Test Equipment               | Manufacturer | Model No.  | Serial No. | Calibrated Until |
| 1                 | Trilog-Broadband Antenna     | Schwarzbeck  | VULB 9168  | 9168-759   | Oct. 16, 2027    |
| 2                 | Horn Antenna                 | Schwarzbeck  | BBHA 9120D | 9120D-648  | Dec. 11, 2026    |
| 3                 | Test Receiver                | Keysight     | N9038A     | MY56400071 | Dec. 12, 2026    |
| 4                 | Broadband Amplifier          | Schwarzbeck  | BBV9743B   | 259        | Dec. 12, 2026    |
| 5                 | Mirowave Broadband Amplifier | Schwarzbeck  | BBV9718C   | 111        | Dec. 12, 2026    |
| 6                 | 3m chamber 3                 | YIHENG       | EE106      | /          | Aug. 28, 2028    |
| 7                 | Test Software                | FARA         | EZ-EMC     | FA-03A2    | /                |
| 8                 | LOOP Antenna                 | ETS          | 6507       | 1446       | Dec. 17, 2026    |

| Conducted emission |                   |              |           |                |                  |
|--------------------|-------------------|--------------|-----------|----------------|------------------|
| Item               | Test Equipment    | Manufacturer | Model No. | Serial No.     | Calibrated Until |
| 1                  | LISN              | R&S          | ENV216    | 101112         | Dec. 12, 2026    |
| 2                  | LISN              | R&S          | ENV216    | 101113         | Dec. 12, 2026    |
| 3                  | EMI Test Receiver | R&S          | ESCI      | 100524         | Dec. 12, 2026    |
| 4                  | ISN CAT6          | Schwarzbeck  | NTFM 8158 | CAT6-8158-0046 | Dec. 12, 2026    |
| 5                  | ISN CAT5          | Schwarzbeck  | NTFM 8158 | CAT5-8158-0046 | Dec. 12, 2026    |
| 6                  | Test Software     | R&S          | EMC32     | 6.10.10        | /                |

Note:

1. The Cal. Interval was one year.
2. The Cal. Interval was three years of the antenna.
3. The cable loss has been calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


##### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

| Frequency (MHz) | Conducted Limit (dB $\mu$ V) |            |
|-----------------|------------------------------|------------|
|                 | Quasi-peak                   | Average    |
| 0.15 - 0.5      | 66 to 56 *                   | 56 to 46 * |
| 0.5 - 5         | 56                           | 46         |
| 5 - 30          | 60                           | 50         |

\* Decreases with the logarithm of the frequency.

##### Test Configuration

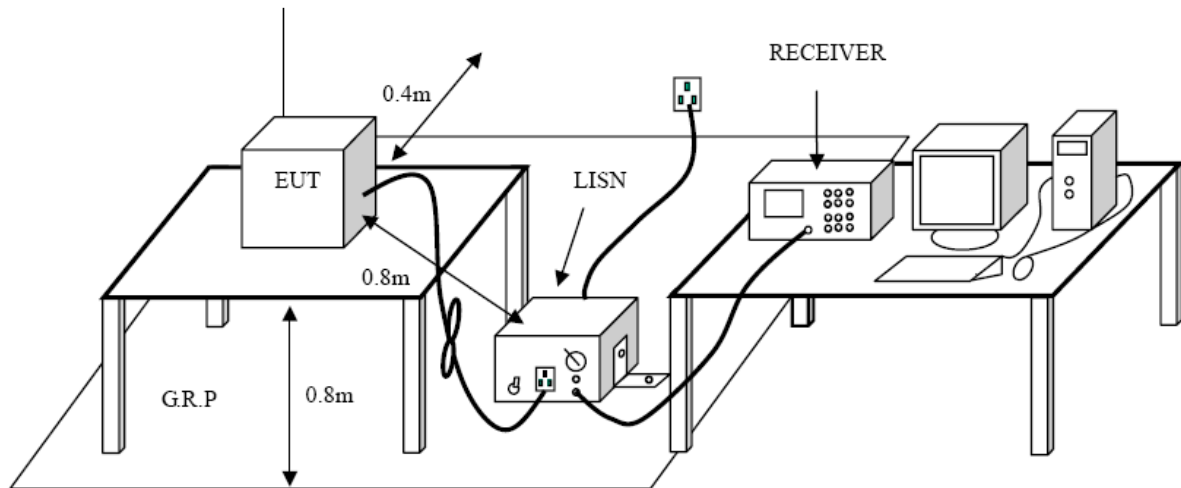

##### Test Procedure


1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

##### Test Mode

Please refer to the clause 2.4.

**Test Result**

|                      |                             |
|----------------------|-----------------------------|
| <b>Test Voltage:</b> | AC 120V/60Hz                |
| <b>Terminal:</b>     | Line                        |
| <b>Remark:</b>       | Only worse case is reported |

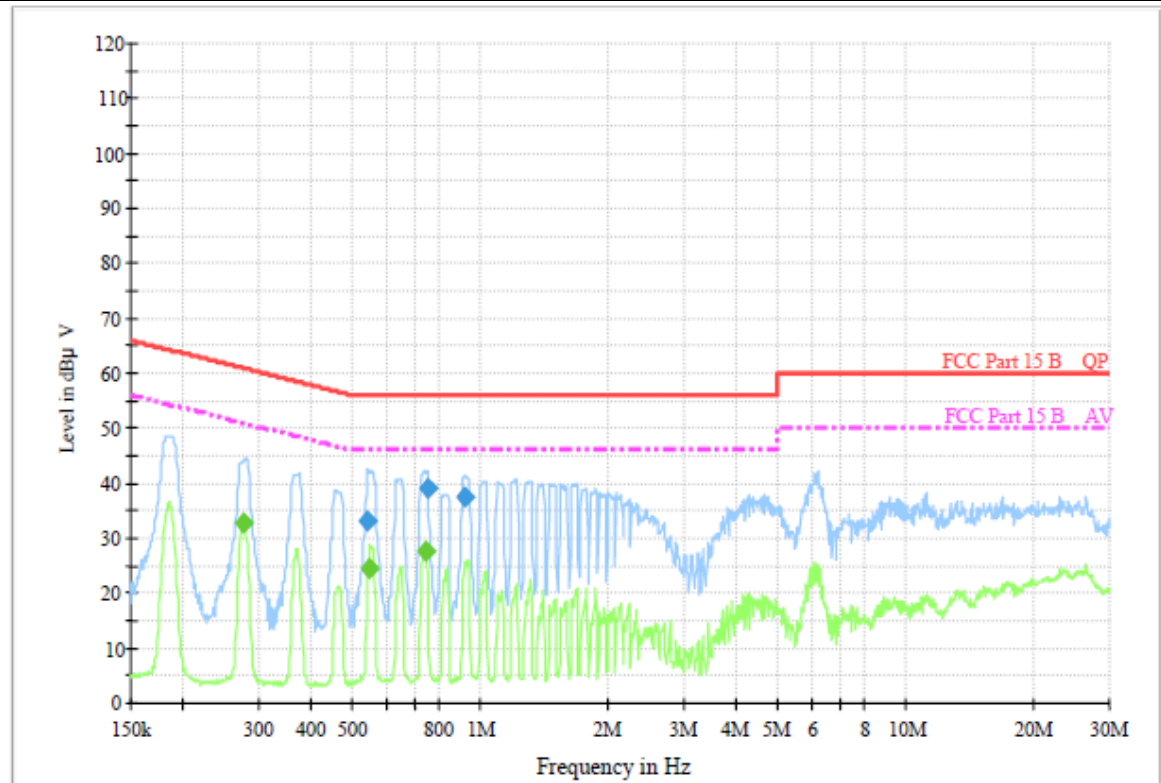**Final Measurement Detector 1**


| Frequency (MHz) | QuasiPeak (dBμ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμ V) | Comment |
|-----------------|-------------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.542430        | 33.2              | 1000.00         | 9.000           | On     | L1   | 9.5        | 22.8        | 56.0          |         |
| 0.746520        | 39.0              | 1000.00         | 9.000           | On     | L1   | 9.7        | 17.0        | 56.0          |         |
| 0.918750        | 37.5              | 1000.00         | 9.000           | On     | L1   | 9.8        | 18.5        | 56.0          |         |

**Final Measurement Detector 2**

| Frequency (MHz) | Average (dBμ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμ V) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.275180        | 32.6            | 1000.00         | 9.000           | On     | L1   | 9.3        | 18.4        | 51.0          |         |
| 0.546780        | 24.6            | 1000.00         | 9.000           | On     | L1   | 9.5        | 21.4        | 46.0          |         |
| 0.740590        | 27.6            | 1000.00         | 9.000           | On     | L1   | 9.7        | 18.4        | 46.0          |         |

Emission Level = Read Level + Correct Factor

|                      |                             |
|----------------------|-----------------------------|
| <b>Test Voltage:</b> | AC 120V/60Hz                |
| <b>Terminal:</b>     | Neutral                     |
| <b>Remark:</b>       | Only worse case is reported |

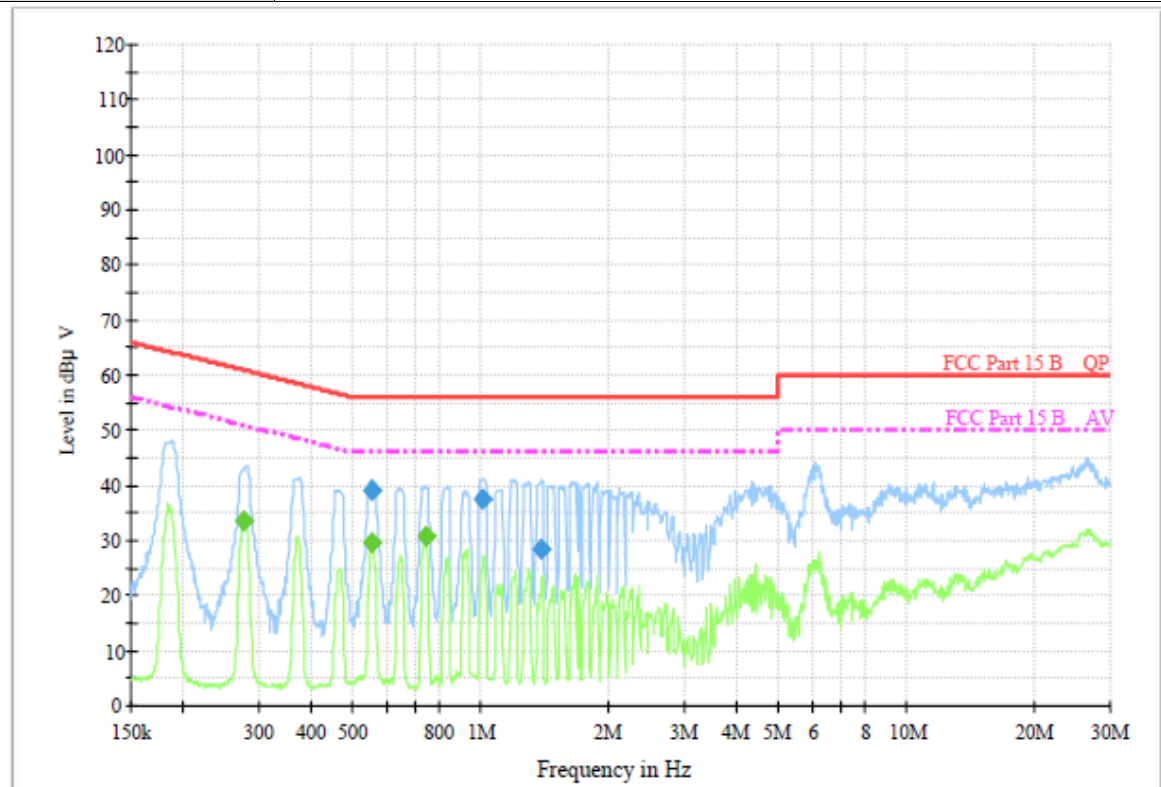

### Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBμ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμ V) | Comment |
|-----------------|-------------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.555580        | 39.1              | 1000.00         | 9.000           | On     | N    | 9.5        | 16.9        | 56.0          |         |
| 1.003090        | 37.5              | 1000.00         | 9.000           | On     | N    | 9.7        | 18.5        | 56.0          |         |
| 1.386020        | 28.4              | 1000.00         | 9.000           | On     | N    | 9.7        | 27.6        | 56.0          |         |

### Final Measurement Detector 2

| Frequency (MHz) | Average (dBμ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμ V) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|---------------|---------|
| 0.276280        | 33.7            | 1000.00         | 9.000           | On     | N    | 9.4        | 17.2        | 50.9          |         |
| 0.551170        | 29.5            | 1000.00         | 9.000           | On     | N    | 9.5        | 16.5        | 46.0          |         |
| 0.740590        | 30.6            | 1000.00         | 9.000           | On     | N    | 9.2        | 15.4        | 46.0          |         |

Emission Level = Read Level + Correct Factor

### 3.2. Radiated Emission

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009~0.490        | 2400/F (kHz)                         | 300                              |
| 0.490~1.705        | 24000/F (kHz)                        | 30                               |
| 1.705~30.0         | 30                                   | 30                               |
| 30~88              | 100                                  | 3                                |
| 88~216             | 150                                  | 3                                |
| 216~960            | 200                                  | 3                                |
| 960~1000           | 500                                  | 3                                |

| Frequency Range (MHz) | dB $\mu$ V/m (at 3 meters) |         |
|-----------------------|----------------------------|---------|
|                       | Peak                       | Average |
| Above 1000            | 74                         | 54      |


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB $\mu$ V/m)=20log Emission Level ( $\mu$ V/m).


#### Test Configuration

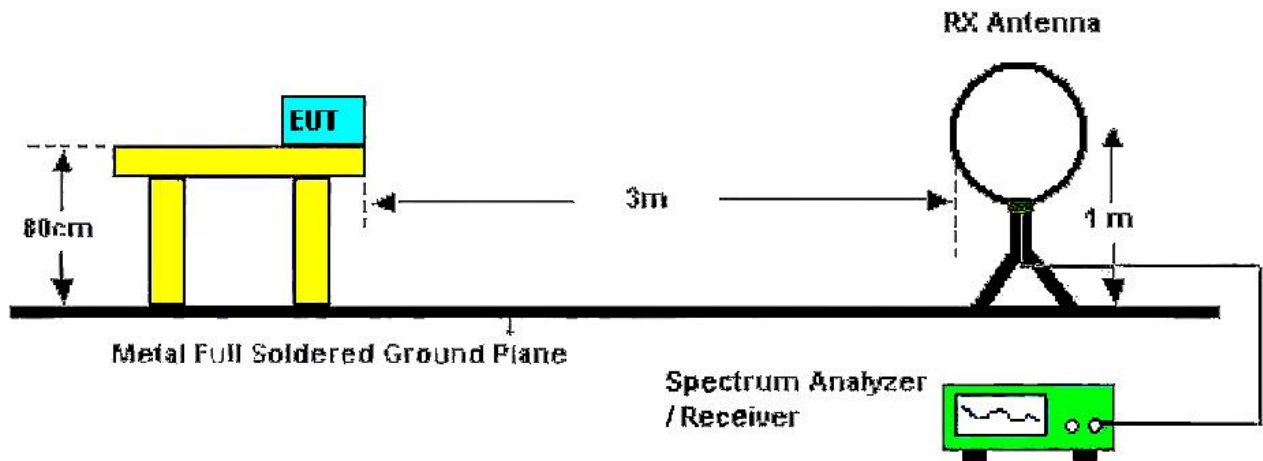

Below 30MHz Test Setup

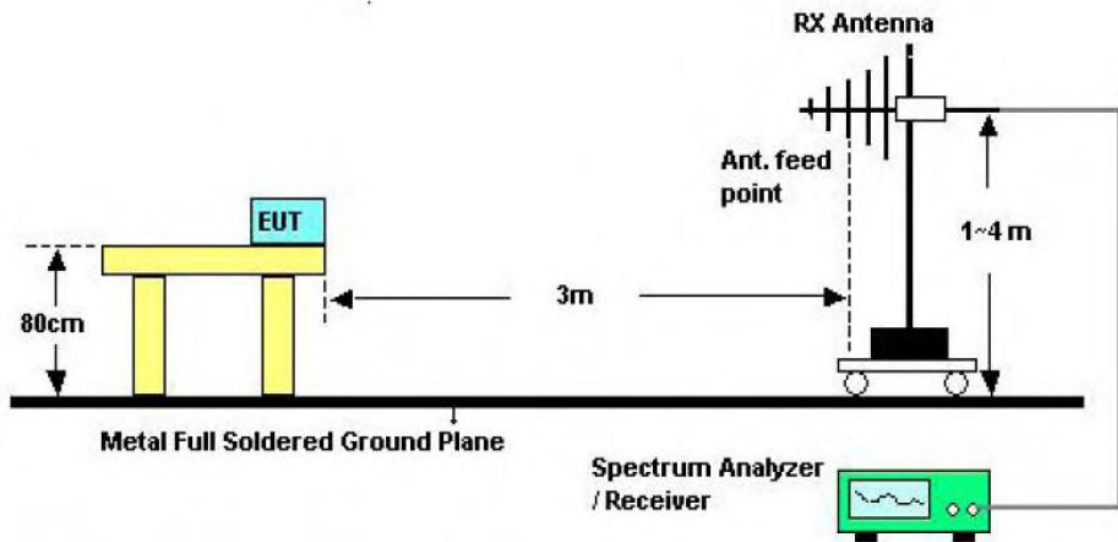

30-1000MHz Test Setup

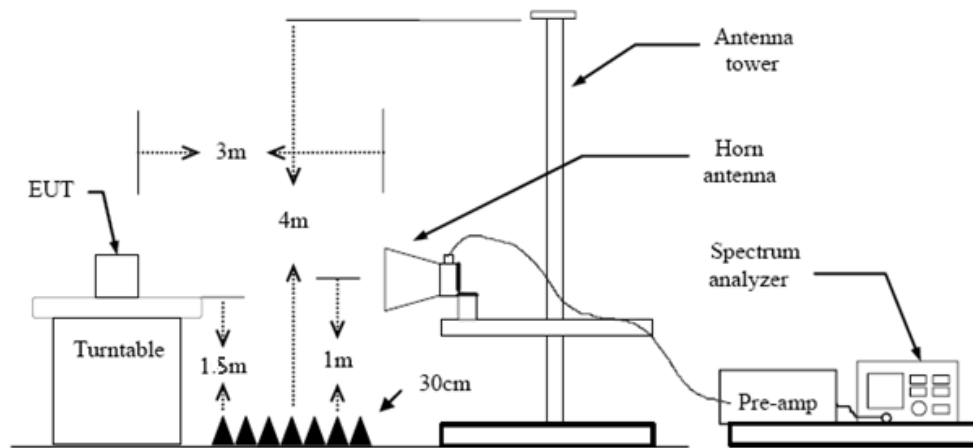

Above 1GHz Test Setup

### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10.
  2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
  3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
  4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
  5. Set to the maximum power setting and enable the EUT transmit continuously.
  6. Use the following spectrum analyzer settings
    - (1) Span shall wide enough to fully capture the emission being measured;
    - (2) 9k – 150kHz:  
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
    - (3) 0.15M – 30MHz:  
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
    - (4) 30M - 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold
- If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the

peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

### **Test Mode**

Please refer to the clause 2.4.


### **Test Result**


#### **9kHz-30MHz**

From 9 kHz to 30 MHz: The conclusion is PASS.


Note: All modes for required channel tested, only the worst case is reported.


## 30MHz-1GHz

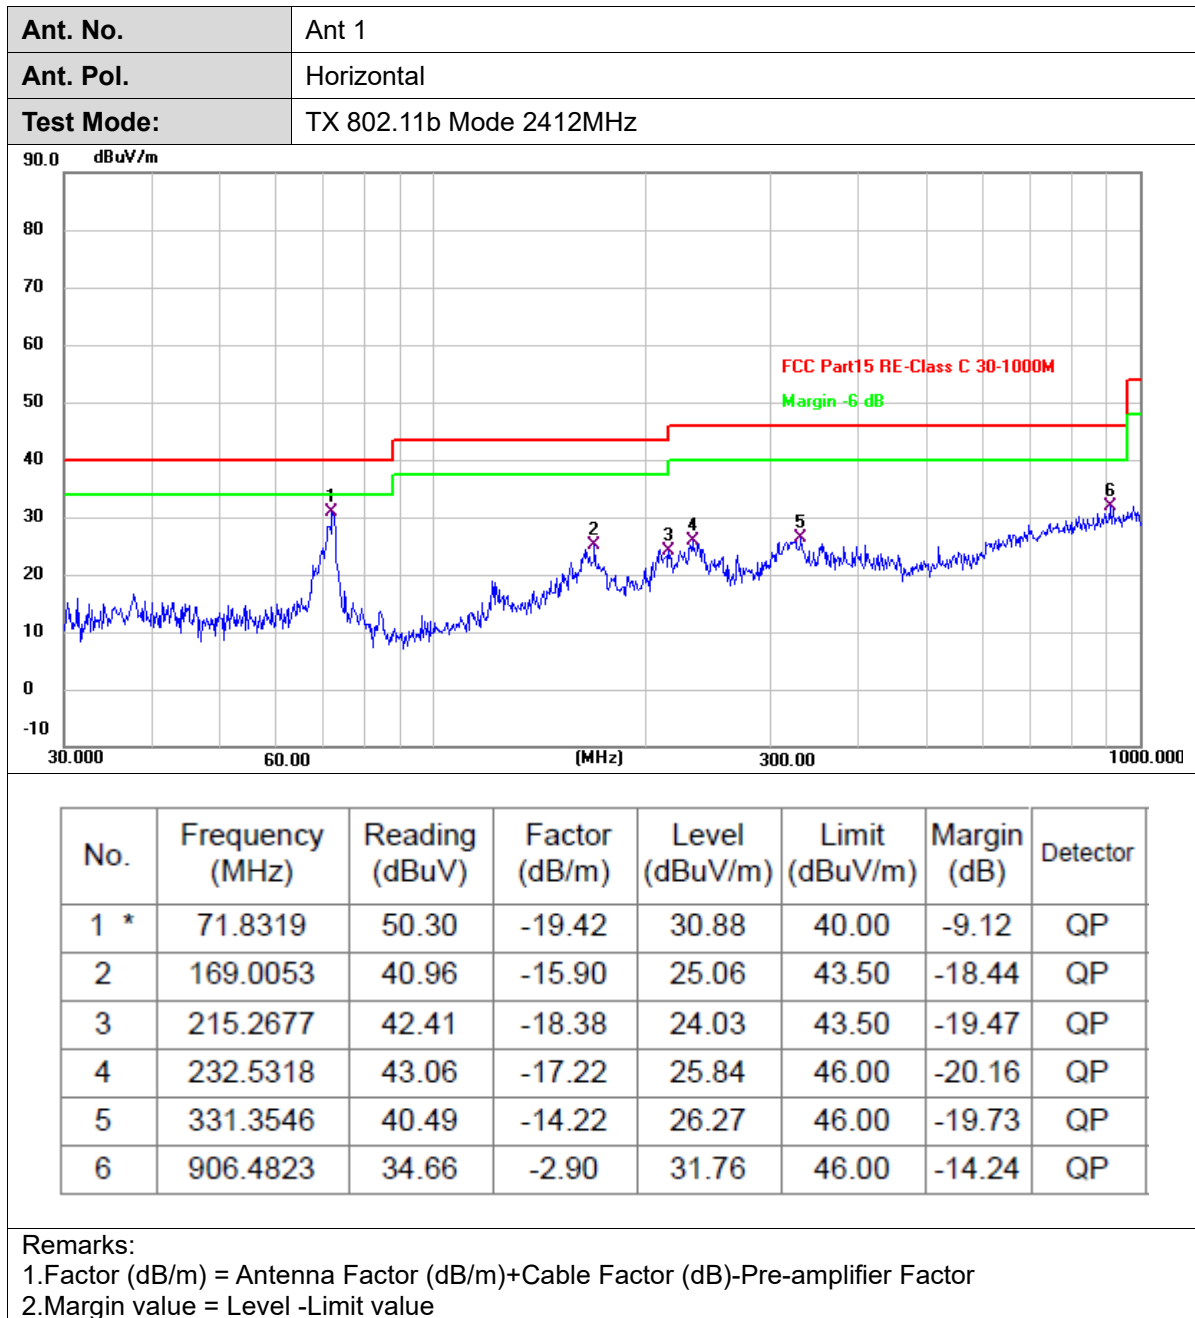


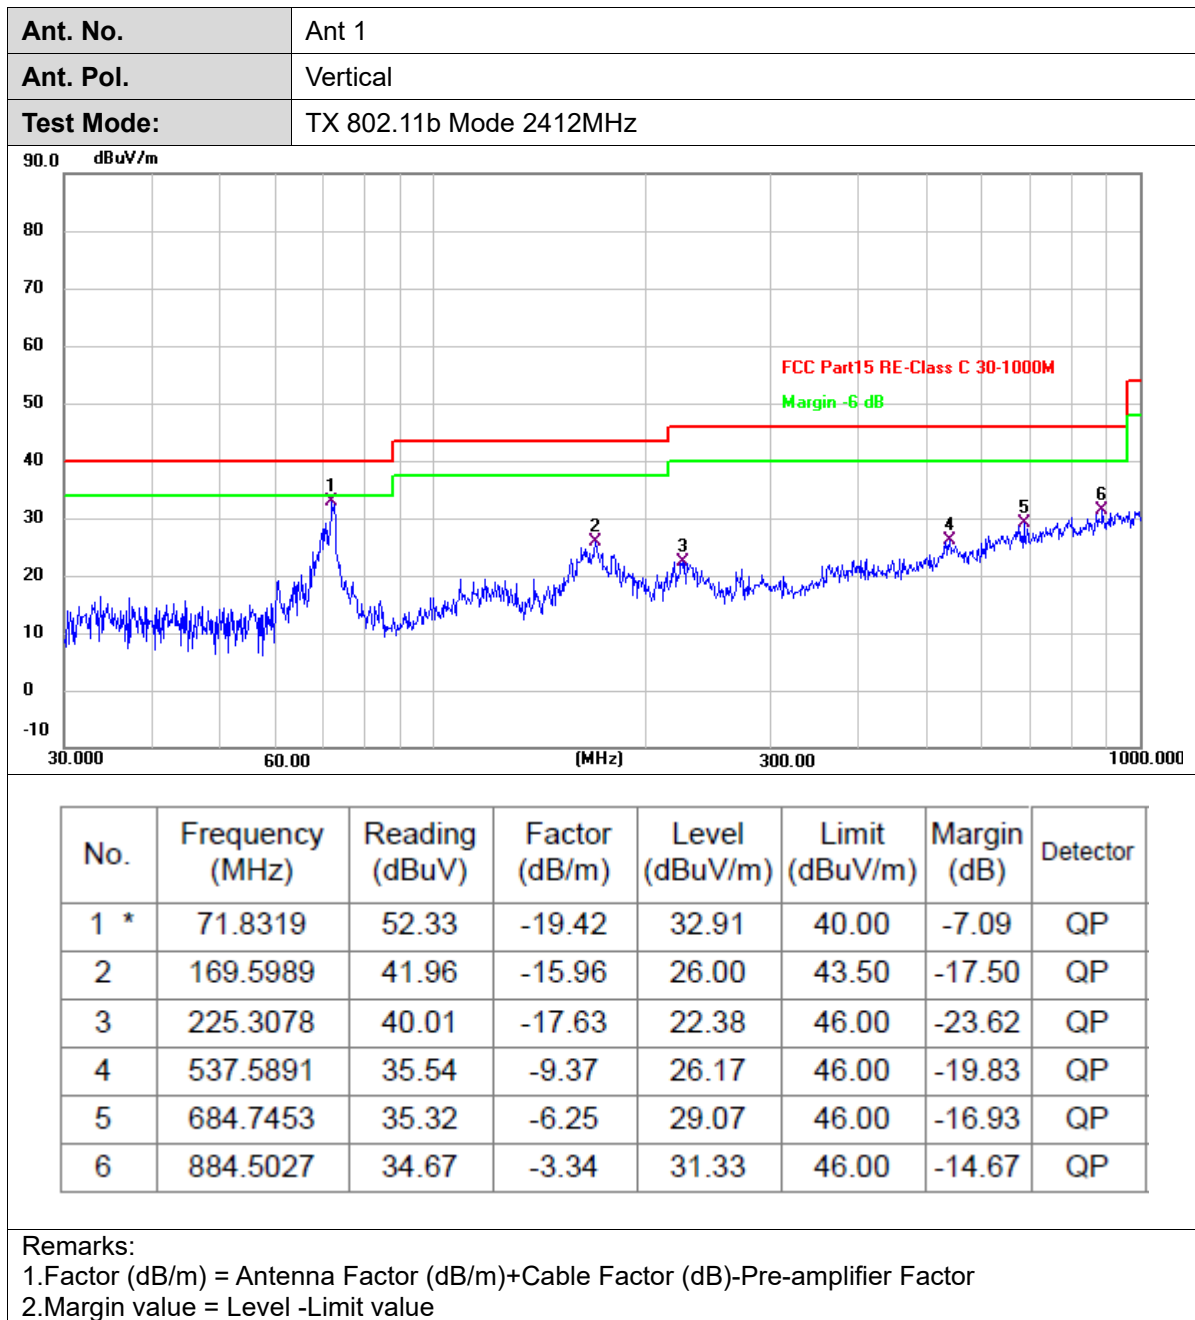



## 1GHz-18GHz

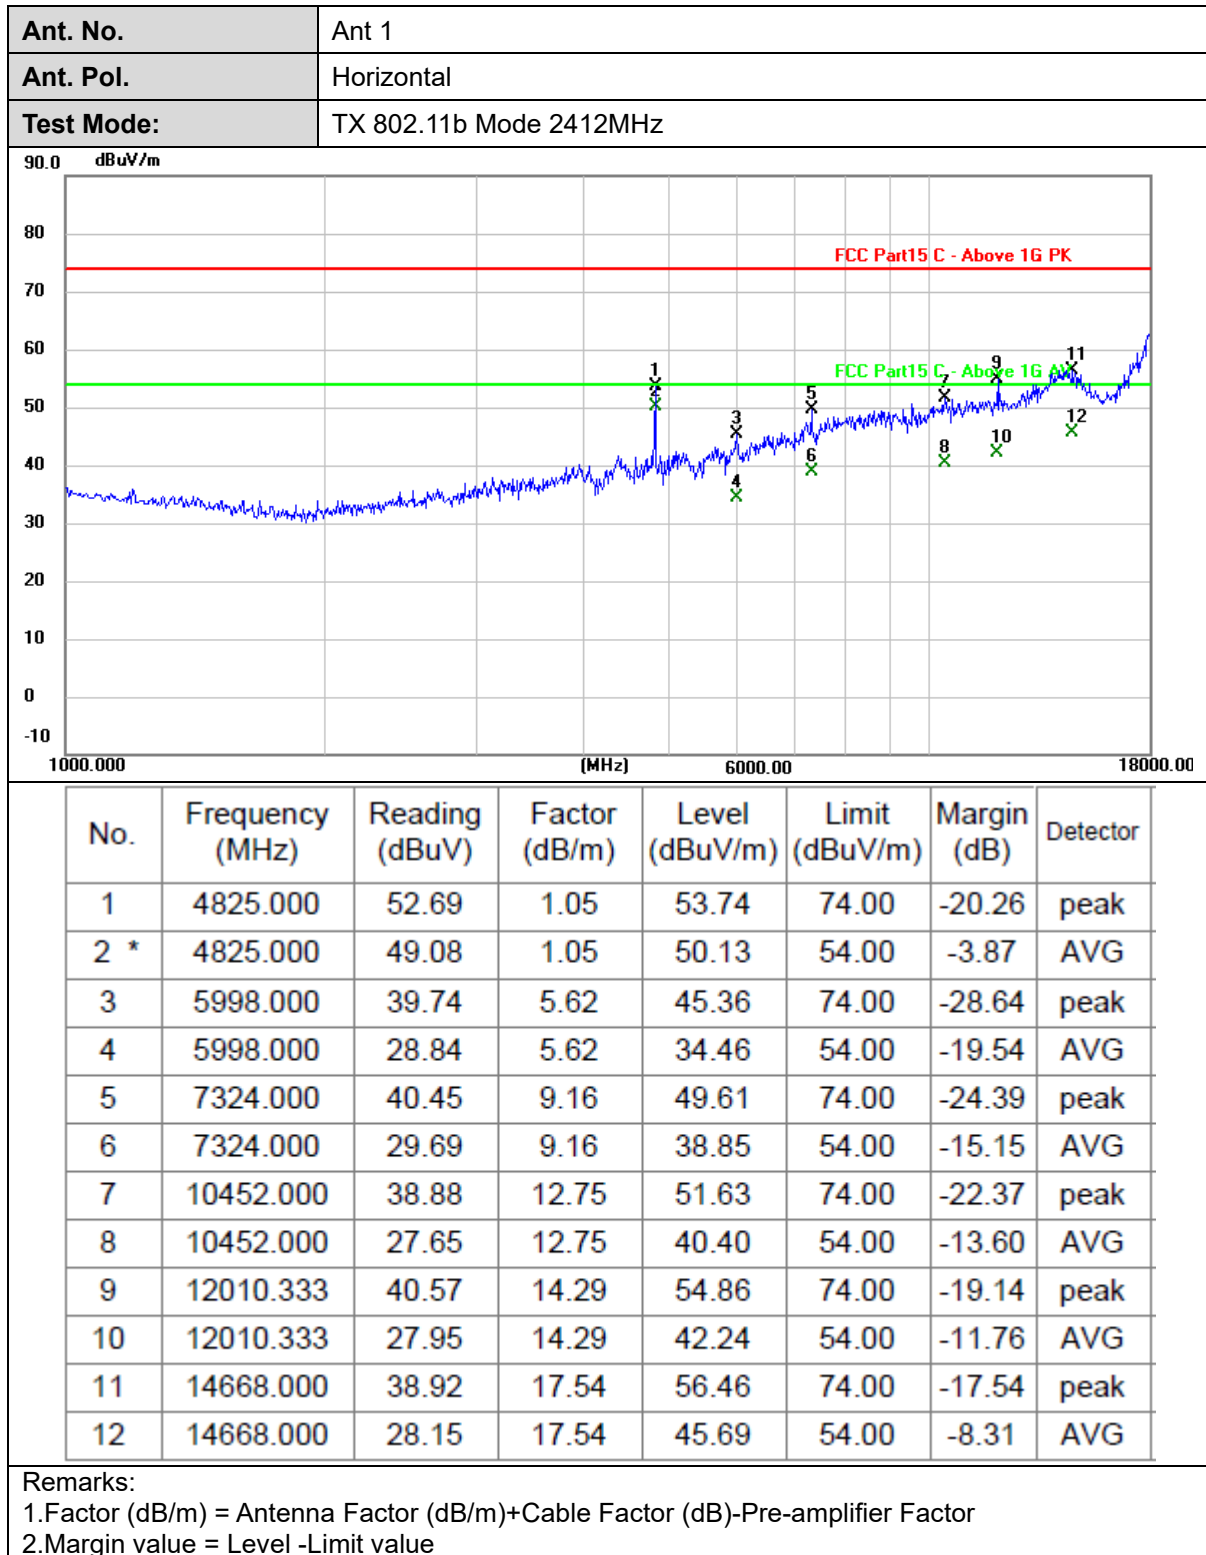


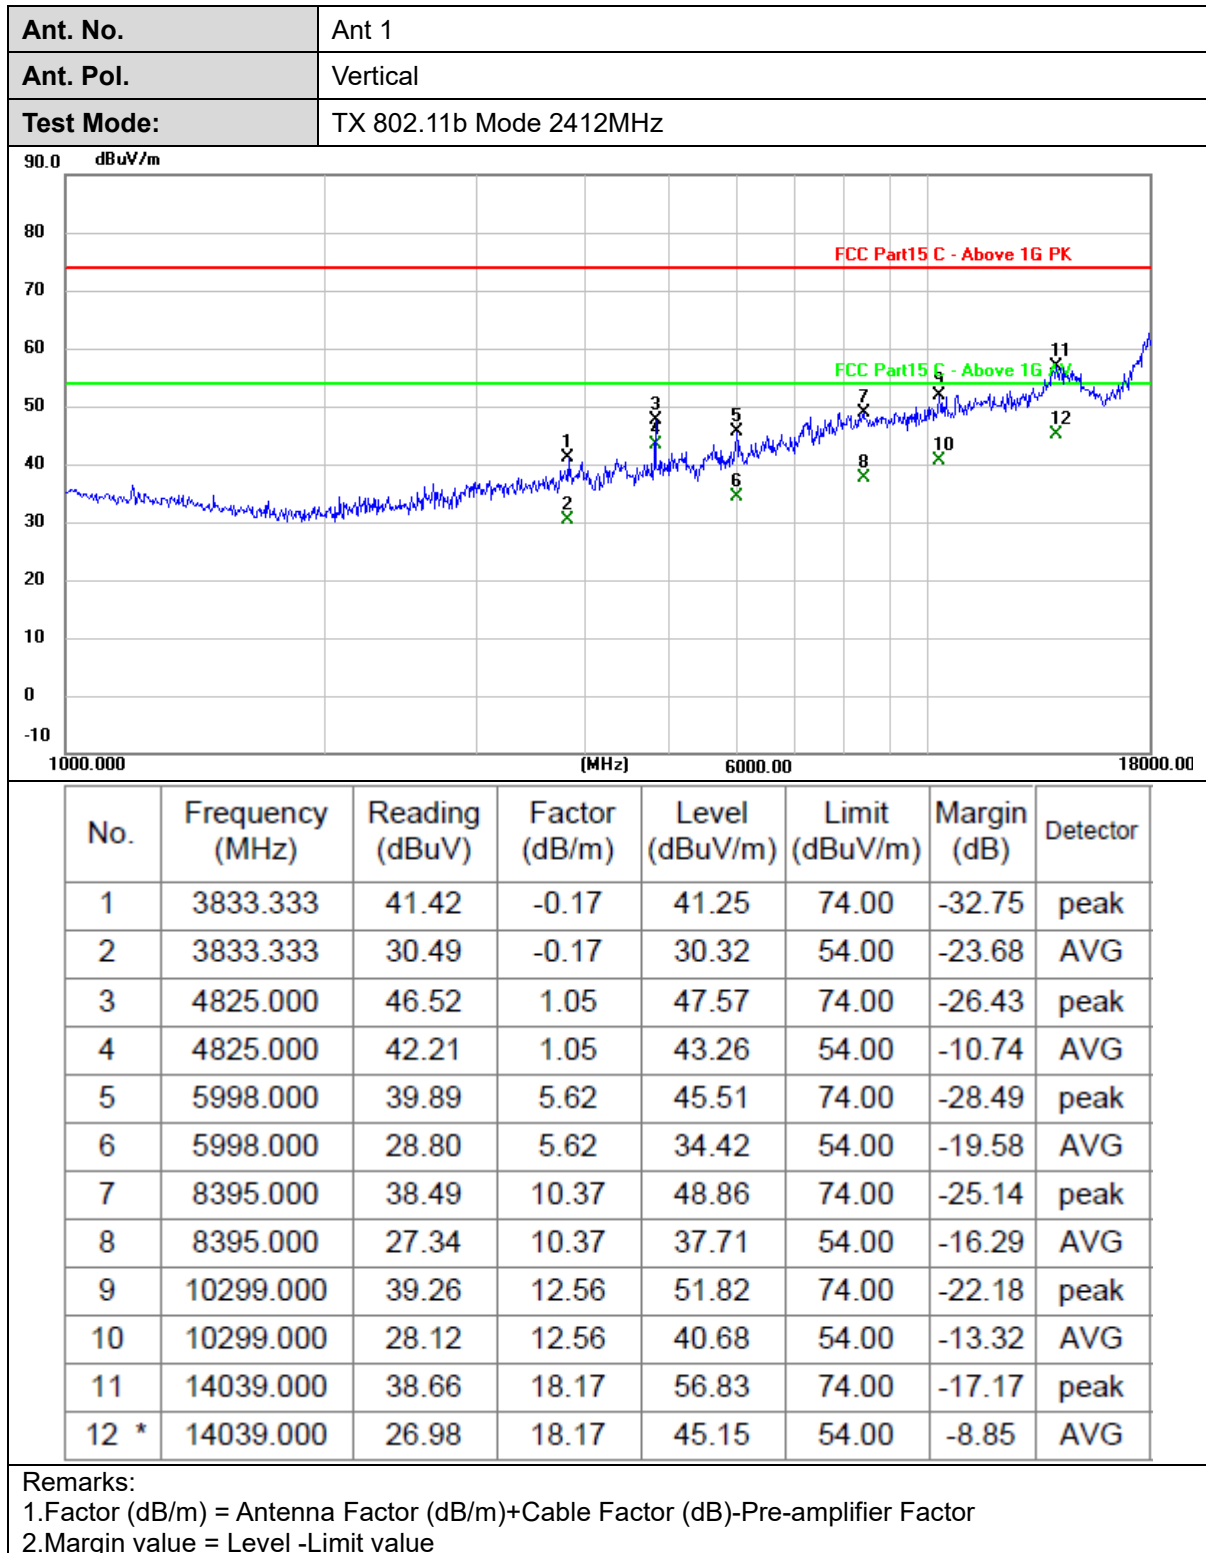

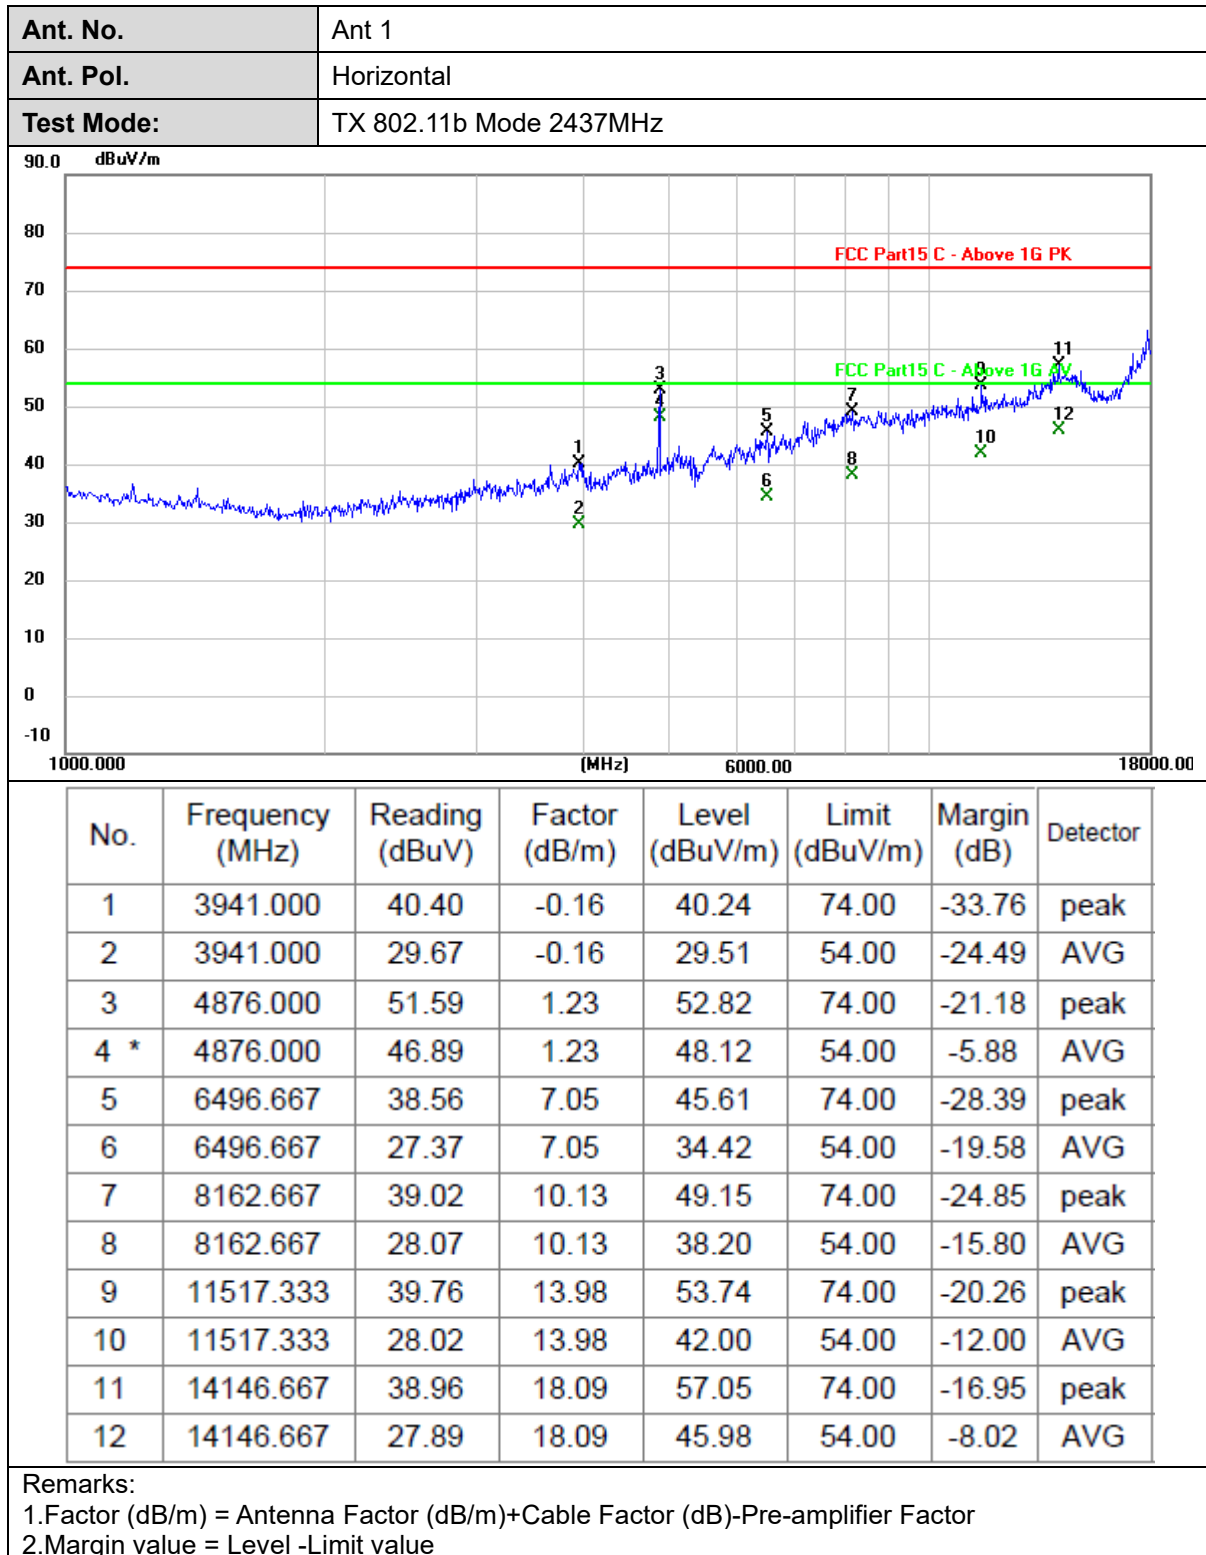


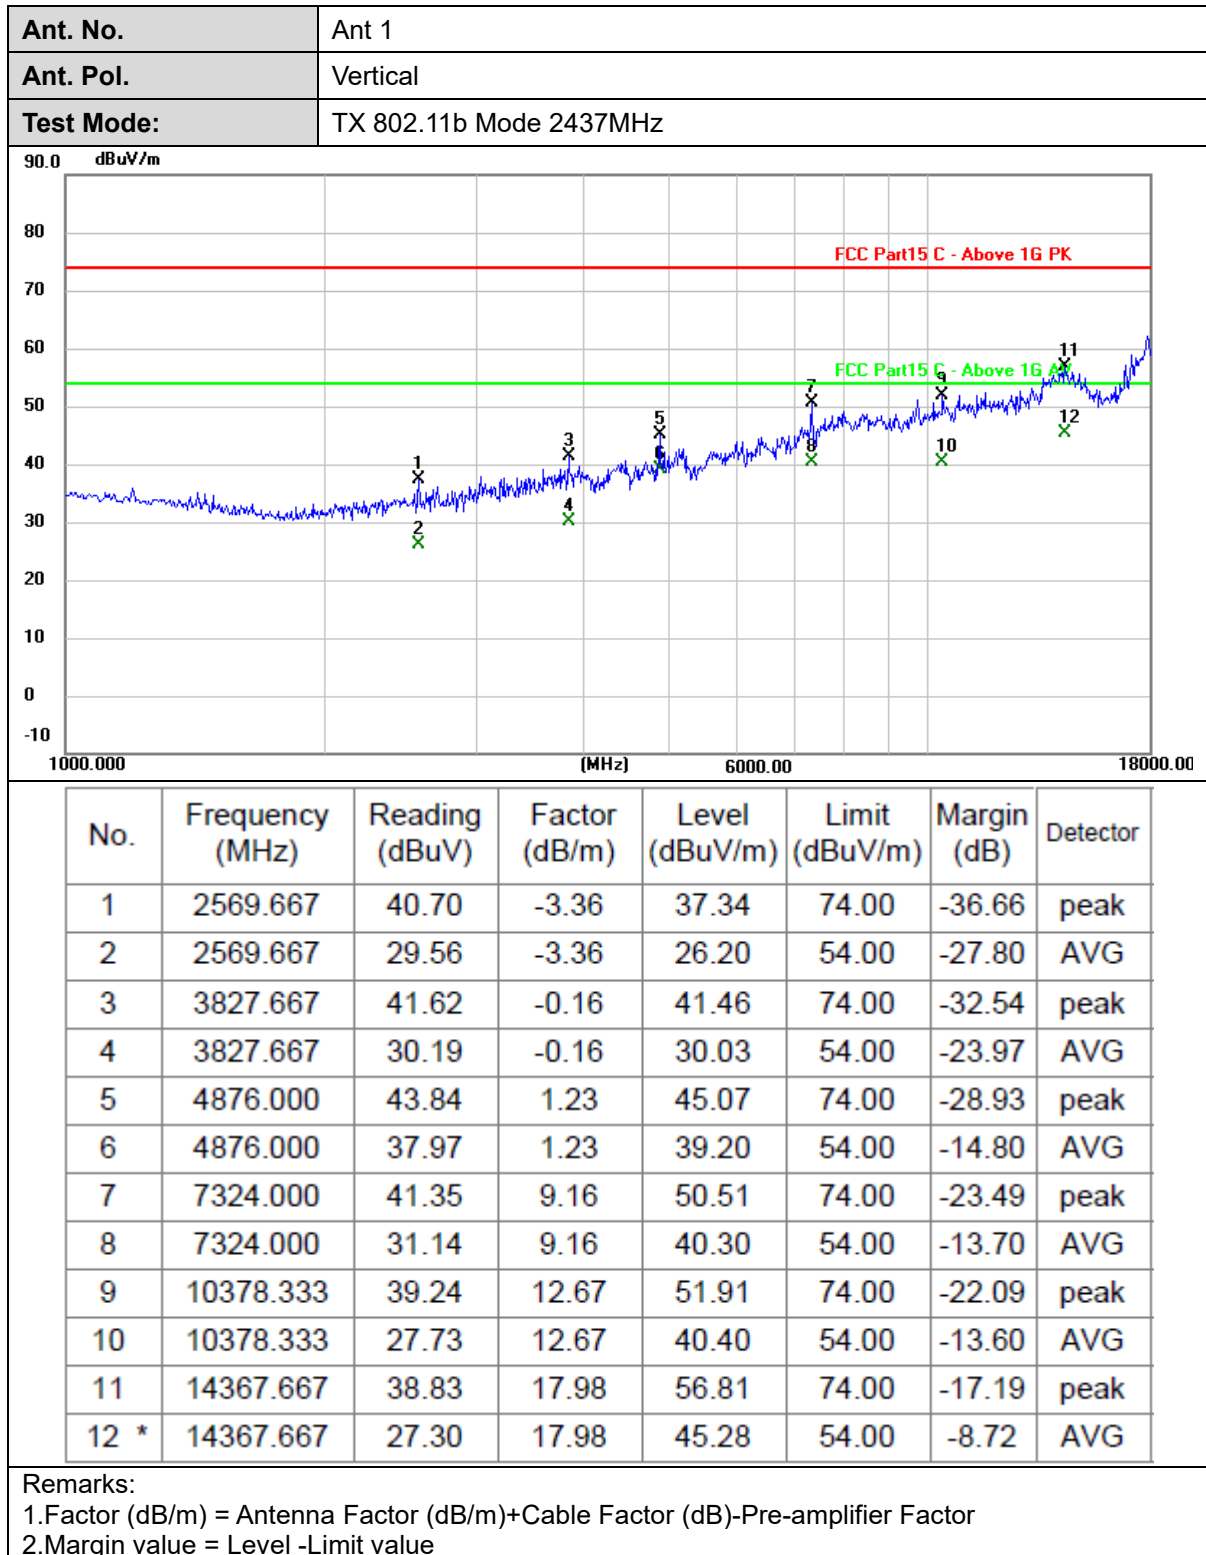


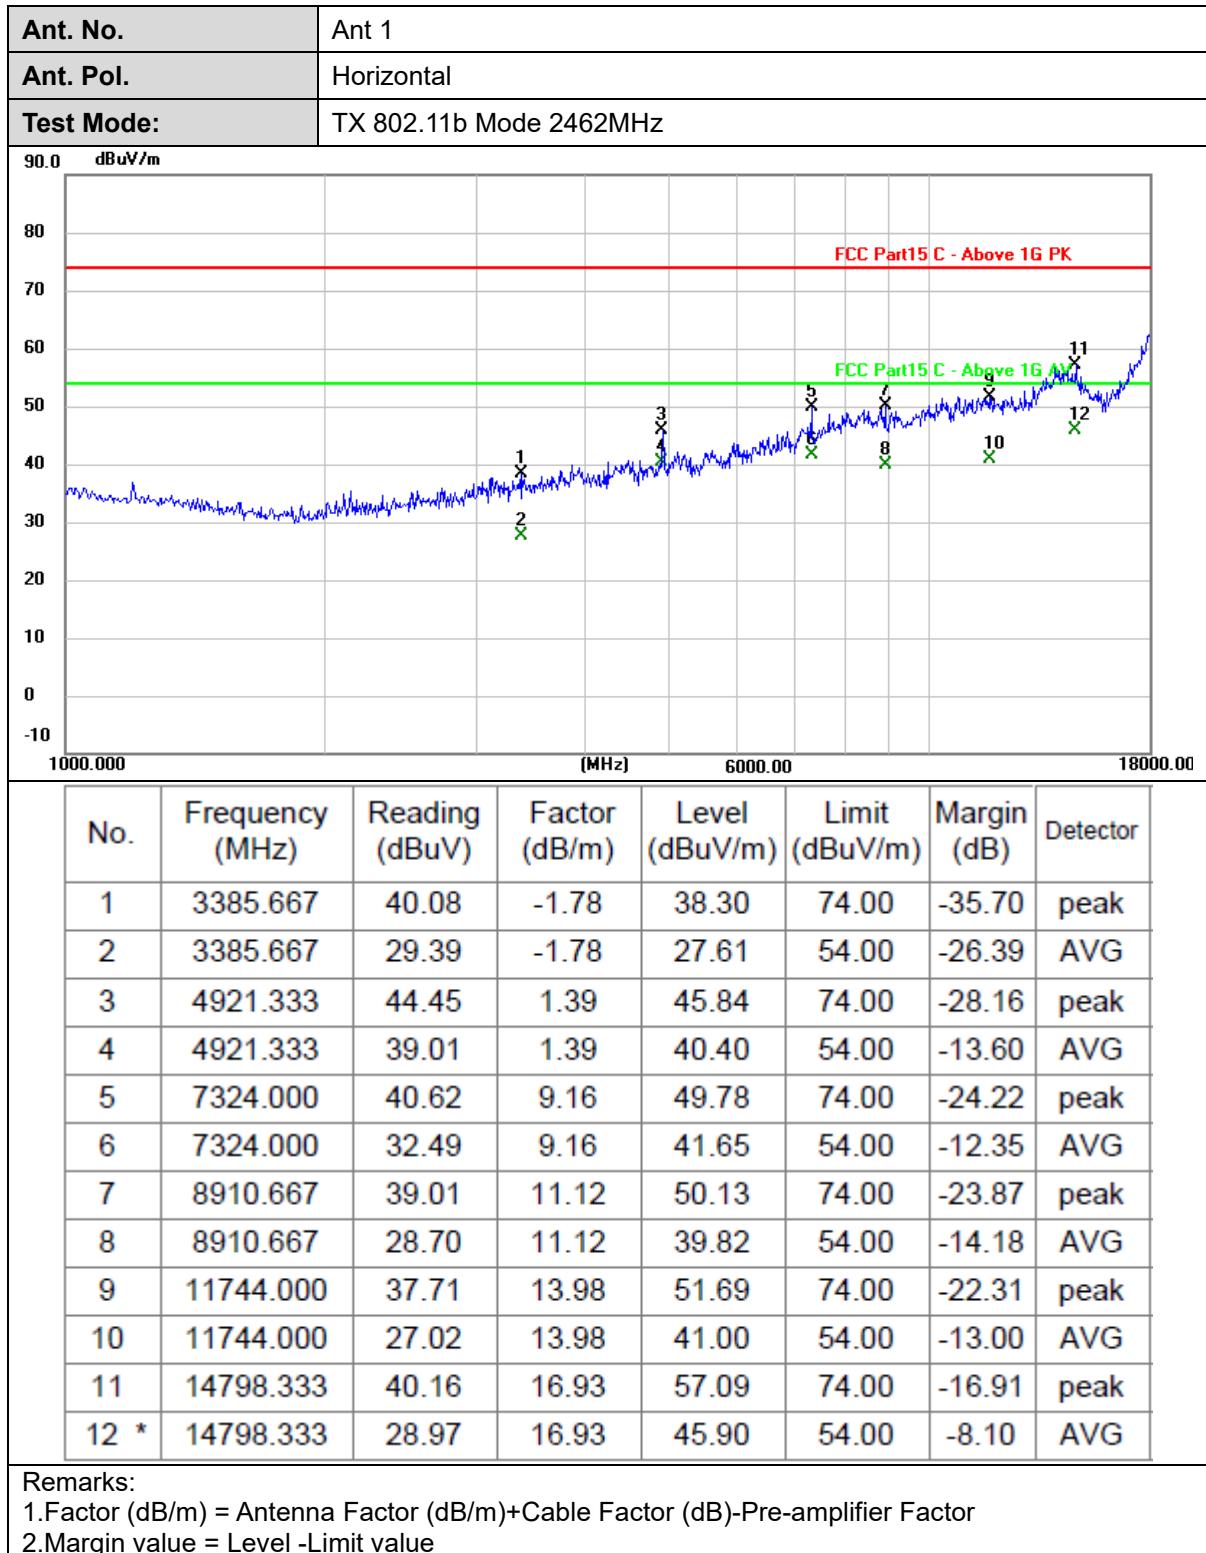


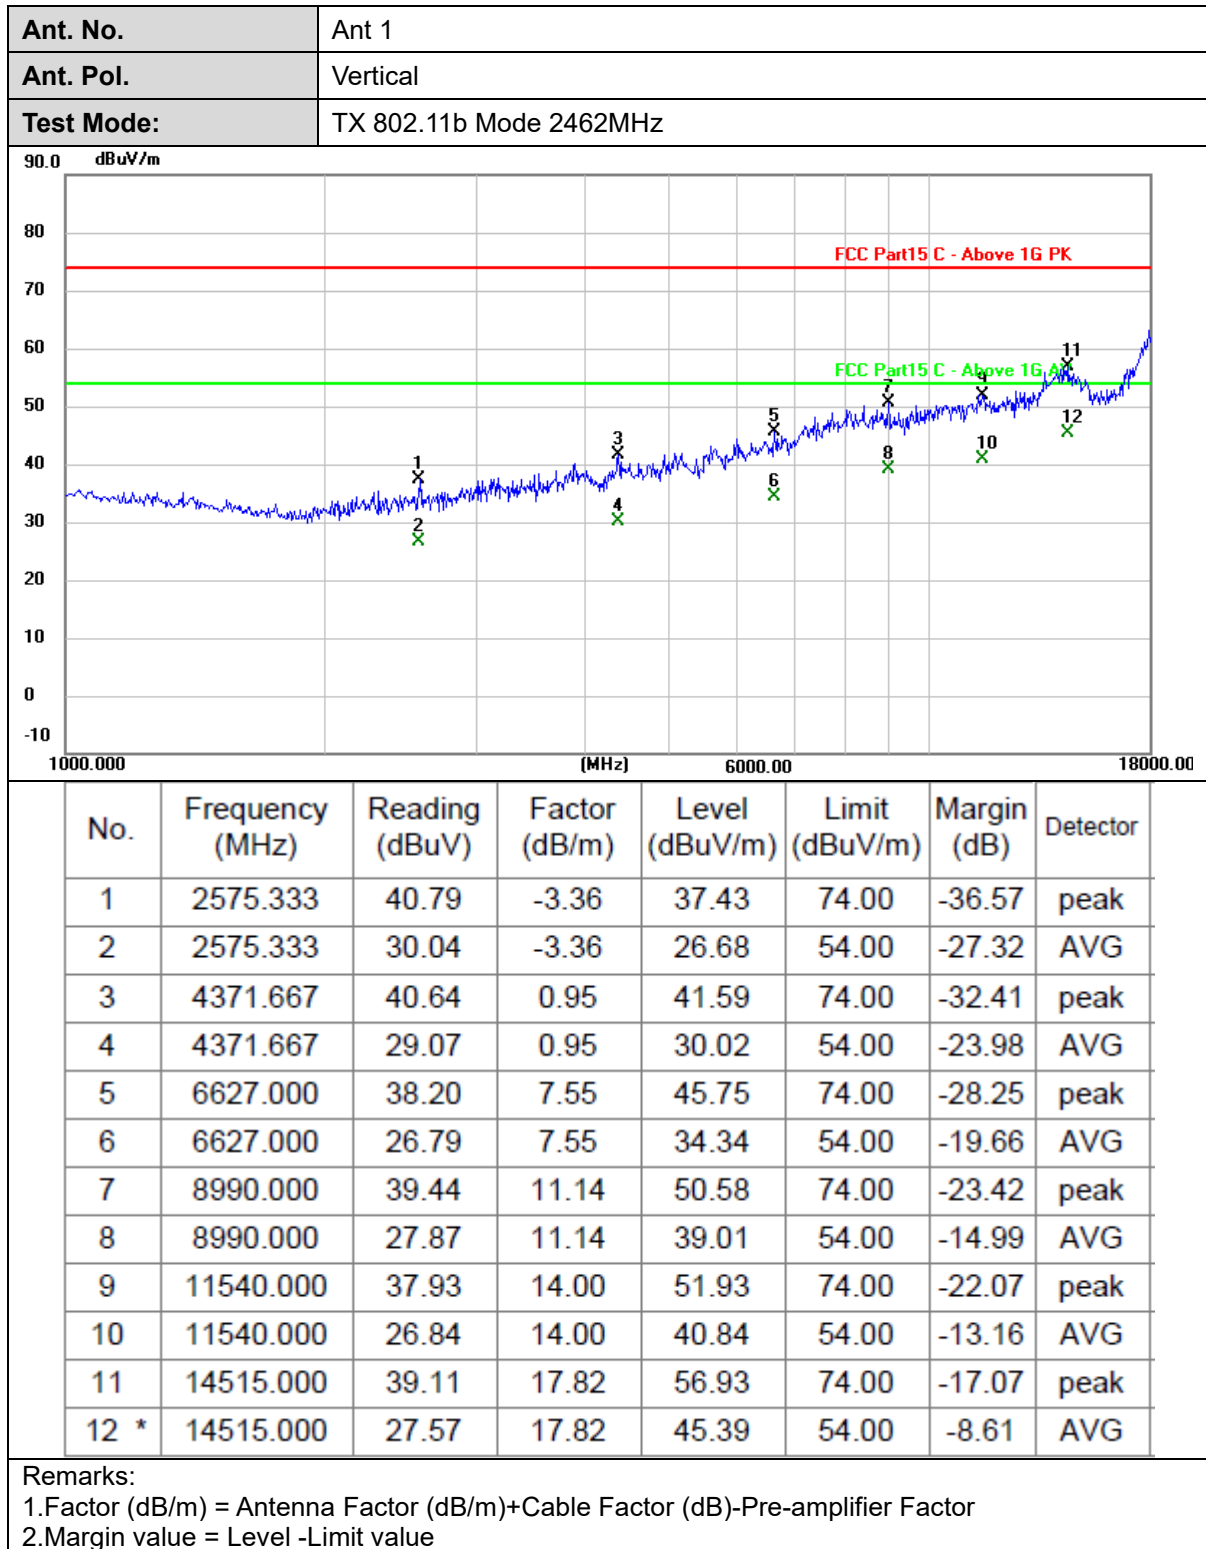



## 18GHz-26GHz

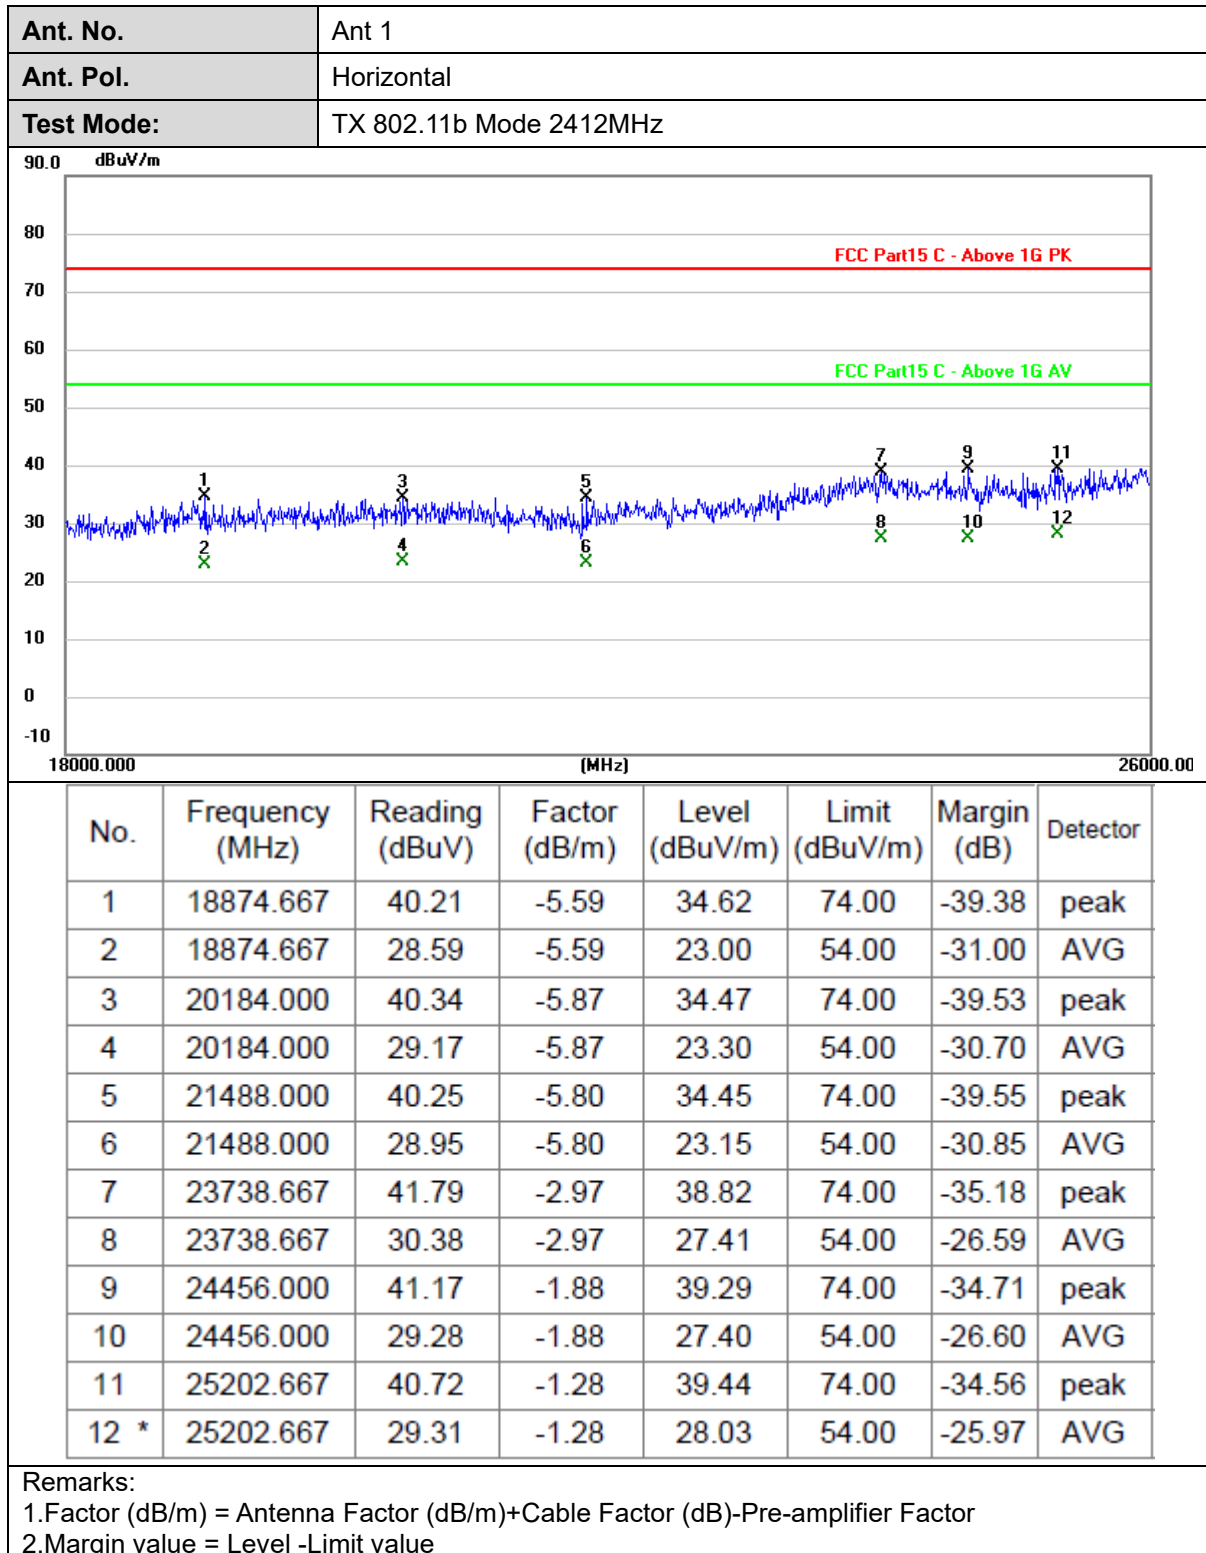


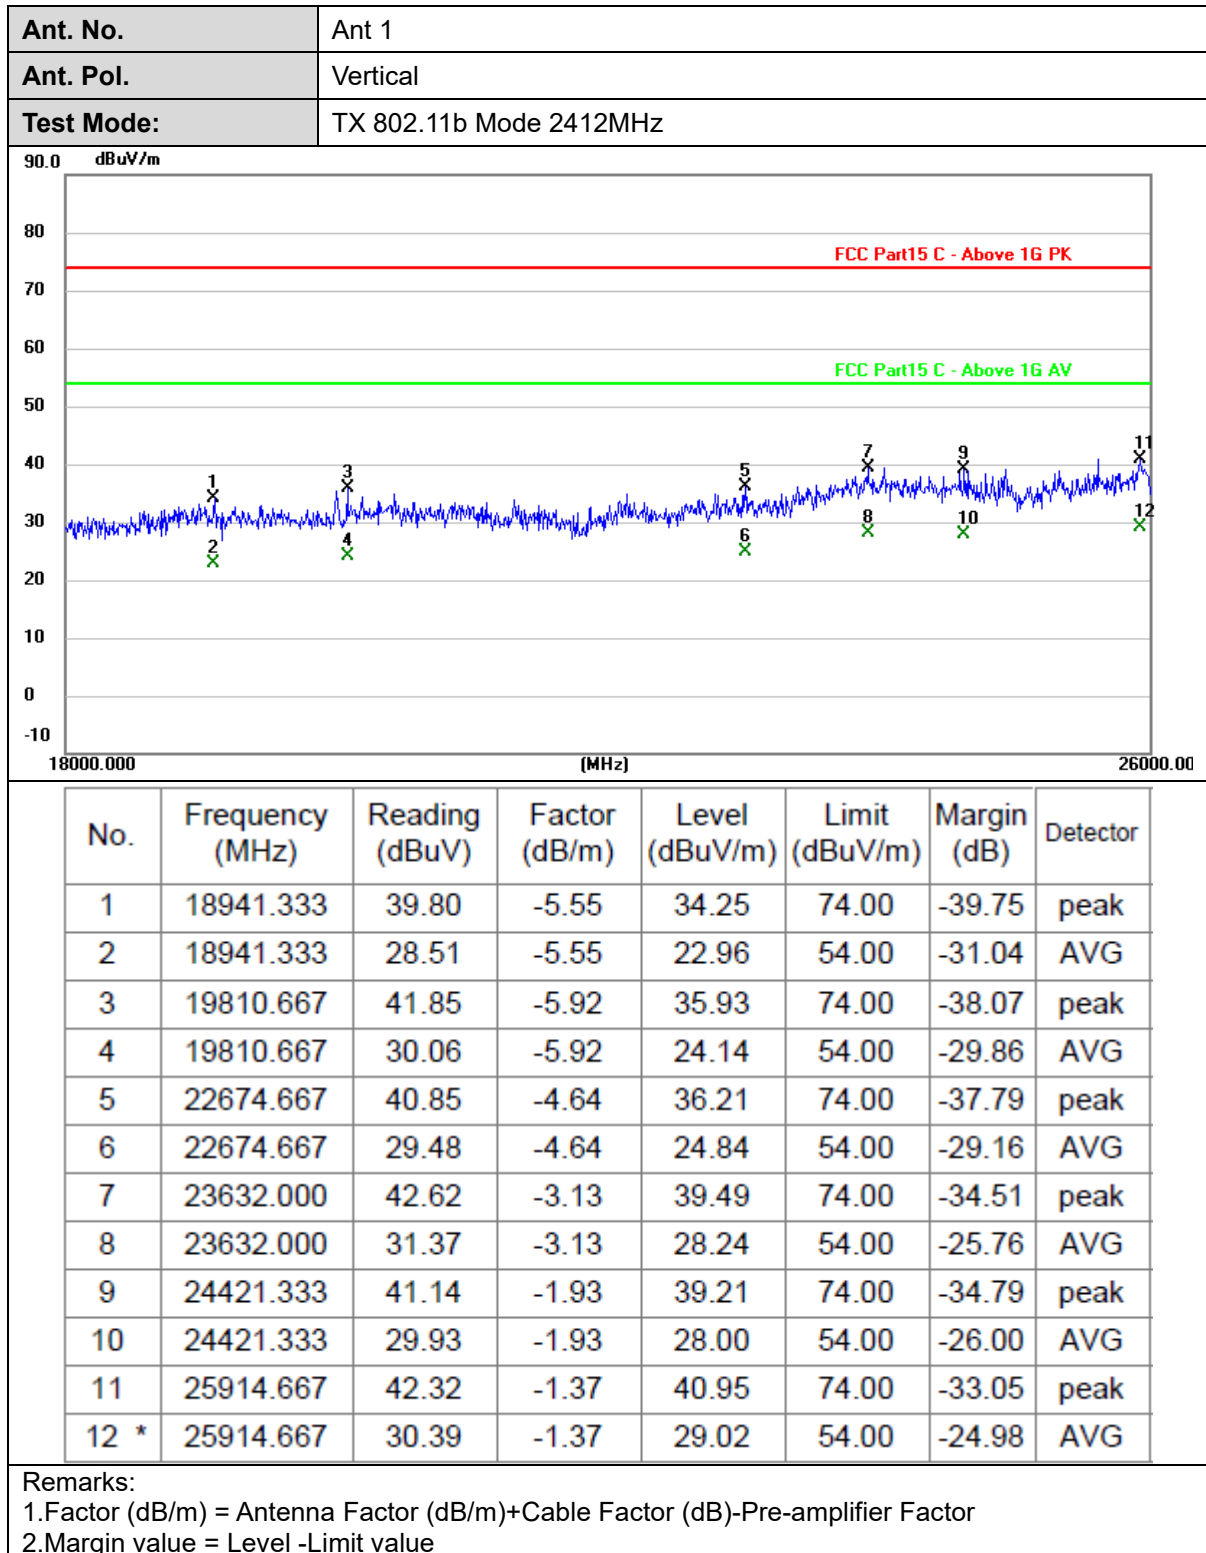

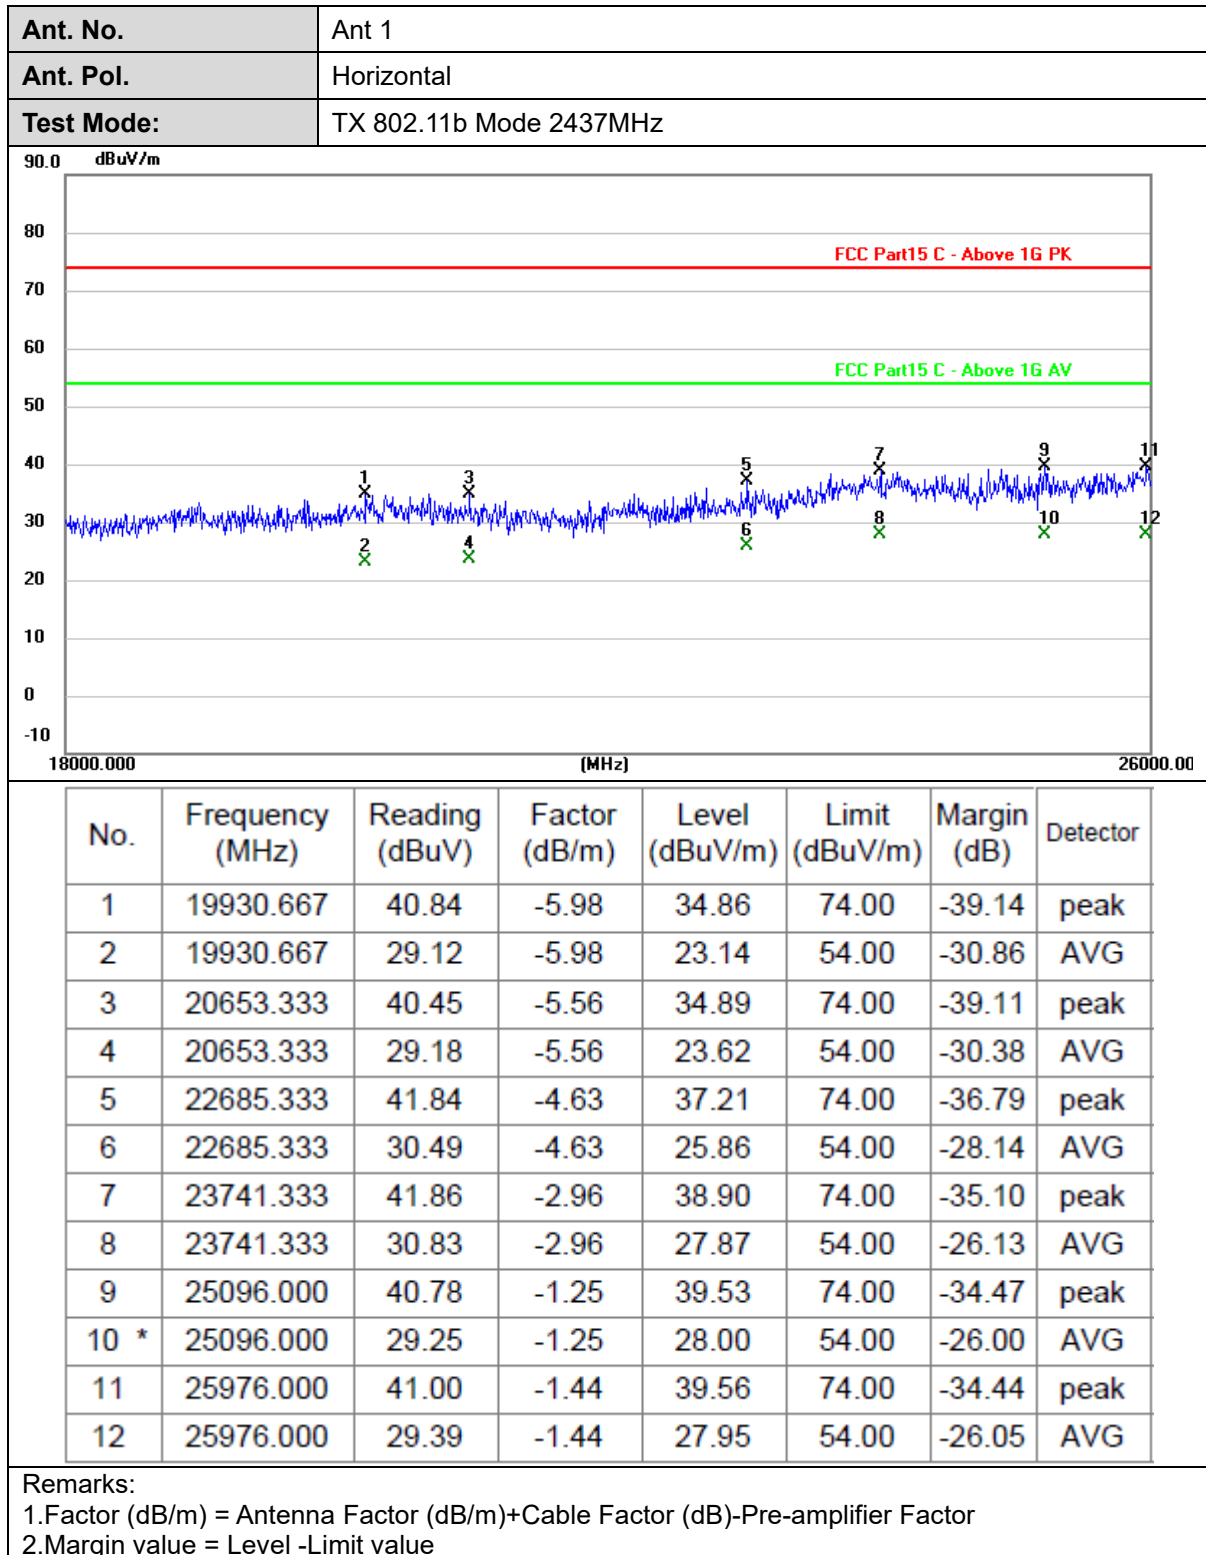

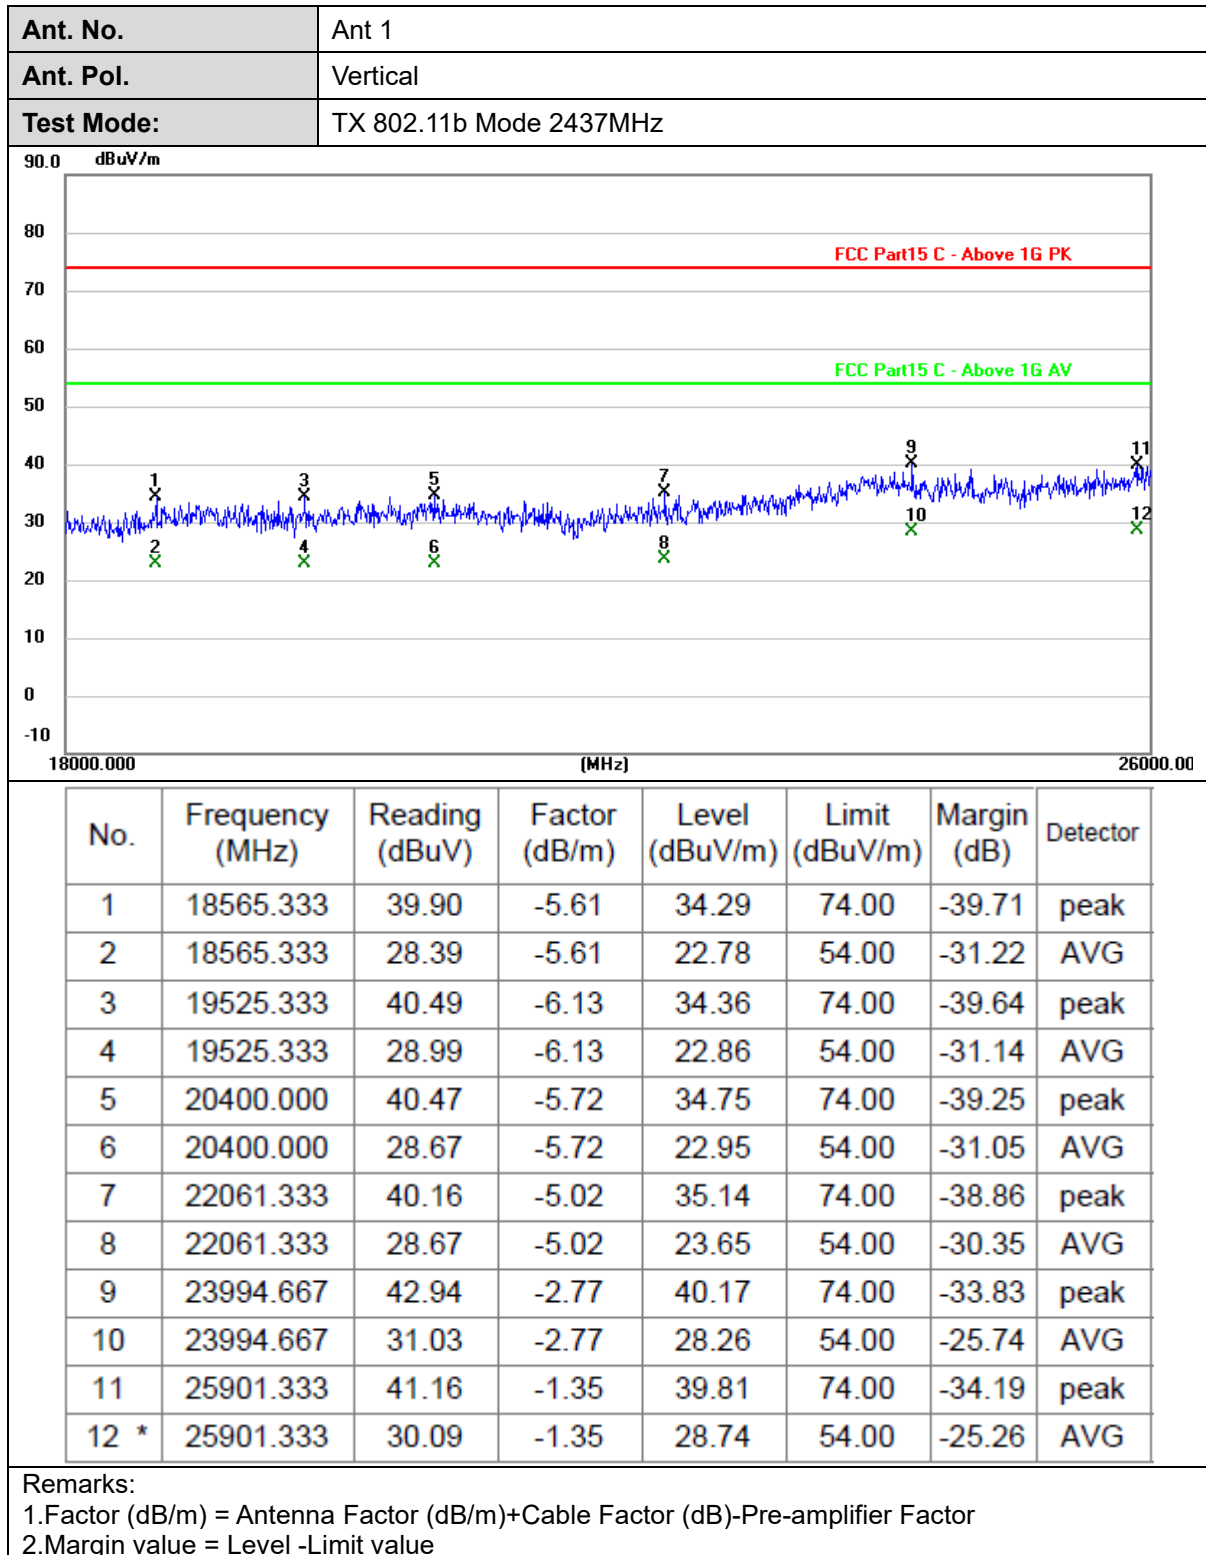

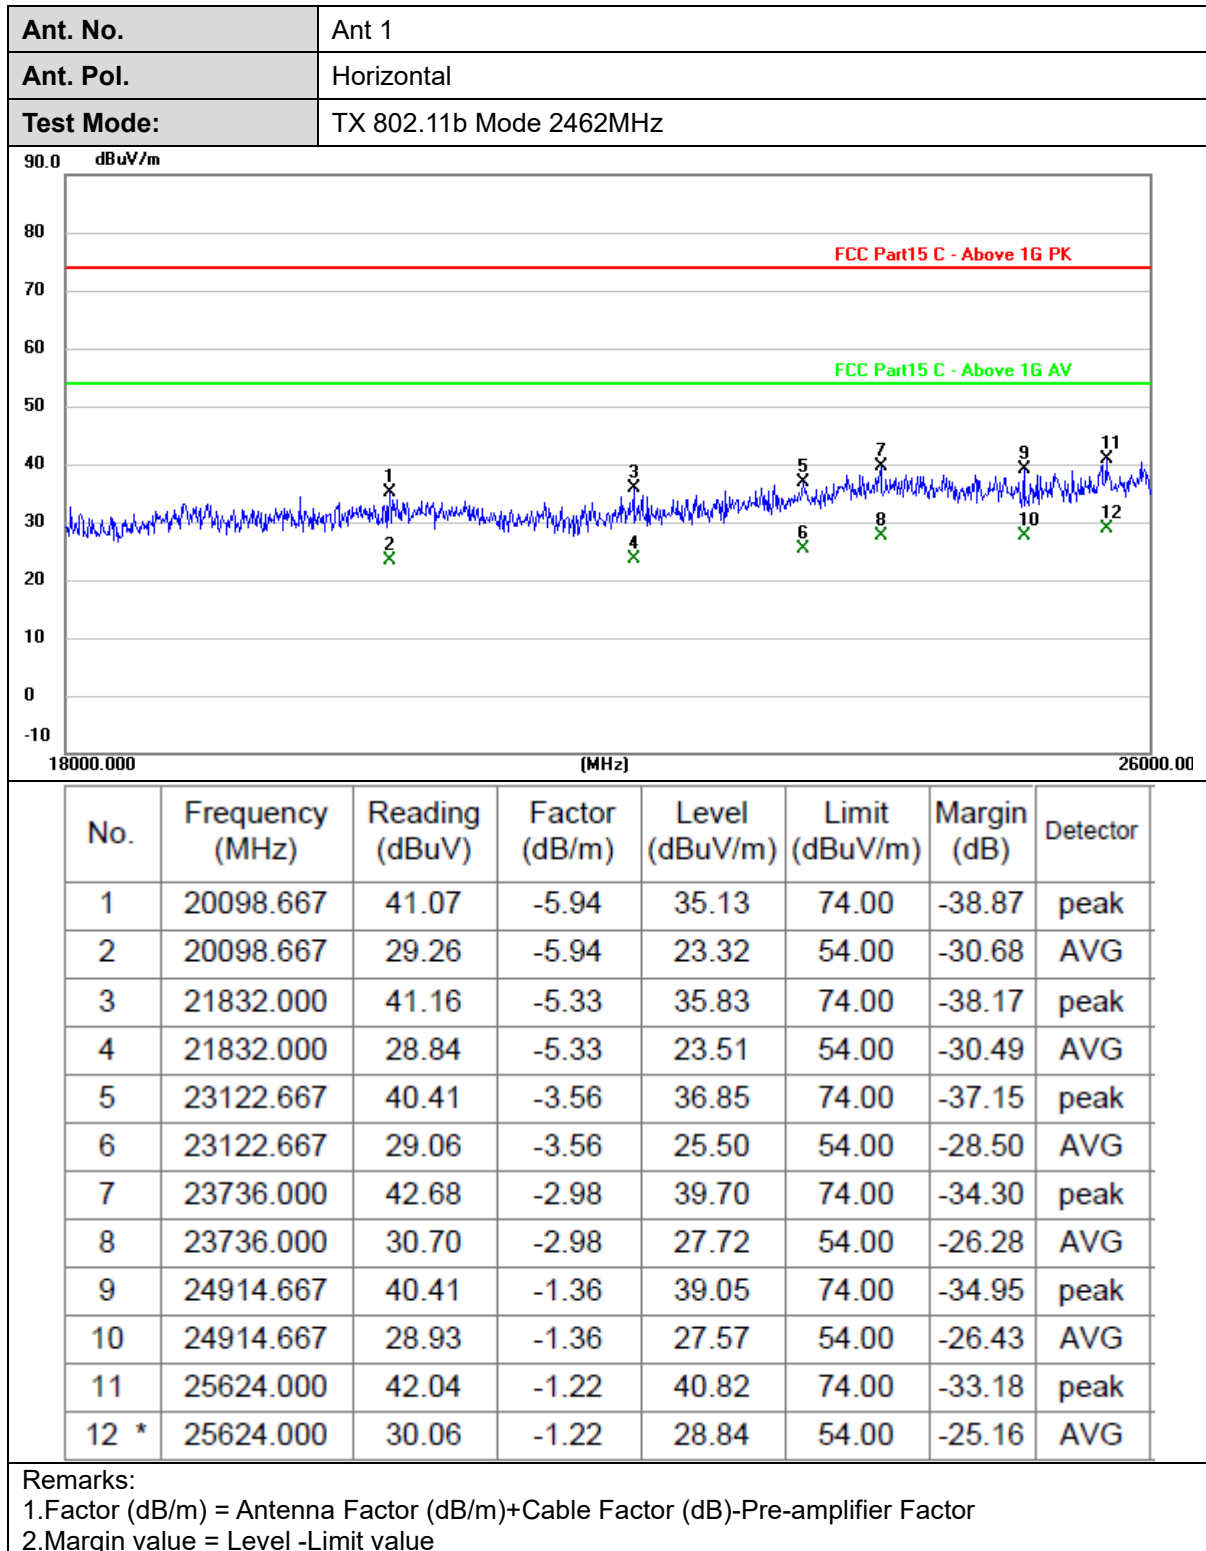

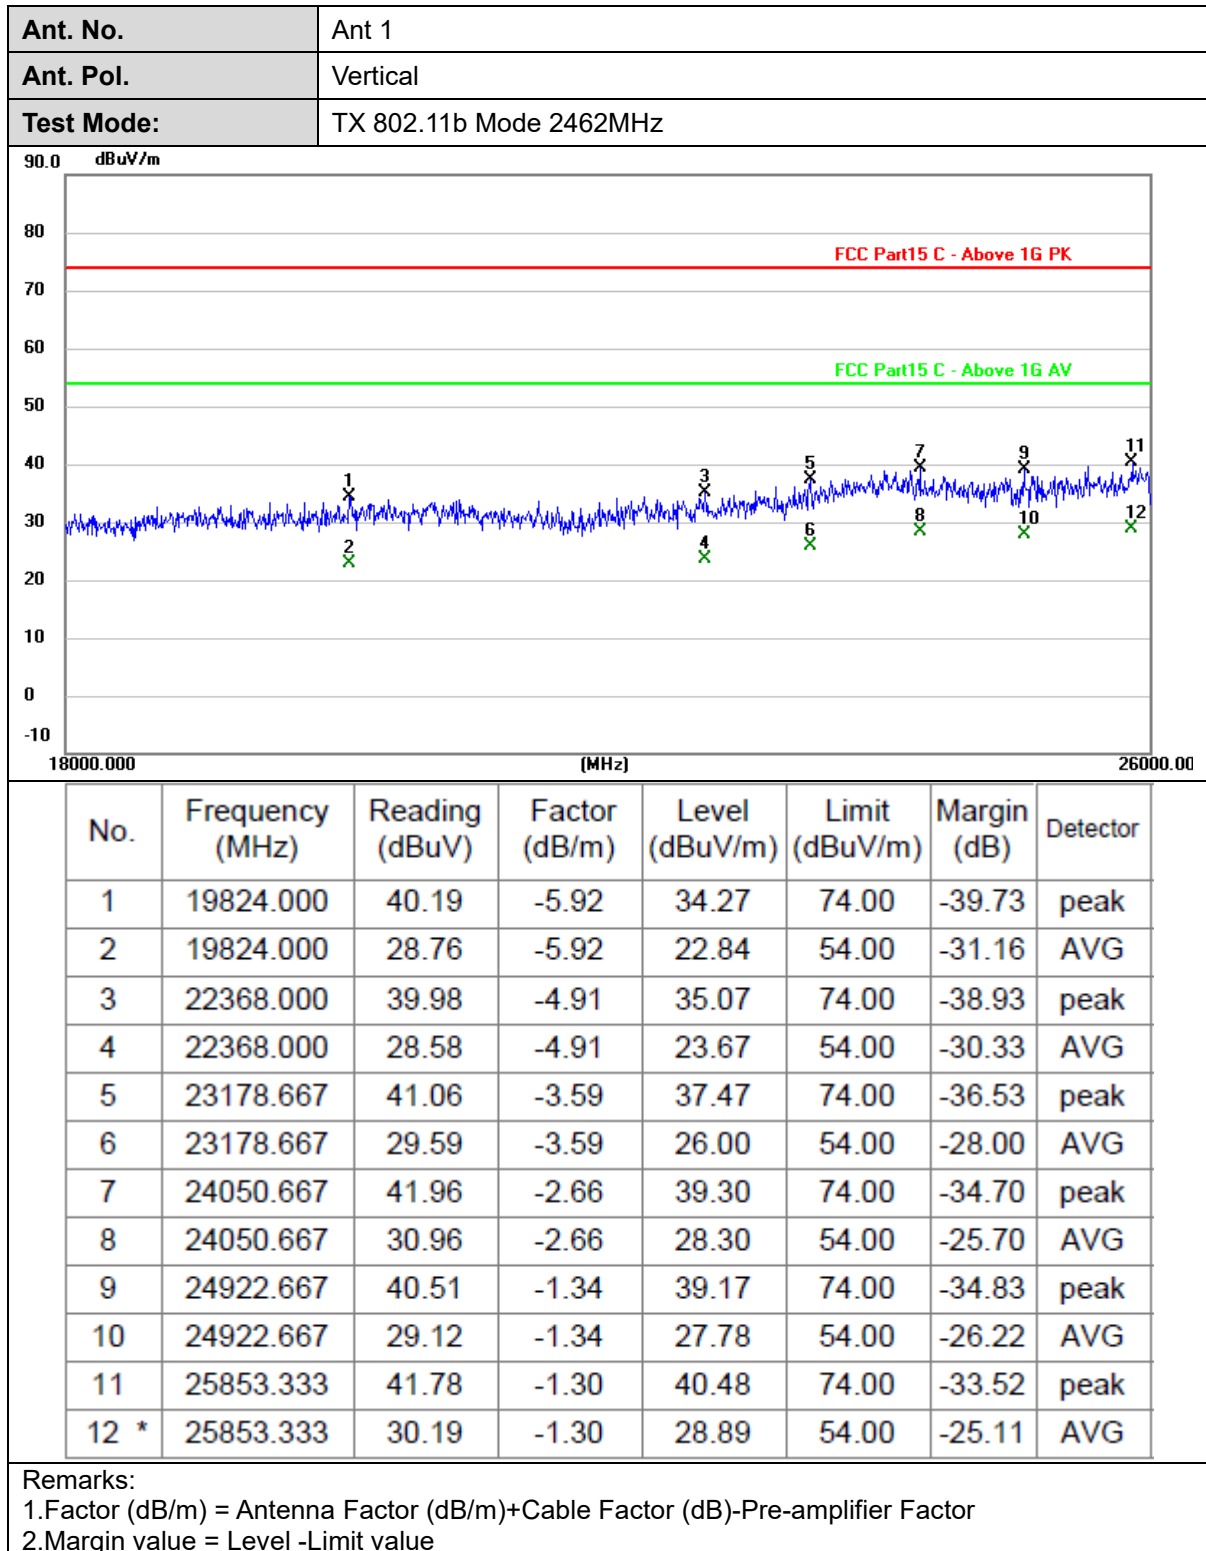


### 3.3. Band Edge Emissions (Radiated)

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 6.6

| Restricted Frequency Band<br>(MHz) | (dB $\mu$ V/m) (at 3m) |         |
|------------------------------------|------------------------|---------|
|                                    | Peak                   | Average |
| 2310 ~ 2390                        | 74                     | 54      |
| 2483.5 ~ 2500                      | 74                     | 54      |

#### Test Configuration

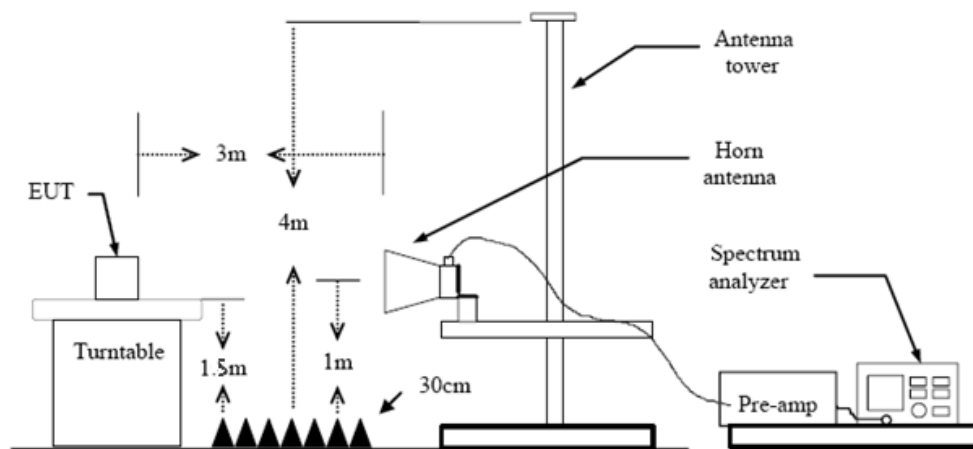


#### Test Procedure


1. The EUT was setup and tested according to ANSI C63.10 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


#### Test Mode


Please refer to the clause 2.4.

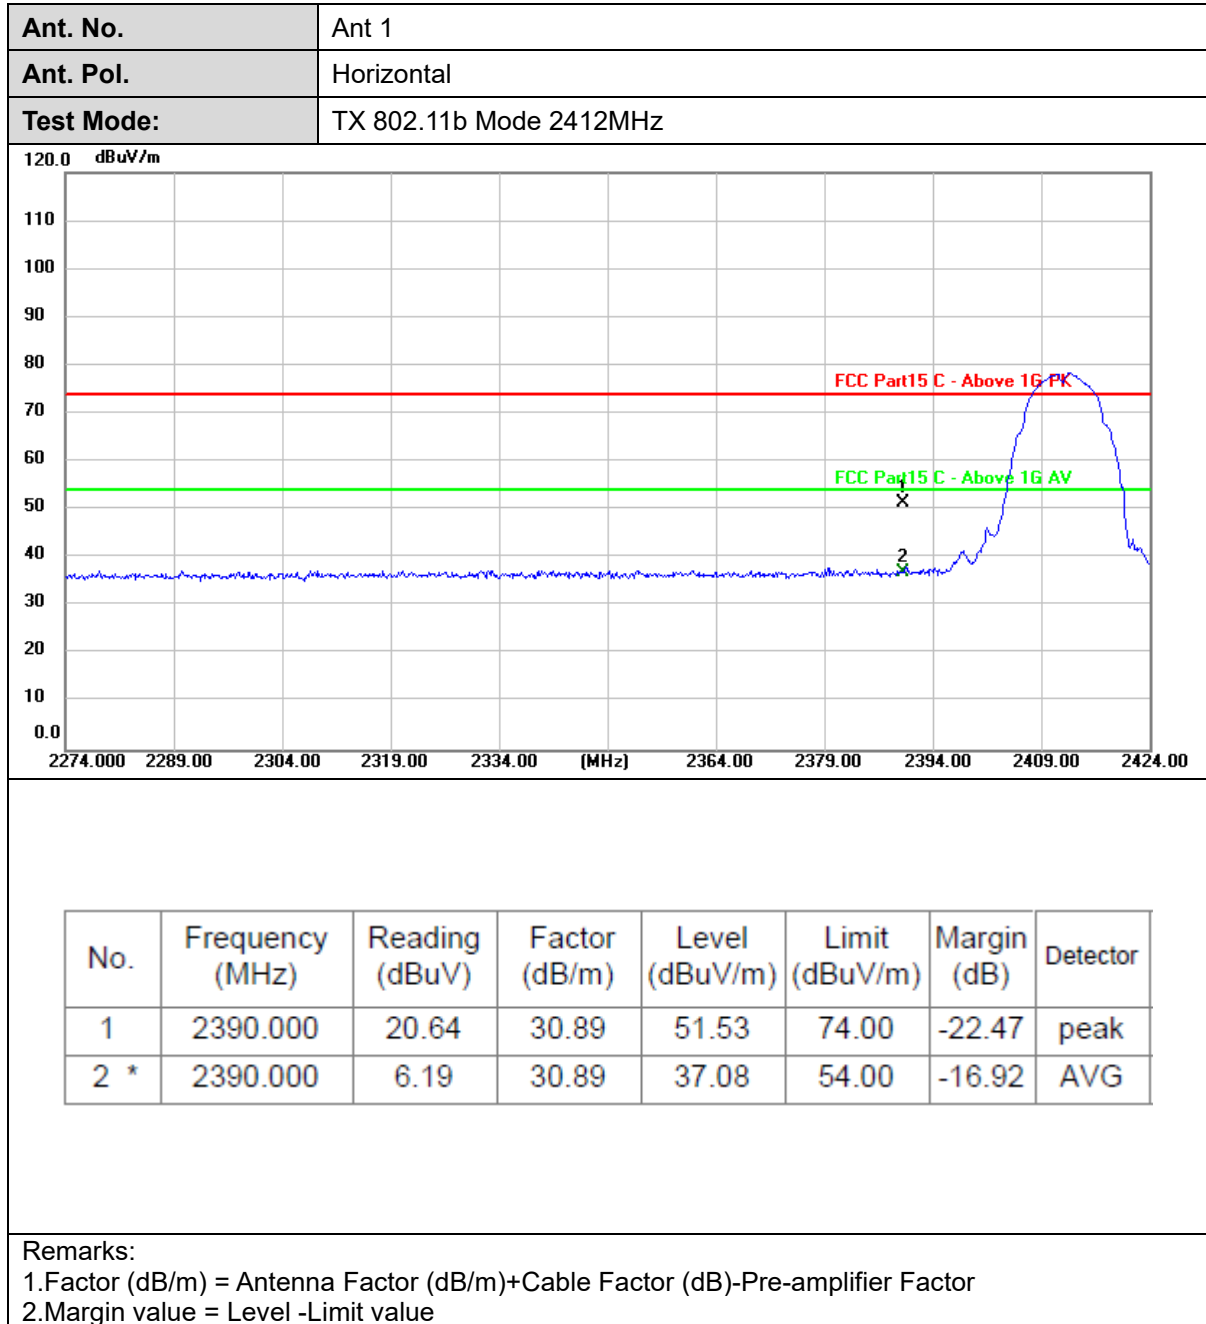
**Test Result**

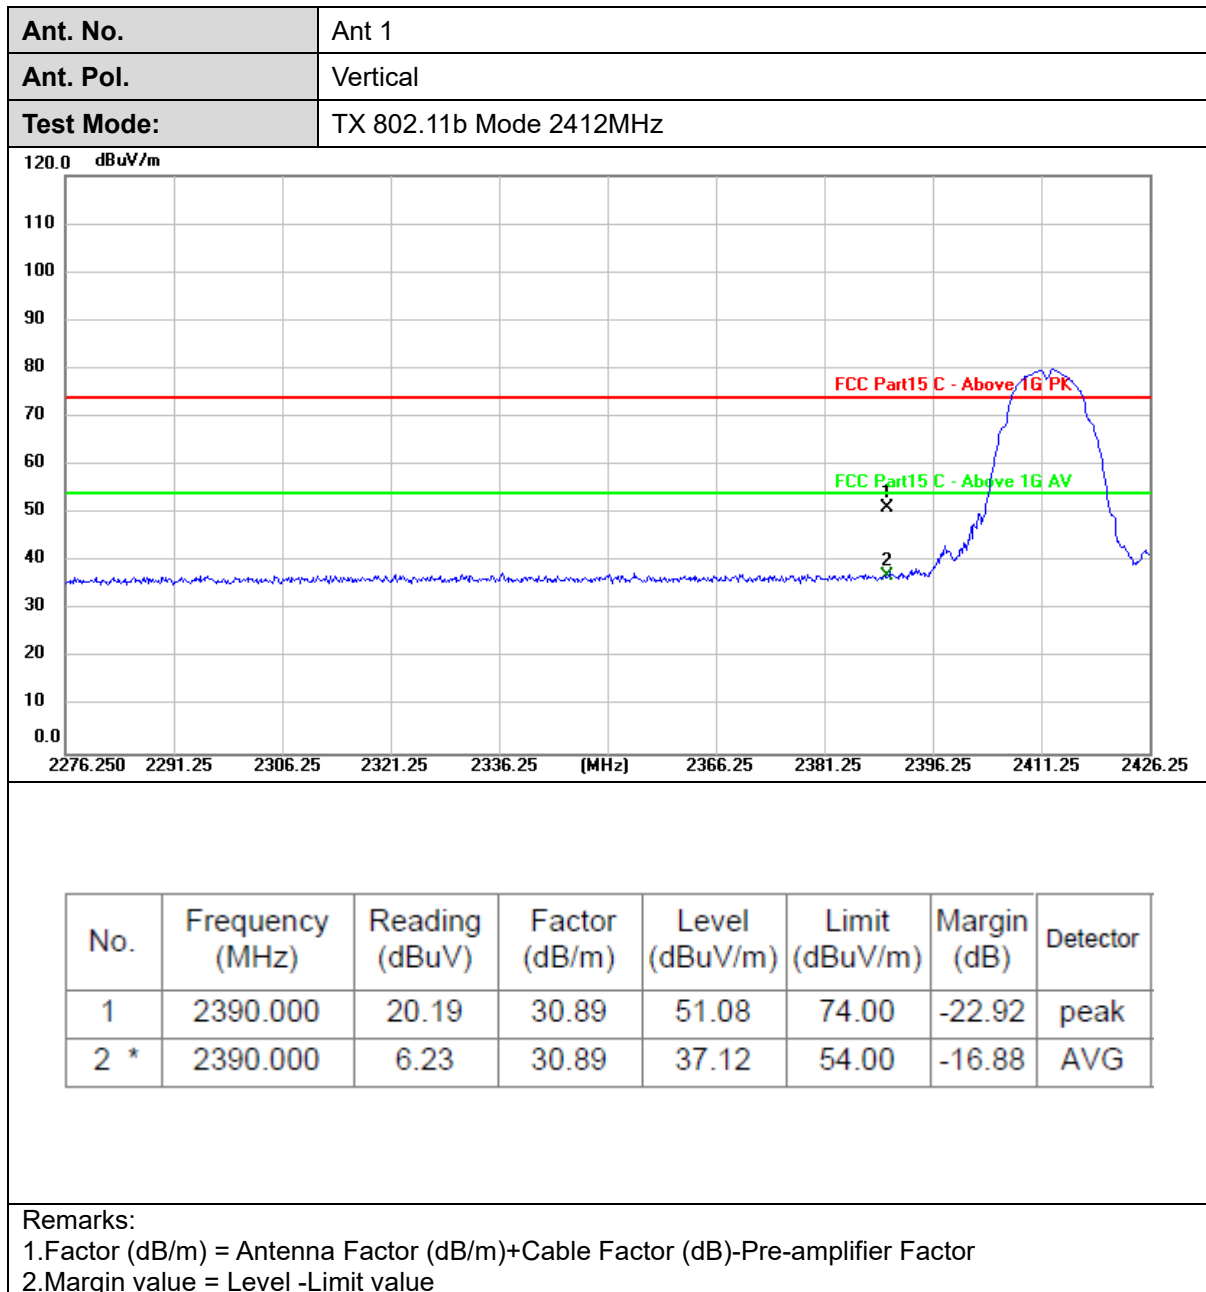


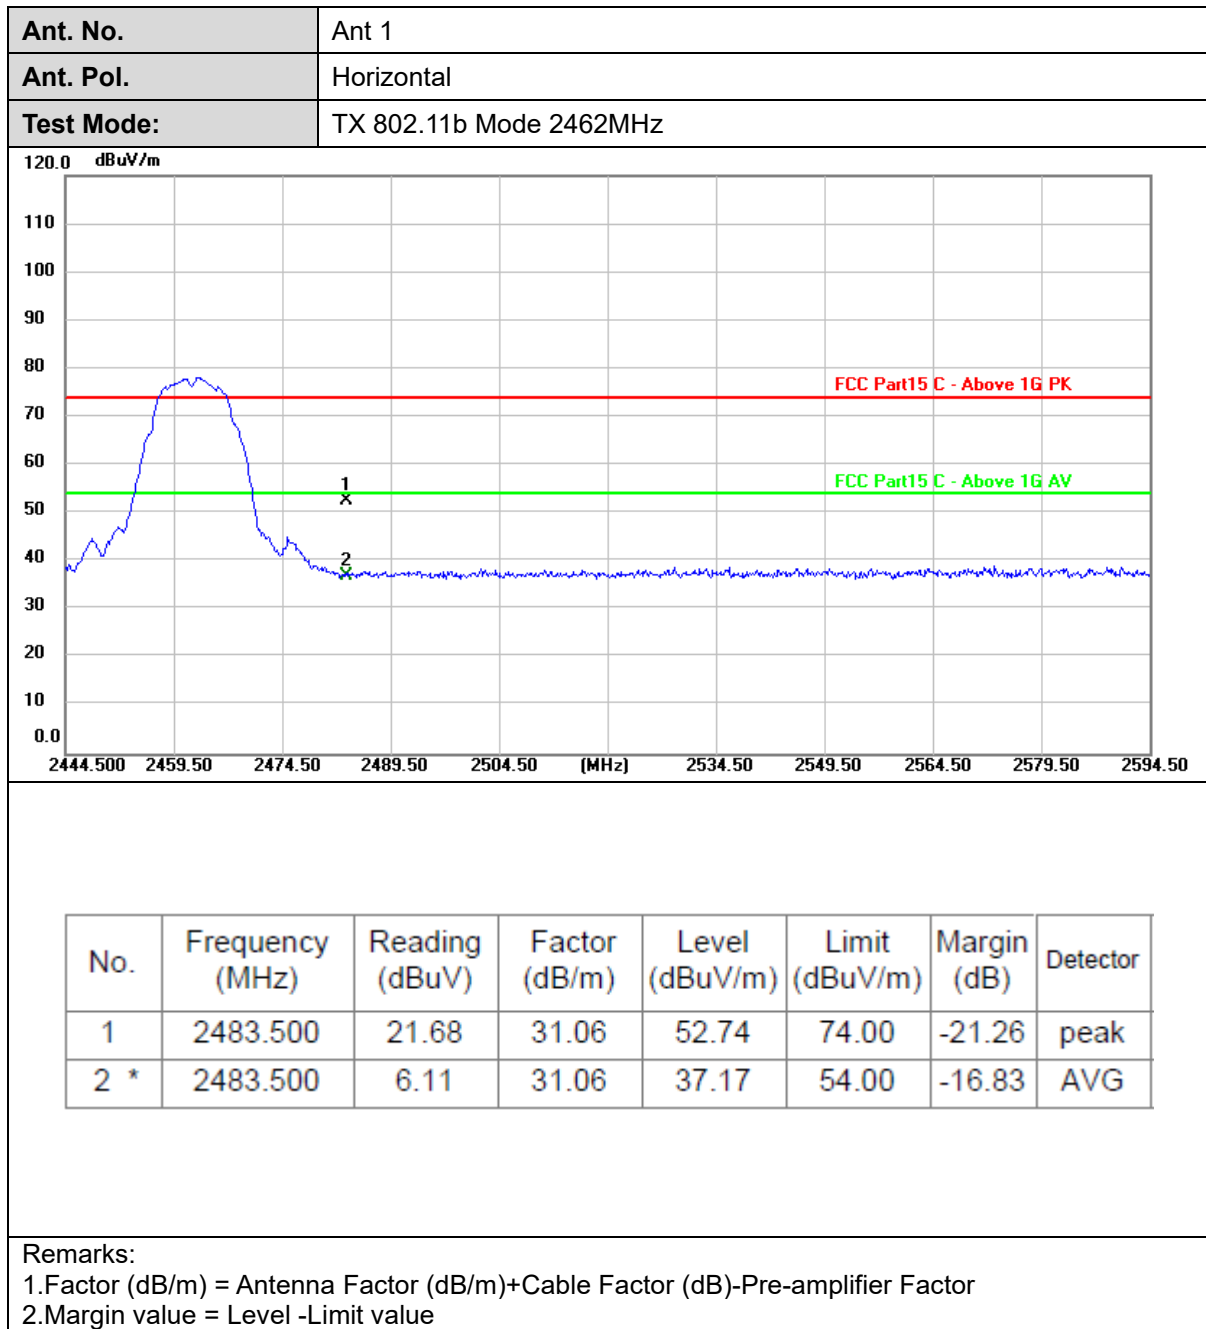


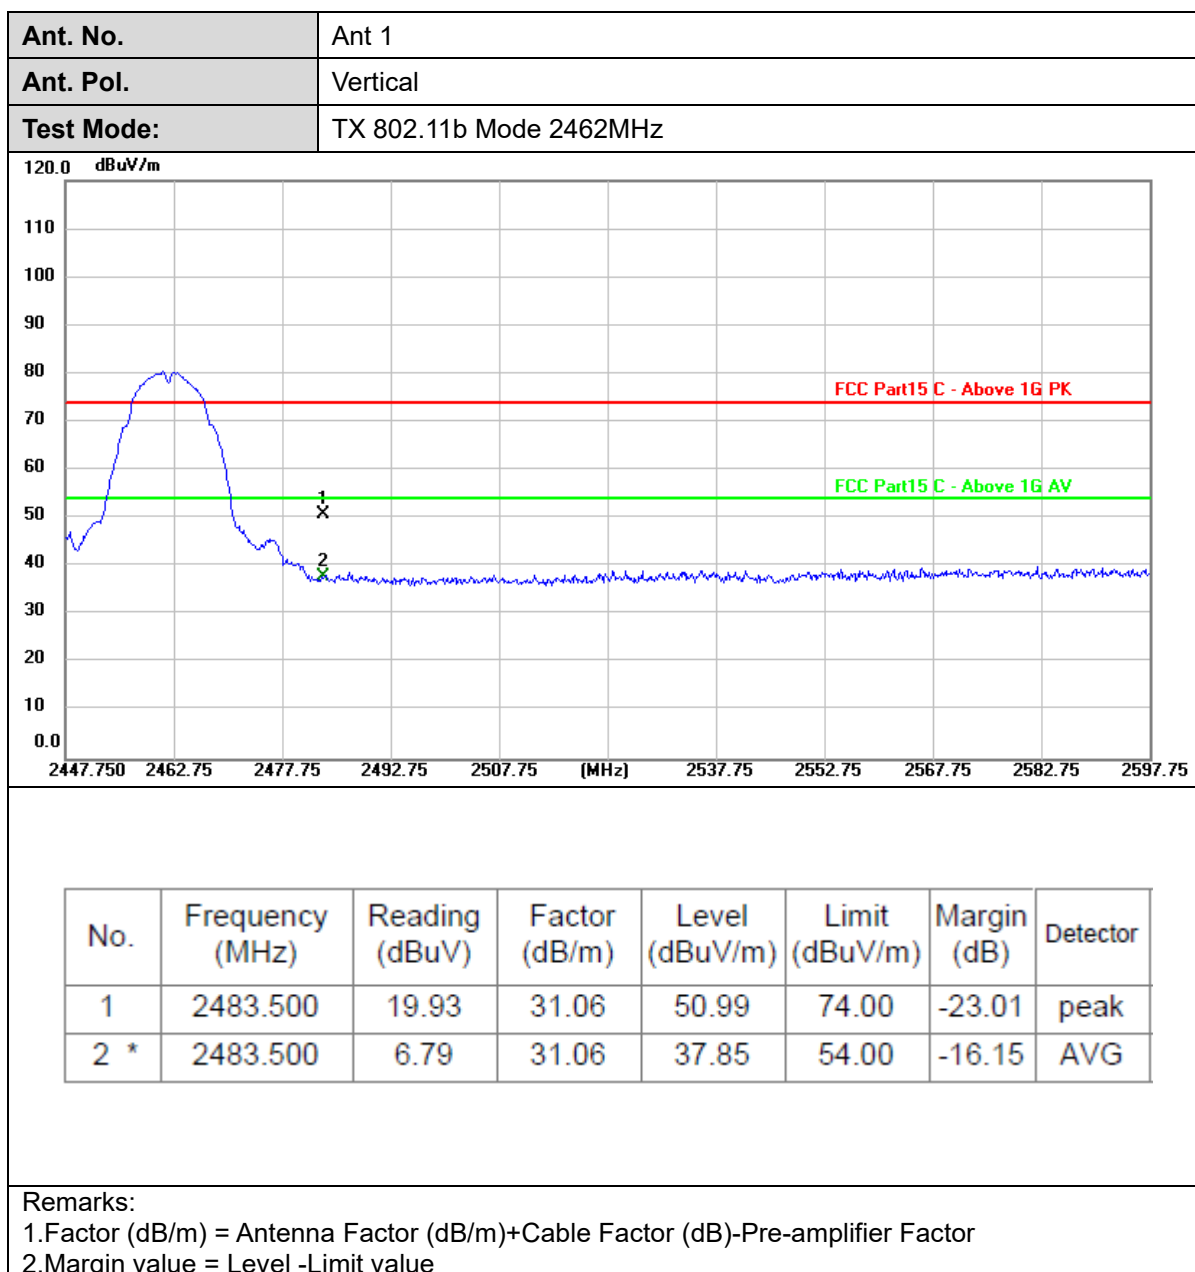


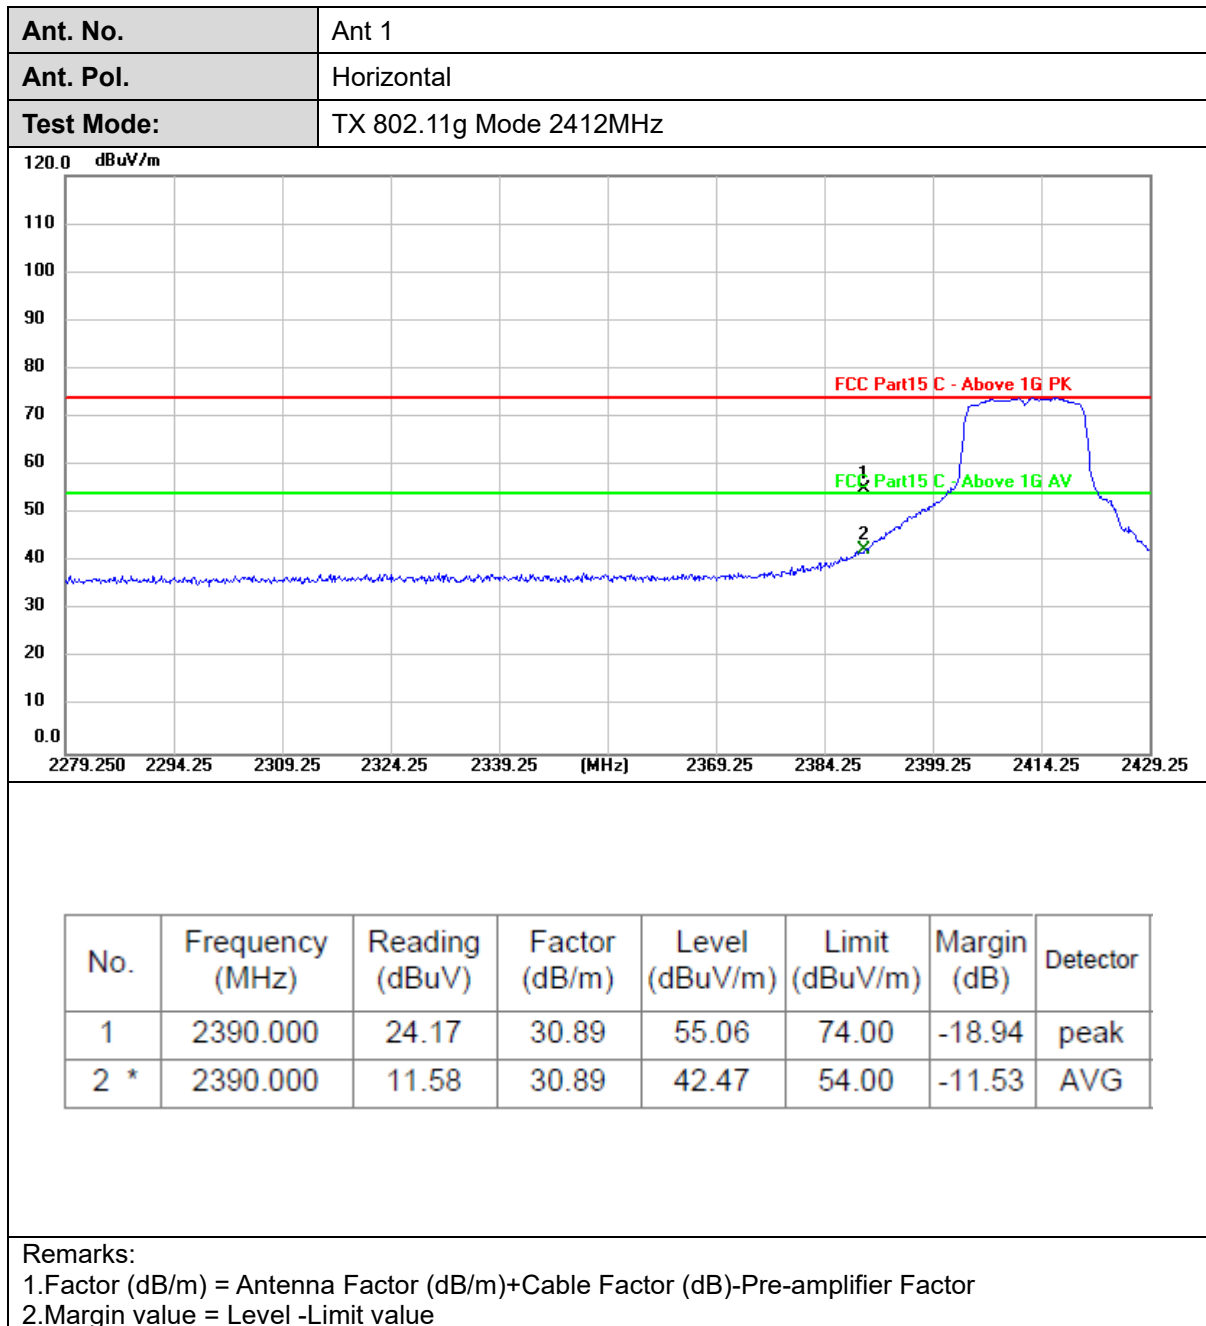


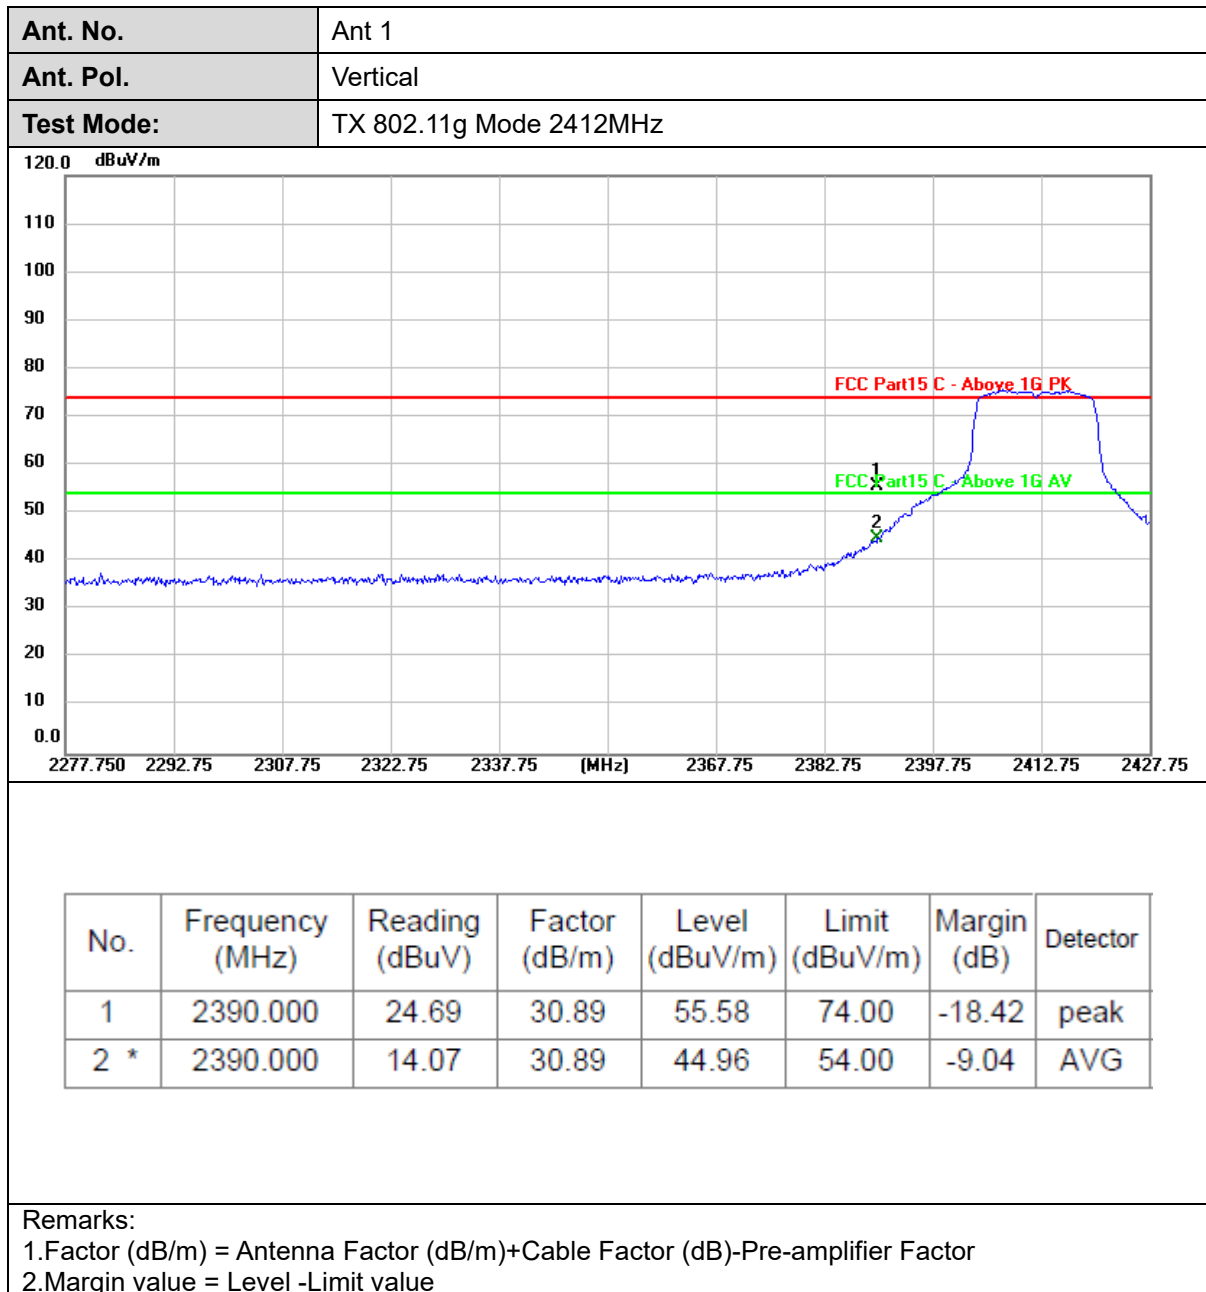


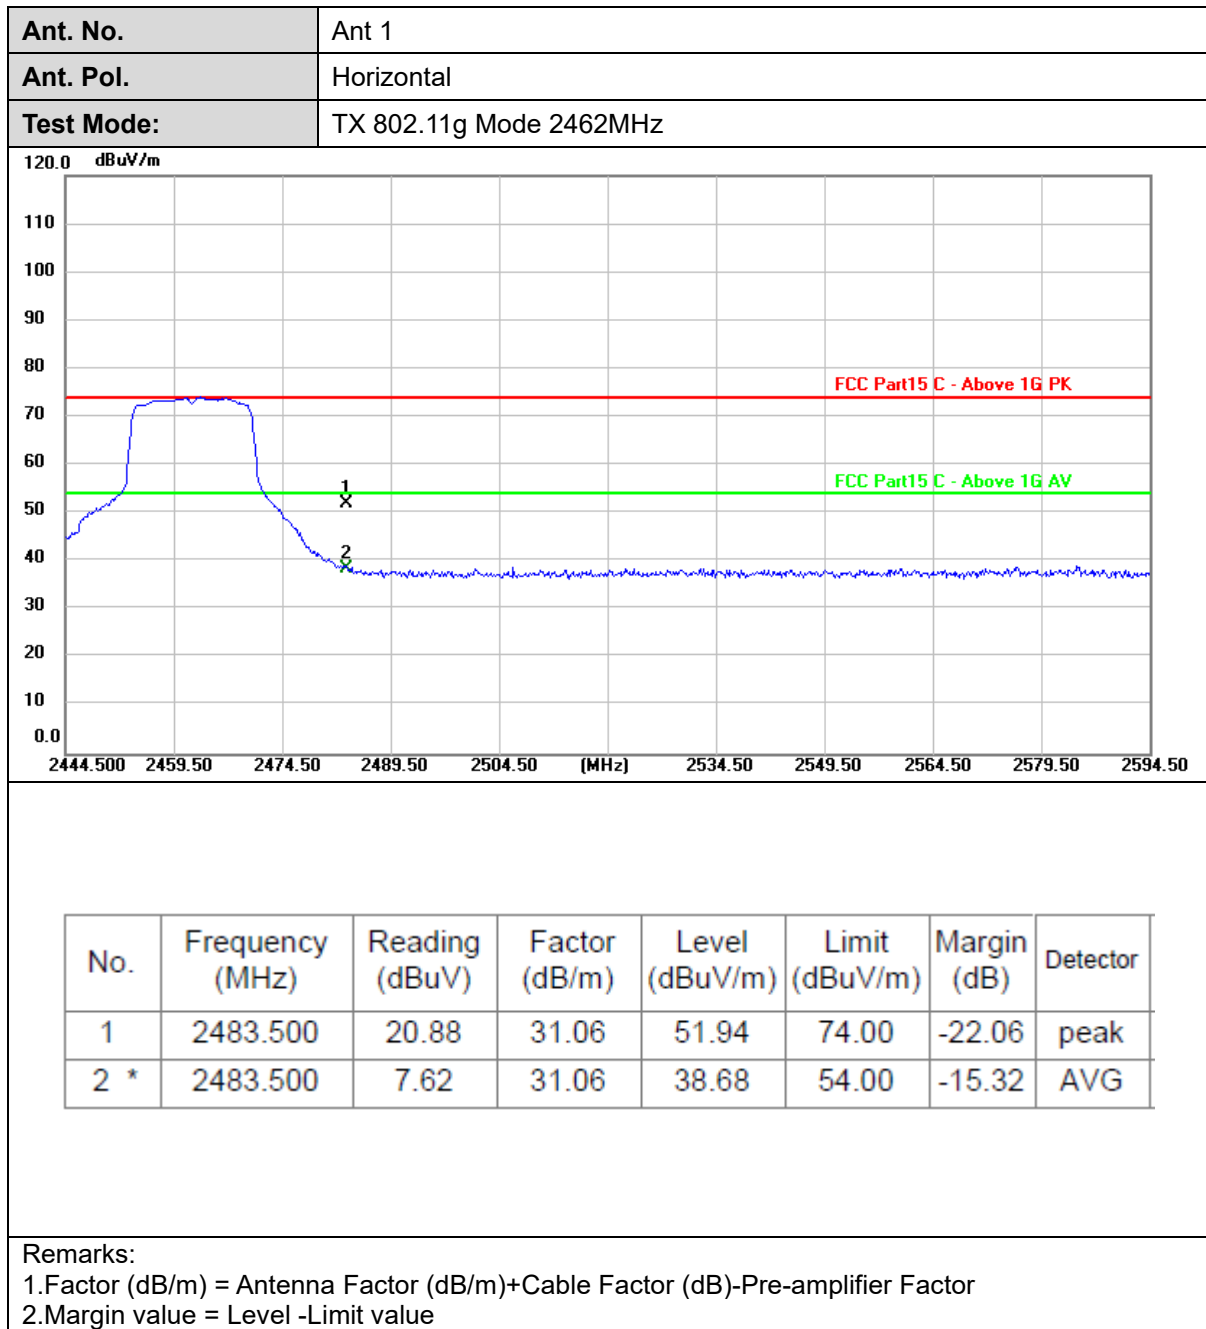


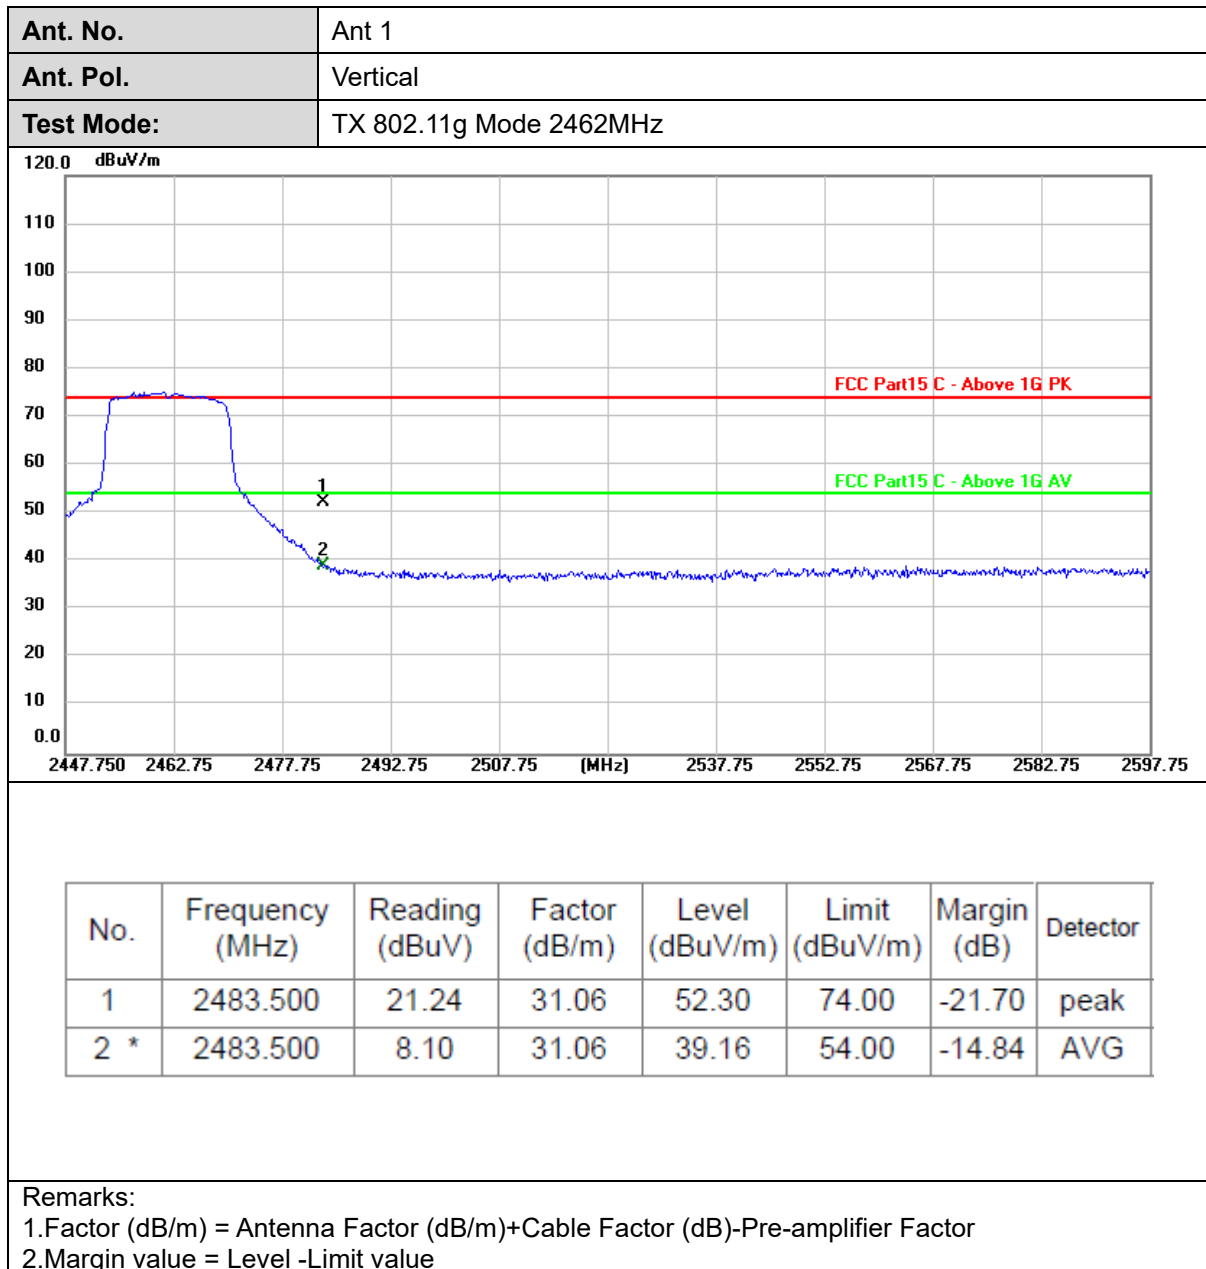


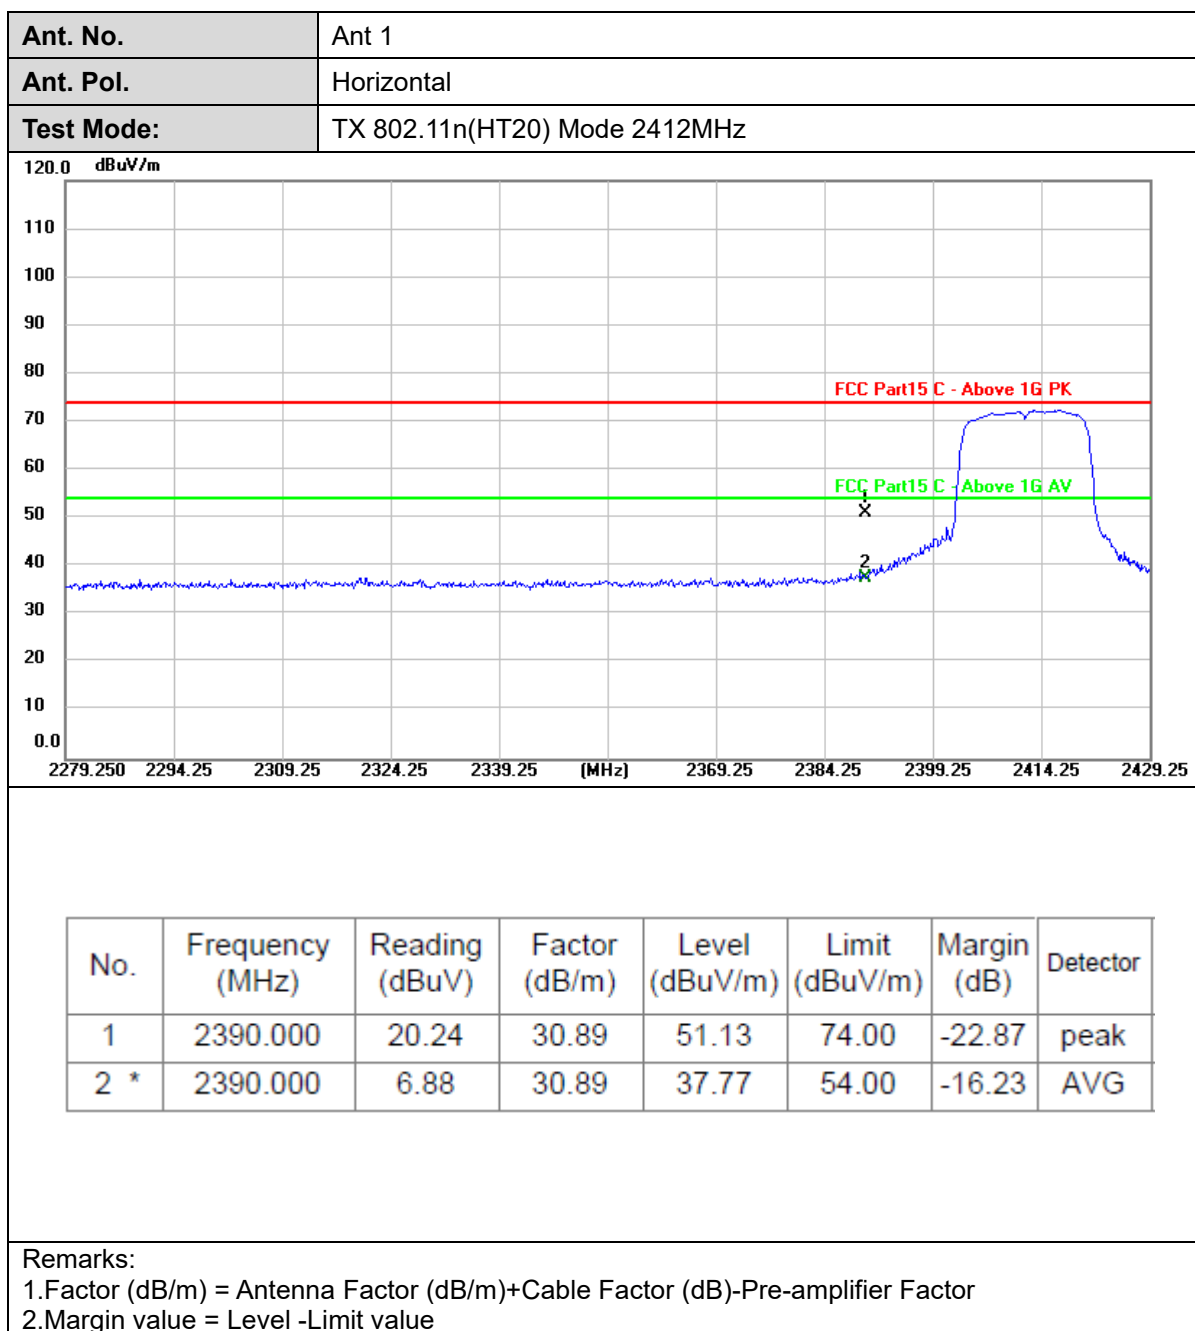


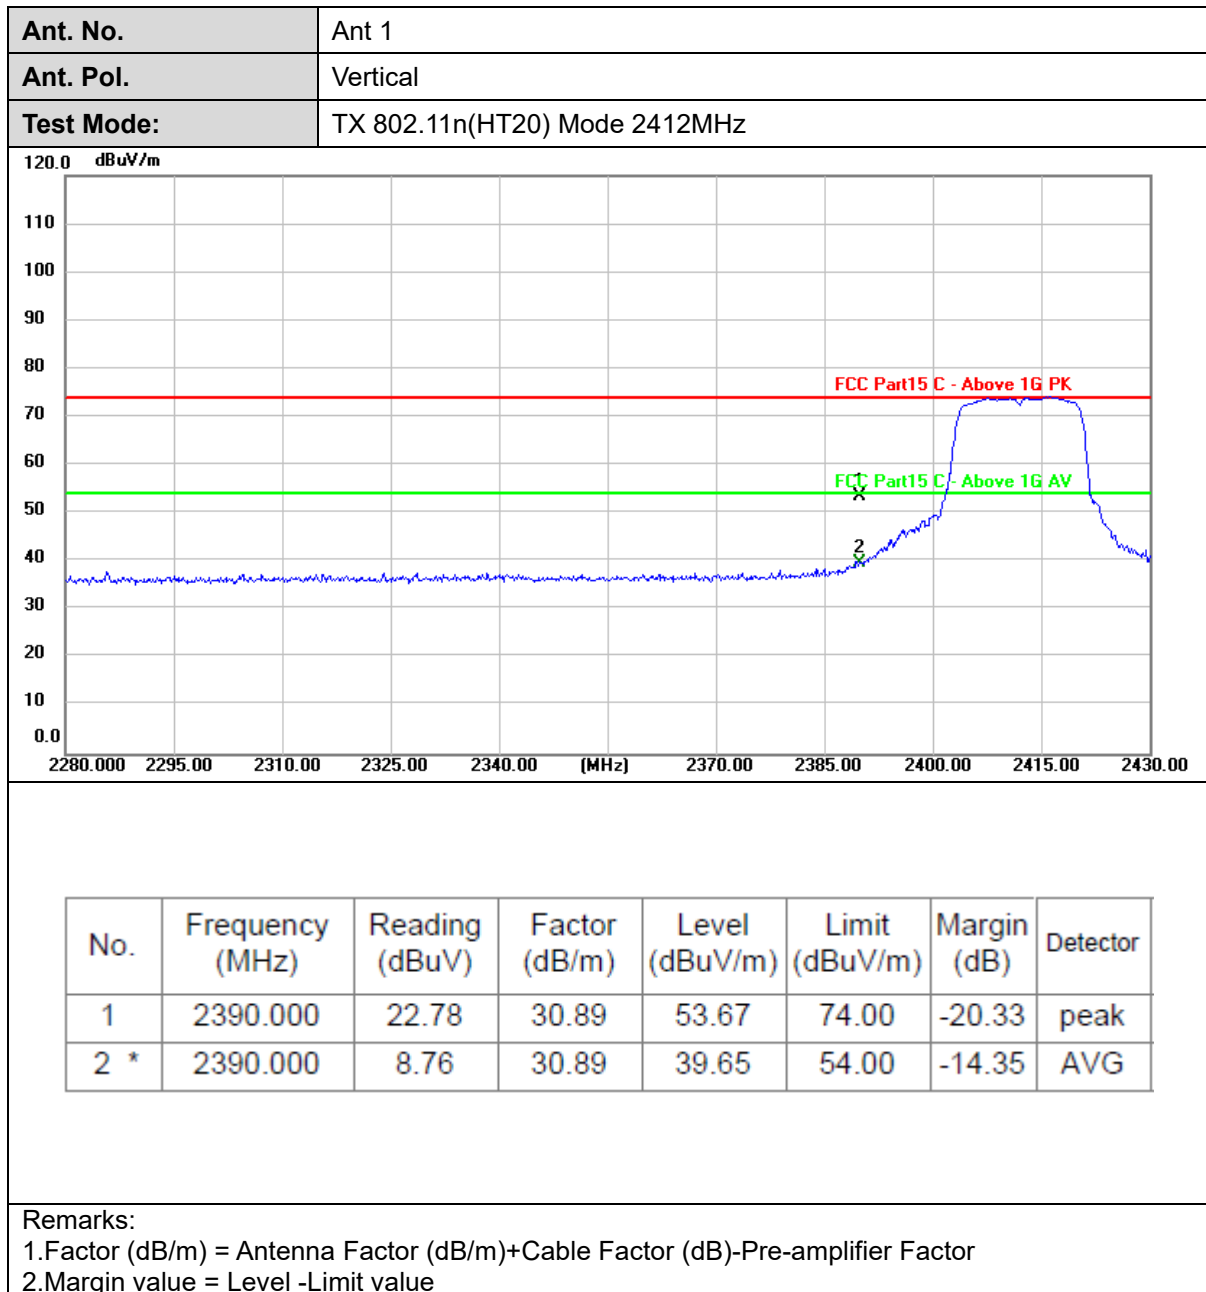


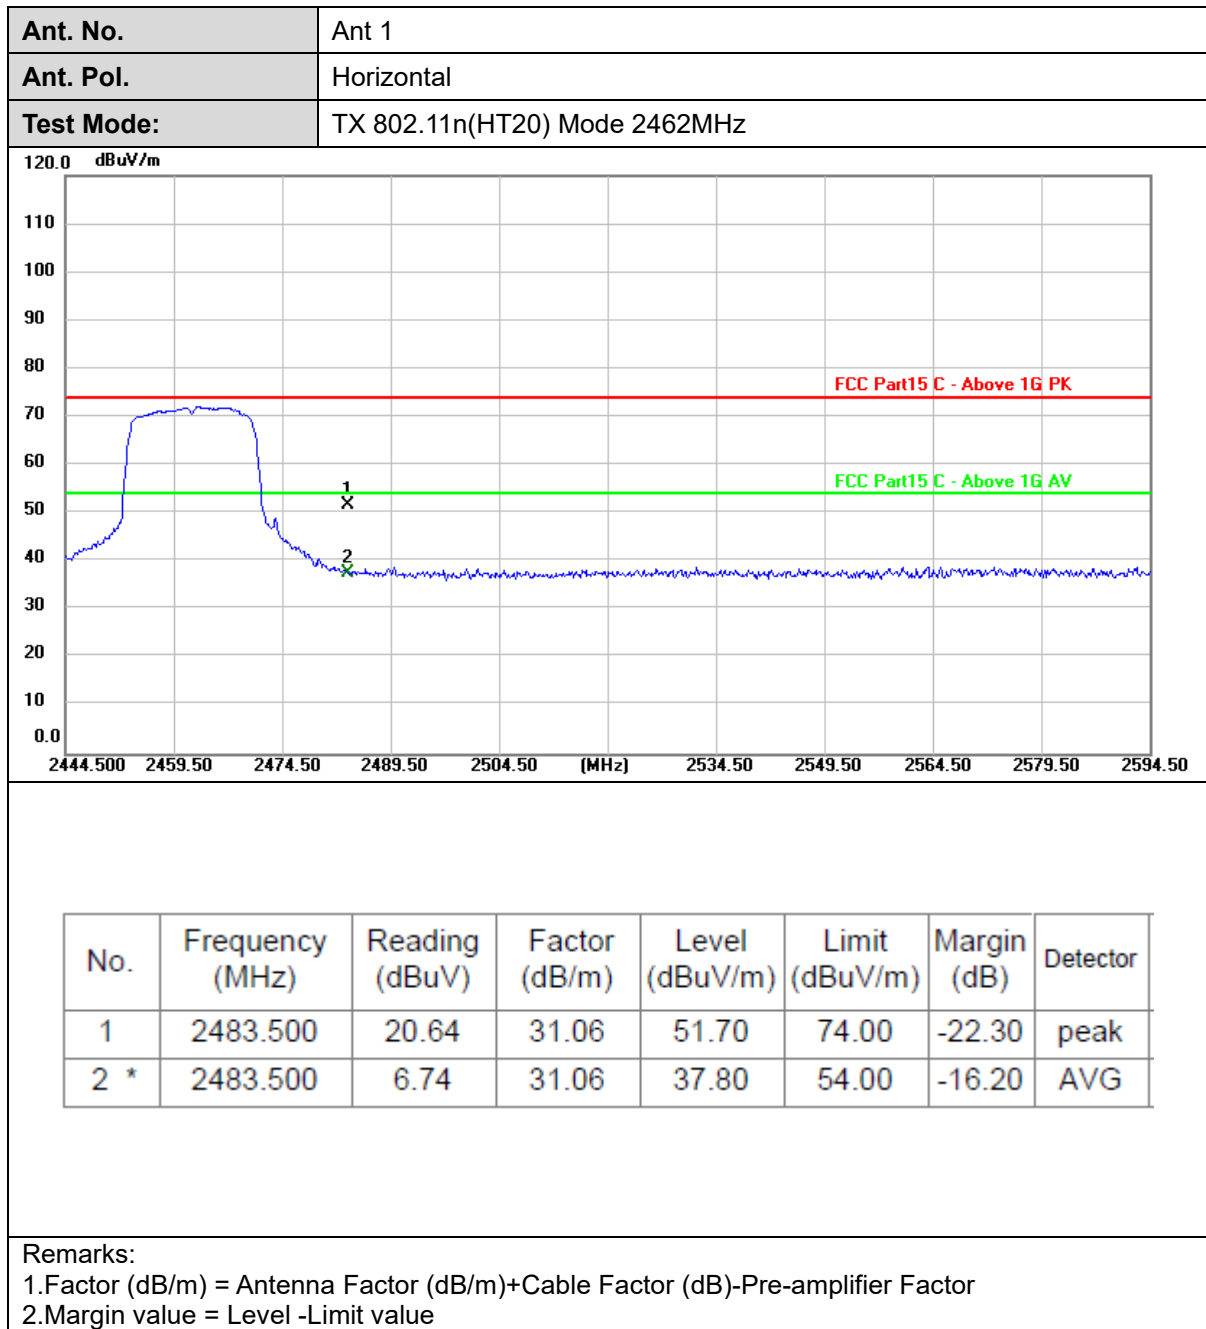


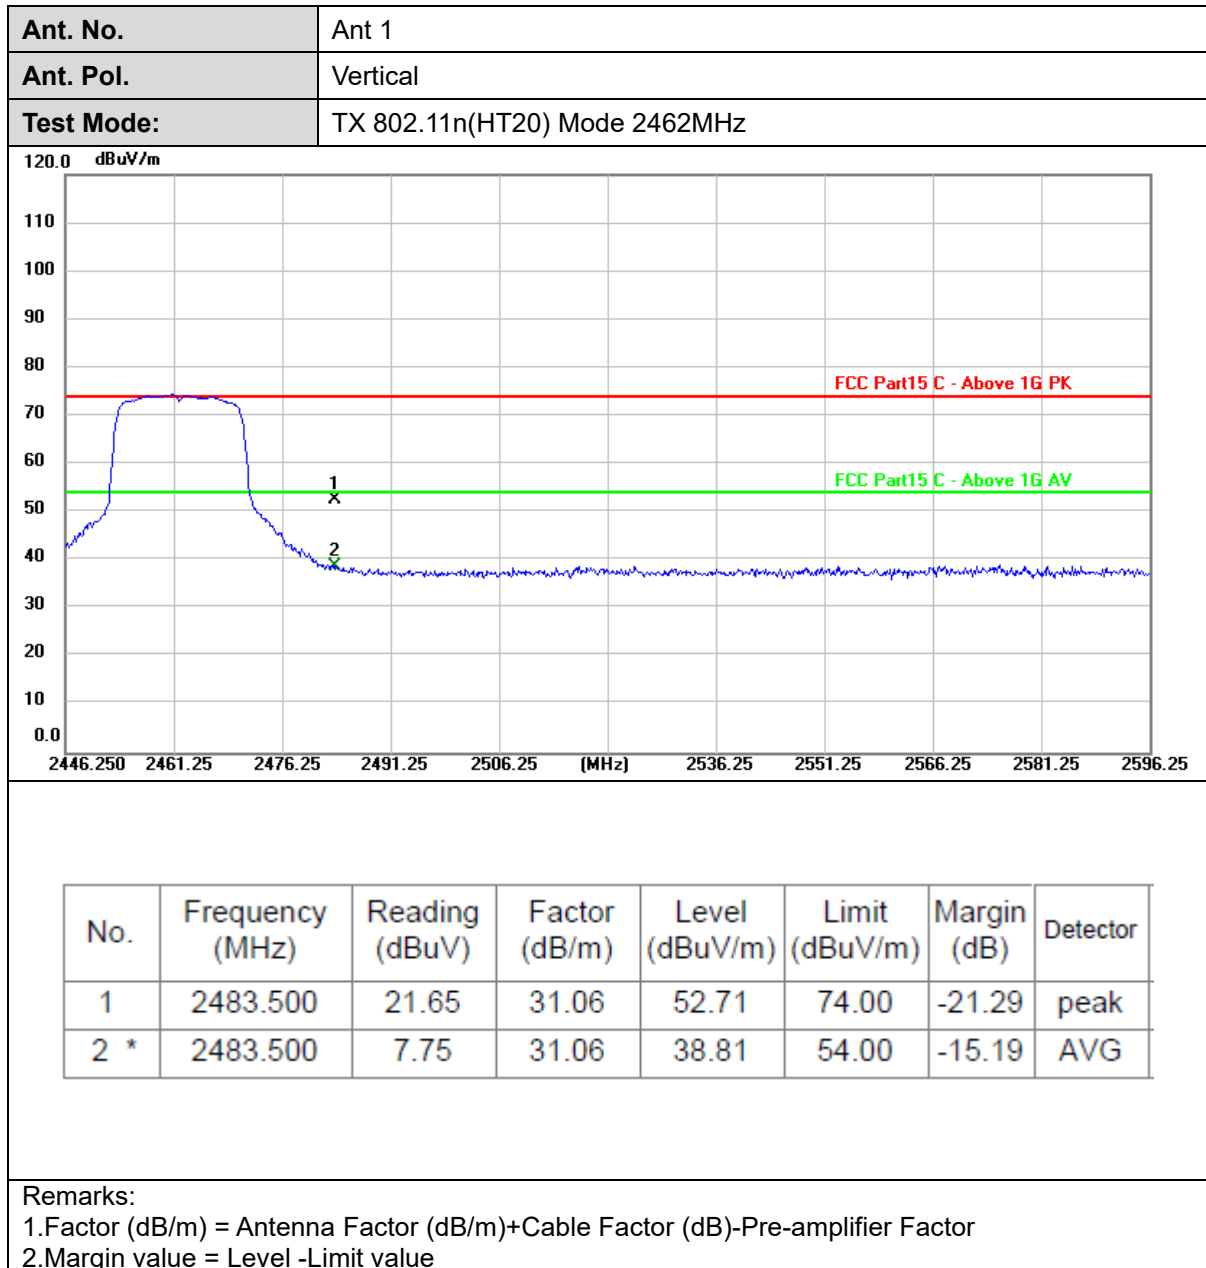

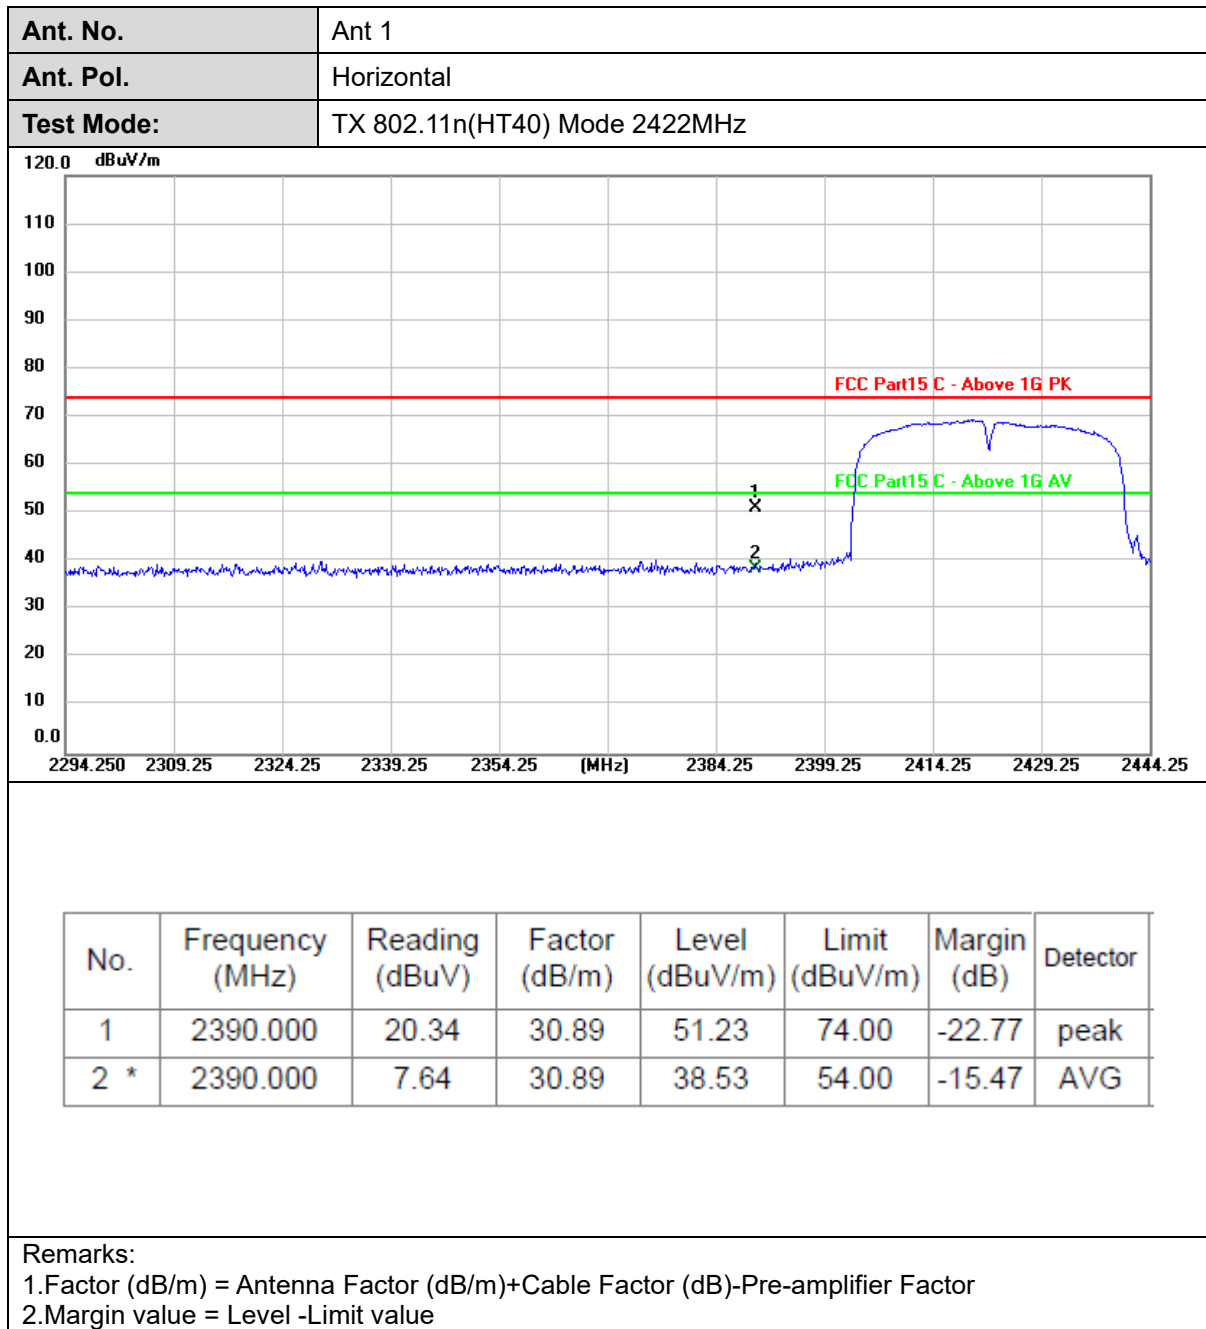

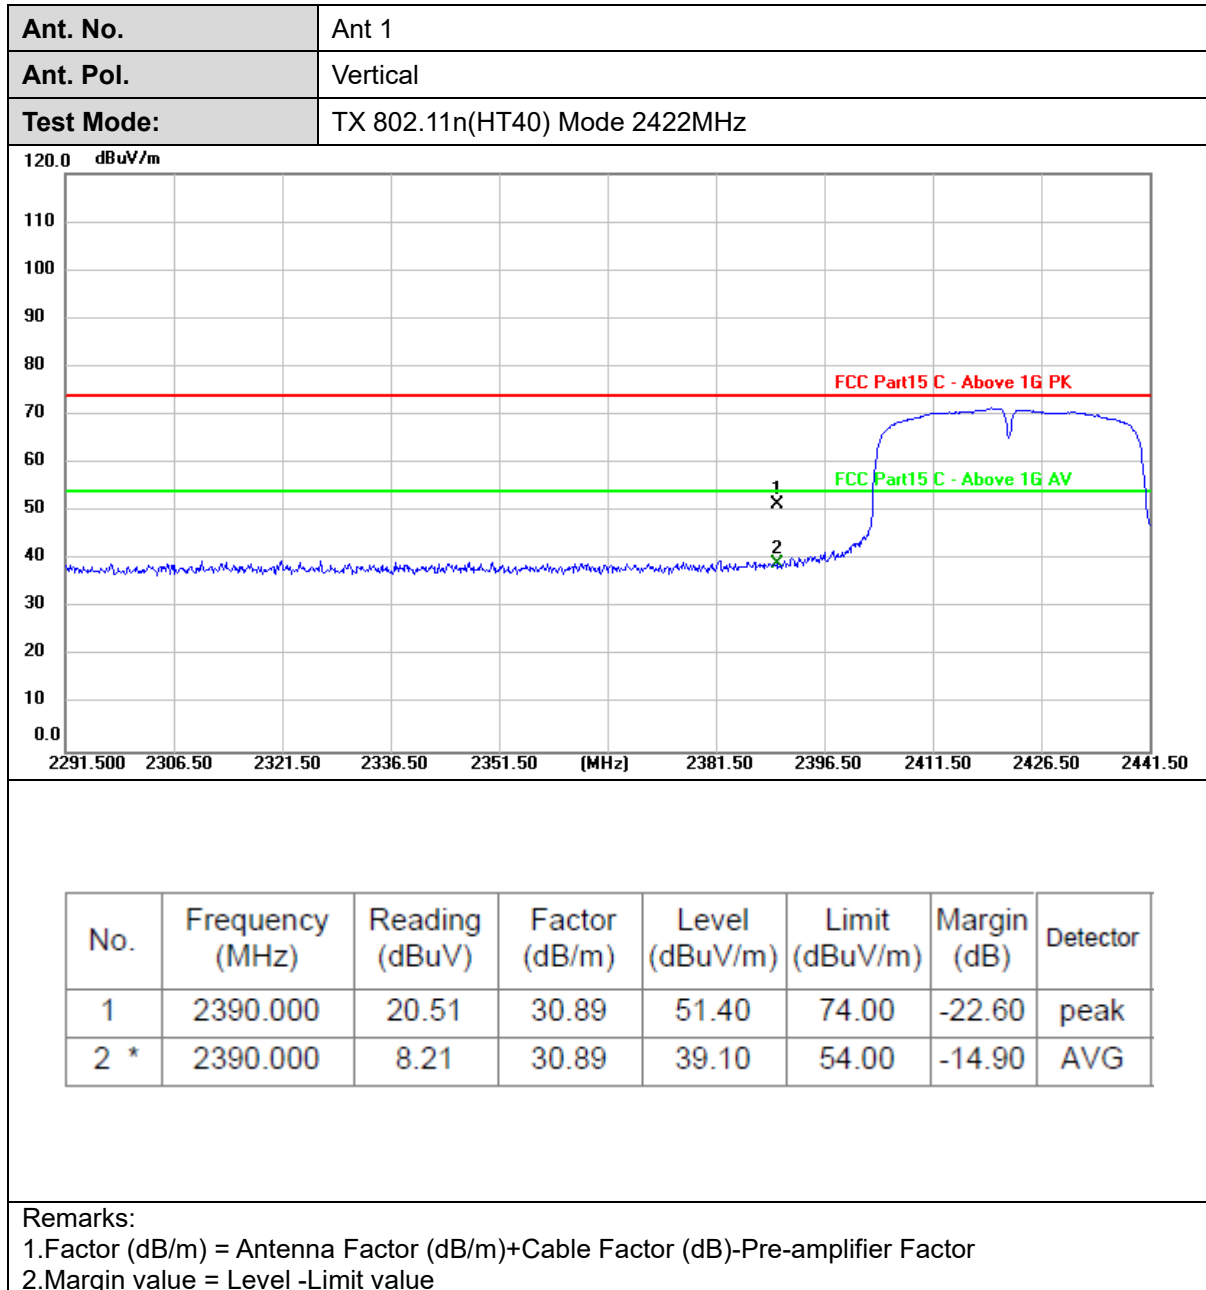

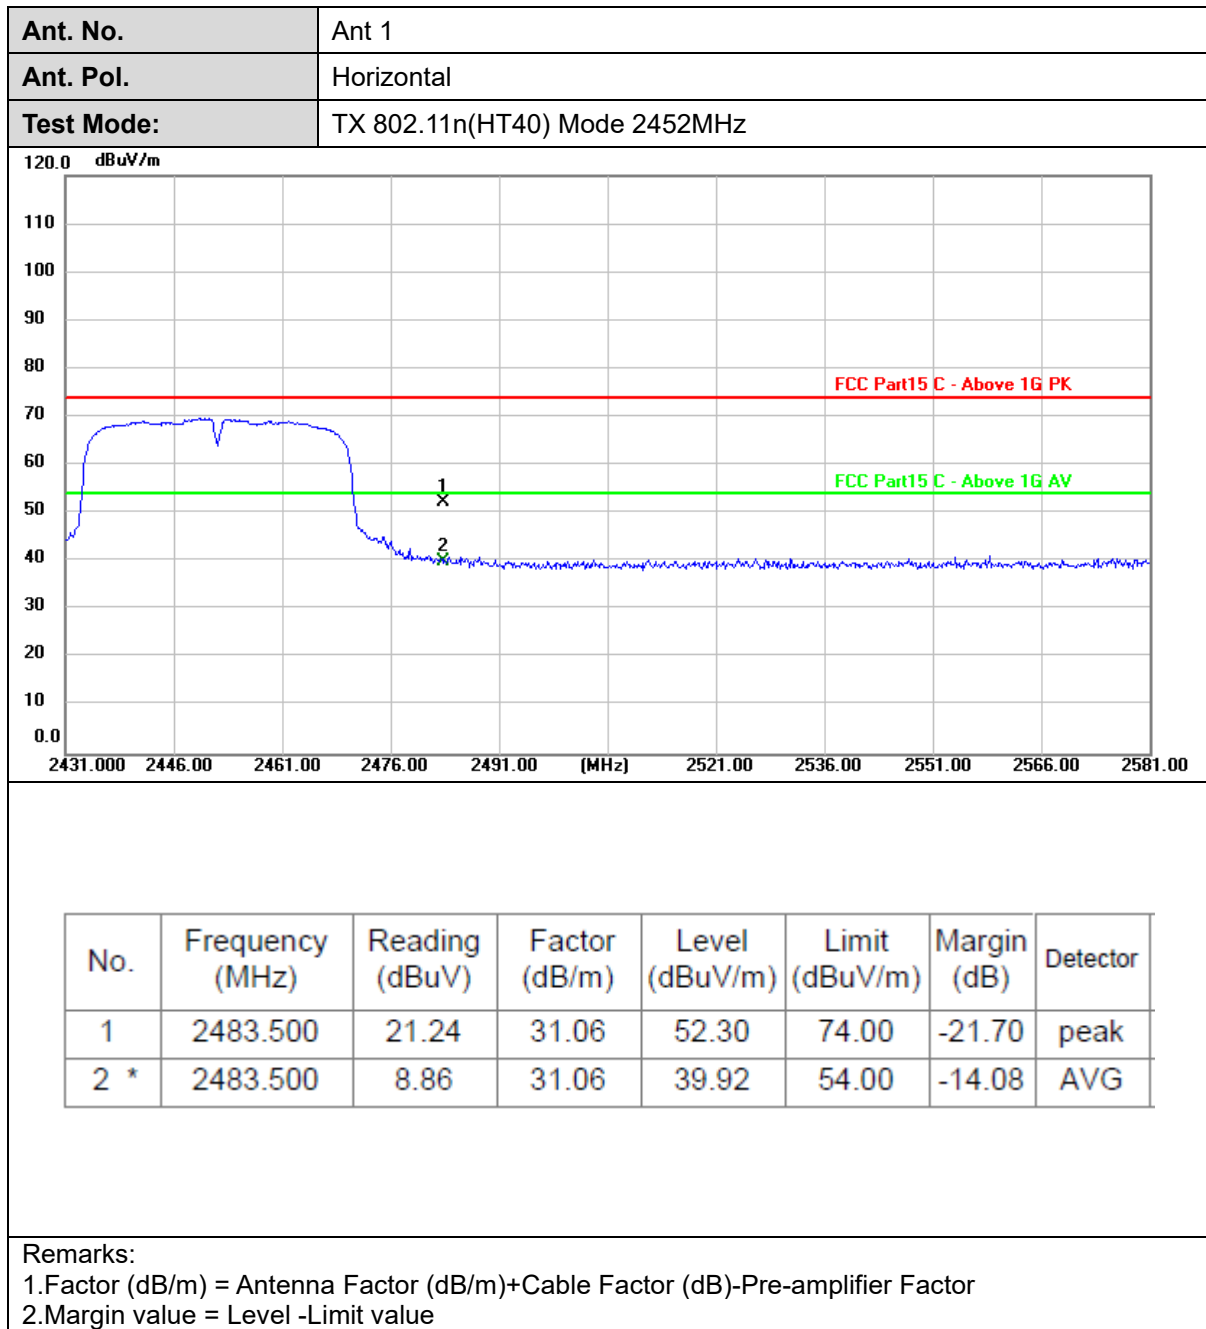

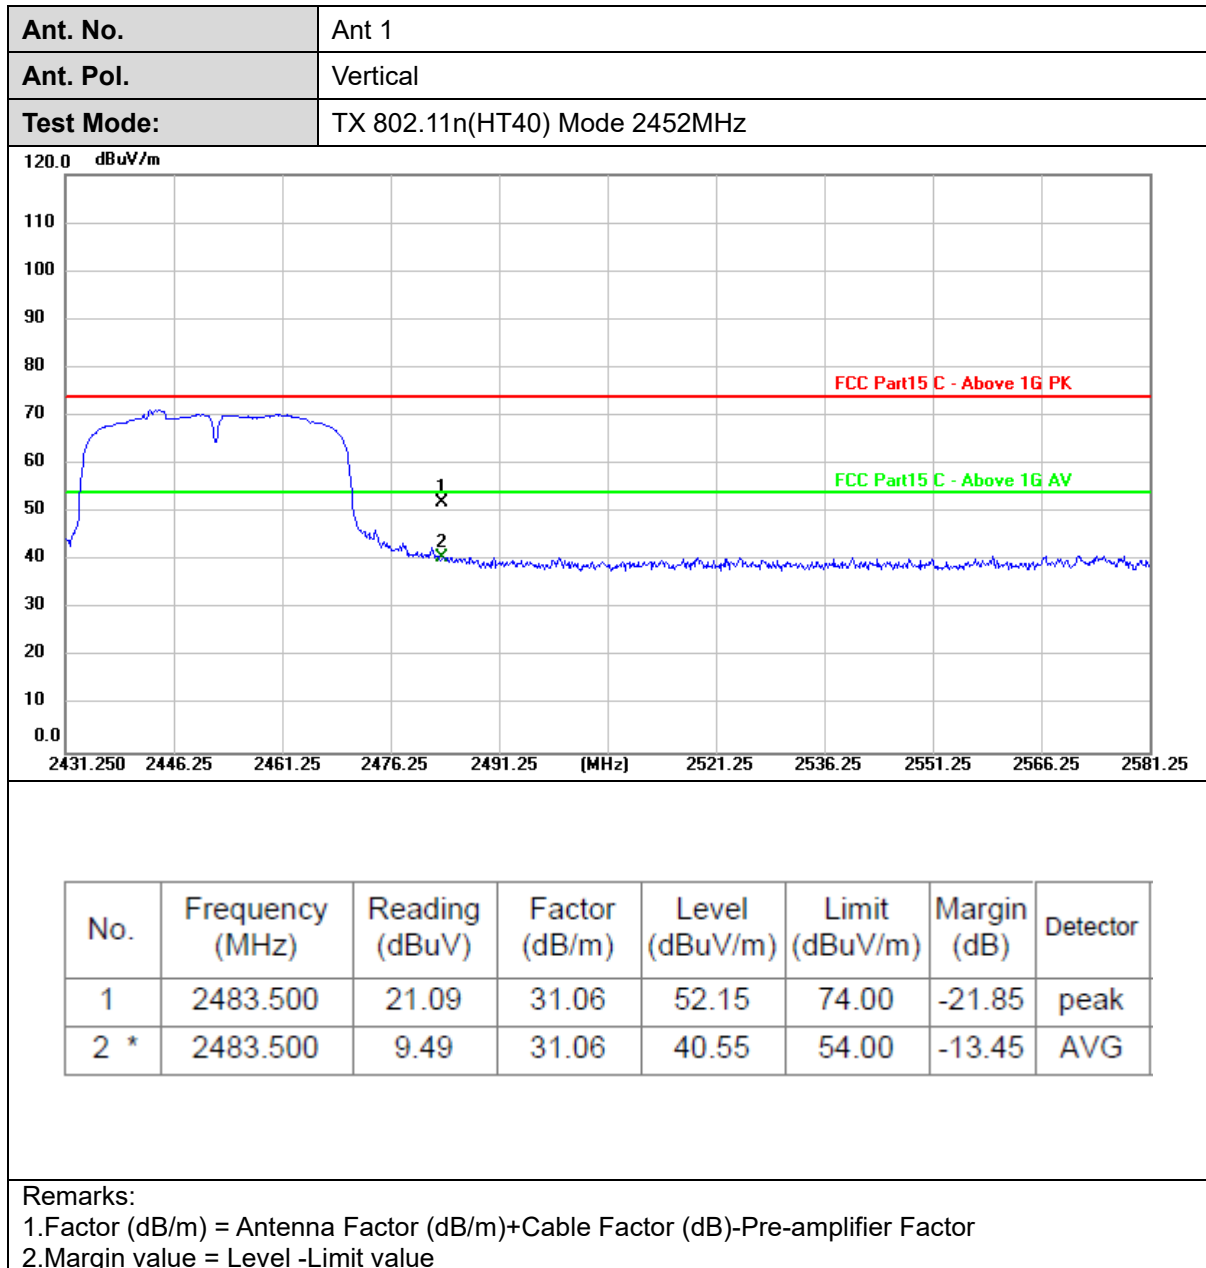


### 3.4. Band Edge and Spurious Emissions (Conducted)

#### Limit

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 6.6**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### Test Configuration



#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW ≥ RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

#### Test Mode


Please refer to the clause 2.4.

#### Test Result

##### **(1) Band Edge Conducted Test**

| Test Mode | Antenna | ChName | Frequency[MHz] | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|--------|----------------|---------------|-------------|------------|---------|
| 11B       | Ant1    | Low    | 2412           | 4.09          | -47.16      | ≤-15.91    | PASS    |
|           |         | High   | 2462           | 4.89          | -48.61      | ≤-15.11    | PASS    |
| 11G       | Ant1    | Low    | 2412           | -1.17         | -39.47      | ≤-21.17    | PASS    |
|           |         | High   | 2462           | -2.06         | -48.78      | ≤-22.06    | PASS    |
| 11N20SISO | Ant1    | Low    | 2412           | -3.49         | -41.12      | ≤-23.49    | PASS    |
|           |         | High   | 2462           | -3.26         | -48.03      | ≤-23.26    | PASS    |
| 11N40SISO | Ant1    | Low    | 2422           | -4.50         | -38.3       | ≤-24.5     | PASS    |
|           |         | High   | 2452           | -5.65         | -49.08      | ≤-25.65    | PASS    |

Band Edge Conducted Test plot as follows:

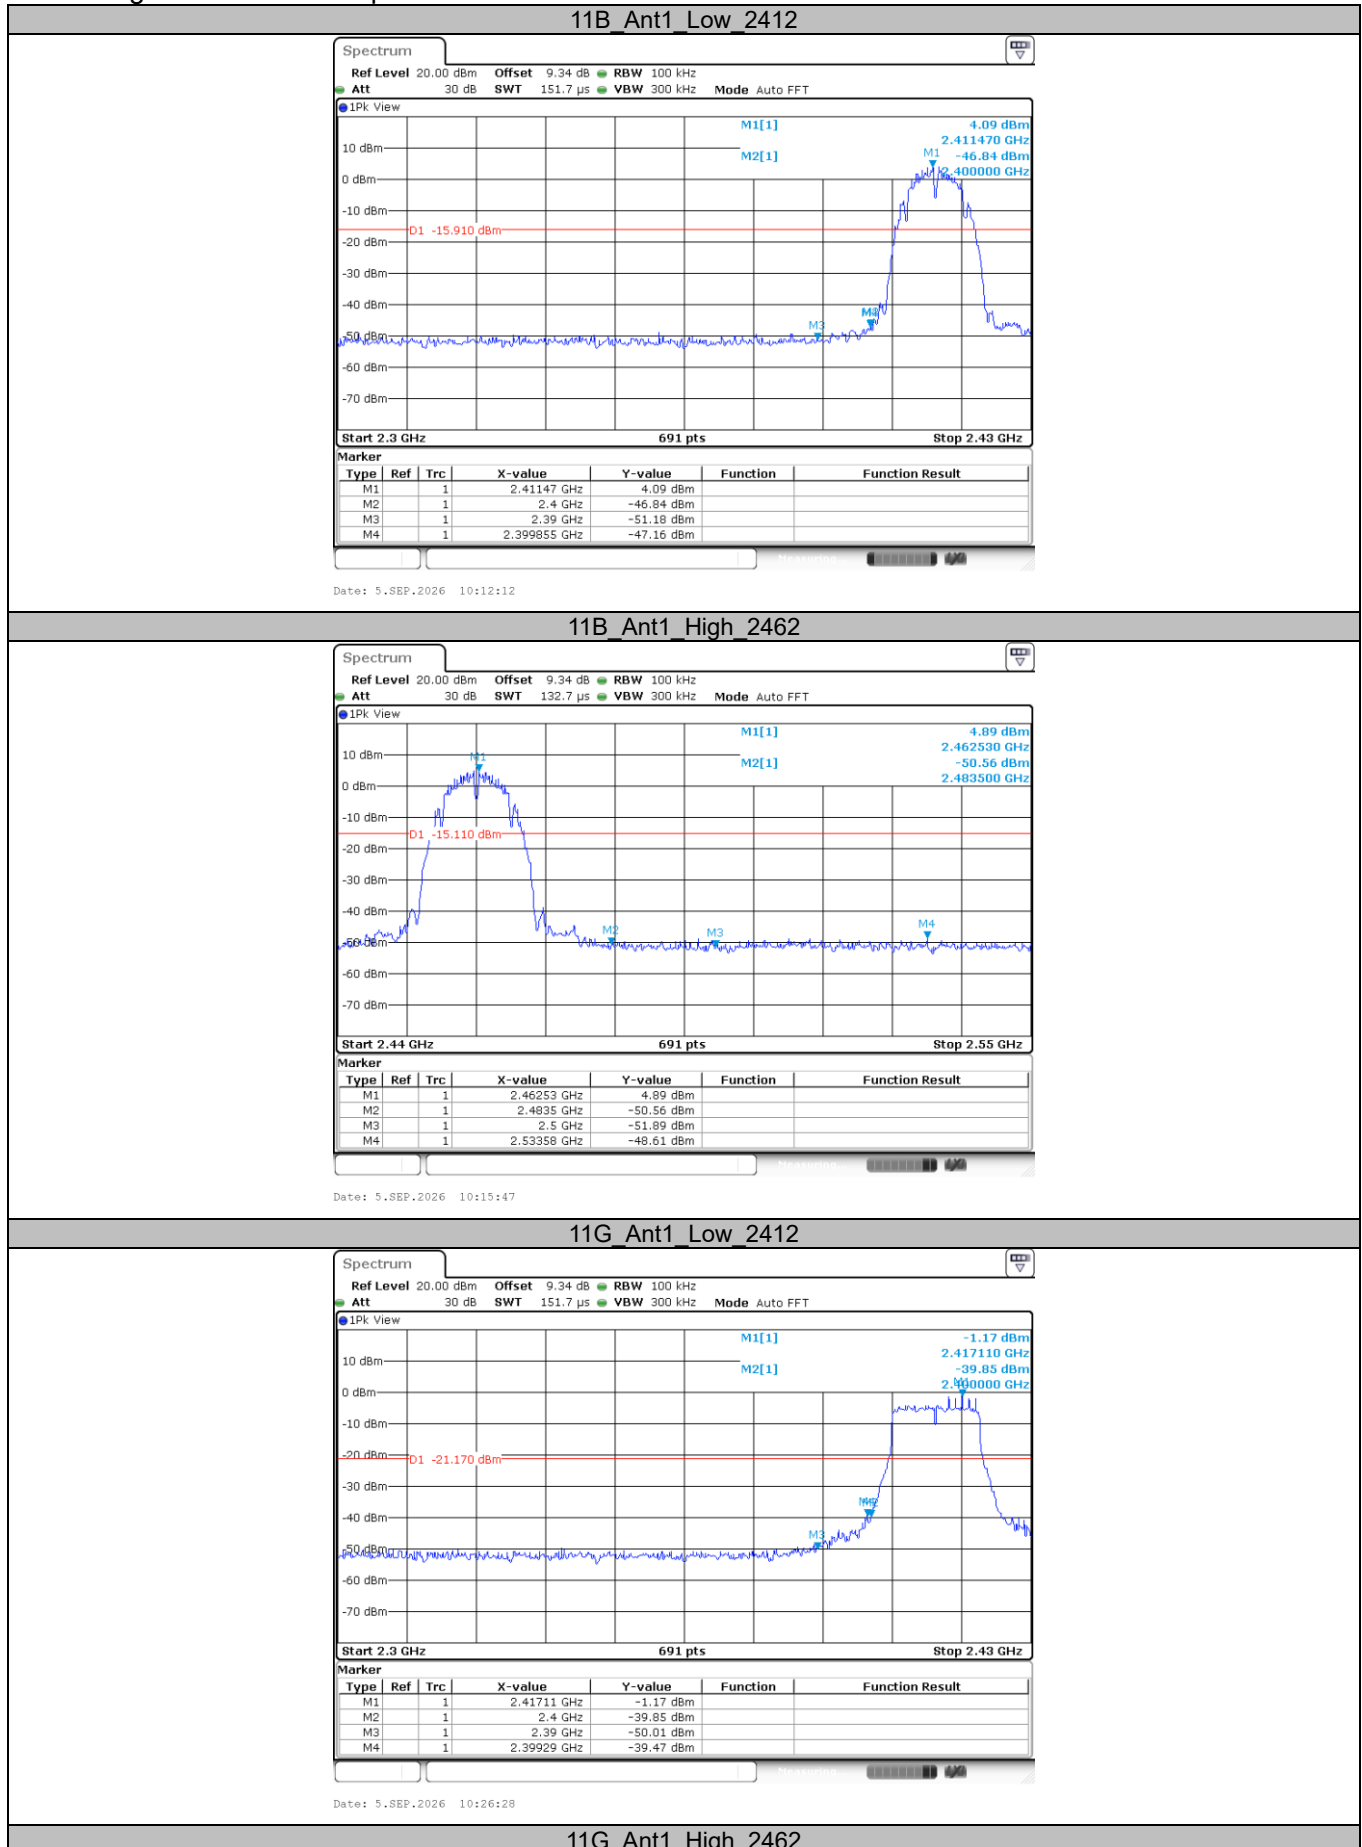


CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Langqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

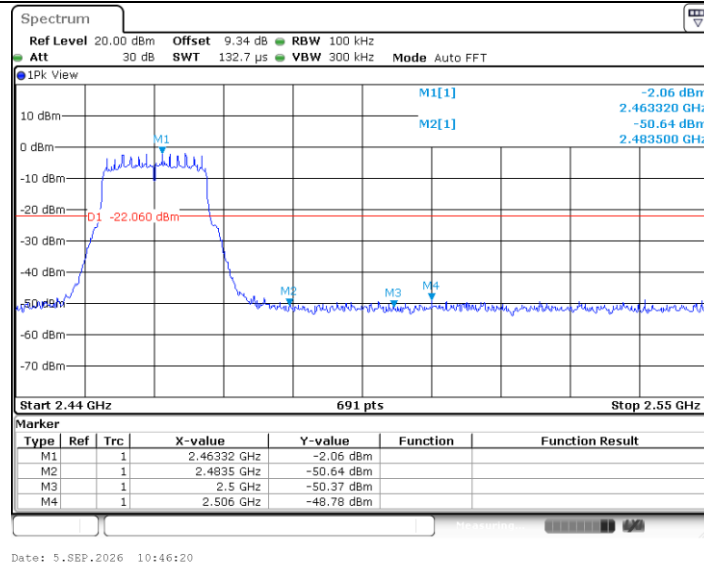


## 11N20SISO\_Ant1\_Low\_2412

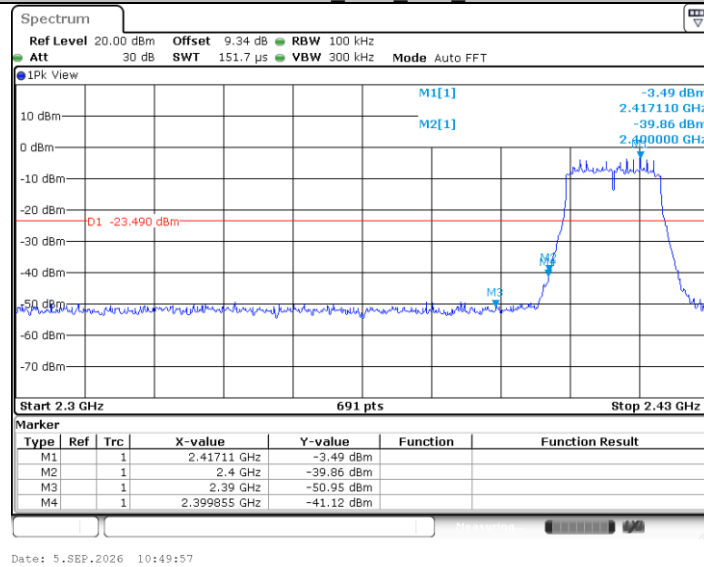


## 11N20SISO\_Ant1\_High\_2462

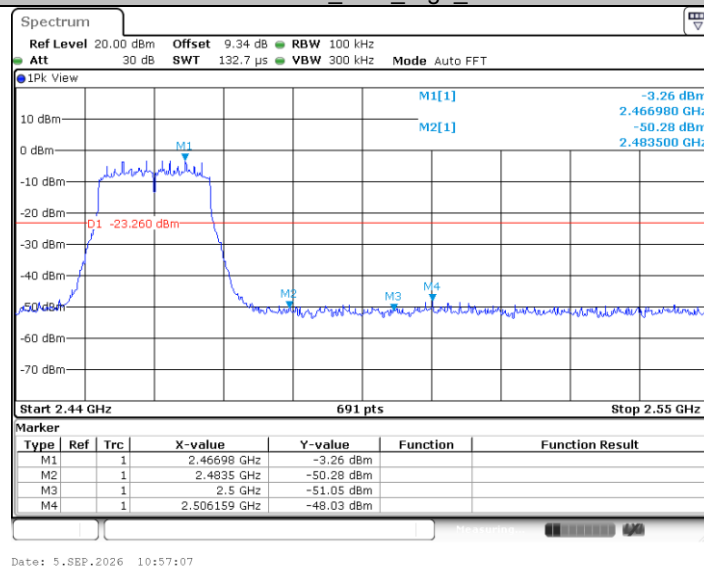

## 11N40SISO\_Ant1\_Low\_2422

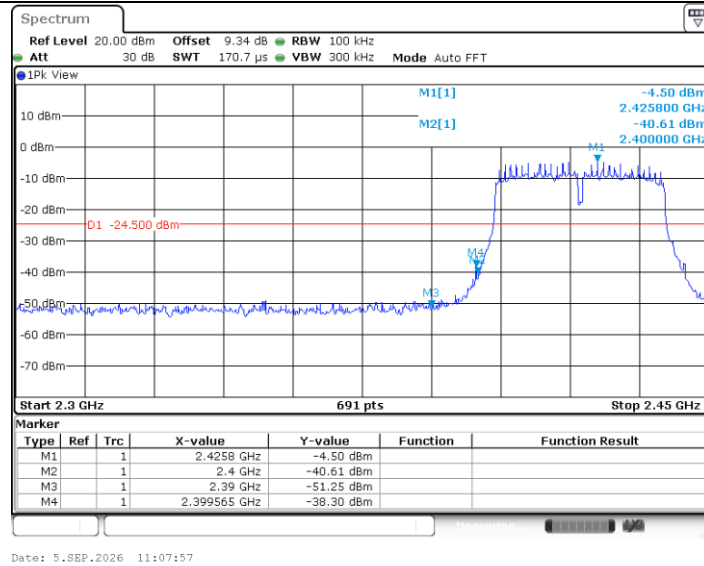


## 11N40SISO\_Ant1\_High\_2452

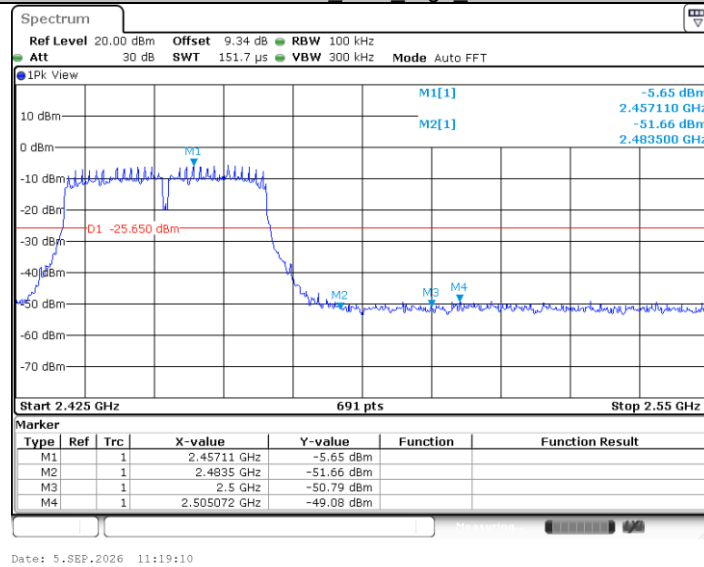

**(2) Conducted Spurious Emissions Test**

| Test Mode | Antenna | Frequency[MHz] | FreqRange [Mhz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|----------------|-----------------|----------------|--------------|-------------|---------|
| 11B       | Ant1    | 2412           | Reference       | 4.59           | -51.42       | ≤-15.41     | PASS    |
|           |         |                | 30~1000         | 4.59           | -31.17       | ≤-15.41     | PASS    |
|           |         |                | 1000~26500      | 4.89           | -50.9        | ≤-15.11     | PASS    |
|           |         | 2437           | Reference       | 4.89           | -29.03       | ≤-15.11     | PASS    |
|           |         |                | 30~1000         | 5.04           | -51.42       | ≤-14.96     | PASS    |
|           |         |                | 1000~26500      | 5.04           | -28.49       | ≤-14.96     | PASS    |
|           |         | 2462           | Reference       | -1.01          | -50.94       | ≤-21.01     | PASS    |
|           |         |                | 30~1000         | -1.01          | -35.19       | ≤-21.01     | PASS    |
|           |         |                | 1000~26500      | -1.32          | -50.71       | ≤-21.32     | PASS    |
| 11G       | Ant1    | 2412           | Reference       | -1.32          | -34.63       | ≤-21.32     | PASS    |
|           |         |                | 30~1000         | -1.97          | -51.37       | ≤-21.97     | PASS    |
|           |         |                | 1000~26500      | -1.97          | -34.97       | ≤-21.97     | PASS    |
|           |         | 2437           | Reference       | -3.05          | -49.29       | ≤-23.05     | PASS    |
|           |         |                | 30~1000         | -3.05          | -35.11       | ≤-23.05     | PASS    |
|           |         |                | 1000~26500      | -2.04          | -51.13       | ≤-22.04     | PASS    |
|           |         | 2462           | Reference       | -2.04          | -34.46       | ≤-22.04     | PASS    |
|           |         |                | 30~1000         | -2.87          | -51.2        | ≤-22.87     | PASS    |
|           |         |                | 1000~26500      | -2.87          | -34.38       | ≤-22.87     | PASS    |
| 11N20SISO | Ant1    | 2412           | Reference       | -4.49          | -50.44       | ≤-24.49     | PASS    |
|           |         |                | 30~1000         | -4.49          | -35.02       | ≤-24.49     | PASS    |
|           |         |                | 1000~26500      | -5.04          | -50.43       | ≤-25.04     | PASS    |
|           |         | 2437           | Reference       | -5.04          | -34.77       | ≤-25.04     | PASS    |
|           |         |                | 30~1000         | -5.30          | -51.35       | ≤-25.3      | PASS    |
|           |         |                | 1000~26500      | -5.30          | -34.66       | ≤-25.3      | PASS    |
|           |         | 2462           | Reference       | 4.59           | -51.42       | ≤-15.41     | PASS    |
|           |         |                | 30~1000         | 4.59           | -31.17       | ≤-15.41     | PASS    |
|           |         |                | 1000~26500      | 4.89           | -50.9        | ≤-15.11     | PASS    |
| 11N40SISO | Ant1    | 2422           | Reference       | 4.89           | -29.03       | ≤-15.11     | PASS    |
|           |         |                | 30~1000         | 5.04           | -51.42       | ≤-14.96     | PASS    |
|           |         |                | 1000~26500      | 5.04           | -28.49       | ≤-14.96     | PASS    |
|           |         | 2437           | Reference       | -1.01          | -50.94       | ≤-21.01     | PASS    |
|           |         |                | 30~1000         | -1.01          | -35.19       | ≤-21.01     | PASS    |
|           |         |                | 1000~26500      | -1.32          | -50.71       | ≤-21.32     | PASS    |
|           |         | 2452           | Reference       | -1.32          | -34.63       | ≤-21.32     | PASS    |
|           |         |                | 30~1000         | -1.97          | -51.37       | ≤-21.97     | PASS    |
|           |         |                | 1000~26500      | -1.97          | -34.97       | ≤-21.97     | PASS    |

Conducted Spurious Emissions Test plot as follows:

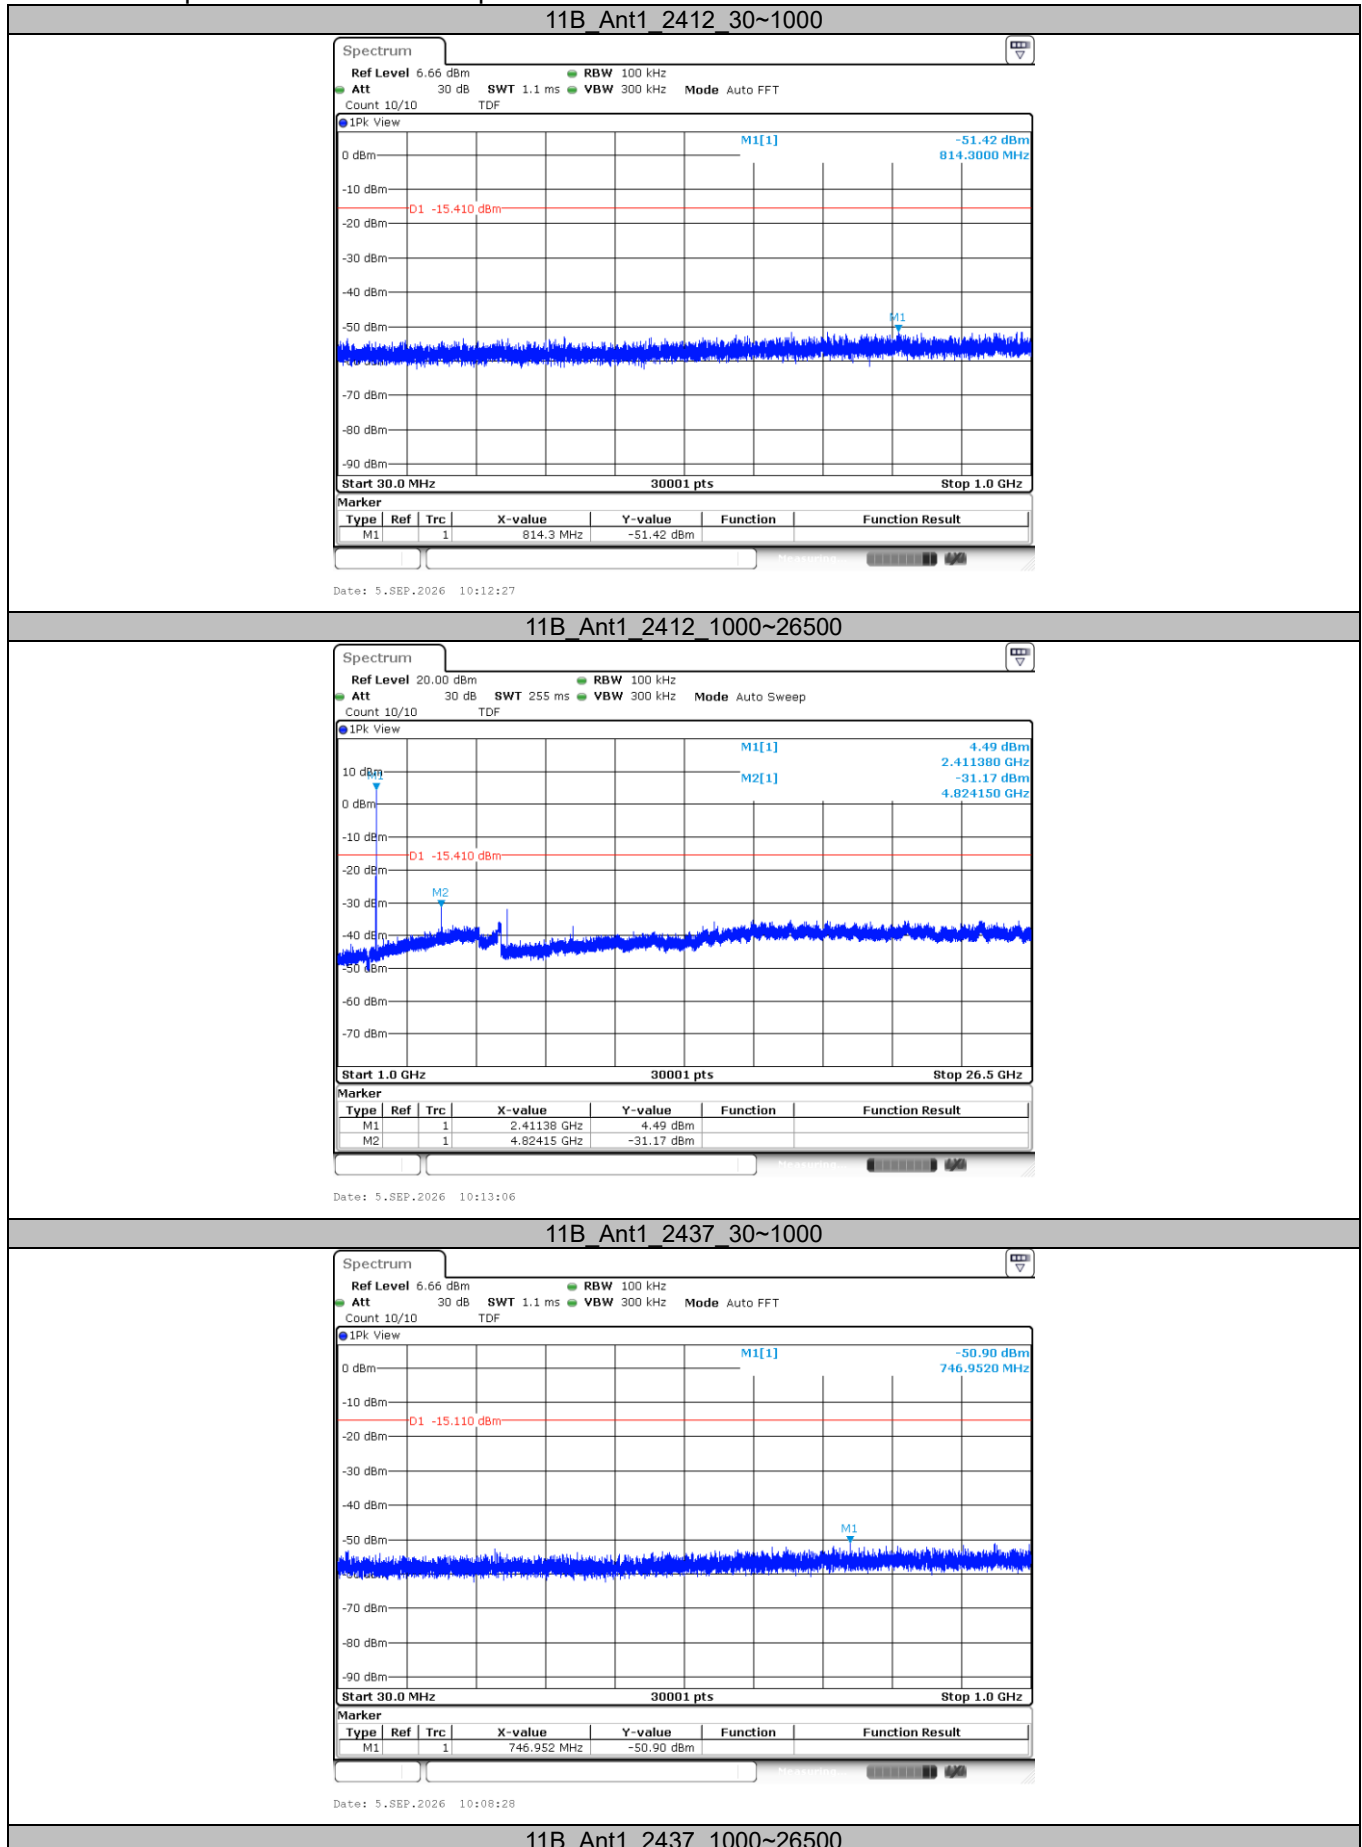


CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Langqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

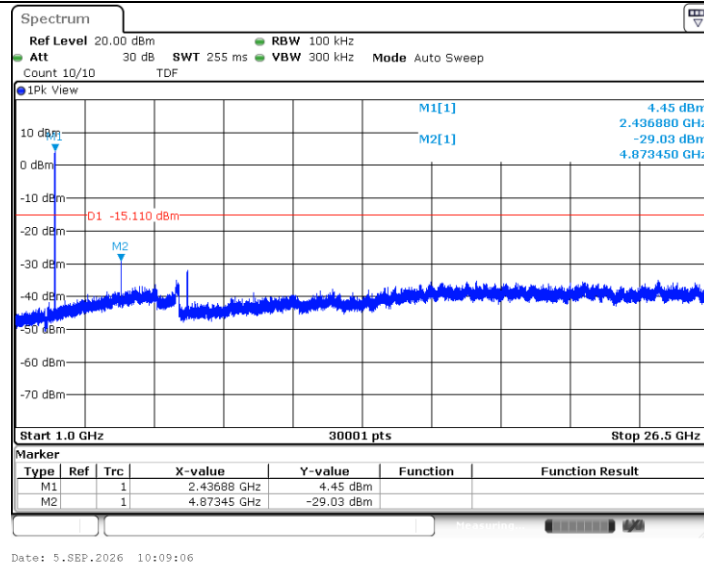


## 11B\_Ant1\_2462\_30~1000

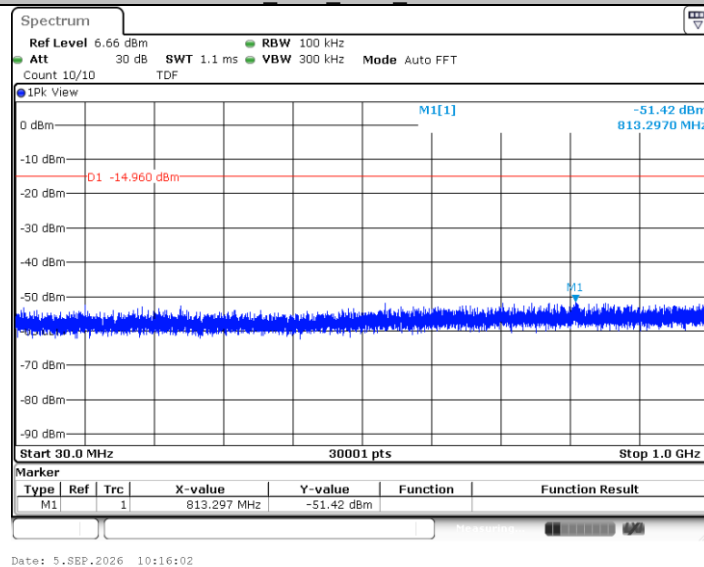


## 11B\_Ant1\_2462\_1000~26500

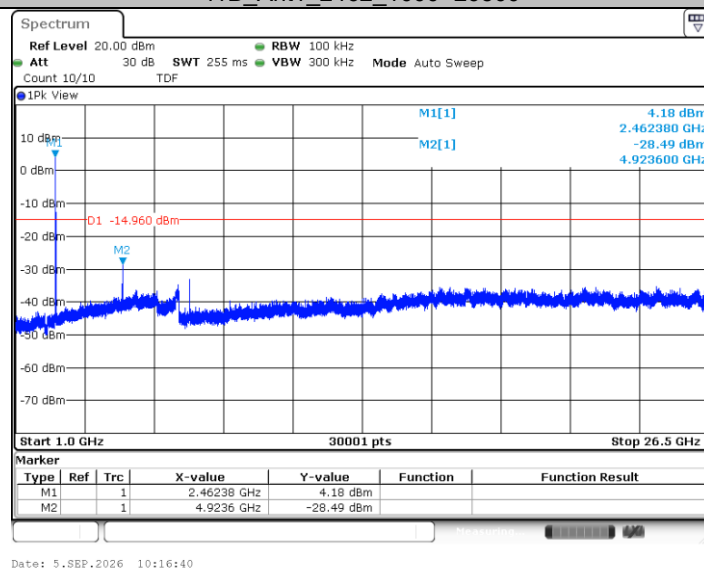


## 11G\_Ant1\_2412\_30~1000

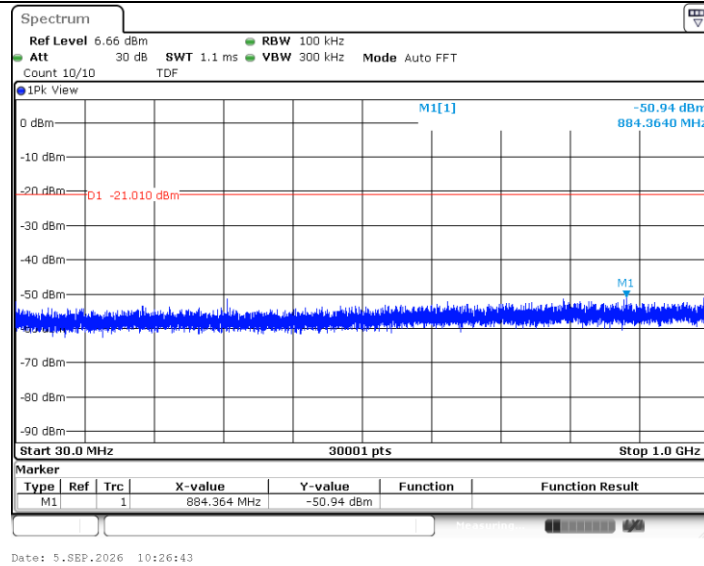


## 11G\_Ant1\_2412\_1000~26500

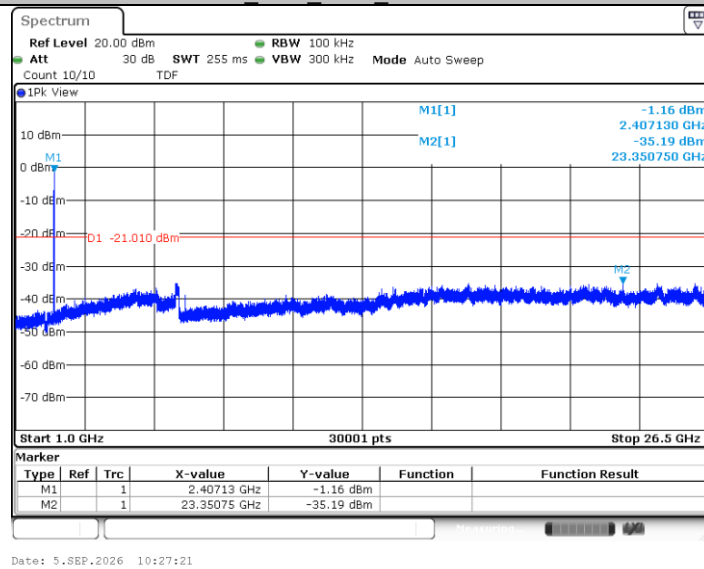


## 11G\_Ant1\_2437\_30~1000

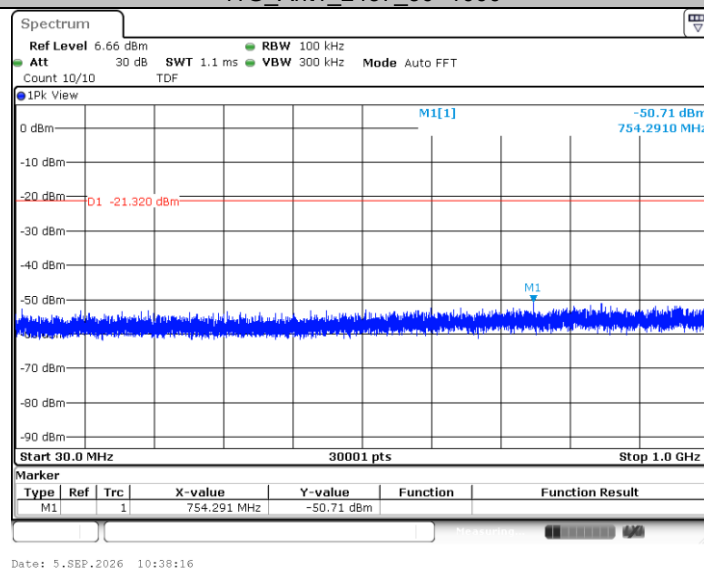


## 11G\_Ant1\_2437\_1000~26500

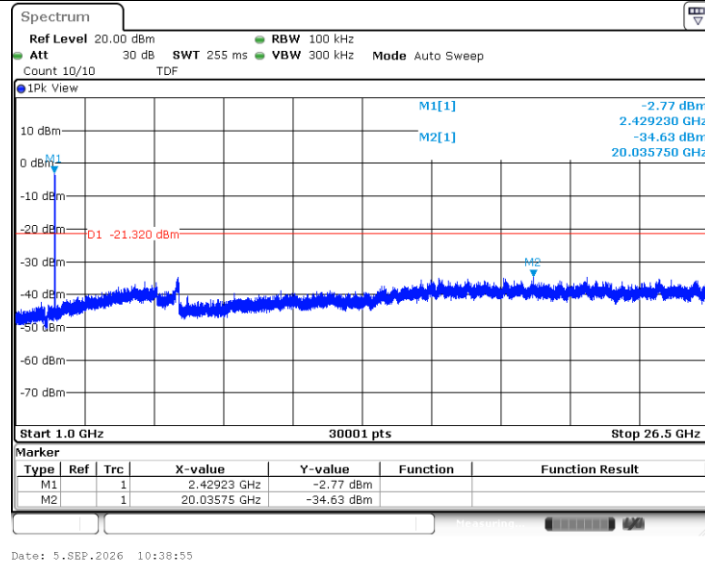


11G\_Ant1\_2462\_30~1000

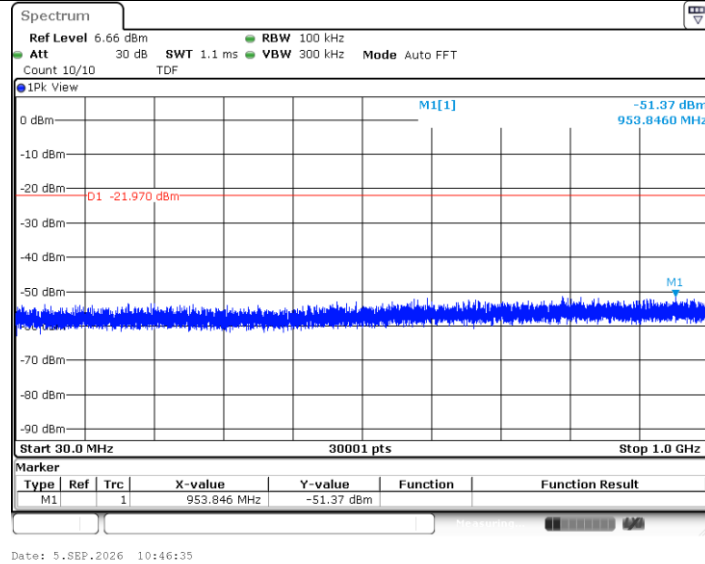


11G\_Ant1\_2462\_1000~26500

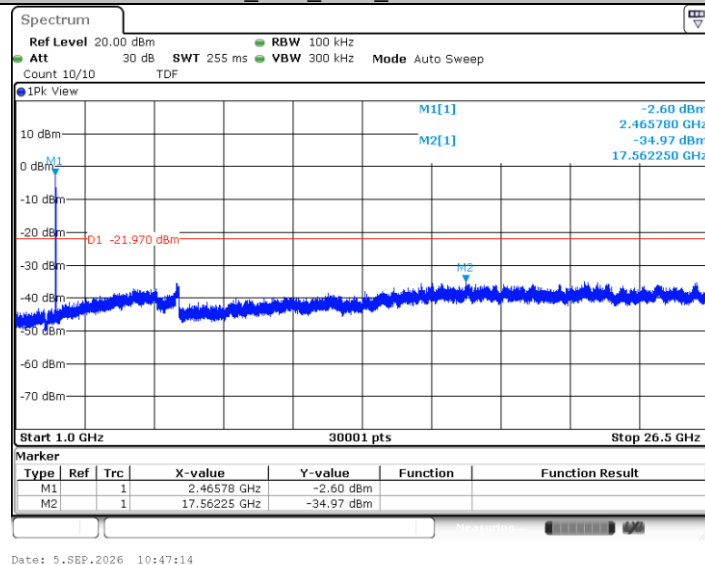


11N20SISO\_Ant1\_2412\_30~1000

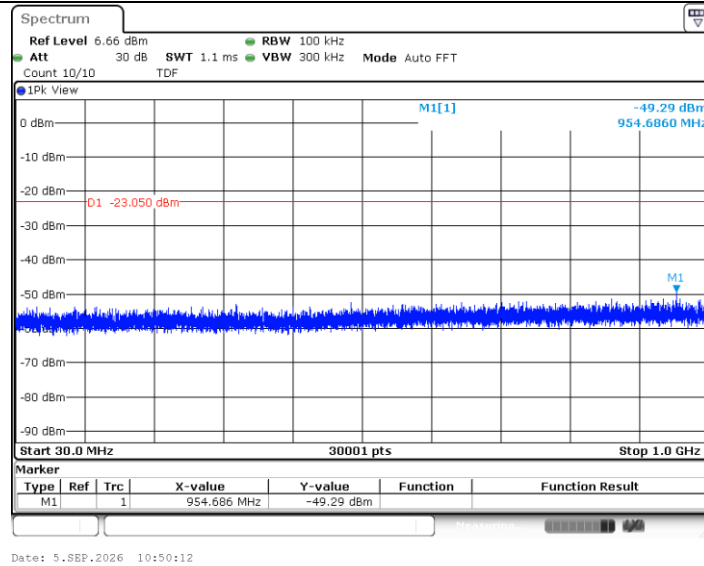

## 11N20SISO\_Ant1\_2412\_1000~26500

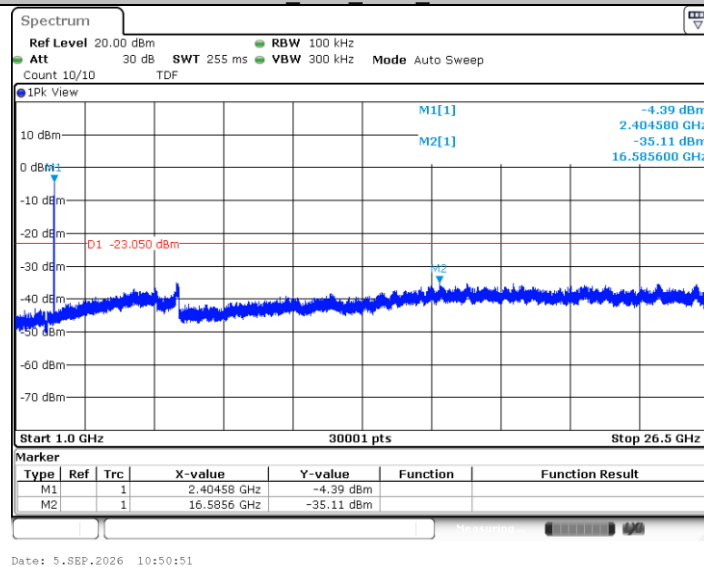

## 11N20SISO\_Ant1\_2437\_30~1000

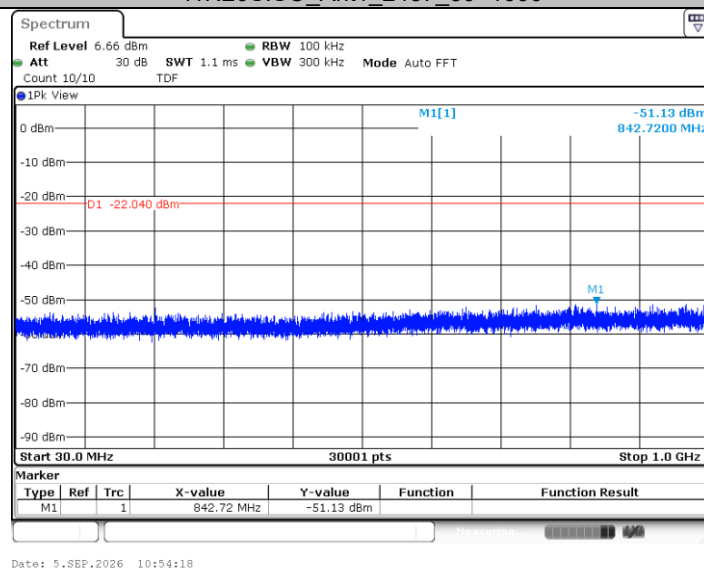


## 11N20SISO\_Ant1\_2437\_1000~26500

CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

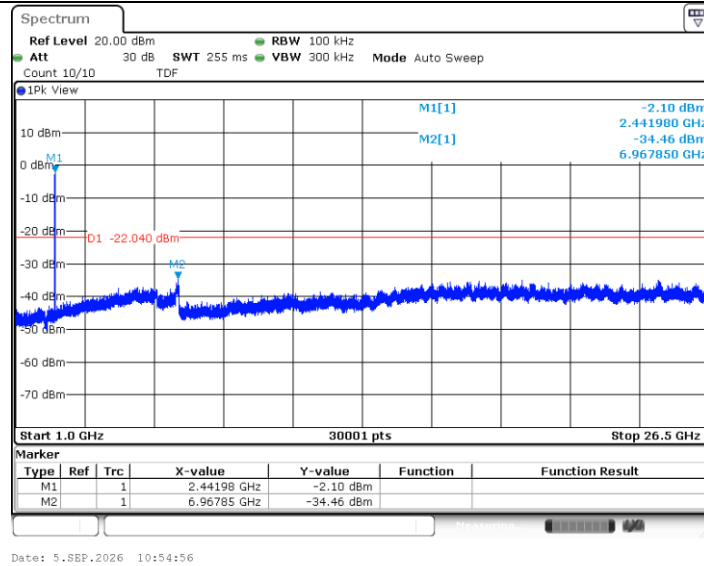


## 11N20SISO\_Ant1\_2462\_30~1000

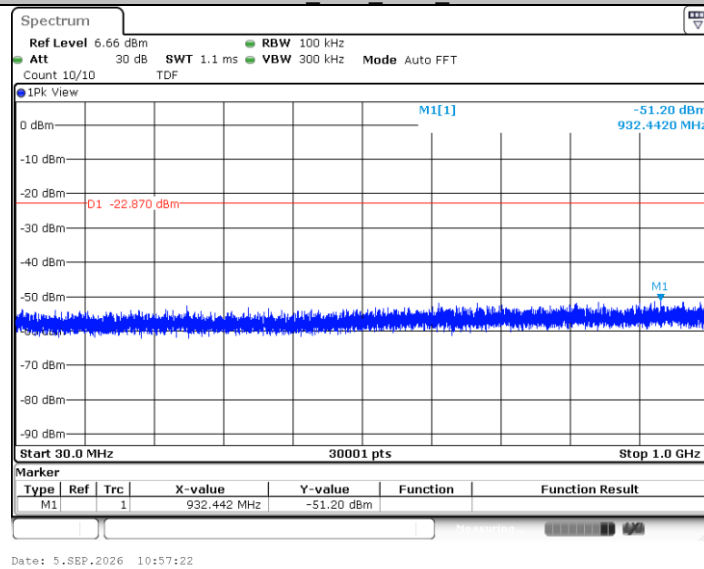


## 11N20SISO\_Ant1\_2462\_1000~26500

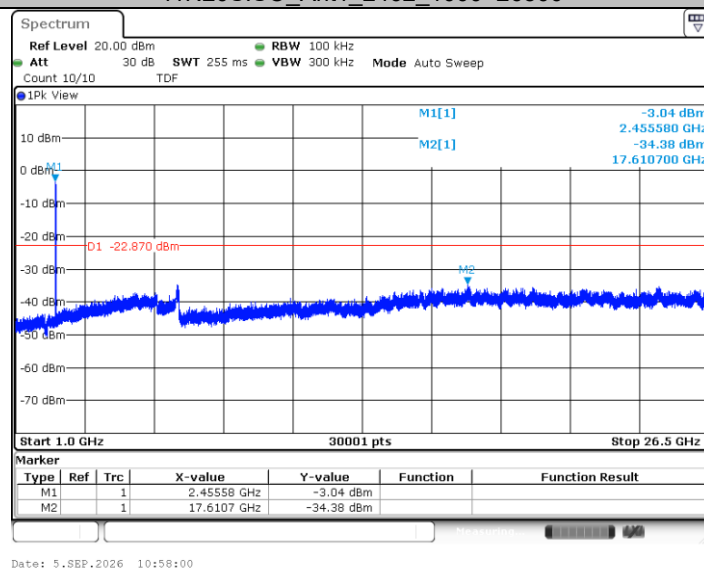


## 11N40SISO\_Ant1\_2422\_30~1000

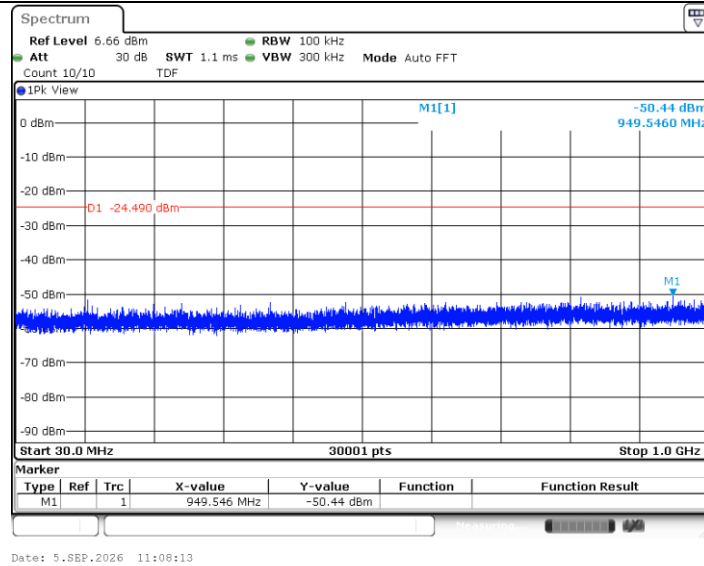

## 11N40SISO\_Ant1\_2422\_1000~26500

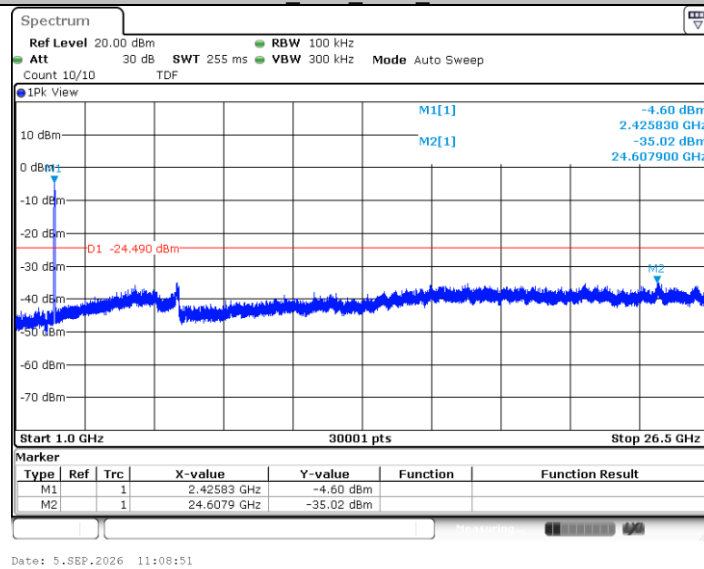

## 11N40SISO\_Ant1\_2437\_30~1000

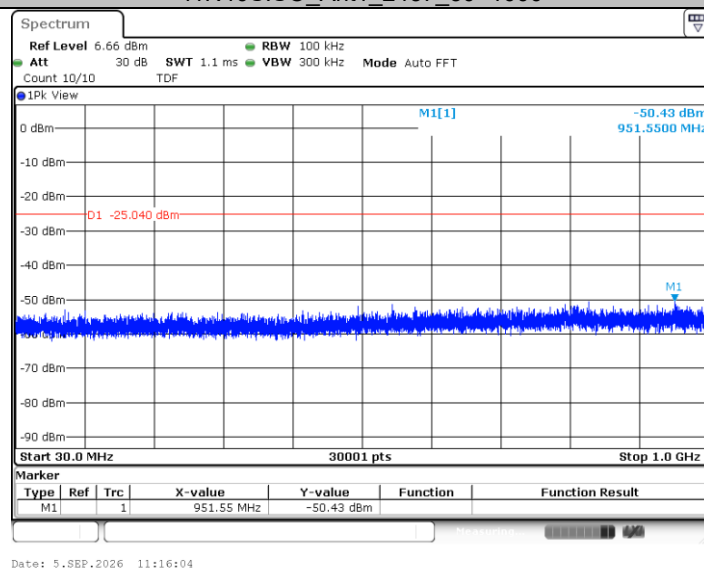


## 11N40SISO\_Ant1\_2437\_1000~26500

CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

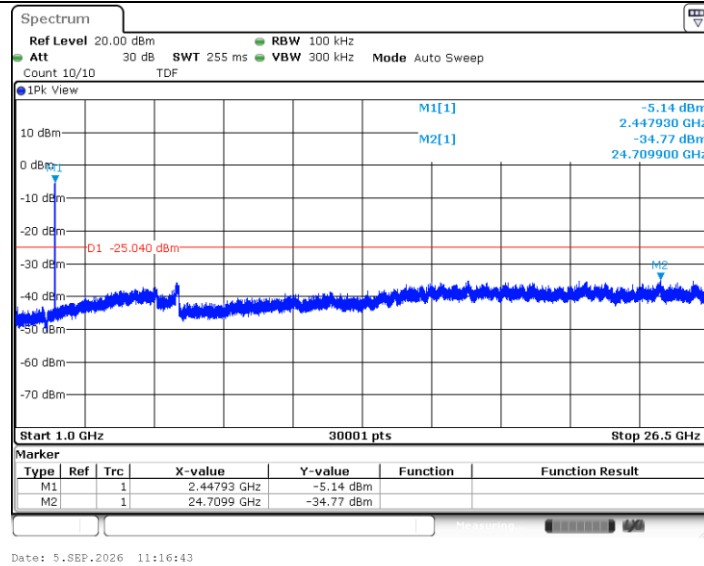

## 11N40SISO\_Ant1\_2452\_30~1000

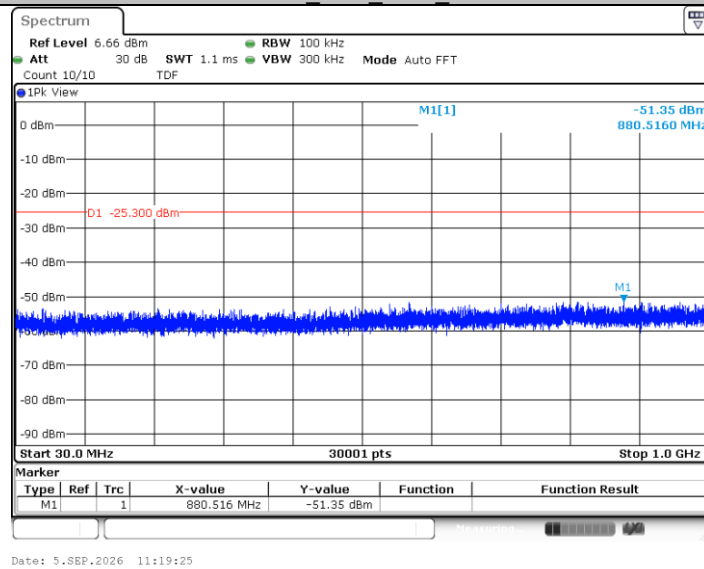

## 11N40SISO\_Ant1\_2452\_1000~26500

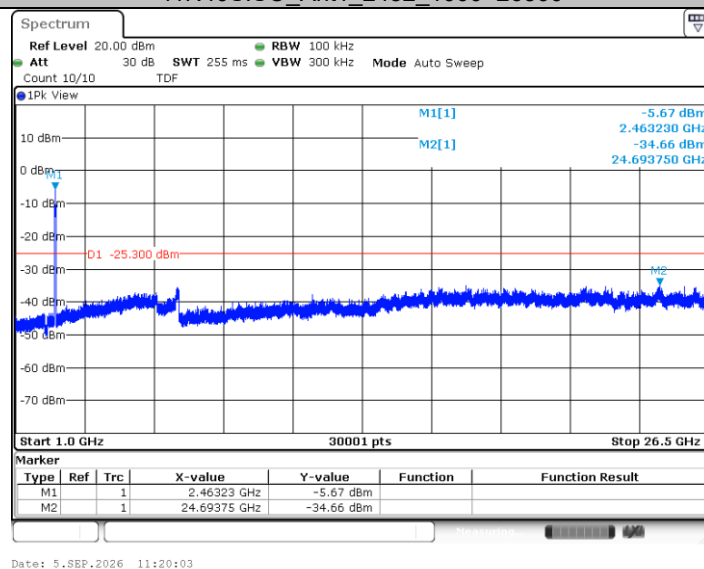


### 3.5. DTS Bandwidth

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2) / RSS-247 6.3.1(a)

| Test Item     | Limit                             | Frequency Range (MHz) |
|---------------|-----------------------------------|-----------------------|
| DTS Bandwidth | $\geq 500$ kHz<br>(6dB bandwidth) | 2400~2483.5           |

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
  2. DTS Spectrum Setting:
    - (1) Set RBW = 100 kHz.
    - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
    - (3) Detector = Peak.
    - (4) Trace mode = Max hold.
    - (5) Sweep = Auto couple.
- OCB Spectrum Setting:
- (1) Set RBW = 1% ~ 5% occupied bandwidth.
  - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


#### Test Mode

Please refer to the clause 2.4.

**Test Result**

| Test Mode | Antenna | Frequency[MHz] | OCB [MHz] | DTS BW [MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------|--------------|------------|---------|
| 11B       | Ant1    | 2412           | 13.187    | 9.08         | 0.5        | PASS    |
|           |         | 2437           | 13.107    | 9.12         | 0.5        | PASS    |
|           |         | 2462           | 13.067    | 10.04        | 0.5        | PASS    |
| 11G       | Ant1    | 2412           | 17.542    | 16.36        | 0.5        | PASS    |
|           |         | 2437           | 17.423    | 16.32        | 0.5        | PASS    |
|           |         | 2462           | 17.862    | 16.08        | 0.5        | PASS    |
| 11N20SISO | Ant1    | 2412           | 18.382    | 17.60        | 0.5        | PASS    |
|           |         | 2437           | 18.581    | 17.20        | 0.5        | PASS    |
|           |         | 2462           | 18.621    | 17.56        | 0.5        | PASS    |
| 11N40SISO | Ant1    | 2422           | 37.163    | 35.12        | 0.5        | PASS    |
|           |         | 2437           | 36.923    | 35.92        | 0.5        | PASS    |
|           |         | 2452           | 37.003    | 35.12        | 0.5        | PASS    |

DTS Bandwidth Test plot as follows:

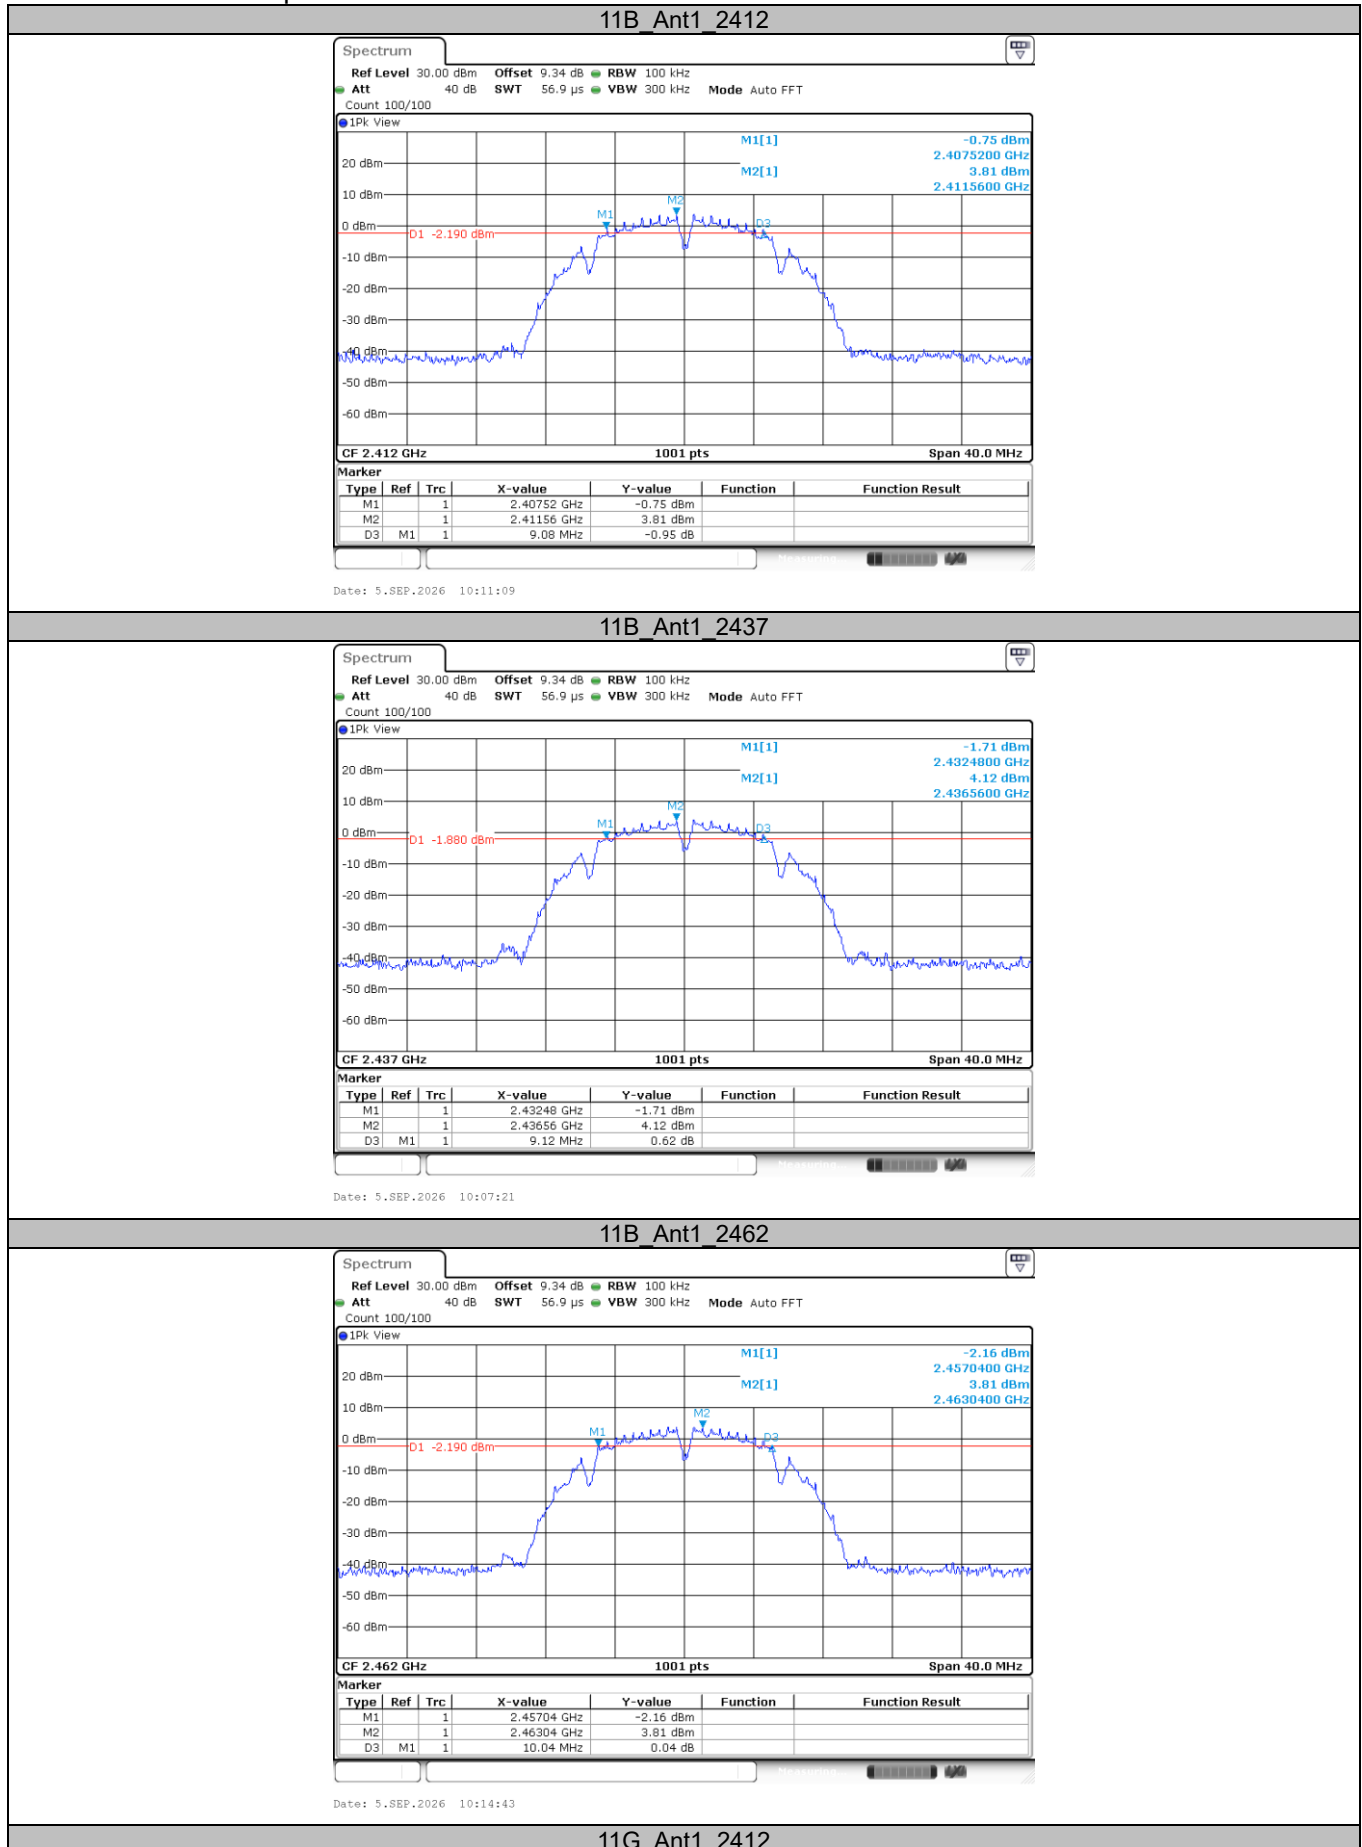


CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Langqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

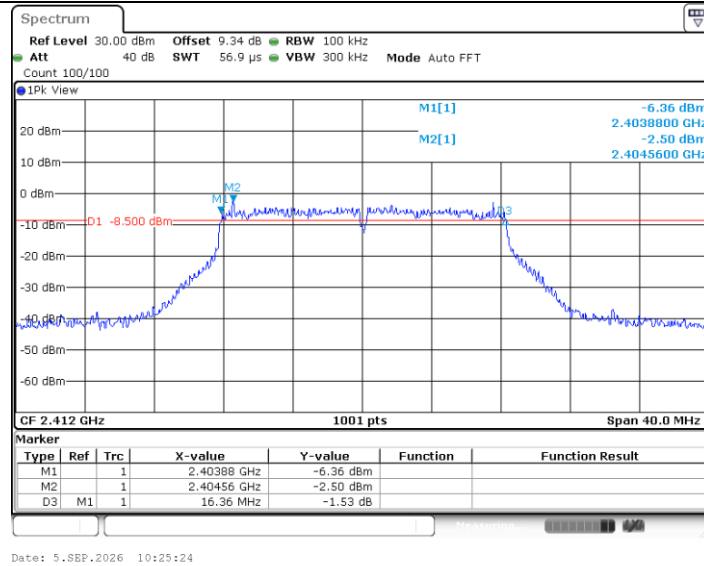

## 11G\_Ant1\_2437

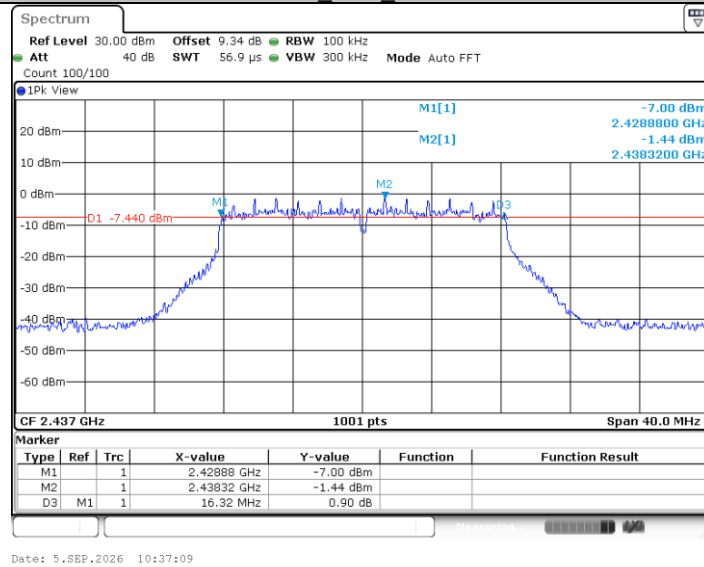

## 11G\_Ant1\_2462

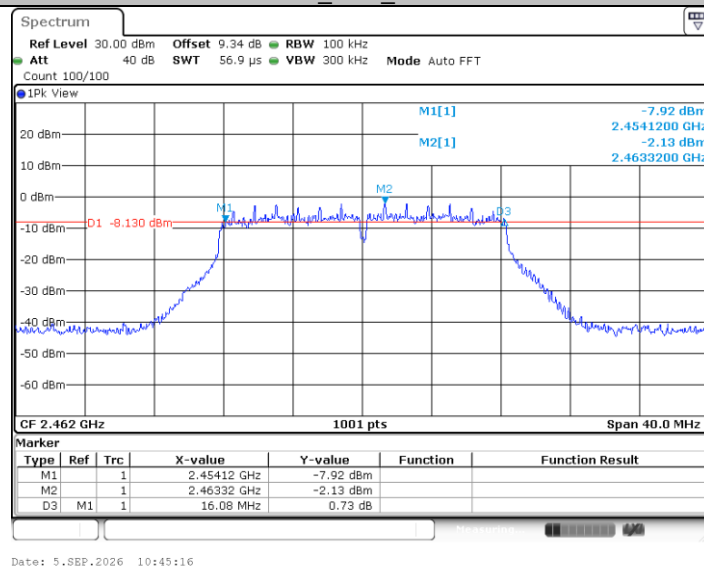


## 11N20SISO\_Ant1\_2412

CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

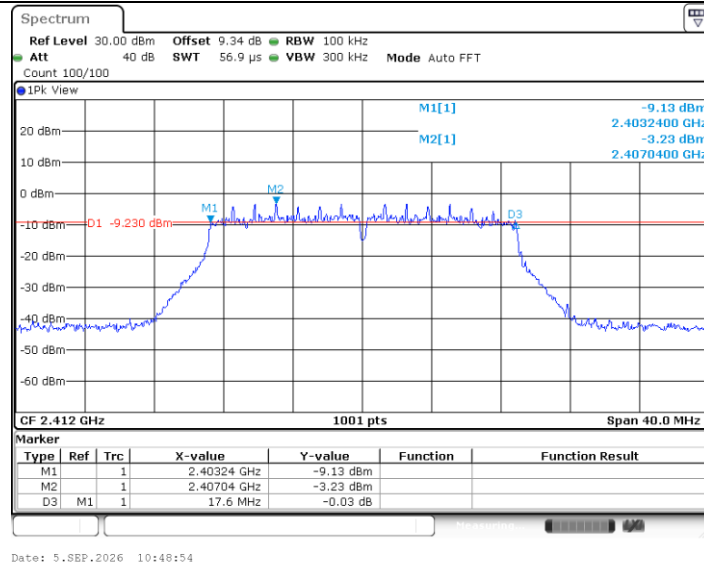


## 11N20SISO\_Ant1\_2437

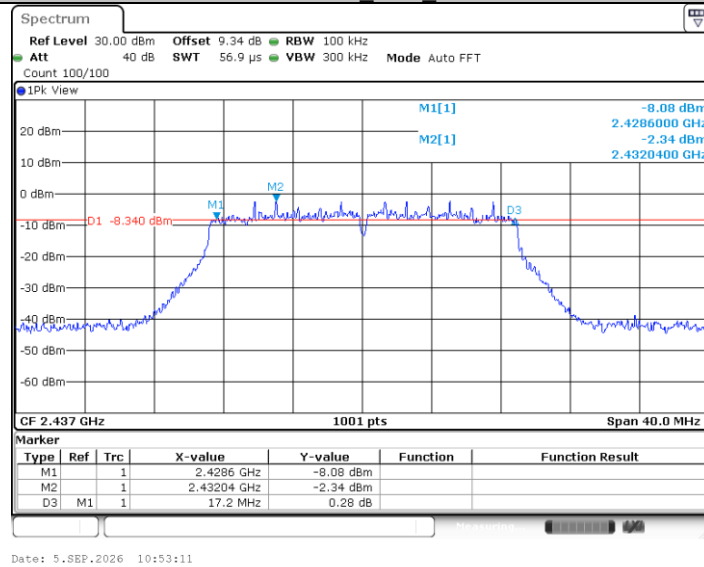


## 11N20SISO\_Ant1\_2462

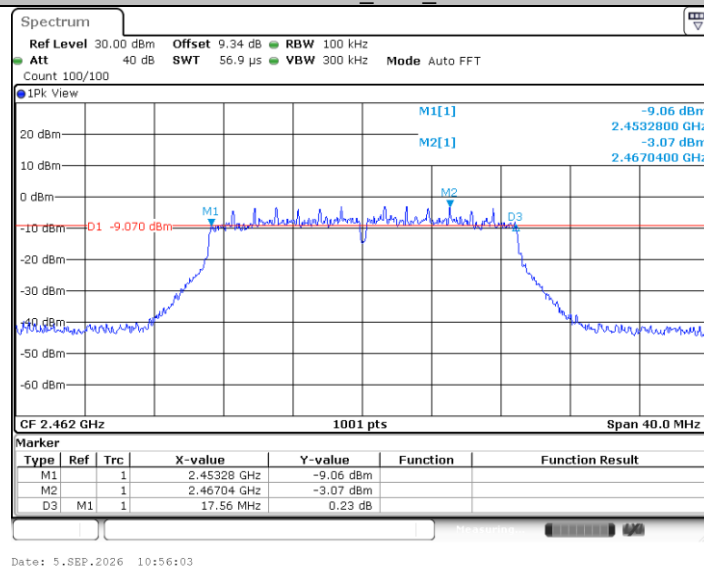


## 11N40SISO\_Ant1\_2422

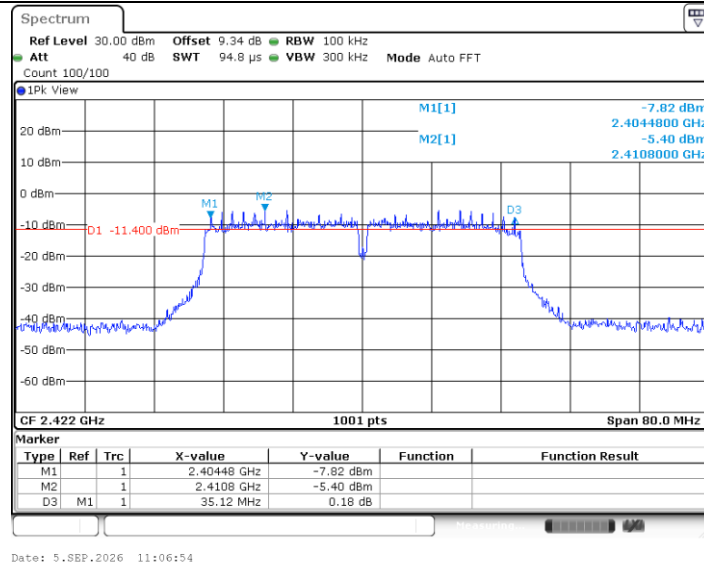


## 11N40SISO\_Ant1\_2437

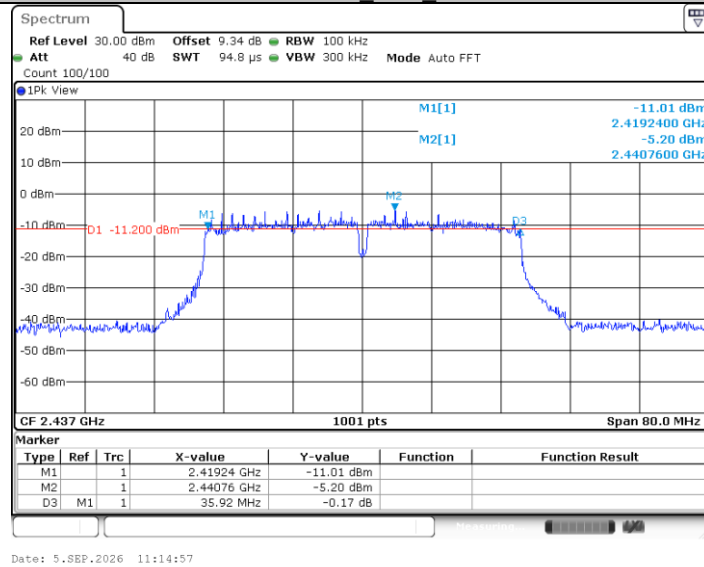

## 11N40SISO\_Ant1\_2452

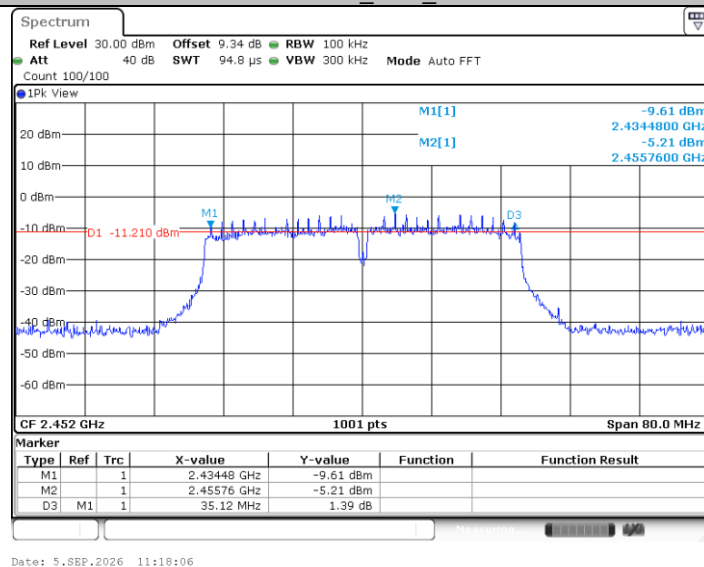

99% Bandwidth Test plot as follows:

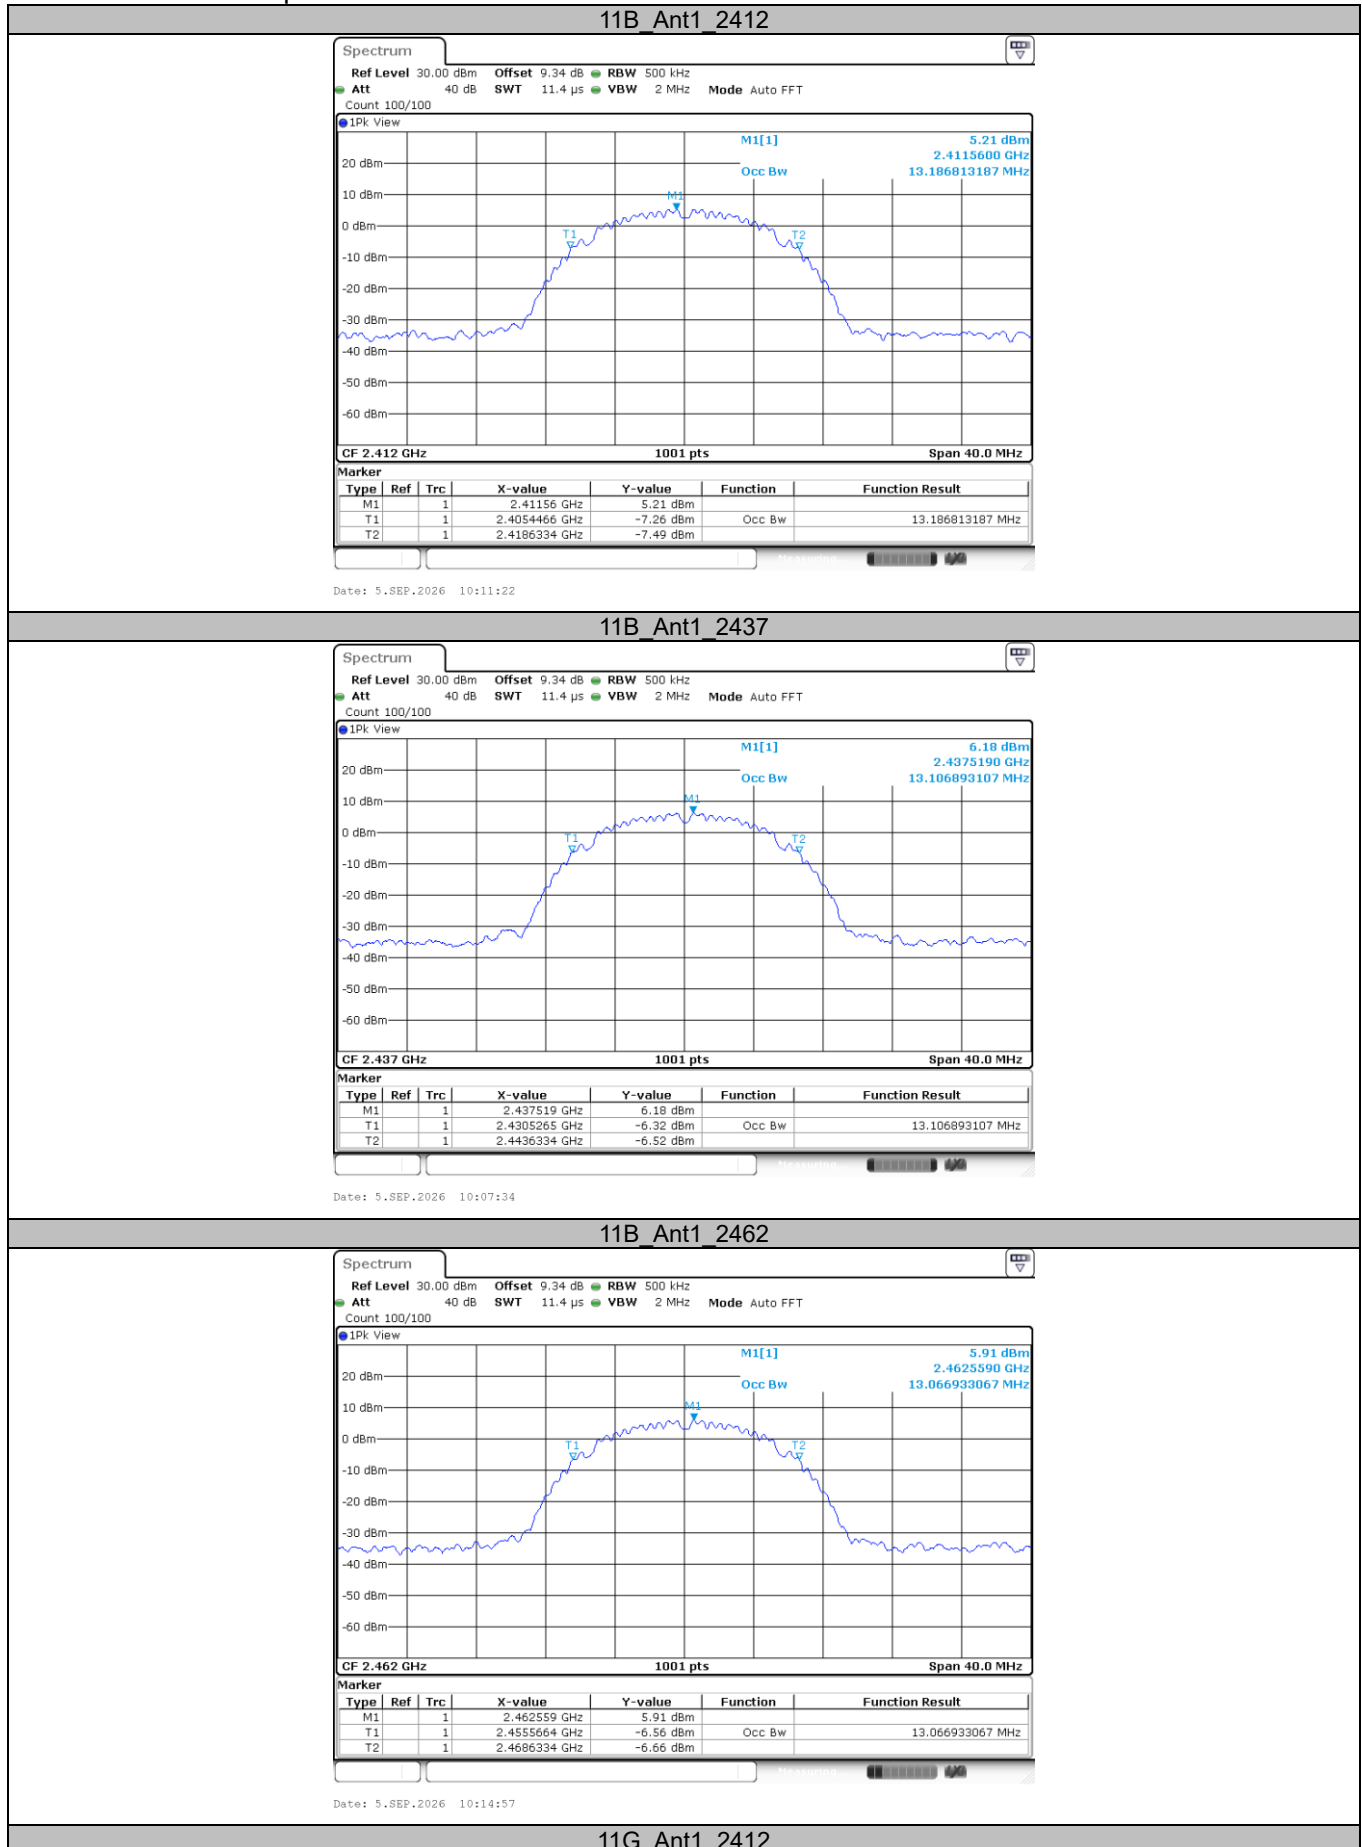


CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Langqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

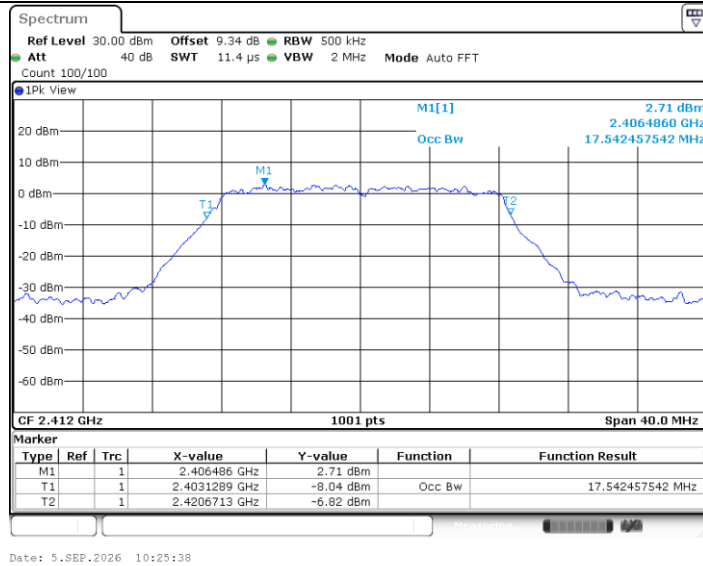


11G\_Ant1\_2437

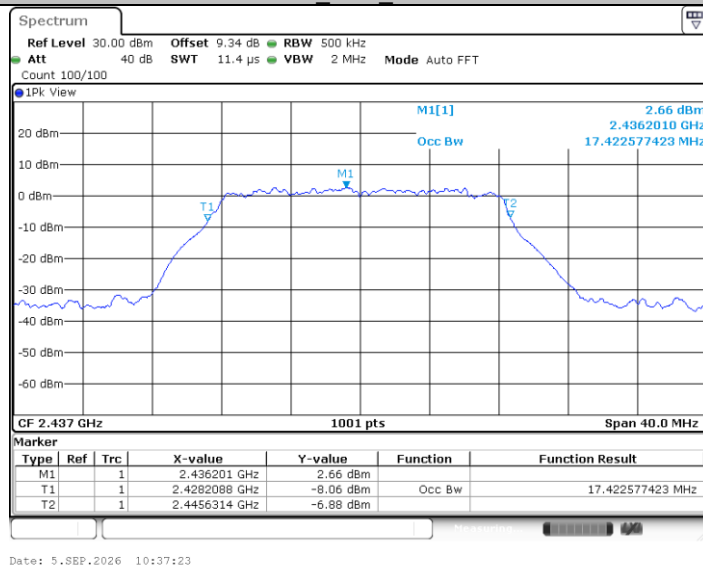


11G\_Ant1\_2462

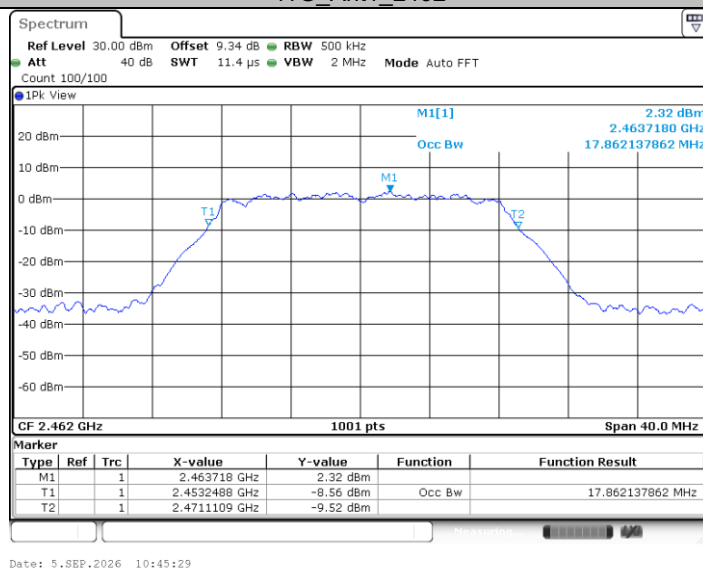


11N20SISO\_Ant1\_2412

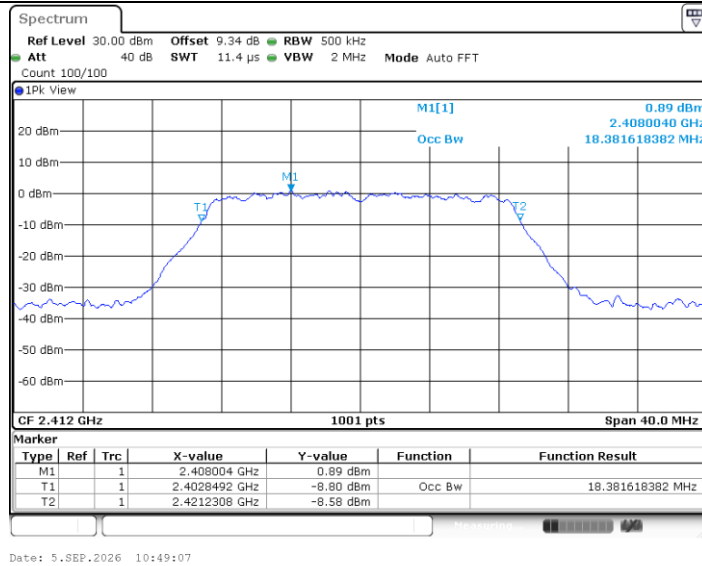


## 11N20SISO\_Ant1\_2437

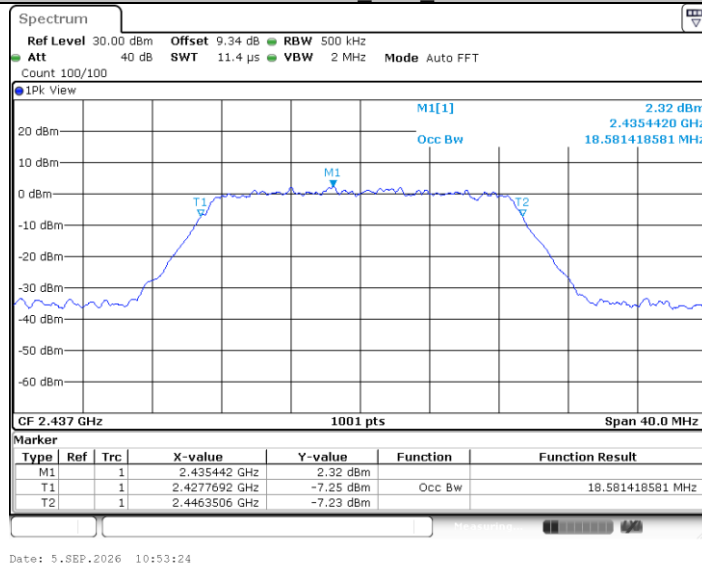


## 11N20SISO\_Ant1\_2462

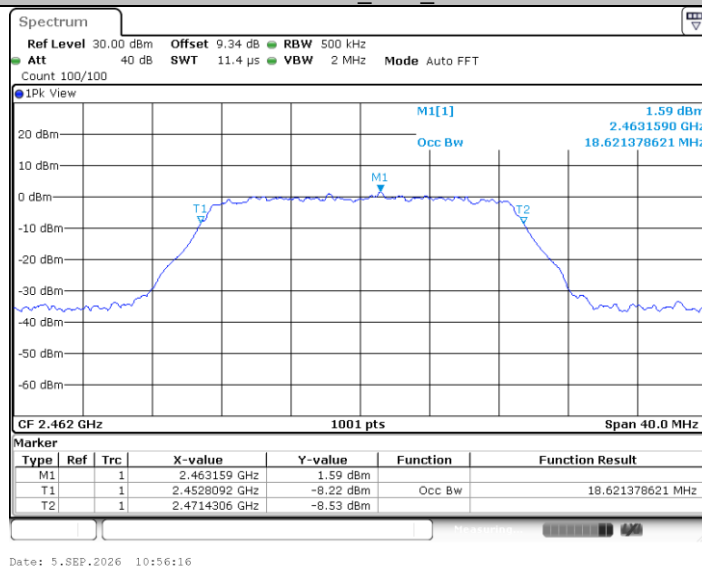


## 11N40SISO\_Ant1\_2422

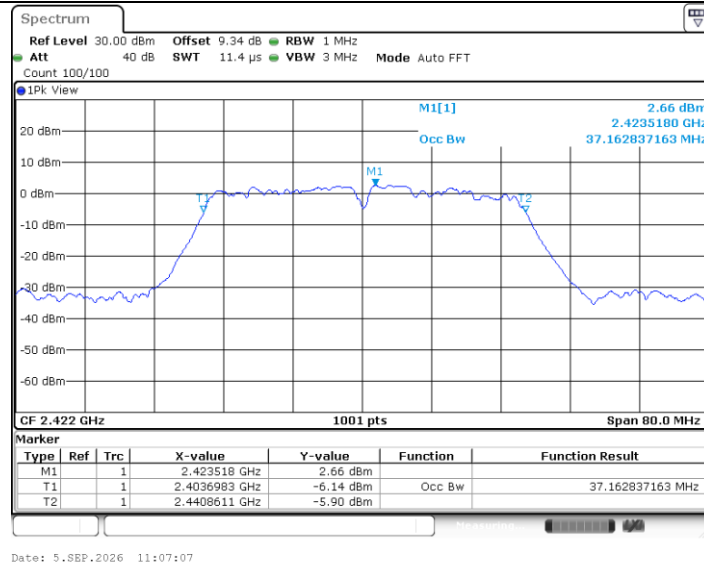

## 11N40SISO\_Ant1\_2437

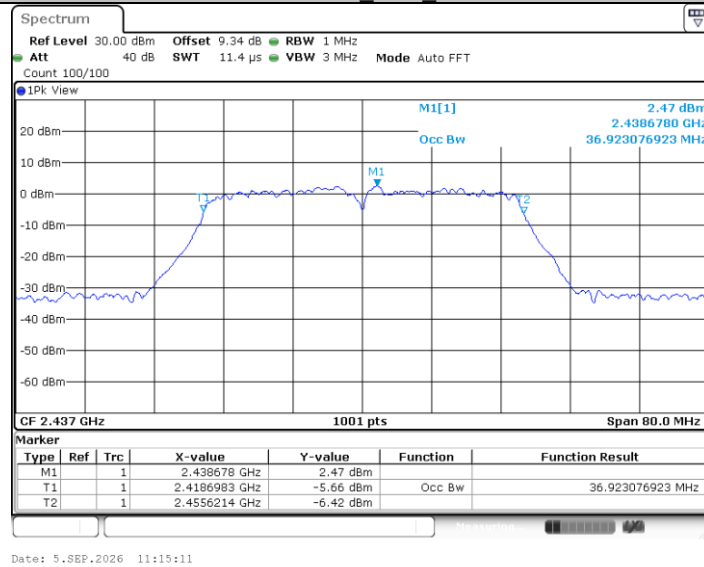

## 11N40SISO\_Ant1\_2452

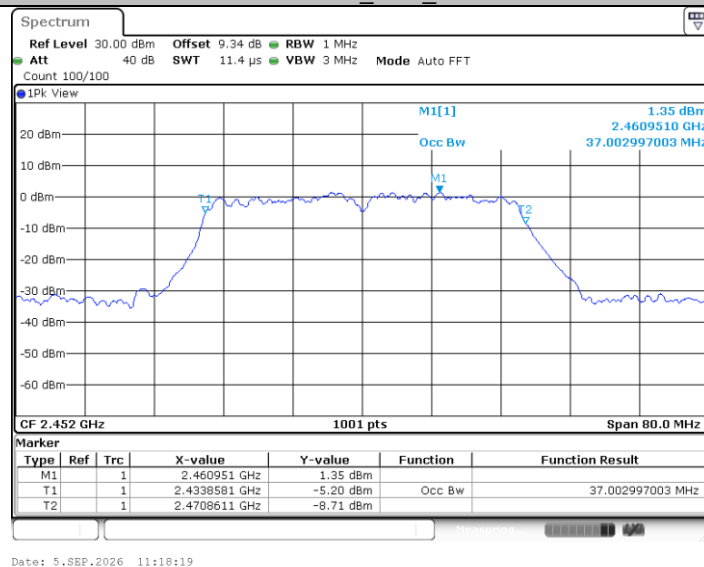


### 3.6. Peak Output Power

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3) / RSS-247 6.3.2

| Section                       | Test Item                      | Limit           | Frequency Range (MHz) |
|-------------------------------|--------------------------------|-----------------|-----------------------|
| FCC CFR 47 Part 15.247 (b)(3) | Maximum Conducted Output Power | 1 Watt or 30dBm | 2400~2483.5           |
| ISED RSS-247 6.3.2            | Maximum Conducted Output Power | 1 Watt or 30dBm | 2400~2483.5           |
|                               | EIRP                           | 4 Watt or 36dBm | 2400~2483.5           |

#### Test Configuration

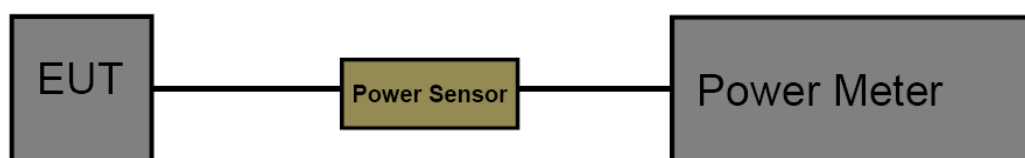

#### Test Procedure

1. The maximum conducted output power may be measured using a broadband RF power meter.
2. Power measurements were performed only when the EUT was transmitting at its peak power control level using a broadband power meter with a pulse sensor.
3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
4. Record the measurement data.

#### Test Mode

Please refer to the clause 2.4.

#### Test Result

| Test Mode | Antenna | Frequency [MHz] | Conducted Peak Power[dBm] | Conducted Limit[dBm] | EIRP[dBm] | EIRP Limit[dBm] | Verdict |
|-----------|---------|-----------------|---------------------------|----------------------|-----------|-----------------|---------|
| 11B       | Ant1    | 2412            | 16.09                     | ≤30.00               | 13.69     | ≤36.00          | PASS    |
|           |         | 2437            | 16.92                     | ≤30.00               | 14.52     | ≤36.00          | PASS    |
|           |         | 2462            | 16.88                     | ≤30.00               | 14.48     | ≤36.00          | PASS    |
| 11G       | Ant1    | 2412            | 17.72                     | ≤30.00               | 15.32     | ≤36.00          | PASS    |
|           |         | 2437            | 17.59                     | ≤30.00               | 15.19     | ≤36.00          | PASS    |
|           |         | 2462            | 16.76                     | ≤30.00               | 14.36     | ≤36.00          | PASS    |
| 11N20SISO | Ant1    | 2412            | 15.82                     | ≤30.00               | 13.42     | ≤36.00          | PASS    |
|           |         | 2437            | 16.86                     | ≤30.00               | 14.46     | ≤36.00          | PASS    |
|           |         | 2462            | 16.08                     | ≤30.00               | 13.68     | ≤36.00          | PASS    |
| 11N40SISO | Ant1    | 2422            | 16.73                     | ≤30.00               | 14.33     | ≤36.00          | PASS    |
|           |         | 2437            | 16.80                     | ≤30.00               | 14.40     | ≤36.00          | PASS    |
|           |         | 2452            | 15.90                     | ≤30.00               | 13.50     | ≤36.00          | PASS    |


### 3.7. Power Spectral Density

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e) / RSS-247 6.3.1(b)

| Test Item              | Limit                | Frequency Range (MHz) |
|------------------------|----------------------|-----------------------|
| Power Spectral Density | 8 dBm (in any 3 kHz) | 2400~2483.5           |

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
 Set analyzer center frequency to DTS channel center frequency.  
 Set the span to 1.5 times the DTS bandwidth.  
 Set the RBW to: 3 kHz.  
 Set the VBW to: 10 kHz.  
 Detector: peak.  
 Sweep time: auto.  
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.


#### Test Mode

Please refer to the clause 2.4.

**Test Result**

| Test Mode | Antenna | Frequency[MHz] | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|----------------|------------------|-----------------|---------|
| 11B       | Ant1    | 2412           | -10.85           | ≤8.00           | PASS    |
|           |         | 2437           | -10.03           | ≤8.00           | PASS    |
|           |         | 2462           | -10.38           | ≤8.00           | PASS    |
| 11G       | Ant1    | 2412           | -15.76           | ≤8.00           | PASS    |
|           |         | 2437           | -16.00           | ≤8.00           | PASS    |
|           |         | 2462           | -16.63           | ≤8.00           | PASS    |
| 11N20SISO | Ant1    | 2412           | -17.75           | ≤8.00           | PASS    |
|           |         | 2437           | -16.58           | ≤8.00           | PASS    |
|           |         | 2462           | -17.32           | ≤8.00           | PASS    |
| 11N40SISO | Ant1    | 2422           | -18.54           | ≤8.00           | PASS    |
|           |         | 2437           | -18.55           | ≤8.00           | PASS    |
|           |         | 2452           | -19.39           | ≤8.00           | PASS    |

Test plot as follows:

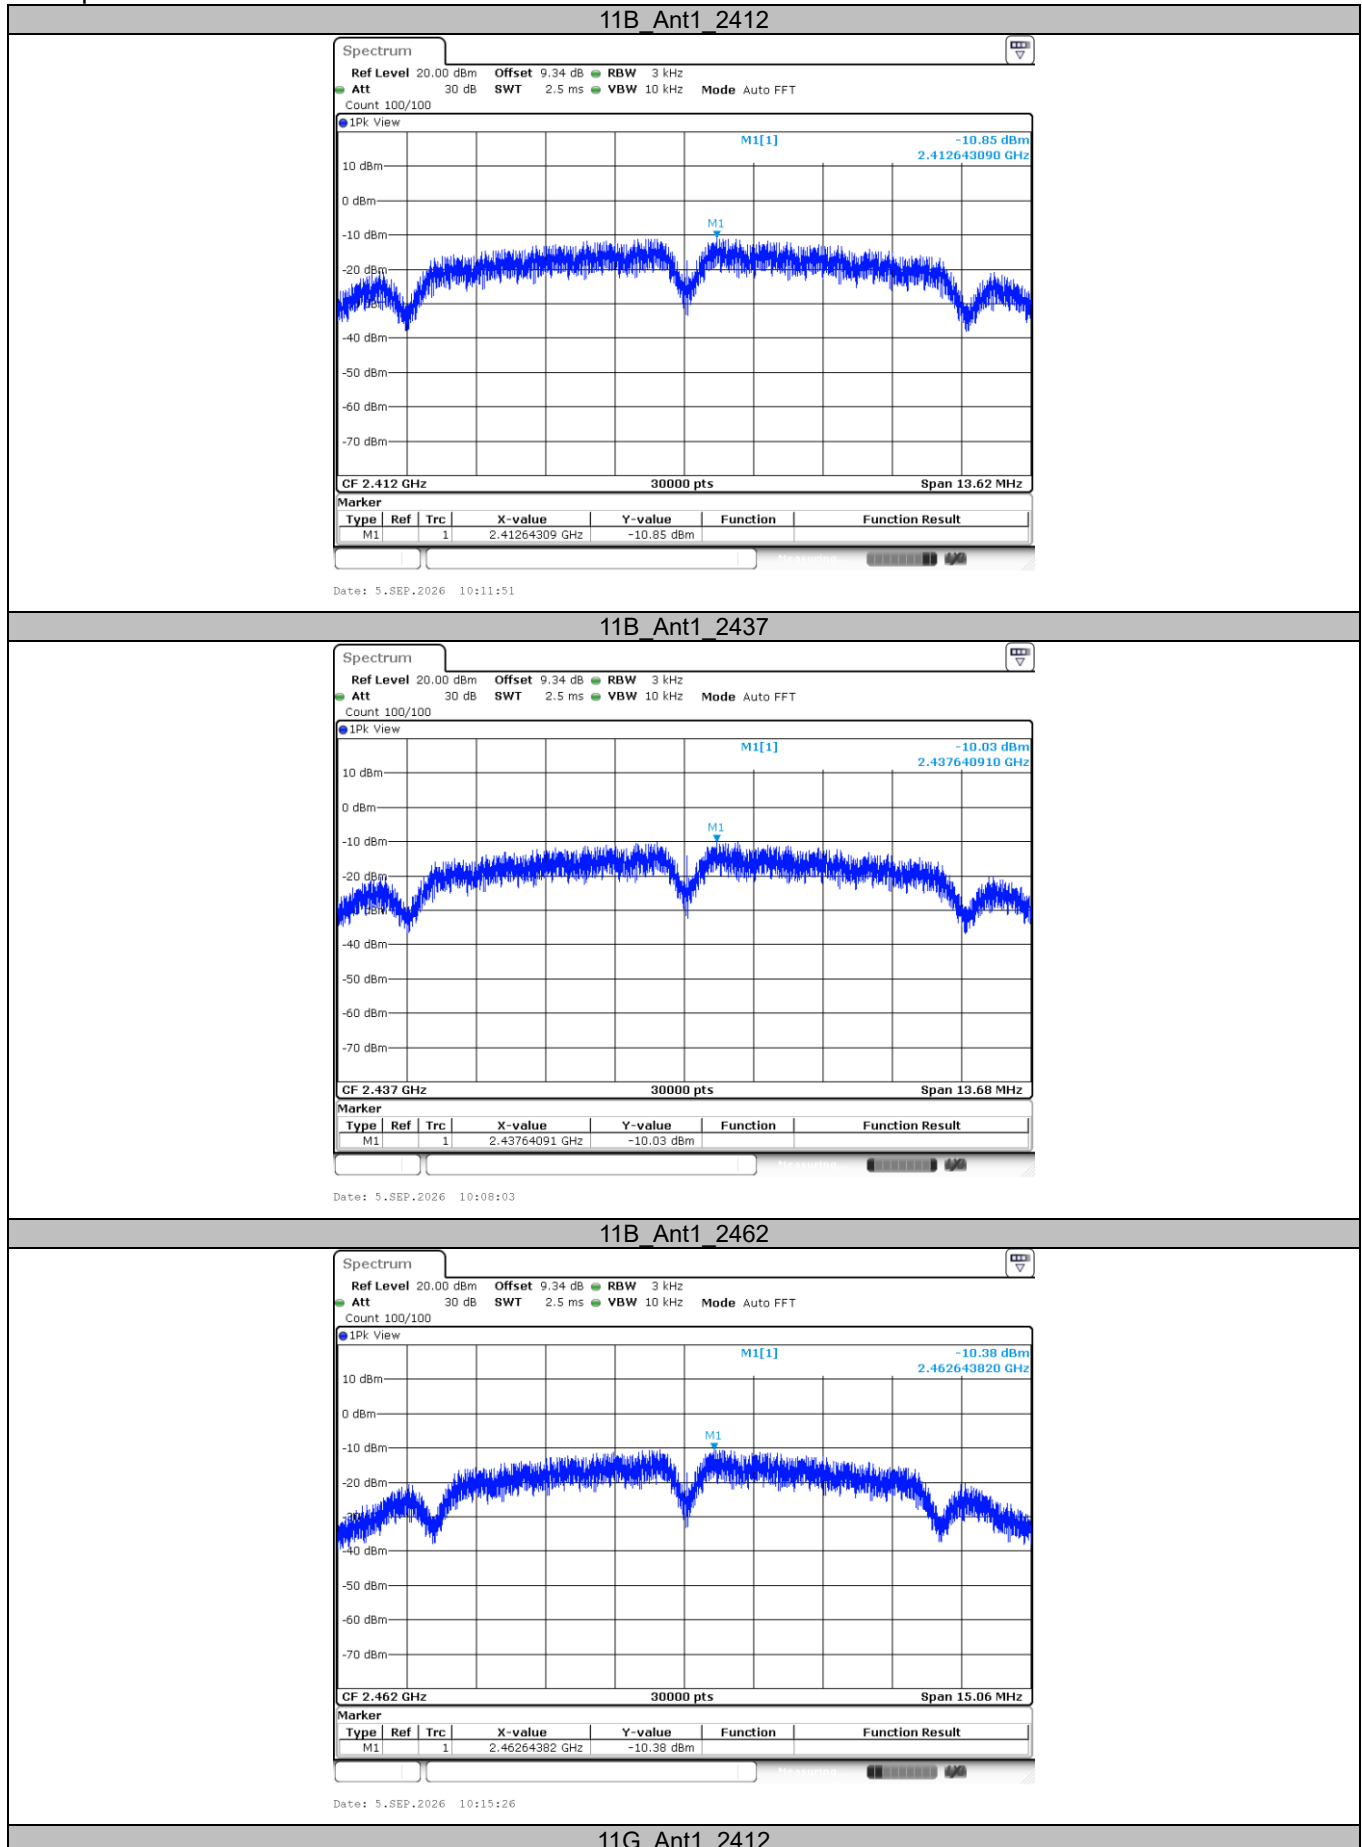


CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Langqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

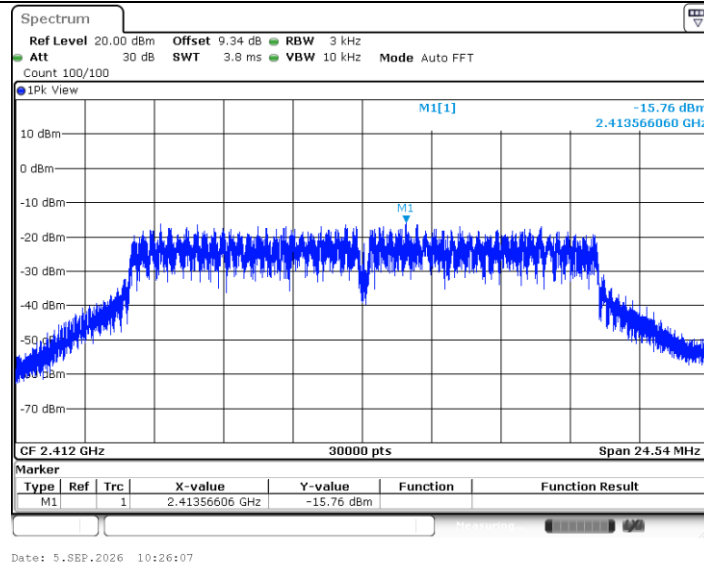


## 11G\_Ant1\_2437

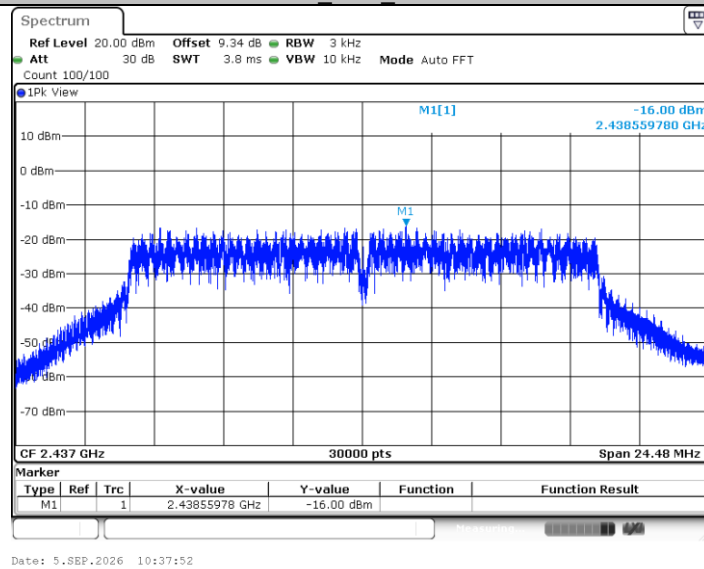


## 11G\_Ant1\_2462

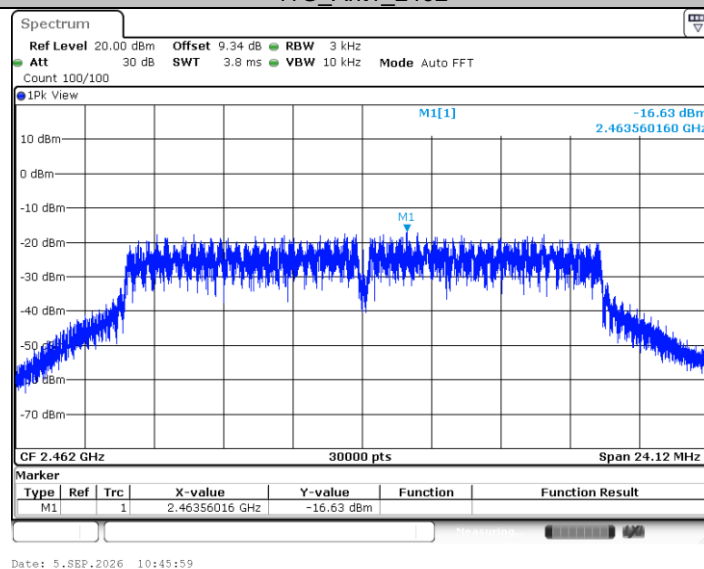


## 11N20SISO\_Ant1\_2412

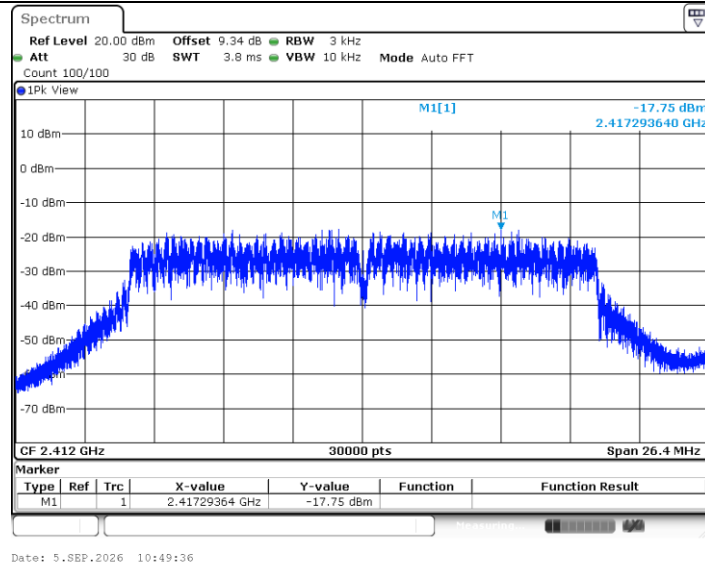

## 11N20SISO\_Ant1\_2437

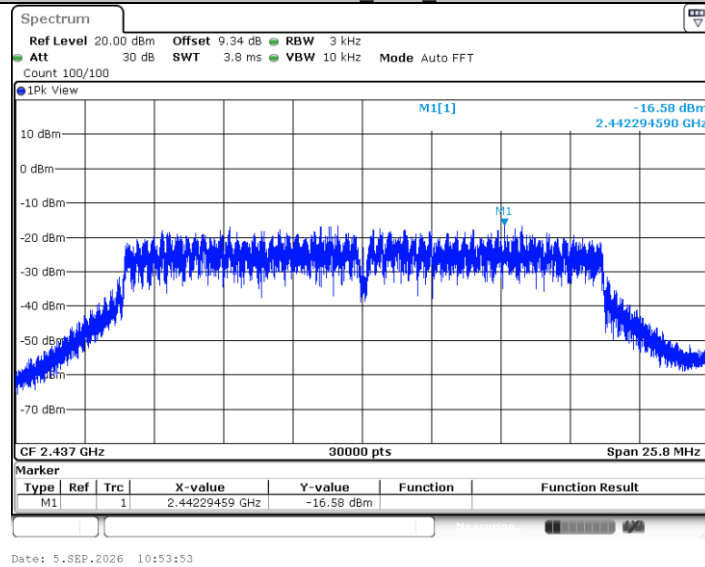

## 11N20SISO\_Ant1\_2462

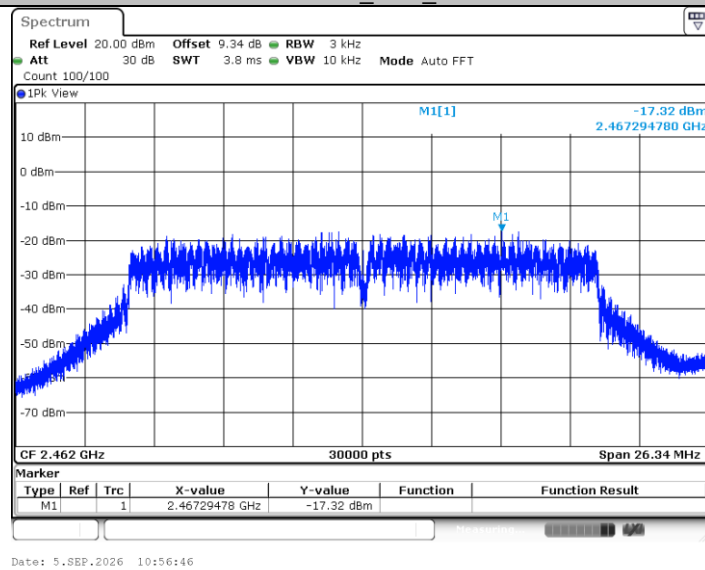


## 11N40SISO\_Ant1\_2422

CTC Laboratories, Inc.


Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Langqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-057\_A5


Master TRF : Dated 2026-06-01

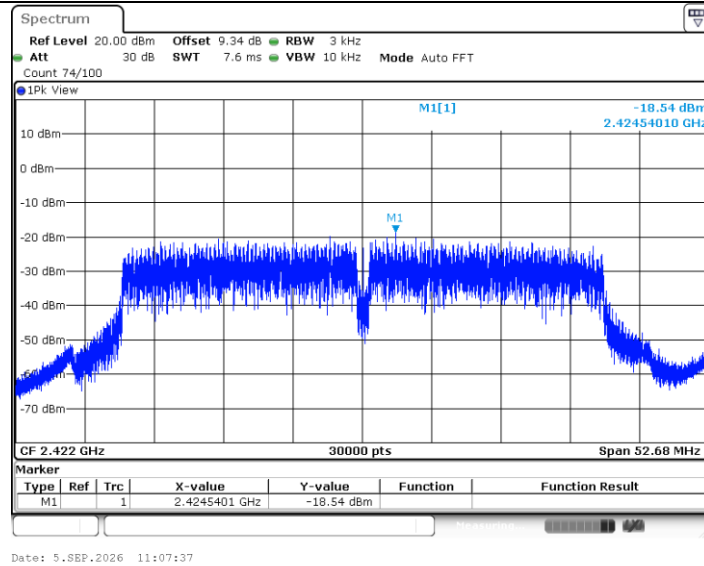

## 11N40SISO\_Ant1\_2437

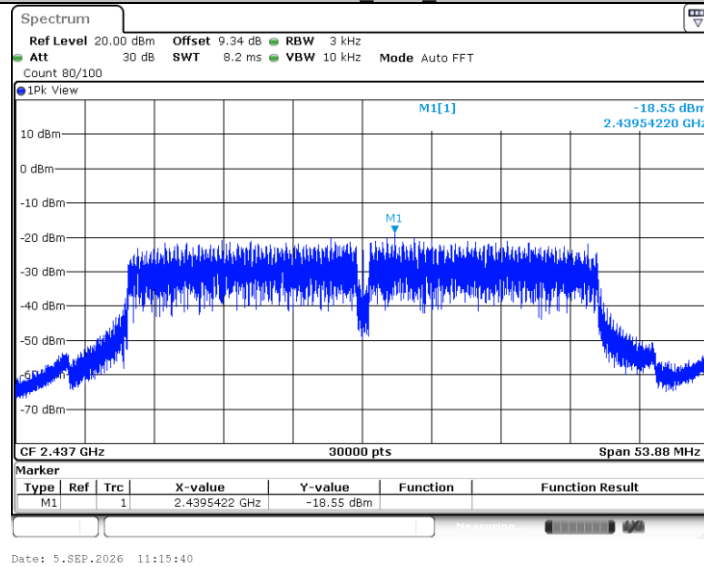

## 11N40SISO\_Ant1\_2452

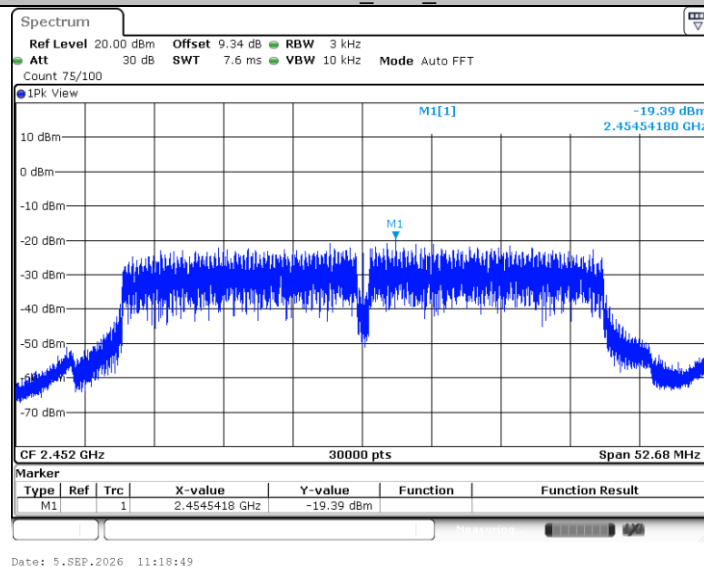


### 3.8. Duty Cycle

#### Limit

None, for report purposes only.

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
Set analyzer center frequency to test channel center frequency.  
Set the span to 0Hz.  
Set the RBW to 10MHz.  
Set the VBW to 10MHz.  
Detector: Peak.  
Sweep time: Auto.  
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode

Please refer to the clause 2.4.

**Test Result**

| Test Mode | Antenna | Frequency[MHz] | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] | 1/T Minimum VBW (kHz) | Final Setting for VBW (kHz) |
|-----------|---------|----------------|----------------------------|--------------------------|----------------|-----------------------|-----------------------------|
| 11B       | Ant1    | 2412           | 1.01                       | 1.11                     | 90.99          | 0.99                  | 1                           |
|           |         | 2437           | 1.01                       | 1.11                     | 90.99          | 0.99                  | 1                           |
|           |         | 2462           | 1.00                       | 1.11                     | 90.09          | 1.00                  | 1                           |
| 11G       | Ant1    | 2412           | 0.61                       | 0.67                     | 91.04          | 1.64                  | 3                           |
|           |         | 2437           | 0.61                       | 0.66                     | 92.42          | 1.64                  | 3                           |
|           |         | 2462           | 0.61                       | 0.82                     | 74.39          | 1.64                  | 3                           |
| 11N20SISO | Ant1    | 2412           | 0.61                       | 0.66                     | 92.42          | 1.64                  | 3                           |
|           |         | 2437           | 0.61                       | 0.66                     | 92.42          | 1.64                  | 3                           |
|           |         | 2462           | 0.61                       | 0.67                     | 91.04          | 1.64                  | 3                           |
| 11N40SISO | Ant1    | 2422           | 0.31                       | 0.36                     | 86.11          | 3.23                  | 5                           |
|           |         | 2437           | 0.32                       | 0.37                     | 86.49          | 3.13                  | 5                           |
|           |         | 2452           | 0.31                       | 0.37                     | 83.78          | 3.23                  | 5                           |

### 3.9. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(b) (4)**

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **RSS-Gen Issue 5 Section 6.8**

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power(e.i.r.p.) limits specified in the applicable standard (RSS) for licence-exempt apparatus.

#### Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

\*\*\*\*\*THE END OF REPORT\*\*\*\*\*