

TEST REPORT

Report No. : **CTC2026307102**

FCC ID..... : **2BWSN-V1**

IC : **35828-V1**

HVIN : **Glasses V1**

Applicant : **Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.**

Address..... : No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region

Manufacturer..... : Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.

Address..... : No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region

Product Name : **AR Display Glasses**

Trade Mark : /

Model/Type reference..... : Glasses GV1

Listed Model(s) : Refer to page 7 of the report.

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Test Report Form No : CTC-TR-059_A5

Master TRF : Dated 2026-06-01

Date of receipt of test sample..... : Jun. 17, 2026

Date of testing..... : Jun. 17, 2026 ~ Jul. 3, 2026


Date of issue..... : Aug. 25, 2026

Result..... : **PASS**

Compiled by:

(Printed name+signature)

Jim Jiang



Supervised by:

(Printed name+signature)

Eric Zhang



Approved by:

(Printed name+signature)

Totti Zhao



This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Table of Contents	Page
1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. ACCESSORY EQUIPMENT INFORMATION	8
2.4. OPERATION STATE	9
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS	11
3.1. CONDUCTED EMISSION.....	11
3.2. RADIATED EMISSION.....	14
3.3. BAND EDGE EMISSIONS (RADIATED)	28
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	41
3.5. BANDWIDTH.....	56
3.6. CHANNEL SEPARATION.....	63
3.7. NUMBER OF HOPPING CHANNEL.....	65
3.8. DWELL TIME	67
3.9. MAXIMUM OUTPUT POWER	70
3.10. DUTY CYCLE	72
3.11. ANTENNA REQUIREMENT.....	76

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 4](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2020](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

[ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2026307102	Aug. 25, 2026	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS-247 Issue 4				
Test Item	Standard Section		Result	Note
	FCC	ISED		
Antenna Requirement	15.203&15.247(b)(4)	RSS-Gen 6.8	Pass	/
Conducted Emission	15.207	RSS-Gen 8.8	Pass	/
Hopping Channel Separation	15.247(a)(1)	RSS-247 6.2.3.1 (a)	Pass	/
Dwell Time	15.247(a)(1)(iii)	RSS-247 6.2.3.1 (b)	Pass	/
Peak Output Power	15.247(b)(1)	RSS-247 6.2.3.2	Pass	/
Number of Hopping Frequency	15.247(a)(1)(iii)	RSS-247 6.2.3.1 (b)	Pass	/
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 6.6 & RSS-Gen 8.10	Pass	/
Radiated Emissions Restricted Band and Radiated Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 6.6 & RSS-Gen 8.9 & RSS-Gen 8.10	Pass	/
20dB Bandwidth	15.247(a)(1)	RSS-247 6.2.1 (a)	Pass	/
Occupied Bandwidth	/	RSS-Gen 6.7	Pass	/

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.

1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
20dB Emission Bandwidth	$\pm 0.0196\%$	(1)
Carrier Frequency Separation	$\pm 1.9\%$	(1)
Number of Hopping Channel	$\pm 1.9\%$	(1)
Time of Occupancy	$\pm 0.028\%$	(1)
Max Peak Conducted Output Power	± 0.743 dB	(1)
Band-edge Spurious Emission	± 1.328 dB	(1)
Conducted RF Spurious Emission	9kHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB	(1)
Conducted Emissions 9kHz~30MHz	± 3.08 dB	(1)
Radiated Emissions 30~1000MHz	± 4.51 dB	(1)
Radiated Emissions 1~18GHz	± 5.84 dB	(1)
Radiated Emissions 18~40GHz	± 6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa

2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.
Address:	No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region
Manufacturer:	Jueyuan Chuangzhi Technology (Guangxi) Co., Ltd.
Address:	No. 25, Cheyuan Hengwu Road, Liuzhou City, Guangxi Zhuang Autonomous Region

2.2. General Description of EUT

Product Name:	AR Display Glasses
Trade Mark:	/
Model/Type reference:	Glasses GV1
Listed Model(s):	GV1, Birdilens GV1, iTour GV1, Captionlens GV1, Captify V1, DL V1, Holotus V1, Floatair V1, F06 V1, F07 V1, F08 V1, F09 V1, F10 V1, F11 V1, F12 V1, F15 V1, F16 V1, F17 V1, F18 V1, F19 V1, F20 V1, F21 V1, F66 V1, F99 V1, F1
Model Difference:	All these models are identical in the same PCB, layout, electrical circuit. The difference is the color of the lens and the shape of the frame.
Sample ID:	CTC-GC260521-010-S002, CTC-GC260521-010-S003
Power Supply:	3.87V 200mAh from li-ion battery
Hardware Version:	V1.1
Software Version:	V1.1
Bluetooth 5.4 / BR+EDR	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	79
Channel Separation:	1MHz
Antenna Type:	FPC Antenna
Antenna Gain:	2.91 dBi

Note: The product has RF modules and antennas on both sides, which have the same RF specifications and antenna gain. We tested them separately, and this report only shows the worst data.

2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Laptop	ThinkBook 14 G3 ACL	MP246QDR	Lenovo
Power Adapter	A2167	/	Apple
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
Test Software Information			
Name	Version	/	/
BQB	20250814	/	/

2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey is the channel selected for testing.

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
EUT is charged through a power adapter.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 12, 2026
2	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Dec. 12, 2026
3	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2026
4	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2026
5	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2026
6	RF Control Unit	Tonscend	JS0806-2	/	Dec. 12, 2026
7	Test Software	Tonscend	JS1120-3	V3.3.38	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-759	Oct. 16, 2027
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-648	Dec. 11, 2026
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2026
4	Broadband Amplifier	Schwarzbeck	BBV9743B	259	Dec. 12, 2026
5	Microwave Broadband Amplifier	Schwarzbeck	BBV9718C	111	Dec. 12, 2026
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 12, 2026
2	LISN	R&S	ENV216	101113	Dec. 12, 2026
3	EMI Test Receiver	R&S	ESCI	100524	Dec. 12, 2026
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2026
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2026
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

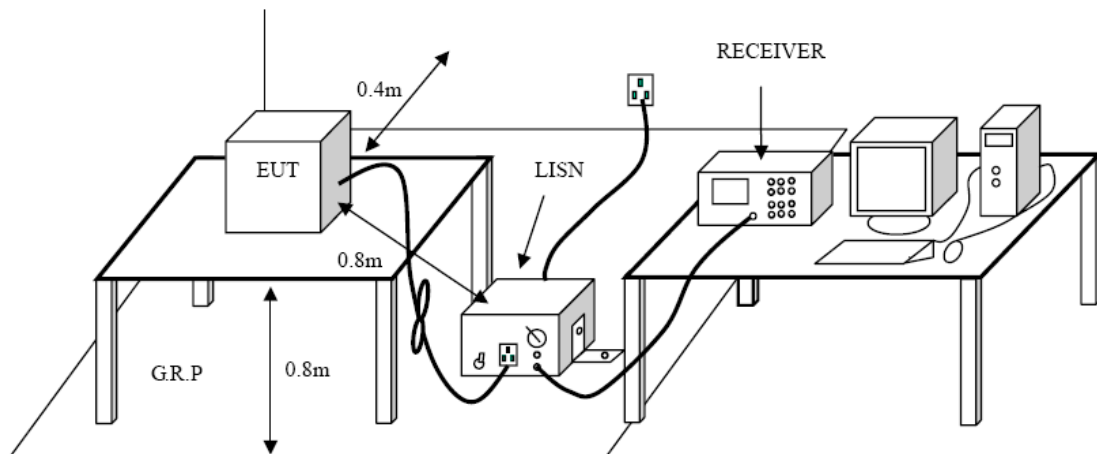

Test Procedure


1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

Test Result


Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported.

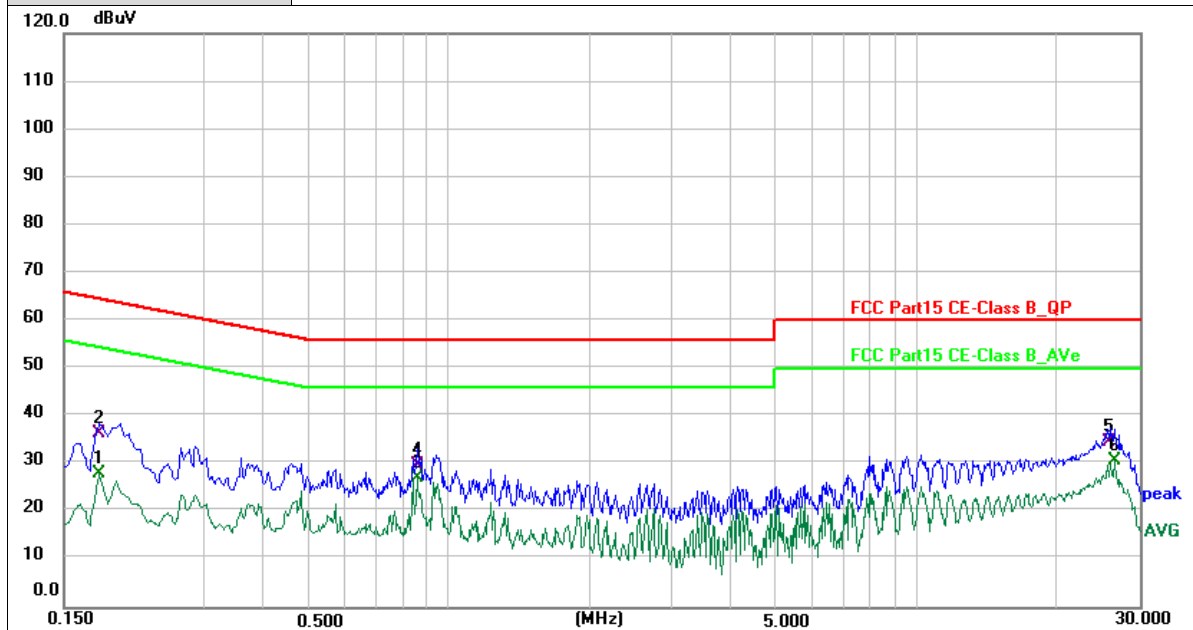

No.	Frequency (MHz)	Reading (dBuV)	Factor ()	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1779	18.17	9.87	28.04	54.58	-26.54	AVG
2	0.1792	26.66	9.87	36.53	64.52	-27.99	QP
3 *	0.8539	17.63	9.61	27.24	46.00	-18.76	AVG
4	0.8552	20.20	9.61	29.81	56.00	-26.19	QP
5	25.9977	25.12	9.60	34.72	60.00	-25.28	QP
6	26.5500	21.21	9.58	30.79	50.00	-19.21	AVG

Emission Level = Read Level + Correct Factor

Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported.

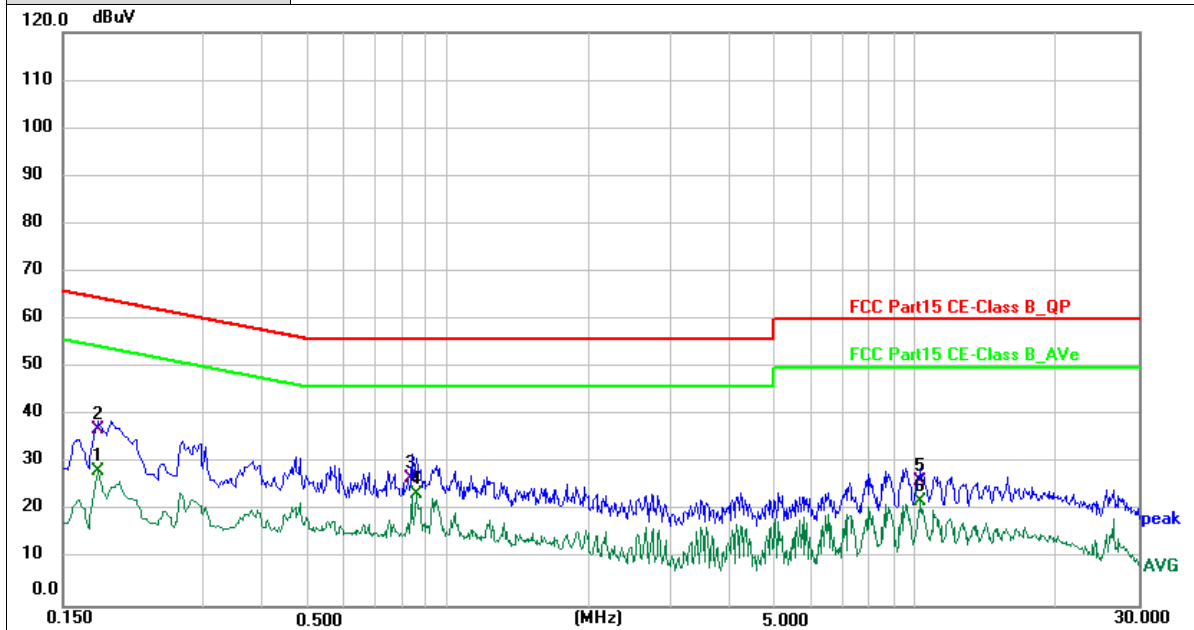

No.	Frequency (MHz)	Reading (dBuV)	Factor ()	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1779	18.60	9.75	28.35	54.58	-26.23	AVG
2	0.1785	27.29	9.75	37.04	64.56	-27.52	QP
3	0.8375	17.41	9.40	26.81	56.00	-29.19	QP
4 *	0.8539	14.14	9.41	23.55	46.00	-22.45	AVG
5	10.2760	16.51	9.62	26.13	60.00	-33.87	QP
6	10.2780	12.35	9.62	21.97	50.00	-28.03	AVG

Emission Level = Read Level + Correct Factor

3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dB μ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB μ V/m)=20log Emission Level (μ V/m).


Test Configuration

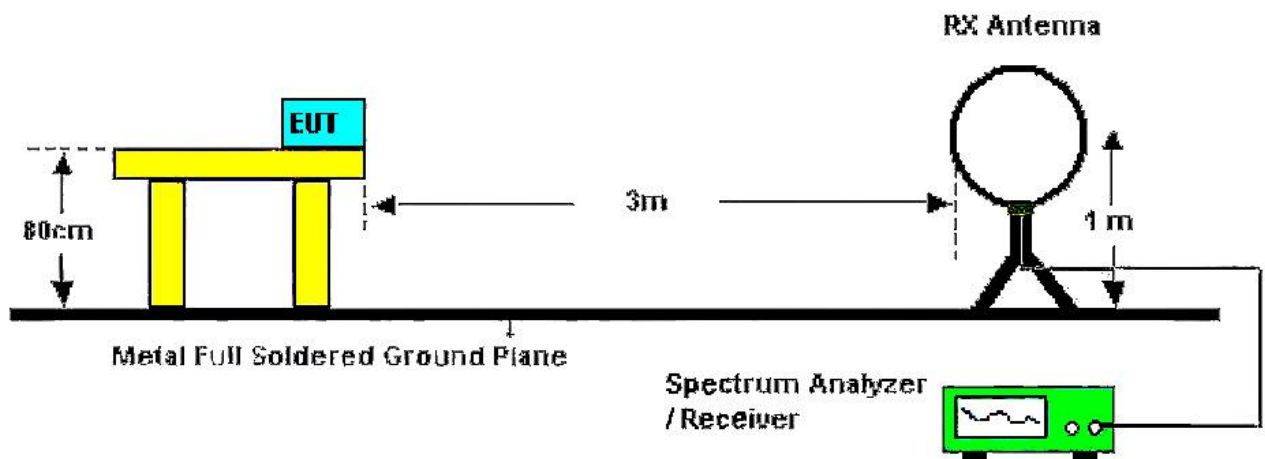

Below 30MHz Test Setup

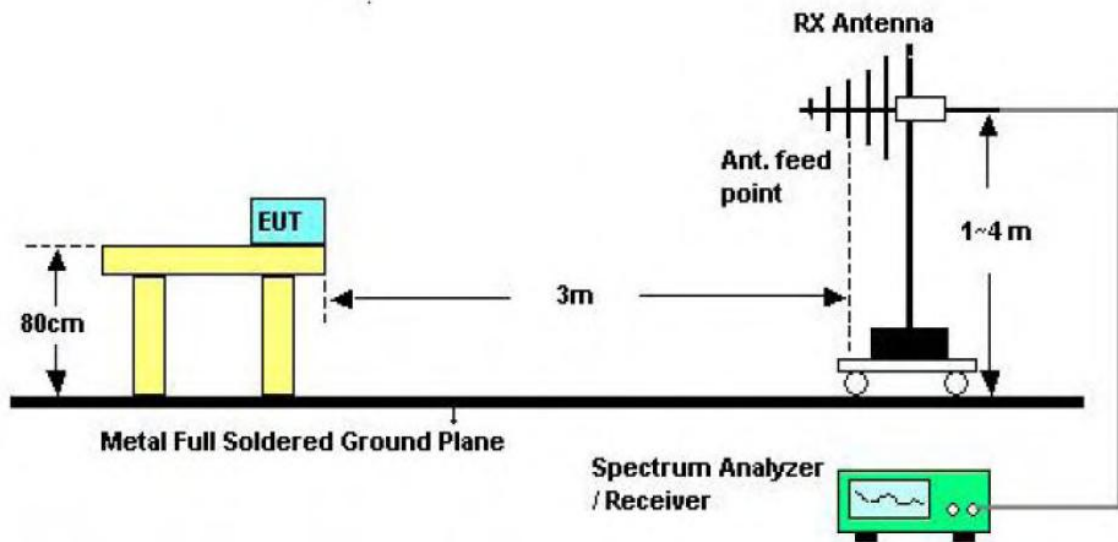

30-1000MHz Test Setup

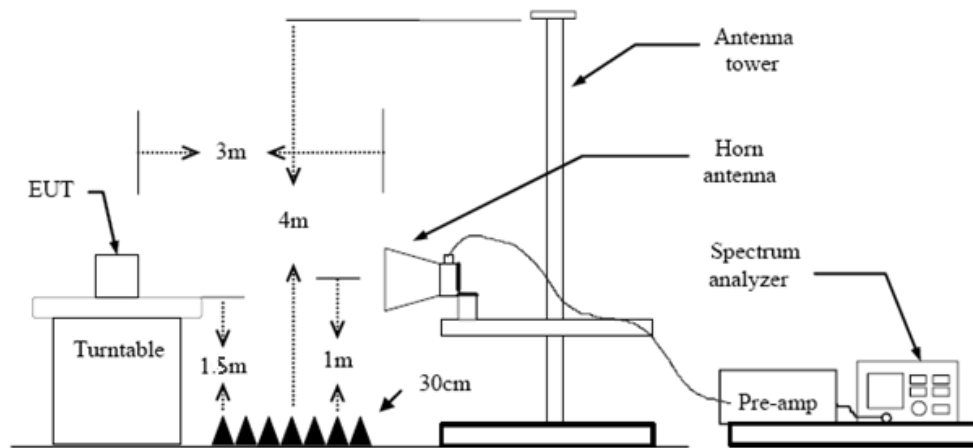

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10.
 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
 5. Set to the maximum power setting and enable the EUT transmit continuously.
 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold
- If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the

quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

Test Mode


Please refer to the clause 2.4.

Test Result


9 kHz~30 MHz

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

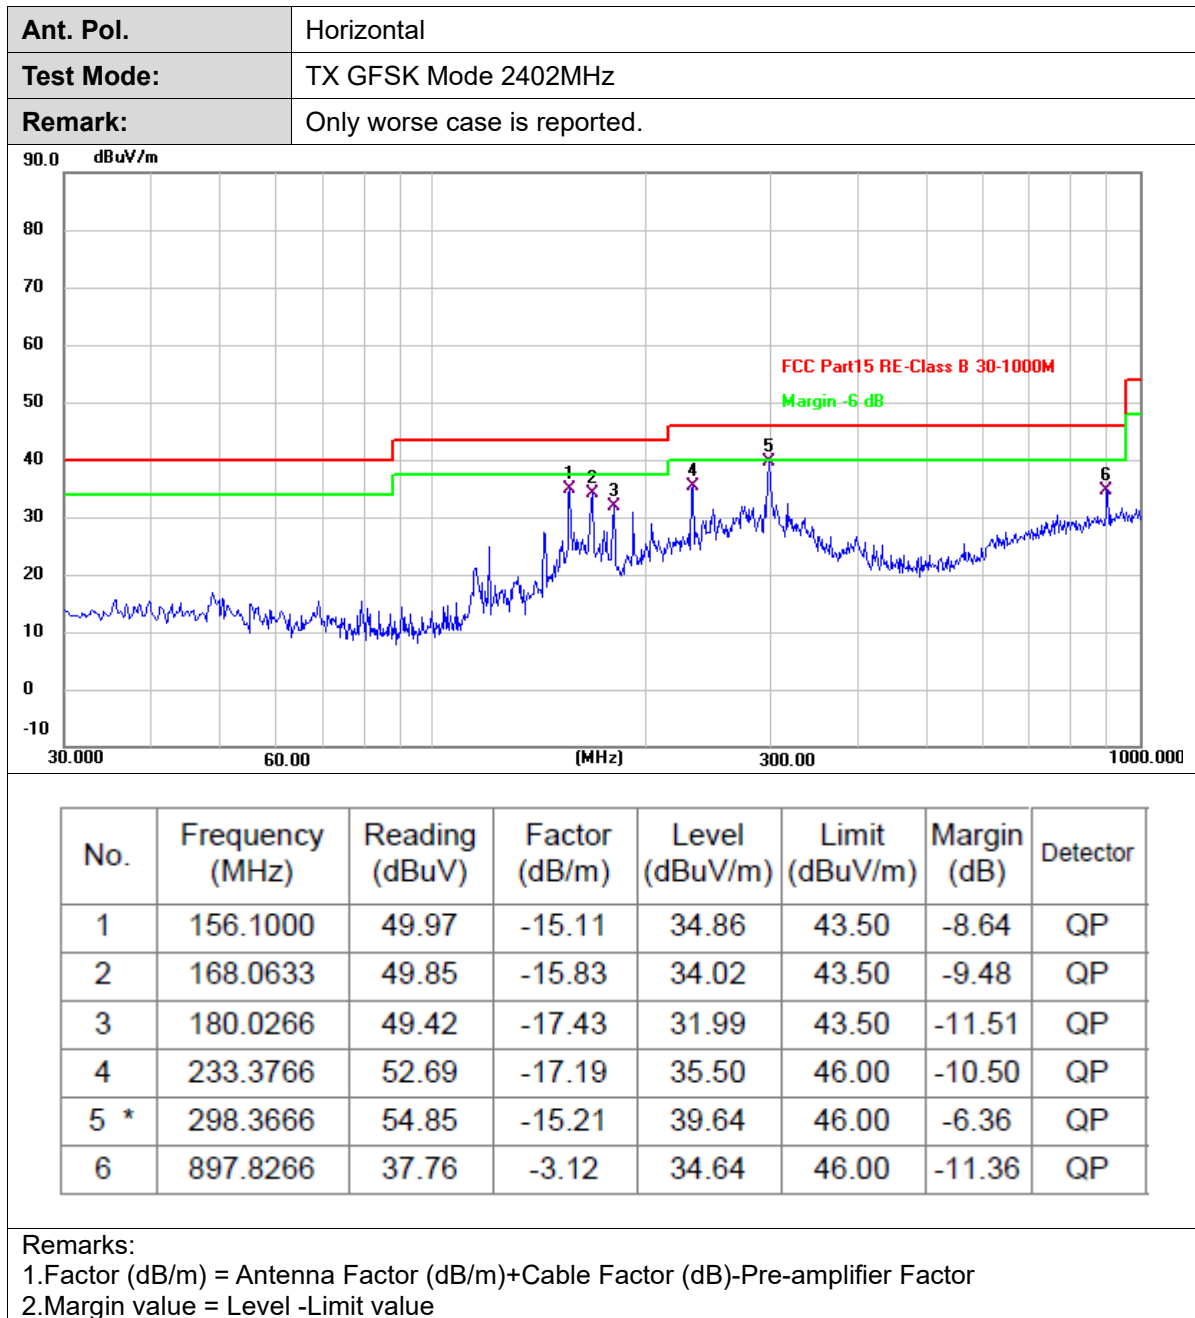30MHz-1GHz

Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported.

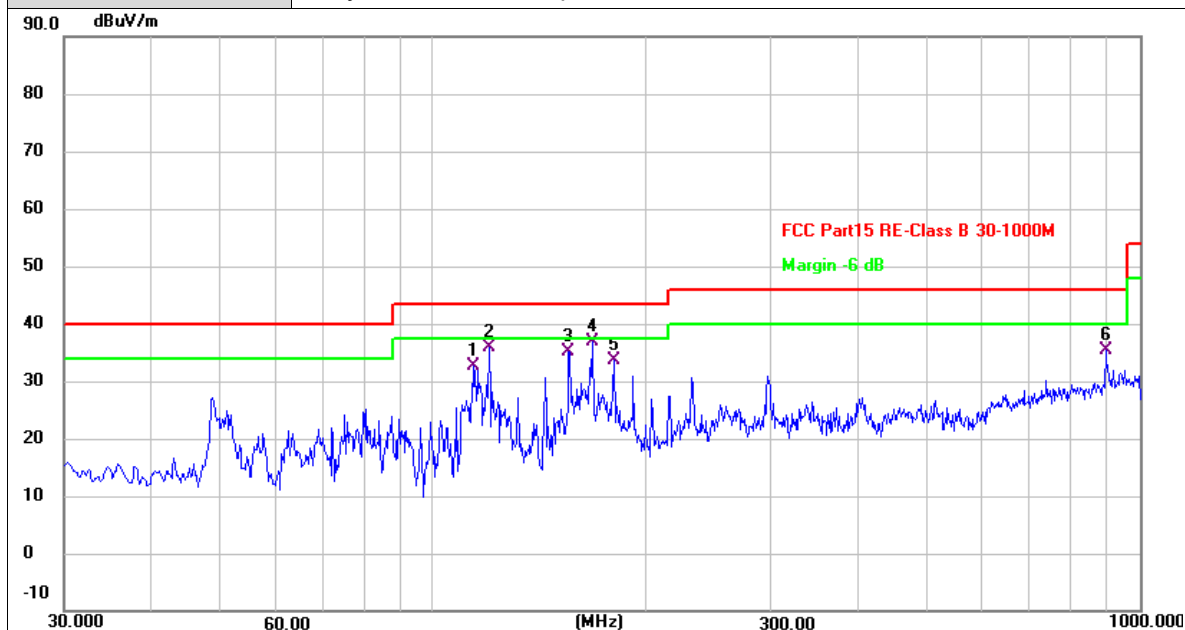

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	114.3900	50.67	-18.01	32.66	43.50	-10.84	QP
2	119.8866	53.25	-17.41	35.84	43.50	-7.66	QP
3	155.7766	50.26	-15.11	35.15	43.50	-8.35	QP
4 *	168.0633	52.83	-15.83	37.00	43.50	-6.50	QP
5	180.0266	51.10	-17.43	33.67	43.50	-9.83	QP
6	896.5333	38.60	-3.15	35.45	46.00	-10.55	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Above 1GHz

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.908	42.17	1.84	44.01	74.00	-29.99	peak
2 *	4803.960	27.48	1.84	29.32	54.00	-24.68	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.020	41.32	1.84	43.16	74.00	-30.84	peak
2 *	4803.121	27.22	1.84	29.06	54.00	-24.94	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Horizontal						
Test Mode:	TX GFSK Mode 2441MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.878	41.27	1.96	43.23	74.00	-30.77	peak
2 *	4882.113	26.86	1.96	28.82	54.00	-25.18	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. Pol.	Vertical																														
Test Mode:	TX GFSK Mode 2441MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><td>No.</td><td>Frequency (MHz)</td><td>Reading (dBuV)</td><td>Factor (dB/m)</td><td>Level (dBuV/m)</td><td>Limit (dBuV/m)</td><td>Margin (dB)</td><td>Detector</td></tr><tr><td>1 *</td><td>4881.891</td><td>26.20</td><td>1.96</td><td>28.16</td><td>54.00</td><td>-25.84</td><td>AVG</td></tr><tr><td>2</td><td>4882.112</td><td>40.53</td><td>1.96</td><td>42.49</td><td>74.00</td><td>-31.51</td><td>peak</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.891	26.20	1.96	28.16	54.00	-25.84	AVG	2	4882.112	40.53	1.96	42.49	74.00	-31.51	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4881.891	26.20	1.96	28.16	54.00	-25.84	AVG																								
2	4882.112	40.53	1.96	42.49	74.00	-31.51	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Horizontal																														
Test Mode:	TX GFSK Mode 2480MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><td>No.</td><td>Frequency (MHz)</td><td>Reading (dBuV)</td><td>Factor (dB/m)</td><td>Level (dBuV/m)</td><td>Limit (dBuV/m)</td><td>Margin (dB)</td><td>Detector</td></tr><tr><td>1 *</td><td>4959.878</td><td>27.08</td><td>2.08</td><td>29.16</td><td>54.00</td><td>-24.84</td><td>AVG</td></tr><tr><td>2</td><td>4960.192</td><td>42.02</td><td>2.08</td><td>44.10</td><td>74.00</td><td>-29.90</td><td>peak</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4959.878	27.08	2.08	29.16	54.00	-24.84	AVG	2	4960.192	42.02	2.08	44.10	74.00	-29.90	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4959.878	27.08	2.08	29.16	54.00	-24.84	AVG																								
2	4960.192	42.02	2.08	44.10	74.00	-29.90	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX GFSK Mode 2480MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><td>No.</td><td>Frequency (MHz)</td><td>Reading (dBuV)</td><td>Factor (dB/m)</td><td>Level (dBuV/m)</td><td>Limit (dBuV/m)</td><td>Margin (dB)</td><td>Detector</td></tr><tr><td>1</td><td>4959.982</td><td>40.51</td><td>2.08</td><td>42.59</td><td>74.00</td><td>-31.41</td><td>peak</td></tr><tr><td>2 *</td><td>4960.082</td><td>26.60</td><td>2.08</td><td>28.68</td><td>54.00</td><td>-25.32</td><td>AVG</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.982	40.51	2.08	42.59	74.00	-31.41	peak	2 *	4960.082	26.60	2.08	28.68	54.00	-25.32	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.982	40.51	2.08	42.59	74.00	-31.41	peak																								
2 *	4960.082	26.60	2.08	28.68	54.00	-25.32	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.952	41.47	1.84	43.31	74.00	-30.69	peak
2 *	4804.152	26.59	1.84	28.43	54.00	-25.57	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4803.879	27.15	1.84	28.99	54.00	-25.01	AVG
2	4803.998	41.03	1.84	42.87	74.00	-31.13	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Horizontal																														
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>4881.878</td><td>40.80</td><td>1.96</td><td>42.76</td><td>74.00</td><td>-31.24</td><td>peak</td></tr><tr><td>2 *</td><td>4881.900</td><td>27.08</td><td>1.96</td><td>29.04</td><td>54.00</td><td>-24.96</td><td>AVG</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4881.878	40.80	1.96	42.76	74.00	-31.24	peak	2 *	4881.900	27.08	1.96	29.04	54.00	-24.96	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4881.878	40.80	1.96	42.76	74.00	-31.24	peak																								
2 *	4881.900	27.08	1.96	29.04	54.00	-24.96	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><td>No.</td><td>Frequency (MHz)</td><td>Reading (dBuV)</td><td>Factor (dB/m)</td><td>Level (dBuV/m)</td><td>Limit (dBuV/m)</td><td>Margin (dB)</td><td>Detector</td></tr><tr><td>1</td><td>4881.859</td><td>40.50</td><td>1.96</td><td>42.46</td><td>74.00</td><td>-31.54</td><td>peak</td></tr><tr><td>2 *</td><td>4881.974</td><td>26.30</td><td>1.96</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>AVG</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4881.859	40.50	1.96	42.46	74.00	-31.54	peak	2 *	4881.974	26.30	1.96	28.26	54.00	-25.74	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4881.859	40.50	1.96	42.46	74.00	-31.54	peak																								
2 *	4881.974	26.30	1.96	28.26	54.00	-25.74	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4959.919	27.05	2.08	29.13	54.00	-24.87	AVG
2	4960.120	41.93	2.08	44.01	74.00	-29.99	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4959.950	26.50	2.08	28.58	54.00	-25.42	AVG
2	4960.160	40.91	2.08	42.99	74.00	-31.01	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4803.941	26.57	1.84	28.41	54.00	-25.59	AVG
2	4804.141	41.68	1.84	43.52	74.00	-30.48	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4803.875	27.05	1.84	28.89	54.00	-25.11	AVG
2	4803.887	41.14	1.84	42.98	74.00	-31.02	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.861	42.16	1.96	44.12	74.00	-29.88	peak
2 *	4881.880	27.21	1.96	29.17	54.00	-24.83	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4881.797	26.83	1.96	28.79	54.00	-25.21	AVG
2	4882.212	41.01	1.96	42.97	74.00	-31.03	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Horizontal						
Test Mode:	TX 8-DPSK Mode 2480MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

Ant. Pol.	Vertical						
Test Mode:	TX 8-DPSK Mode 2480MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4959.795	27.20	2.08	29.28	54.00	-24.72	AVG
2	4959.809	40.90	2.08	42.98	74.00	-31.02	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-Gen 8.10

Restricted Frequency Band (MHz)	(dBμV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

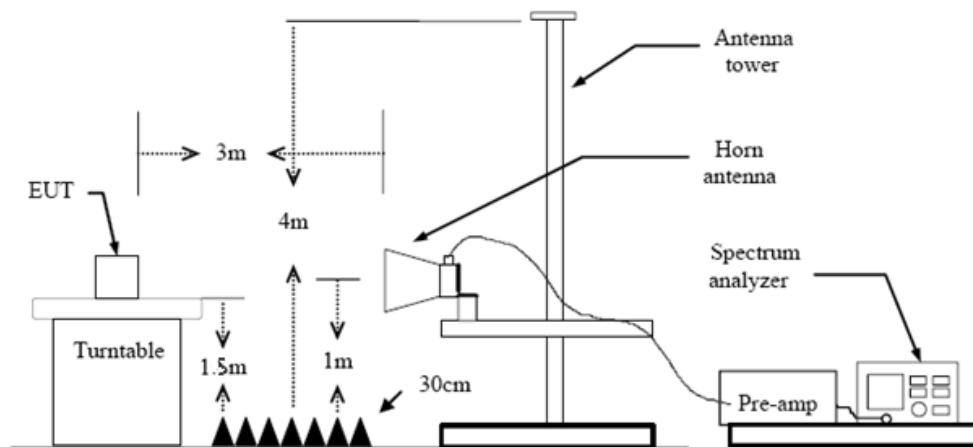


Test Procedure


1. The EUT was setup and tested according to ANSI C63.10 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

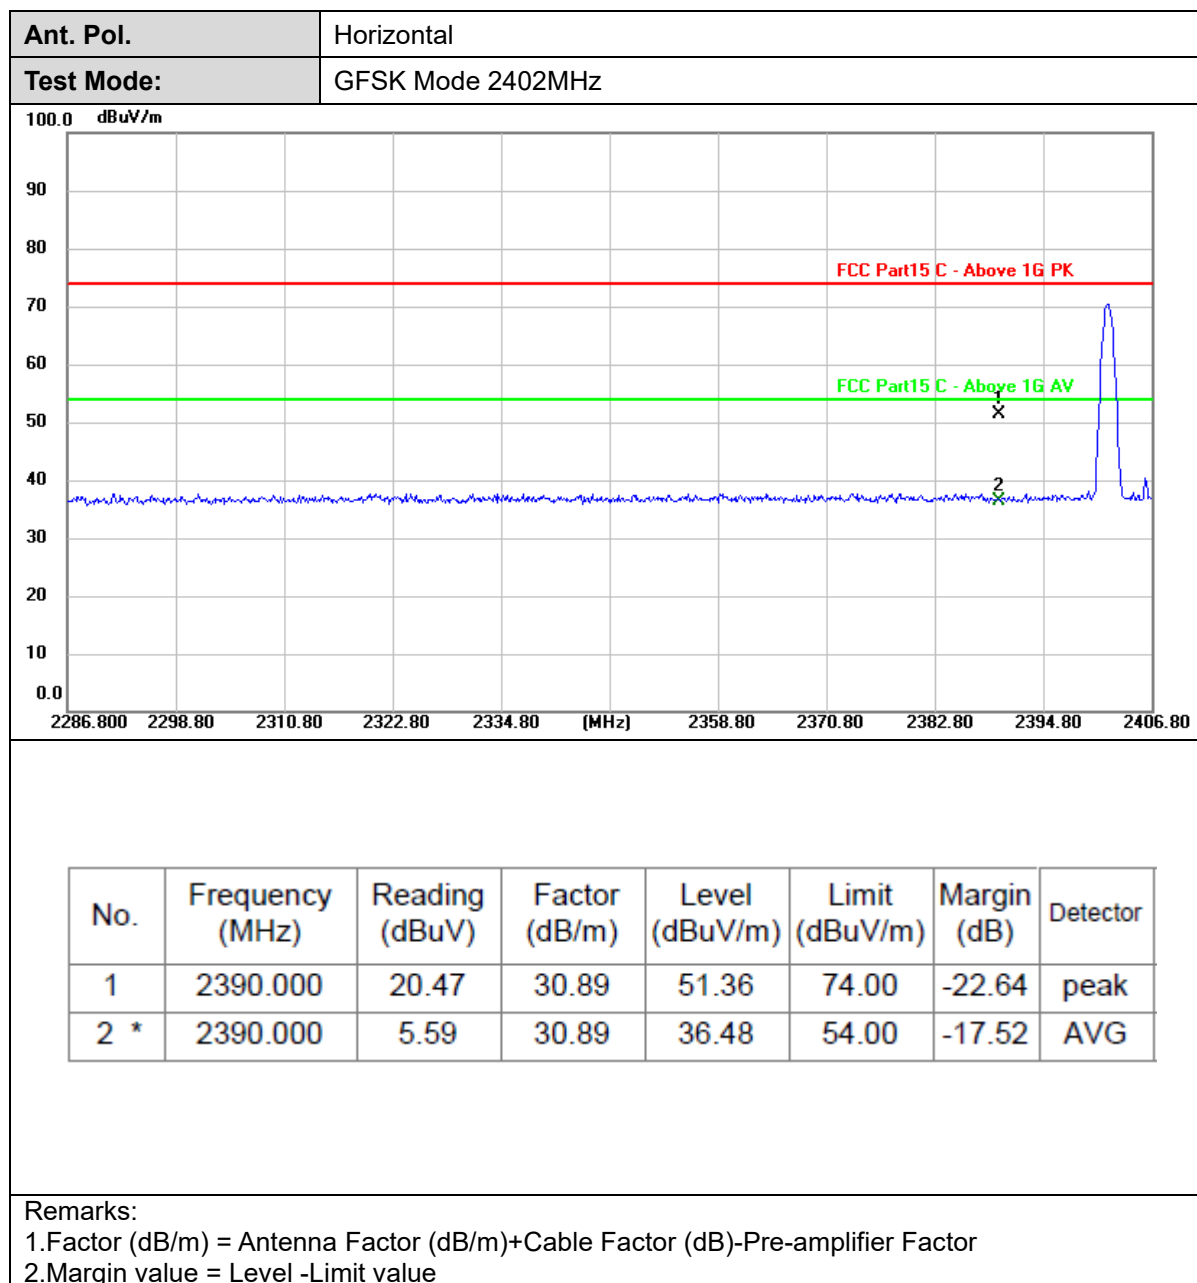
Test Result

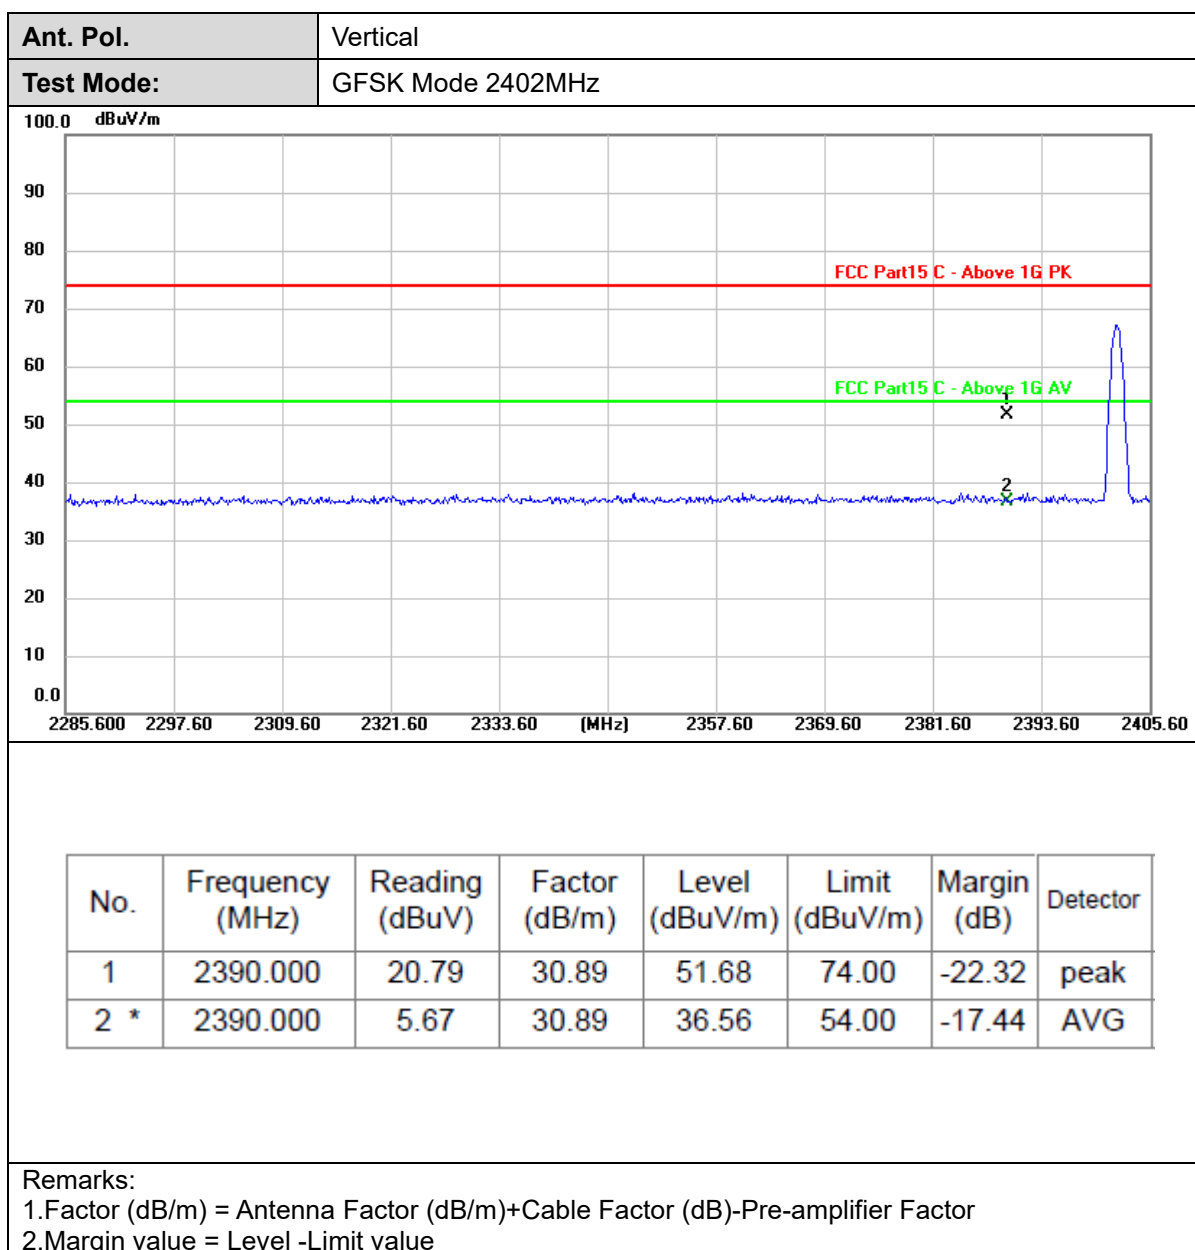


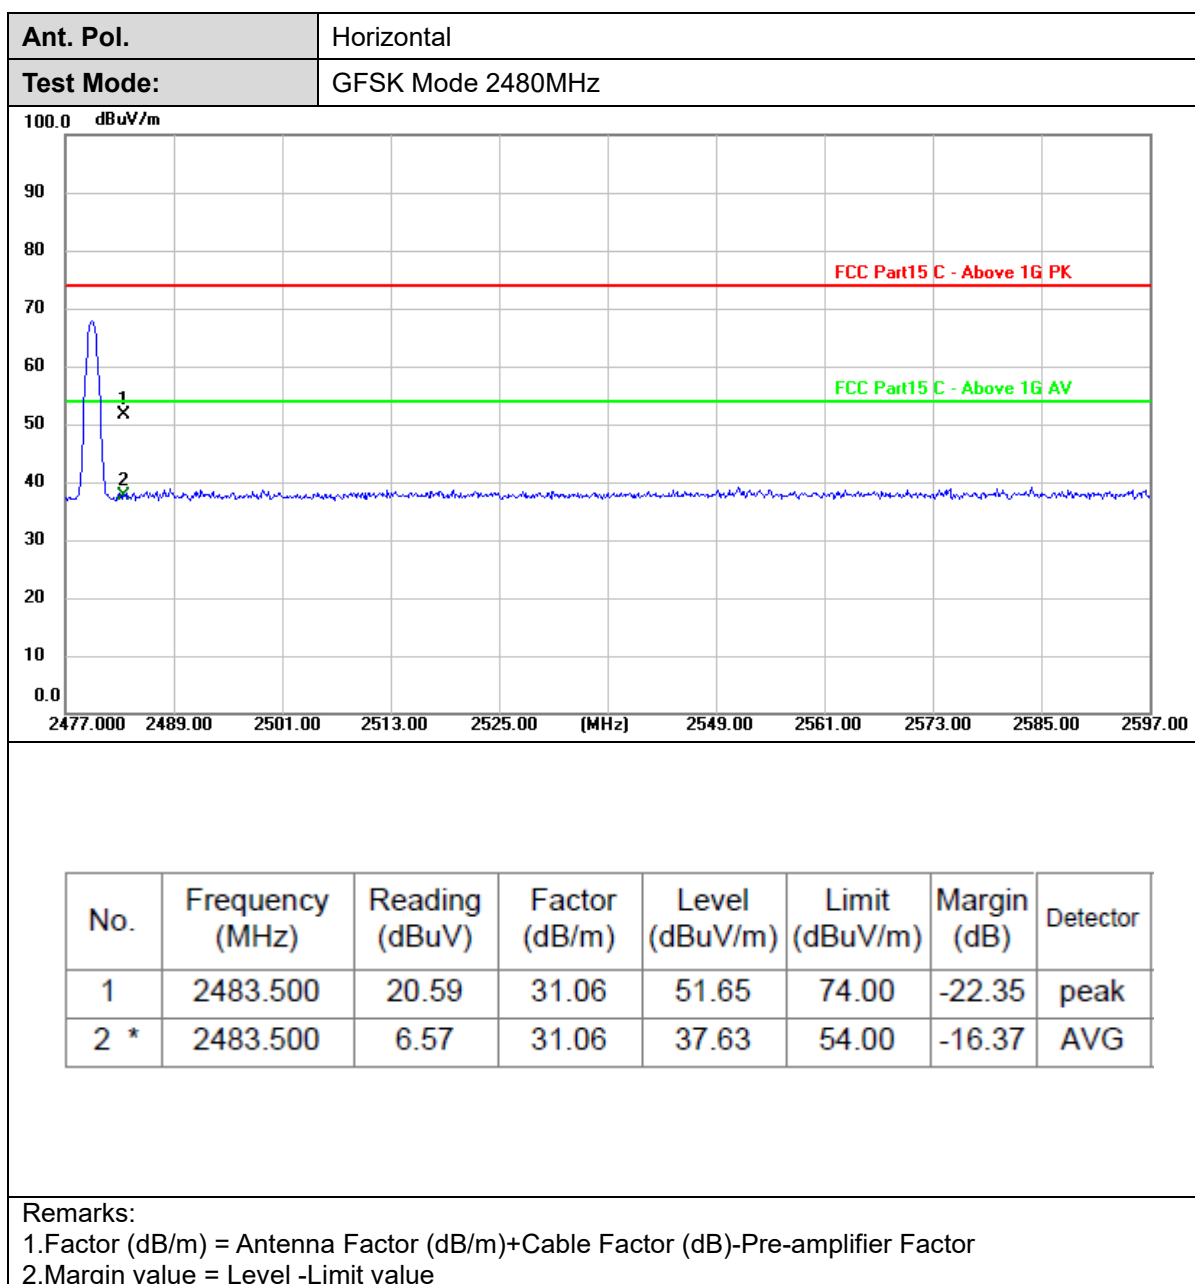


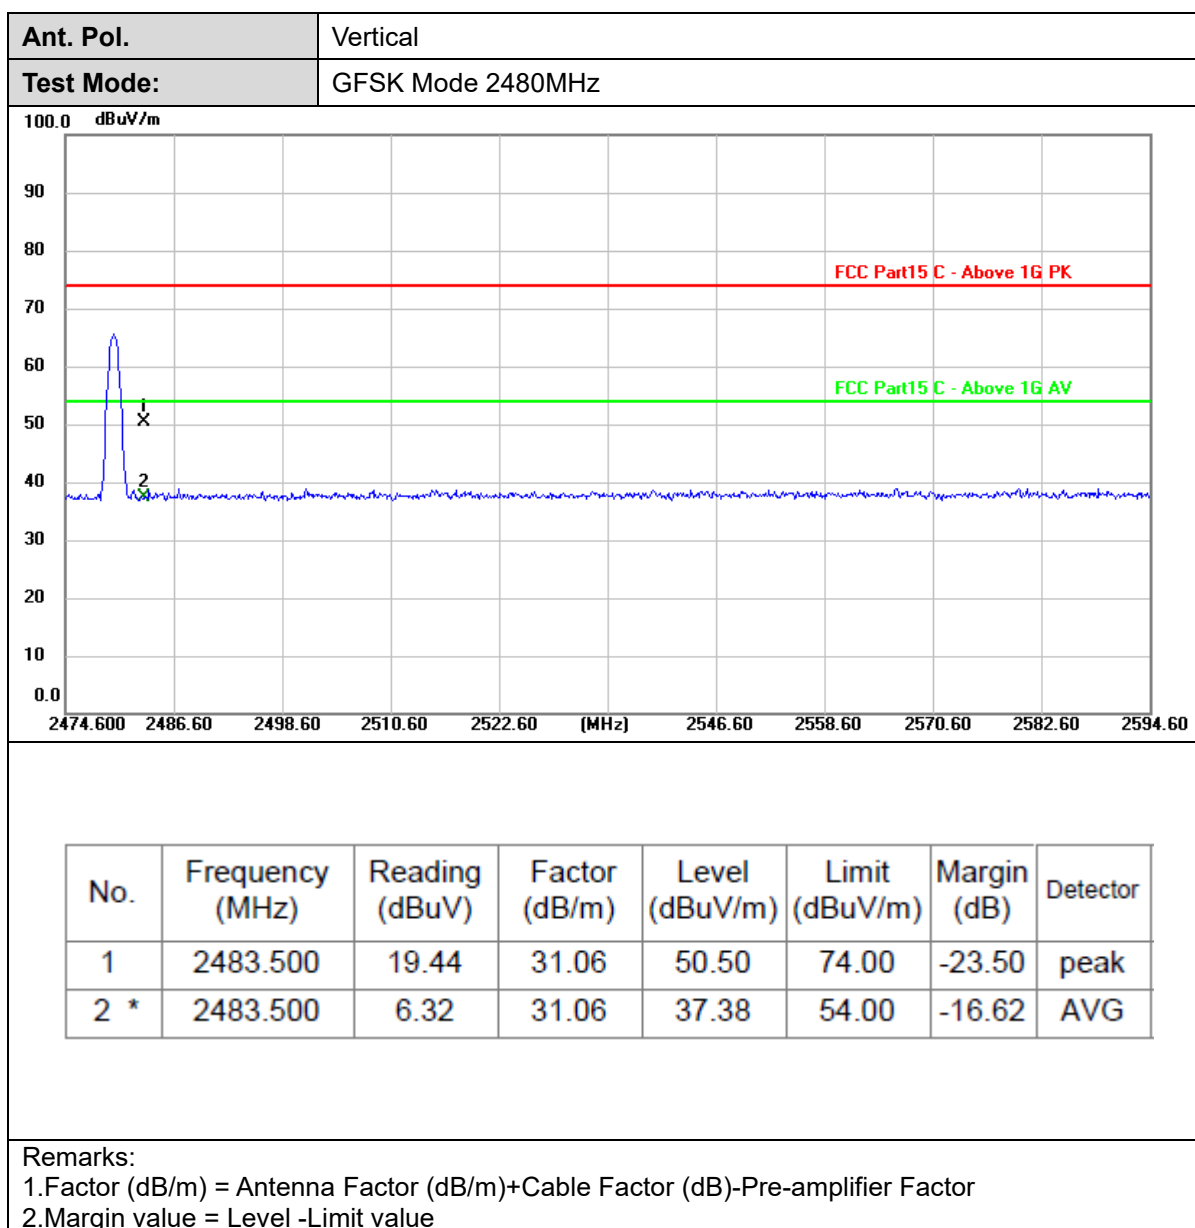


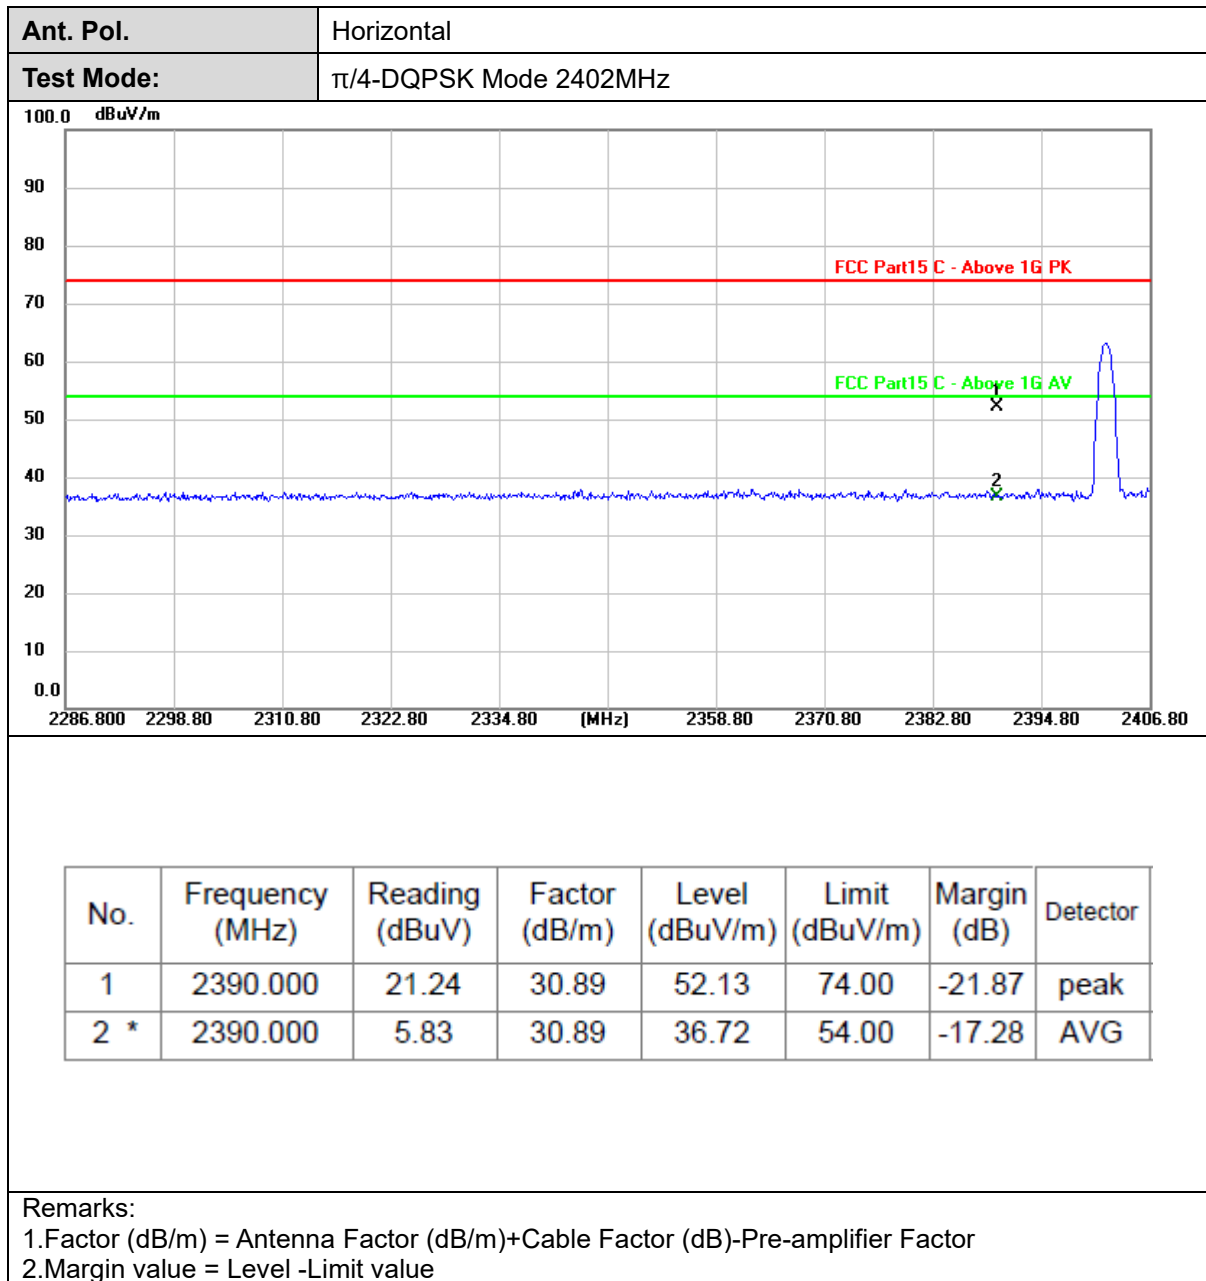


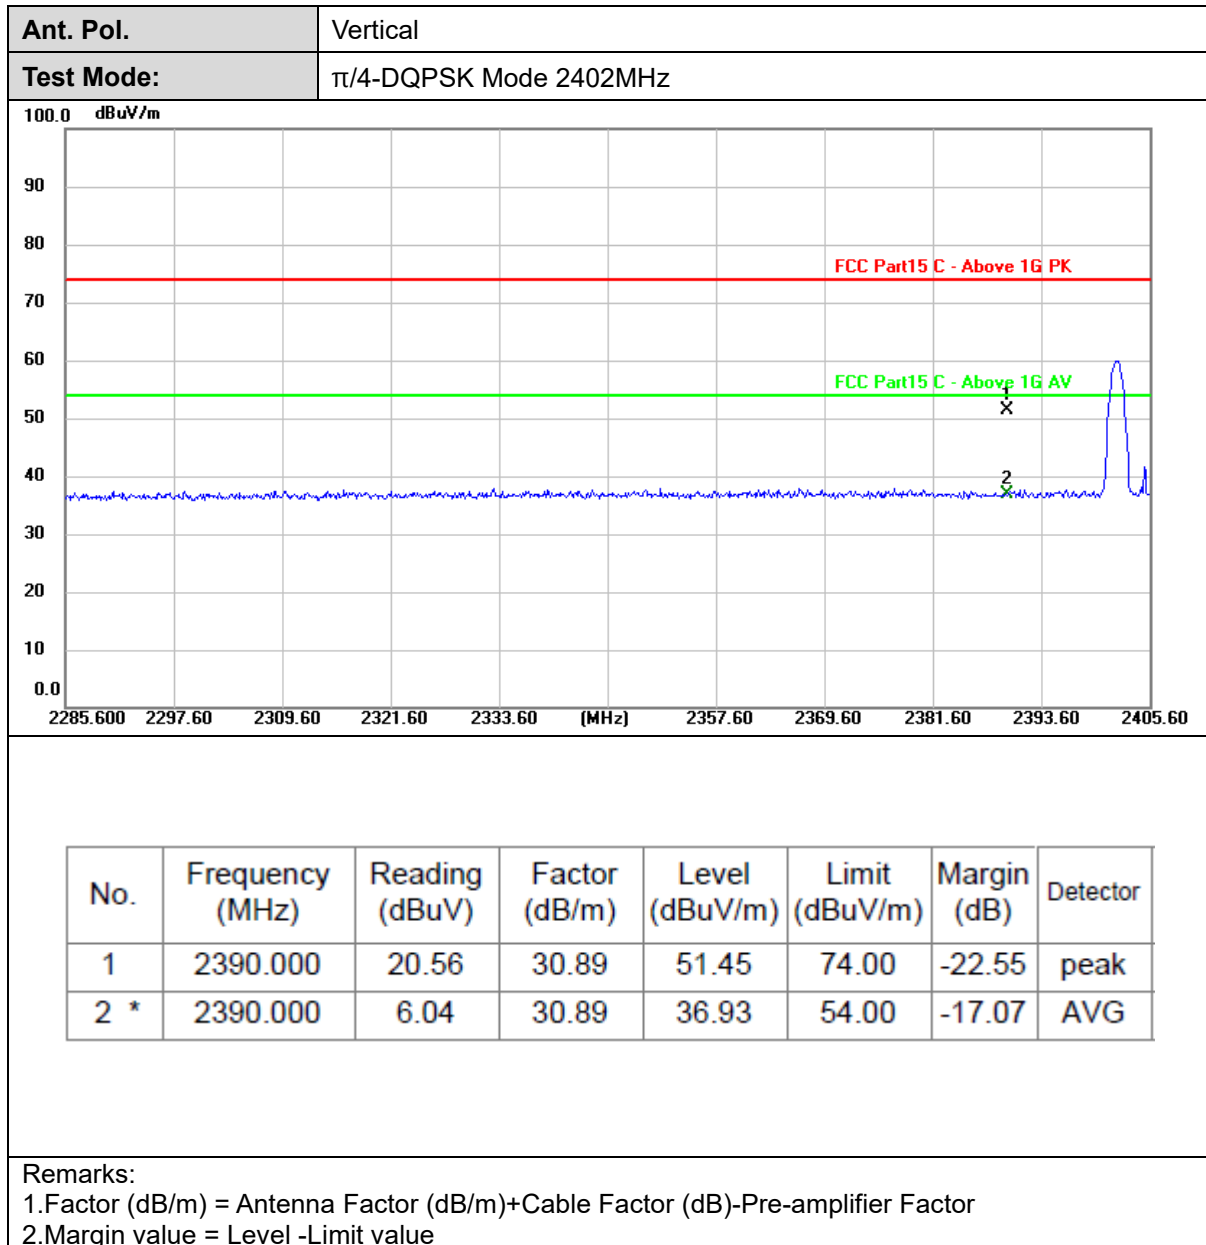


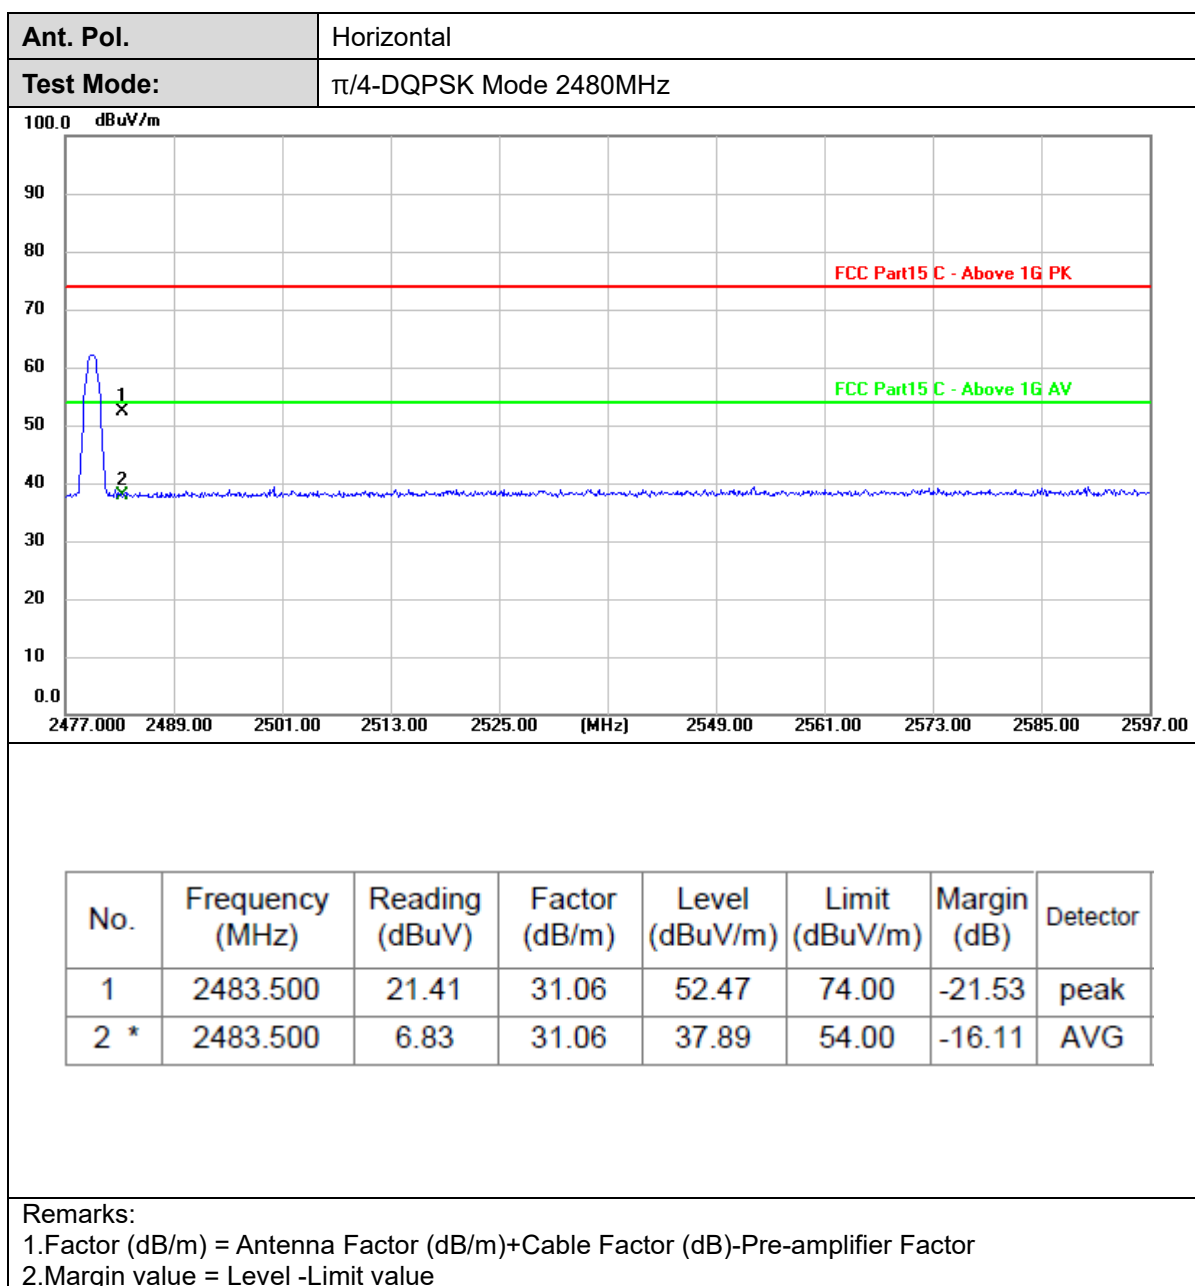


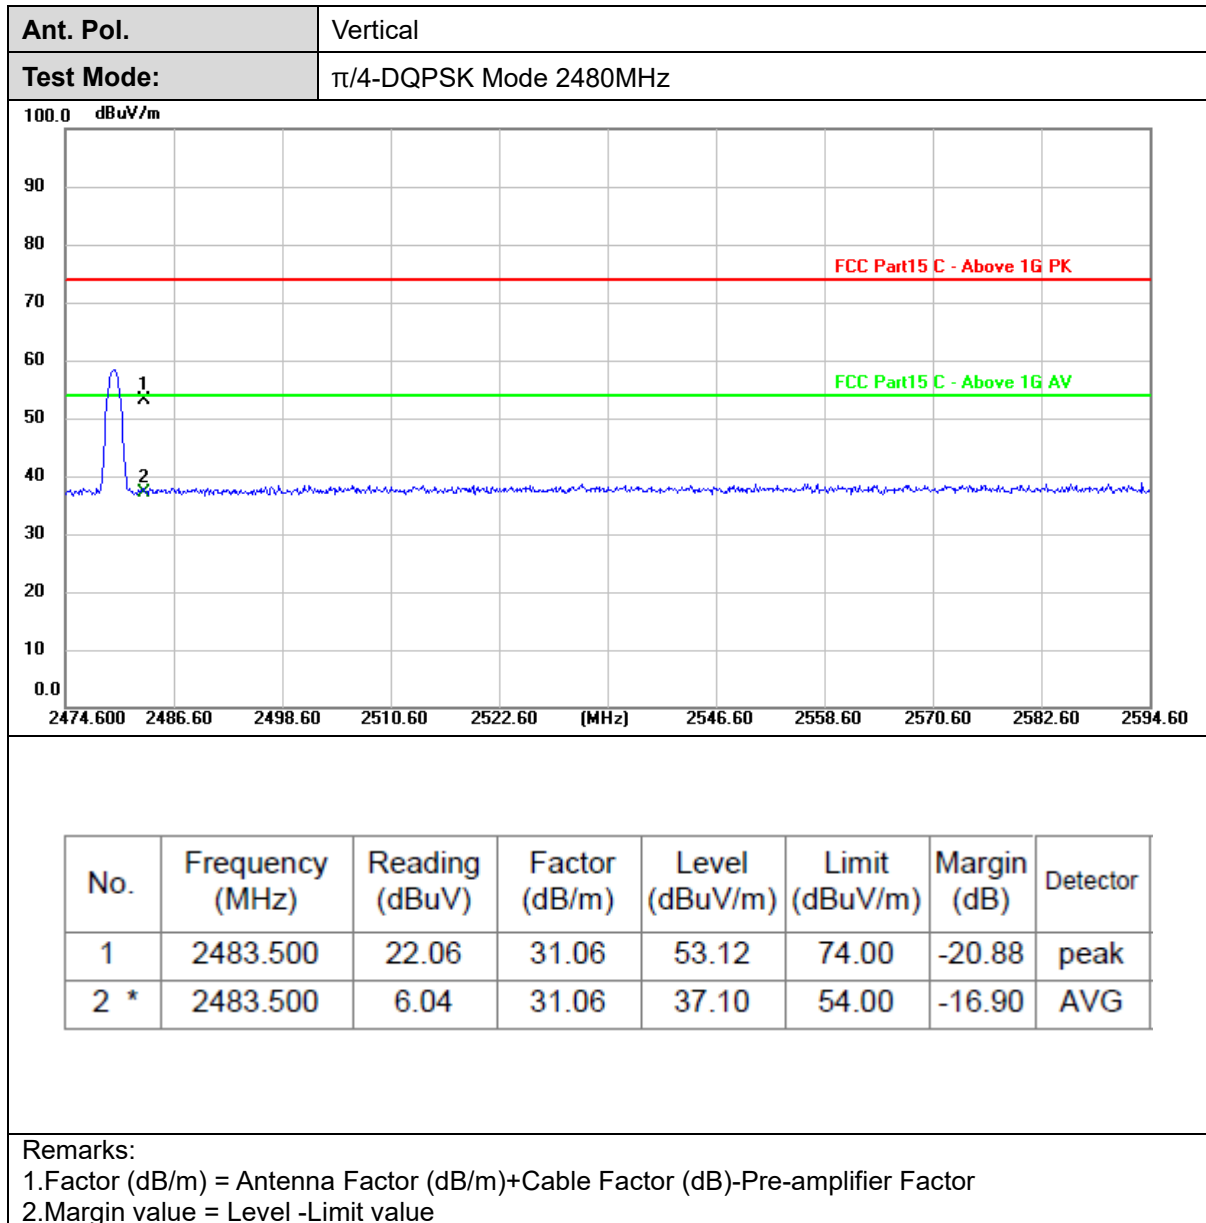

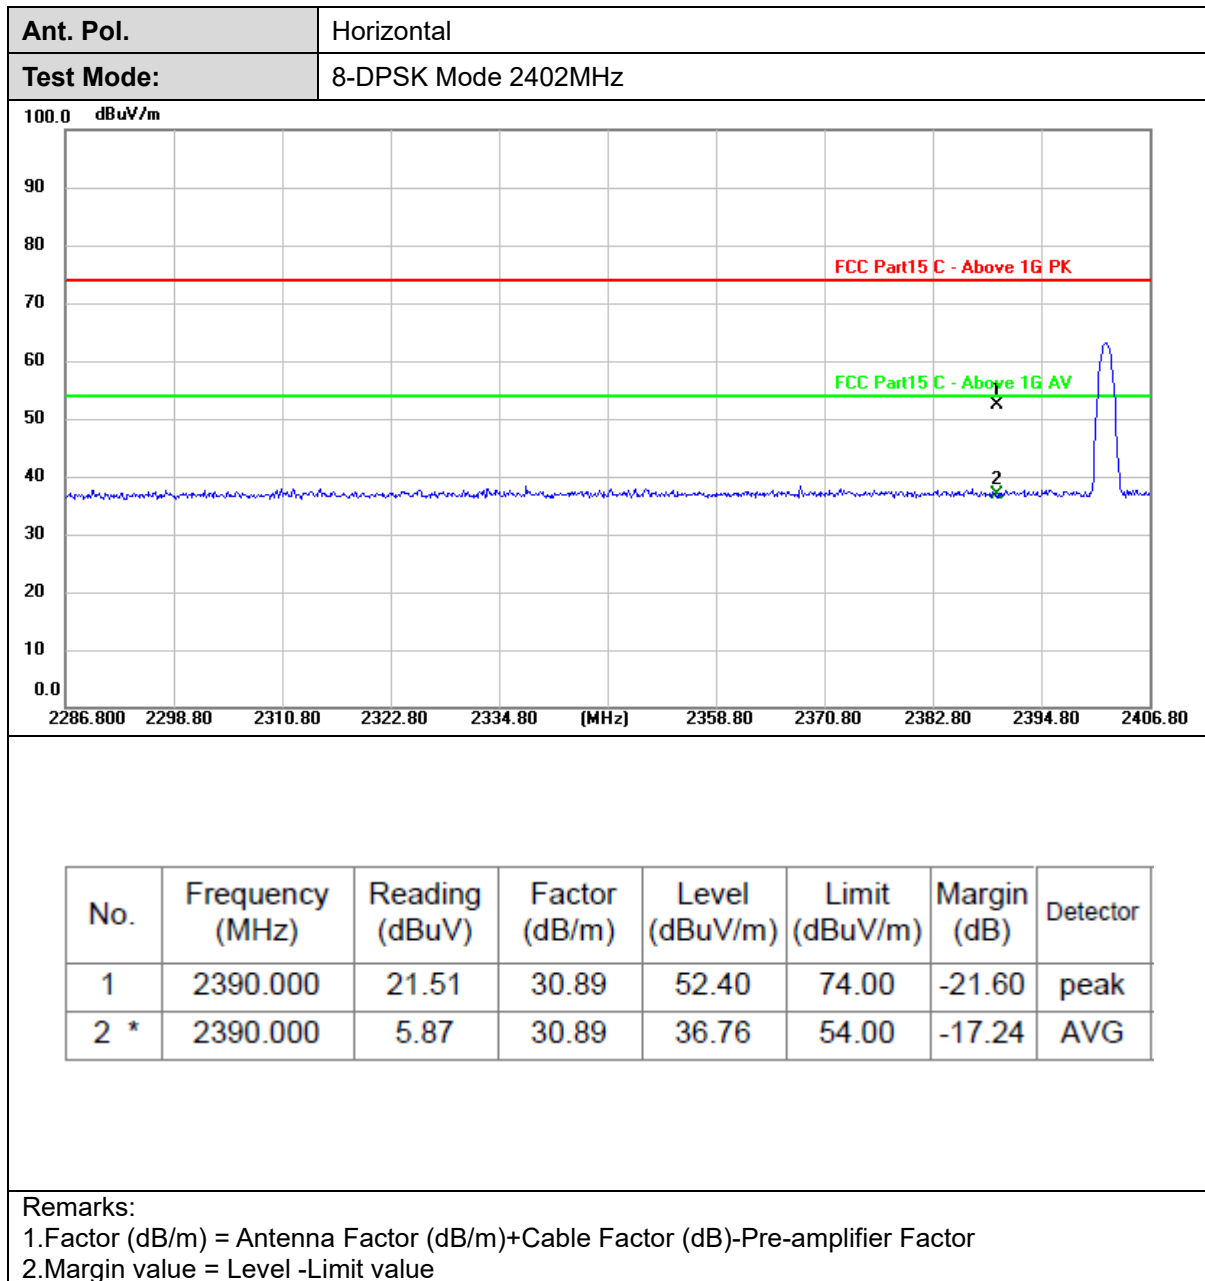

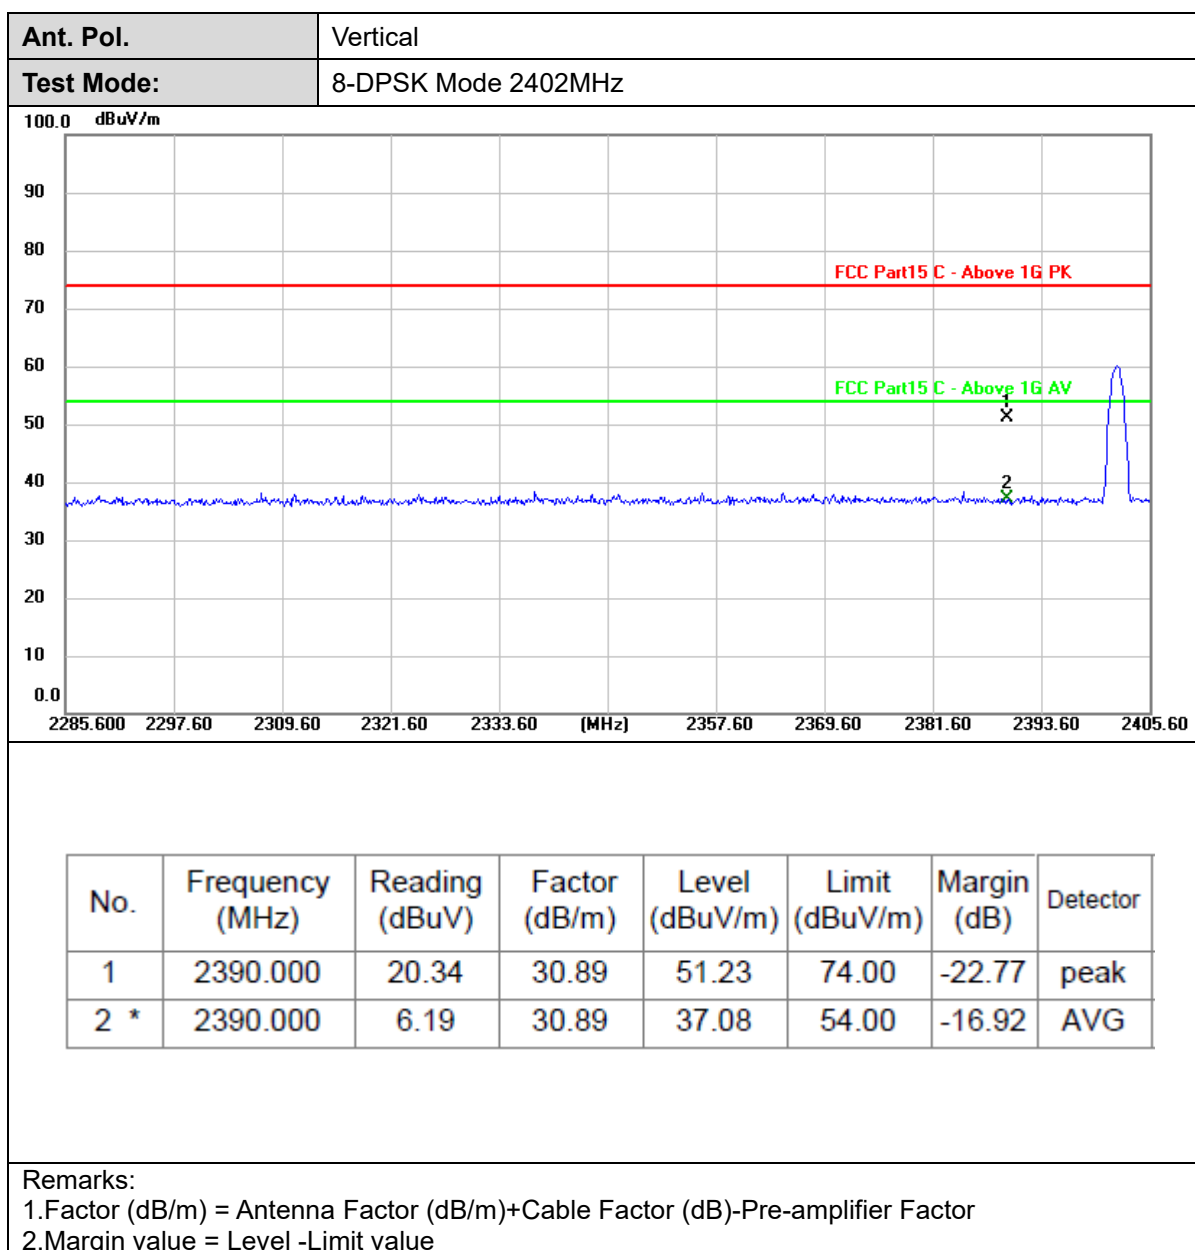

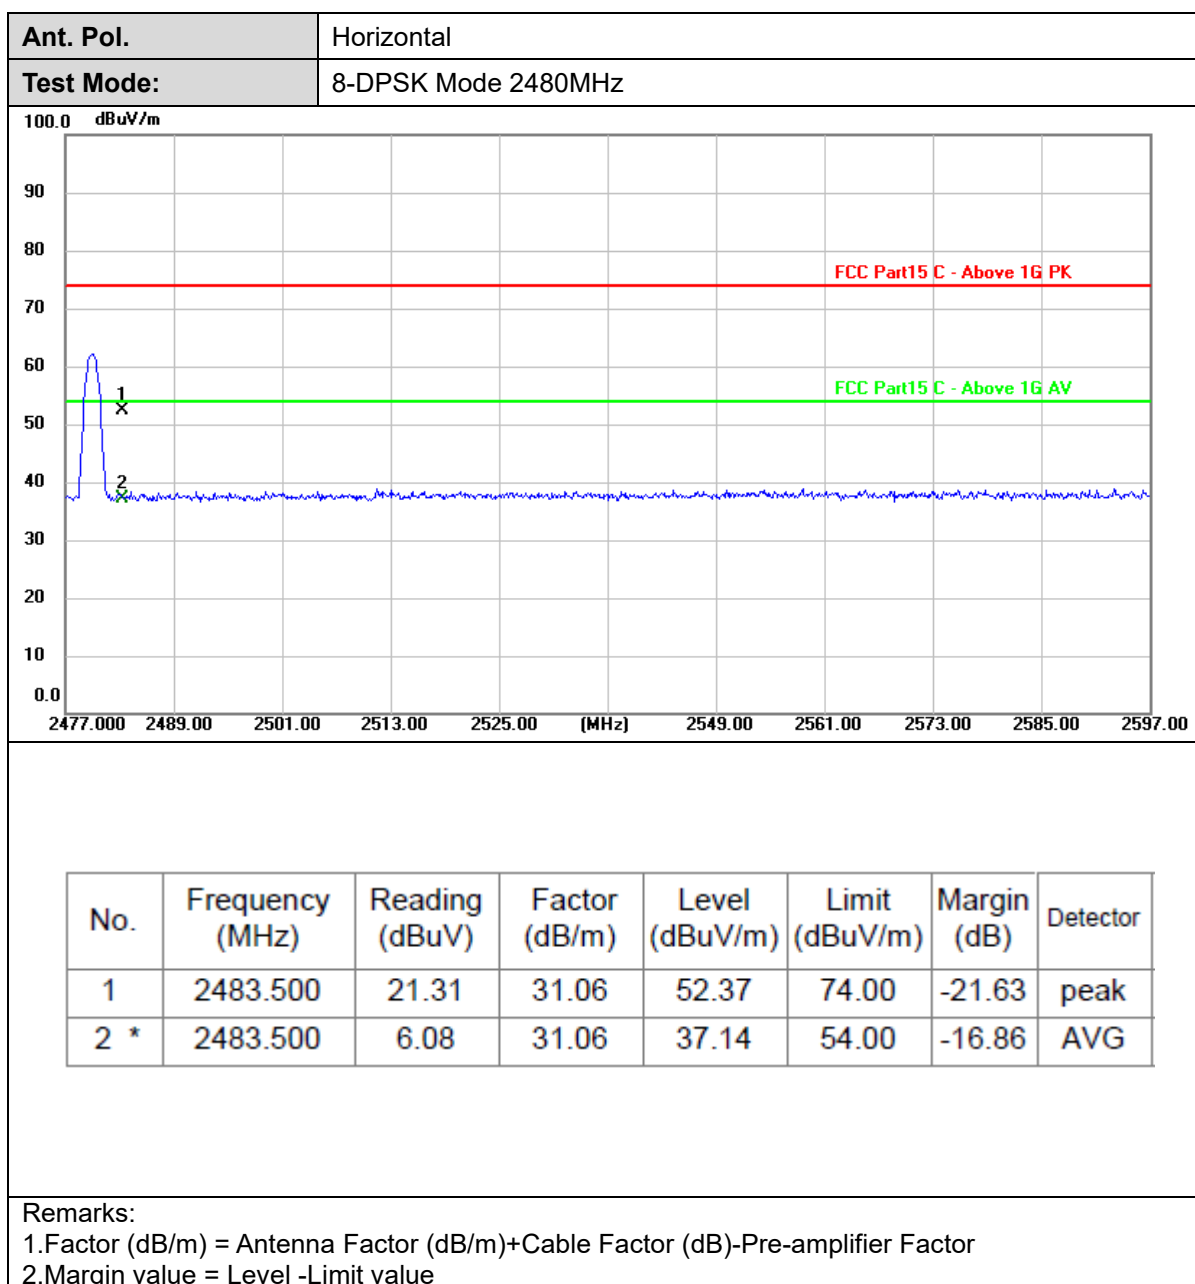

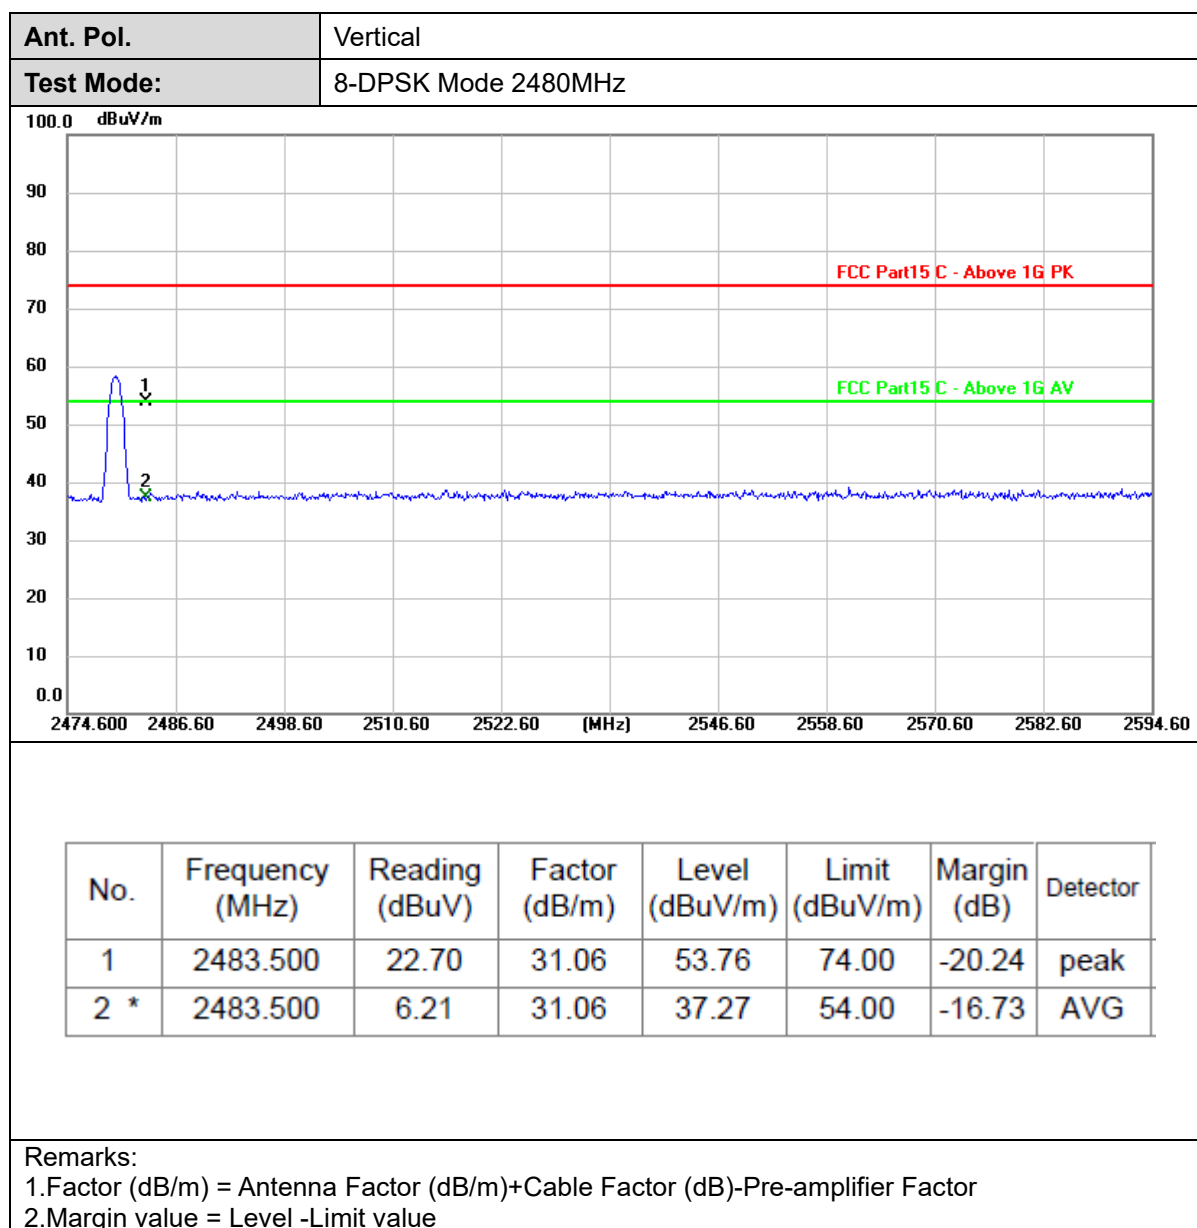


3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode


Please refer to the clause 2.4.


Test Result

Band edge measurements


Test Mode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.52	-52.11	≤-19.48	PASS
		High	2480	-1.42	-55.36	≤-21.42	PASS
		Low	Hop_2402	0.00	-52.37	≤-20.00	PASS
		High	Hop_2480	-1.13	-56.32	≤-21.13	PASS
2DH5	Ant1	Low	2402	-5.61	-57.19	≤-25.61	PASS
		High	2480	-7.54	-55.25	≤-27.54	PASS
		Low	Hop_2402	-5.66	-56.79	≤-25.66	PASS
		High	Hop_2480	-7.93	-55.01	≤-27.93	PASS
3DH5	Ant1	Low	2402	-5.40	-57.20	≤-25.40	PASS
		High	2480	-7.46	-55.10	≤-27.46	PASS
		Low	Hop_2402	-5.28	-56.78	≤-25.28	PASS
		High	Hop_2480	-8.31	-55.41	≤-28.31	PASS

Test Graphs

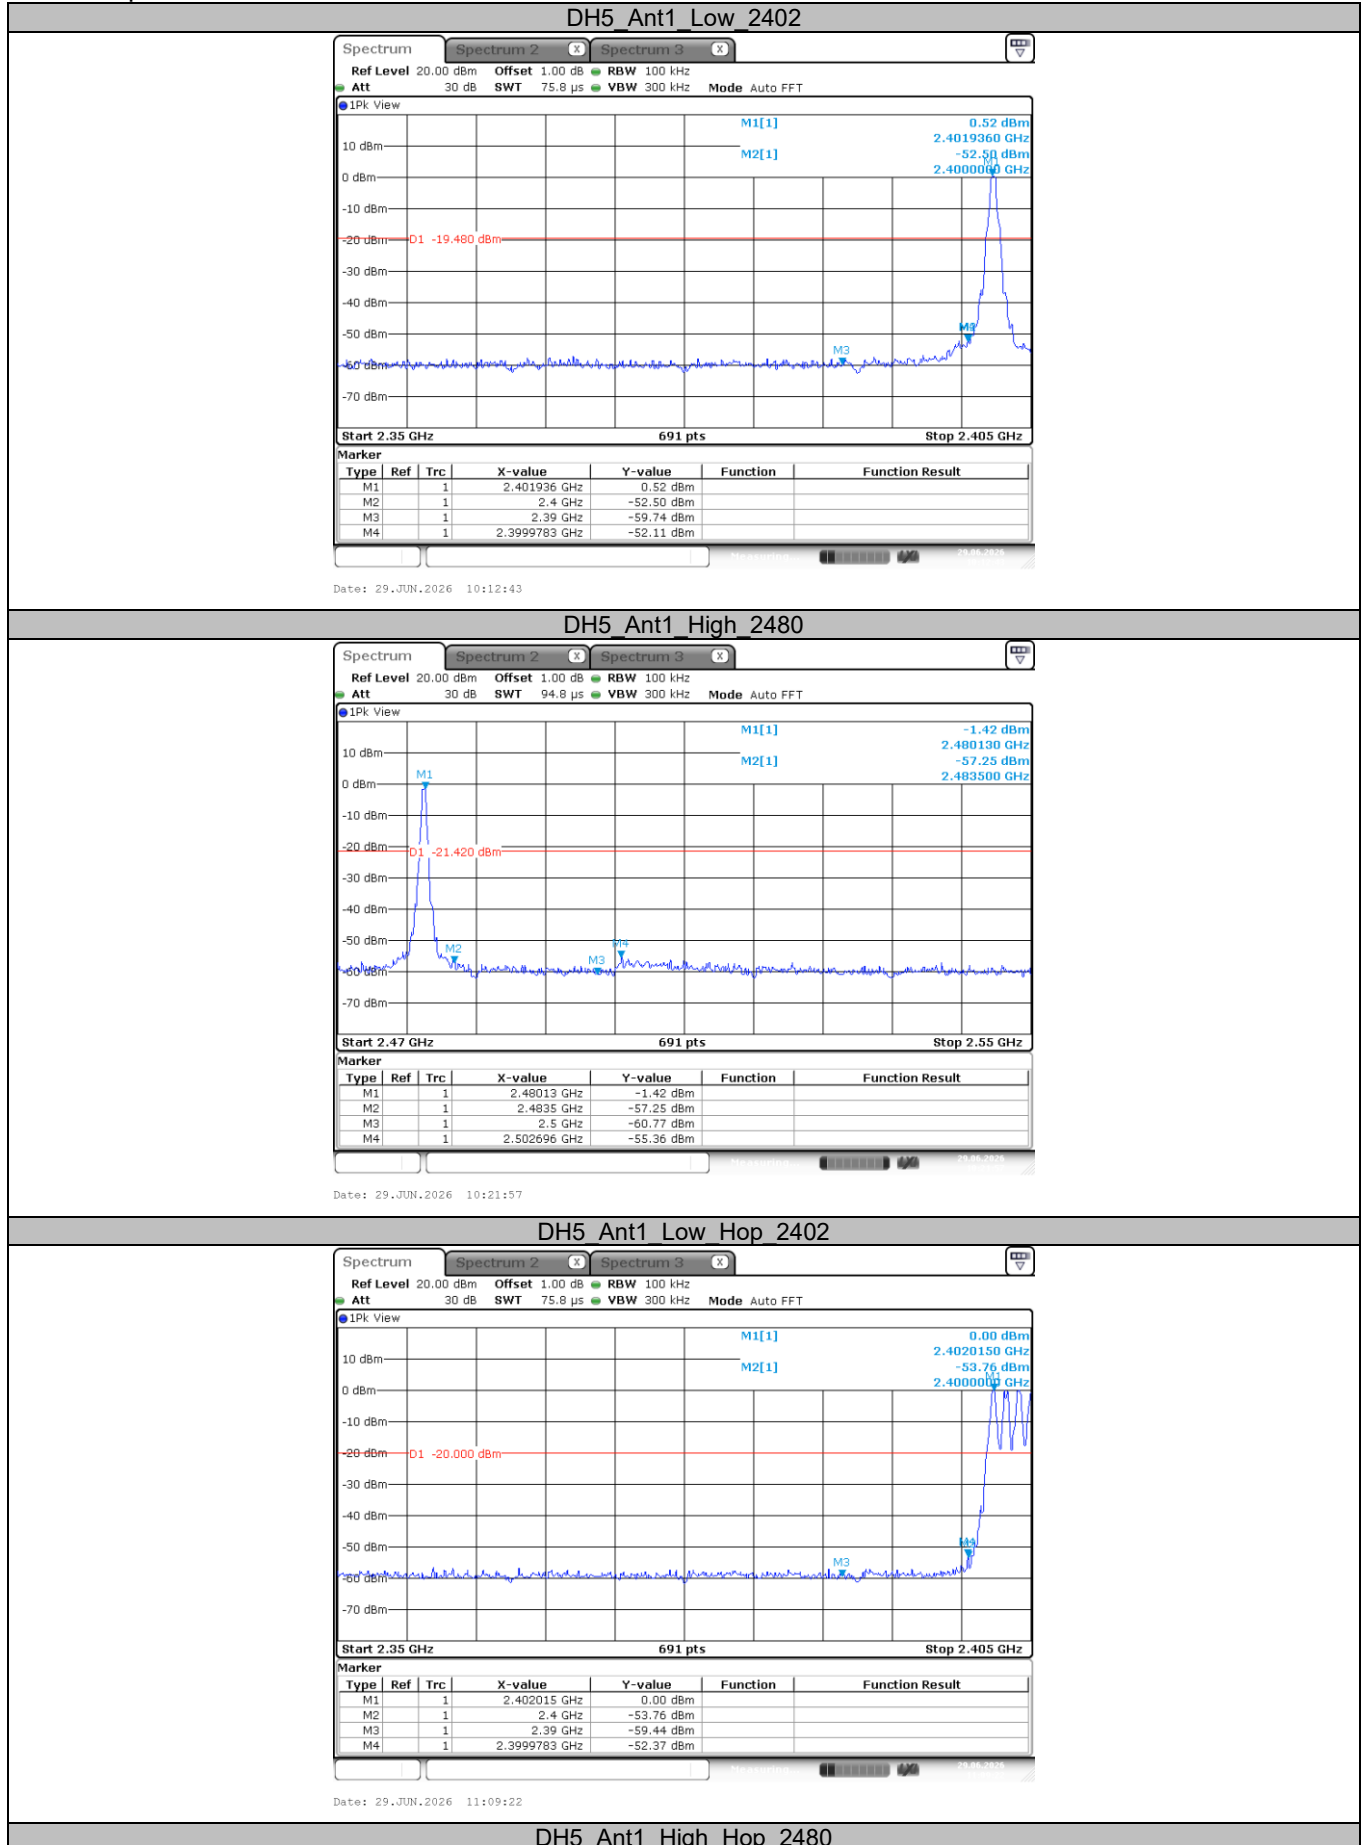


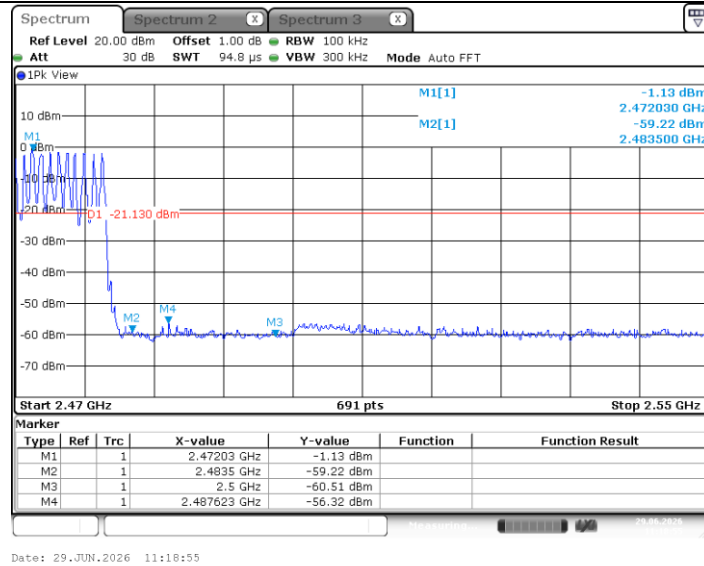


2DH5_Ant1_Low_2402

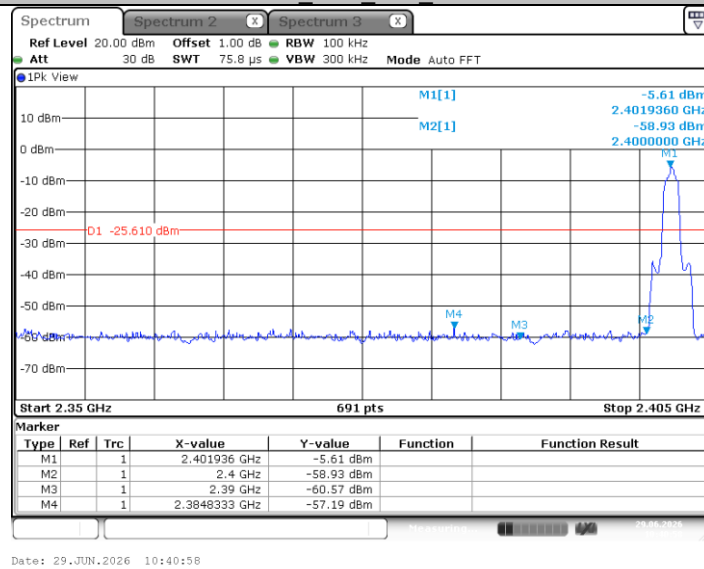


2DH5_Ant1_High_2480

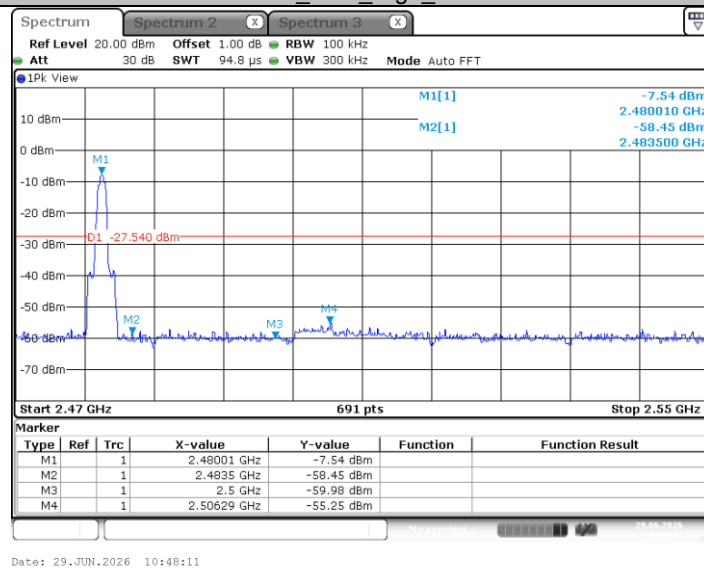


2DH5_Ant1_Low_Hop_2402

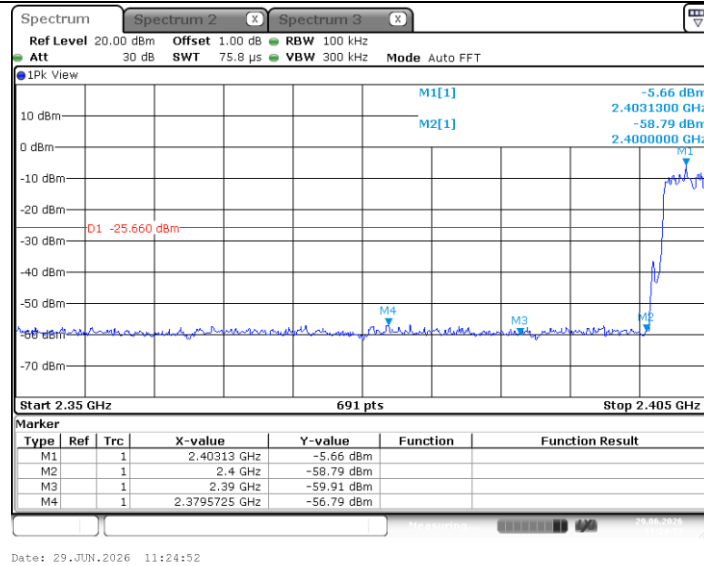


2DH5 Ant1_High_Hop_2480

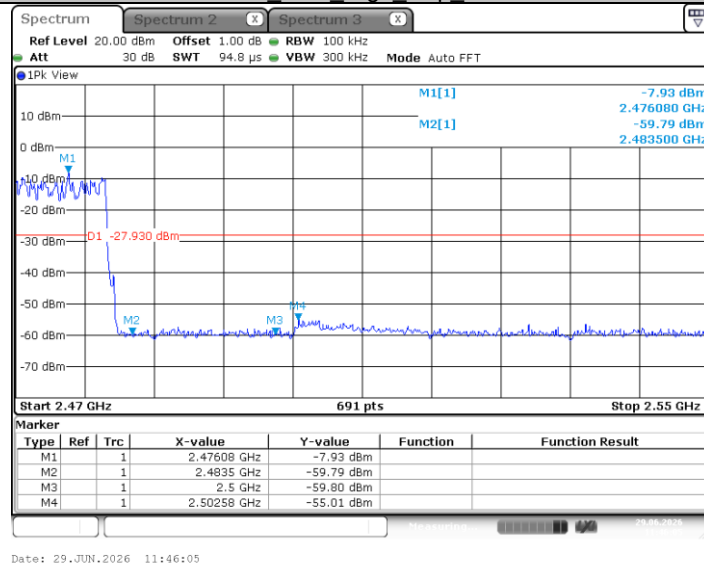


3DH5 Ant1_Low_2402

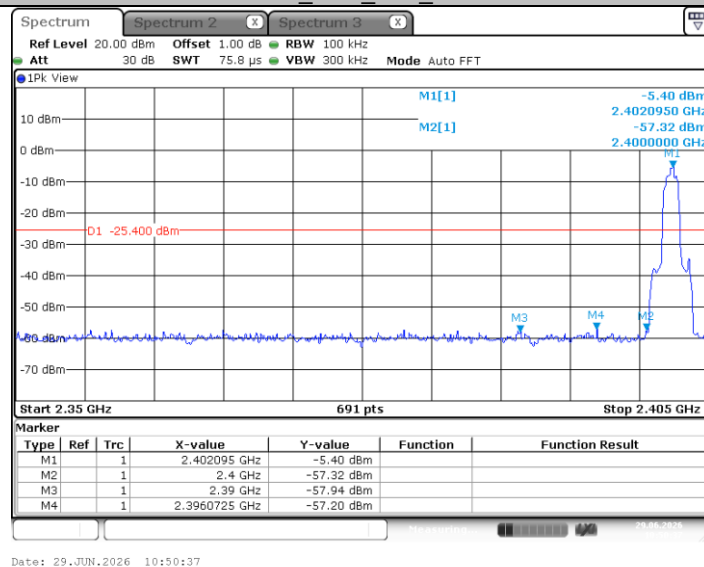


3DH5 Ant1_High_2480

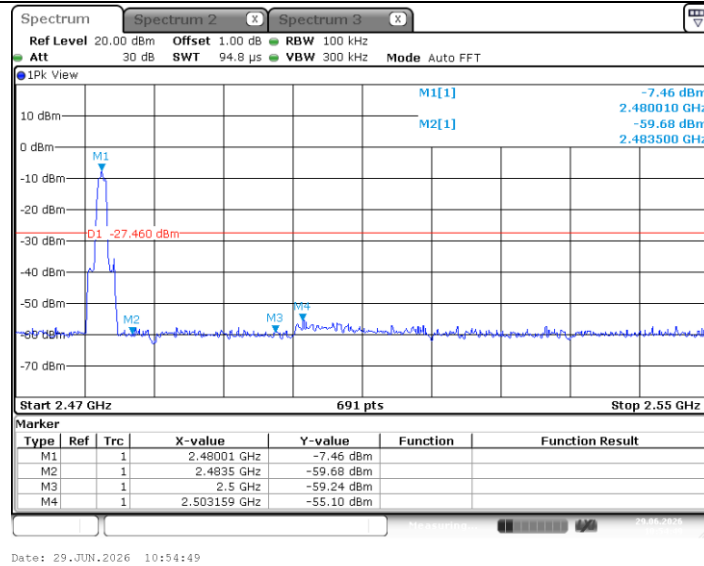

3DH5 Ant1_Low Hop_2402

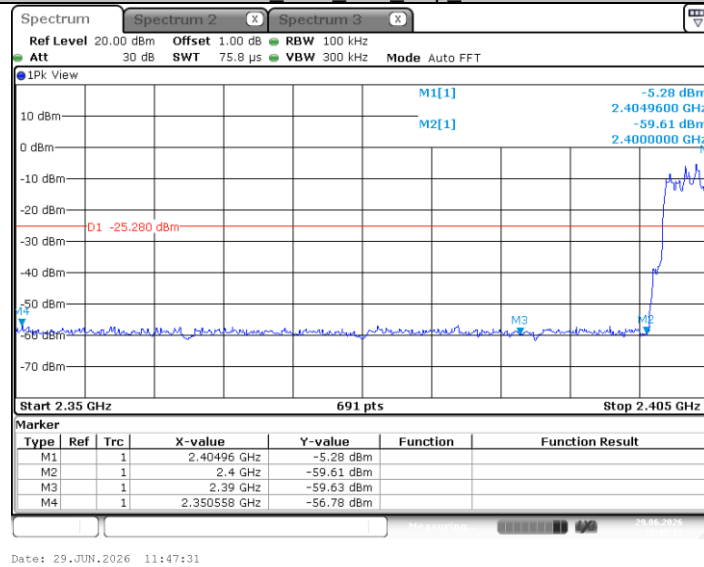


3DH5 Ant1_High Hop_2480

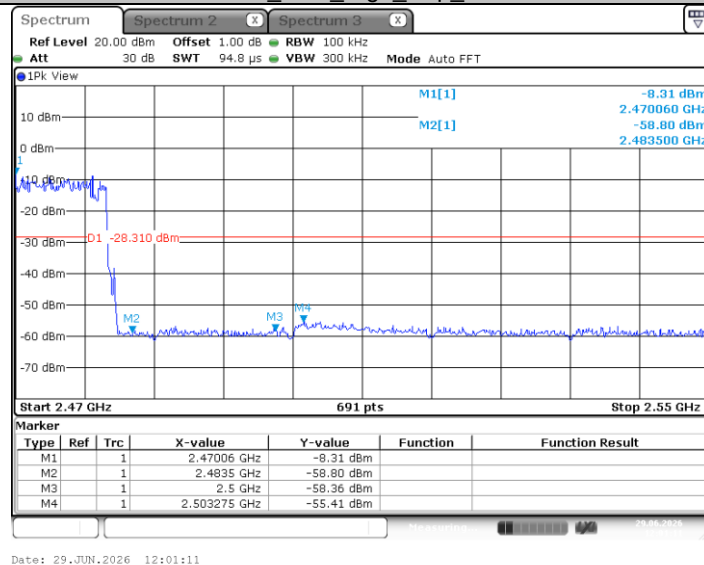

Conducted Spurious Emission


Test Mode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	0.80	0.80	---	PASS
			30~1000	0.80	-56.64	≤-19.20	PASS
			1000~26500	0.80	-48.07	≤-19.20	PASS
		2441	Reference	-0.02	-0.02	---	PASS
			30~1000	-0.02	-58.22	≤-20.02	PASS
			1000~26500	-0.02	-49.27	≤-20.02	PASS
		2480	Reference	-1.09	-1.09	---	PASS
			30~1000	-1.09	-57.12	≤-21.09	PASS
			1000~26500	-1.09	-48.97	≤-21.09	PASS
2DH5	Ant1	2402	Reference	-5.51	-5.51	---	PASS
			30~1000	-5.51	-52.28	≤-25.51	PASS
			1000~26500	-5.51	-49.41	≤-25.51	PASS
		2441	Reference	-6.35	-6.35	---	PASS
			30~1000	-6.35	-57.18	≤-26.35	PASS
			1000~26500	-6.35	-49.67	≤-26.35	PASS
		2480	Reference	-7.40	-7.40	---	PASS
			30~1000	-7.40	-56.71	≤-27.40	PASS
			1000~26500	-7.40	-49.77	≤-27.40	PASS
3DH5	Ant1	2402	Reference	-5.42	-5.42	---	PASS
			30~1000	-5.42	-57.30	≤-25.42	PASS
			1000~26500	-5.42	-49.89	≤-25.42	PASS
		2441	Reference	-6.19	-6.19	---	PASS
			30~1000	-6.19	-56.82	≤-26.19	PASS
			1000~26500	-6.19	-49.32	≤-26.19	PASS
		2480	Reference	-7.26	-7.26	---	PASS
			30~1000	-7.26	-56.61	≤-27.26	PASS
			1000~26500	-7.26	-49.64	≤-27.26	PASS

Test Graphs

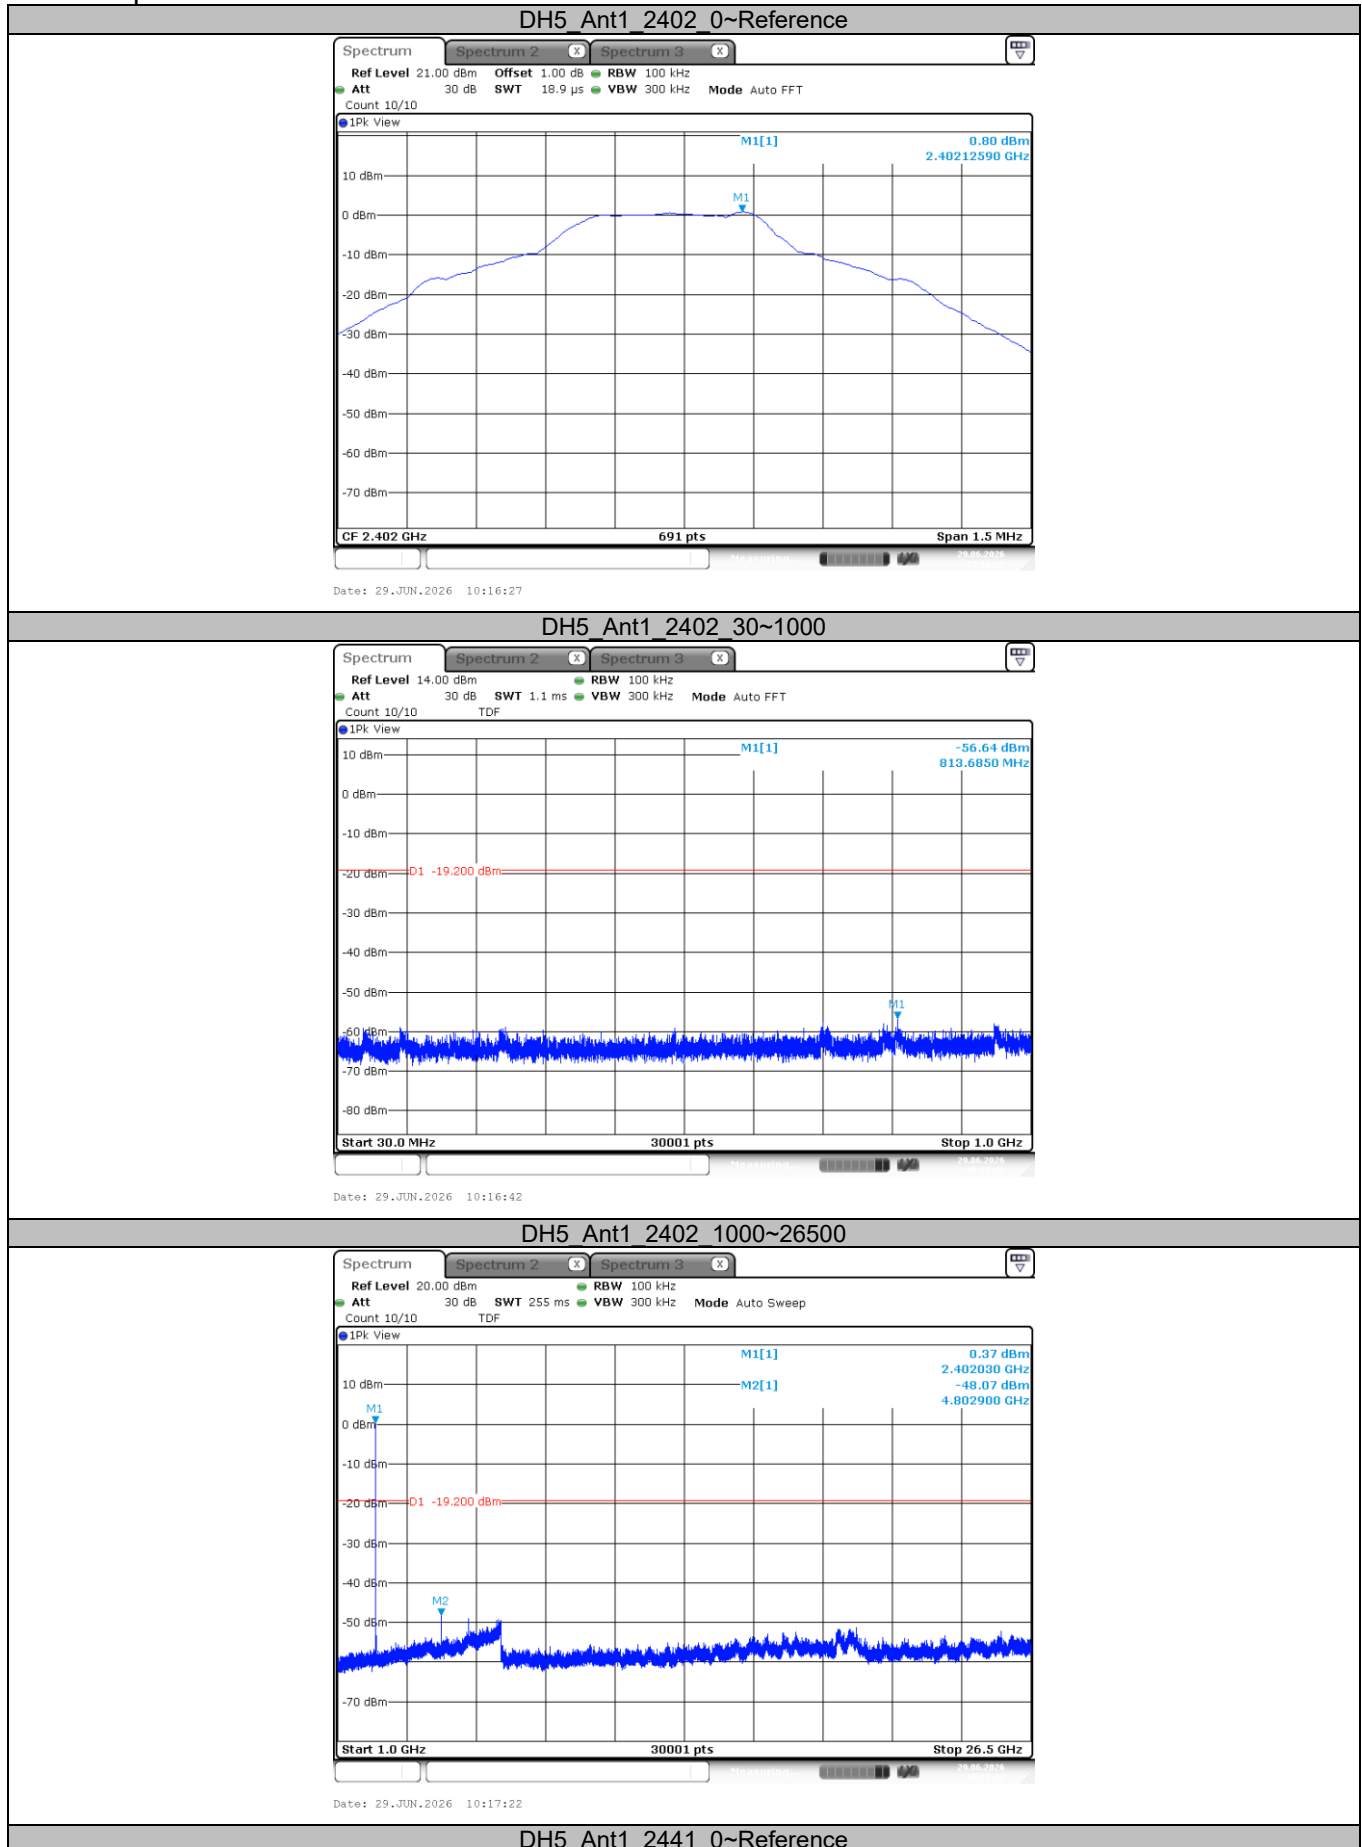





DH5 Ant1_2441_30~1000

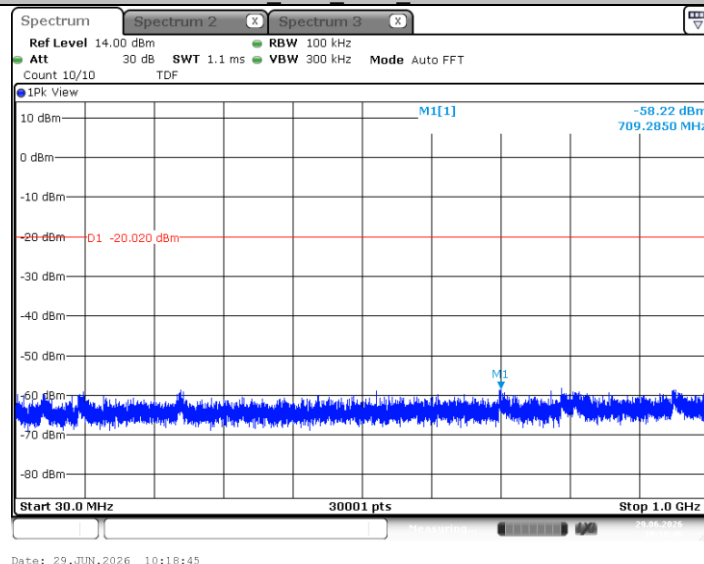


DH5 Ant1_2441_1000~26500

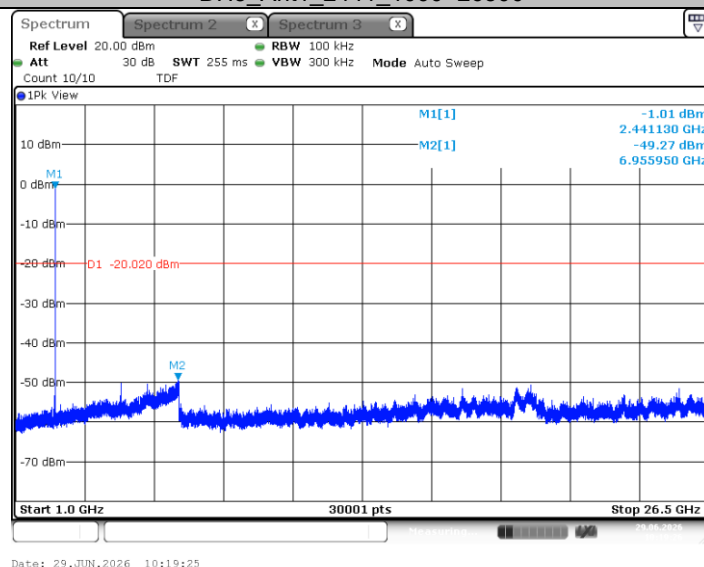


DH5 Ant1_2480_0~Reference

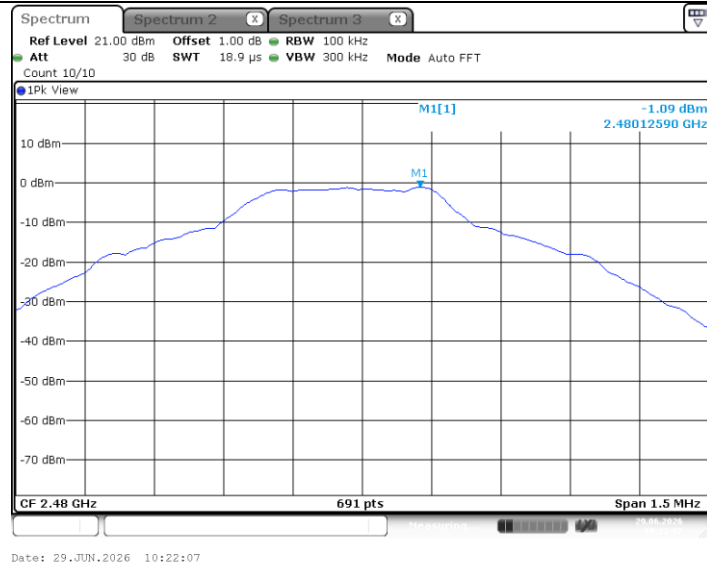


DH5 Ant1_2480_30~1000

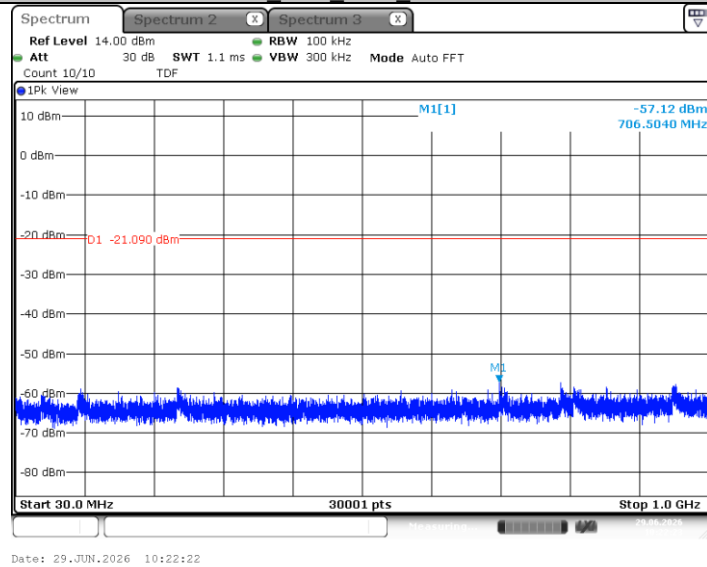


DH5 Ant1_2480_1000~26500

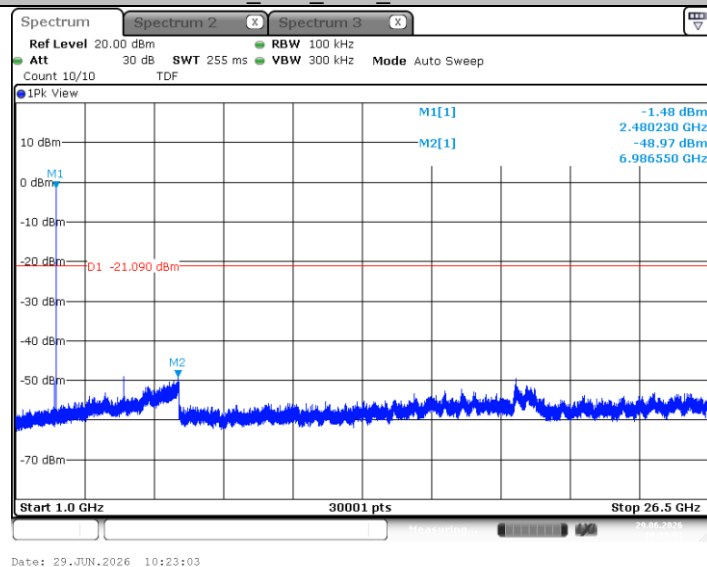


2DH5 Ant1_2402_0~Reference

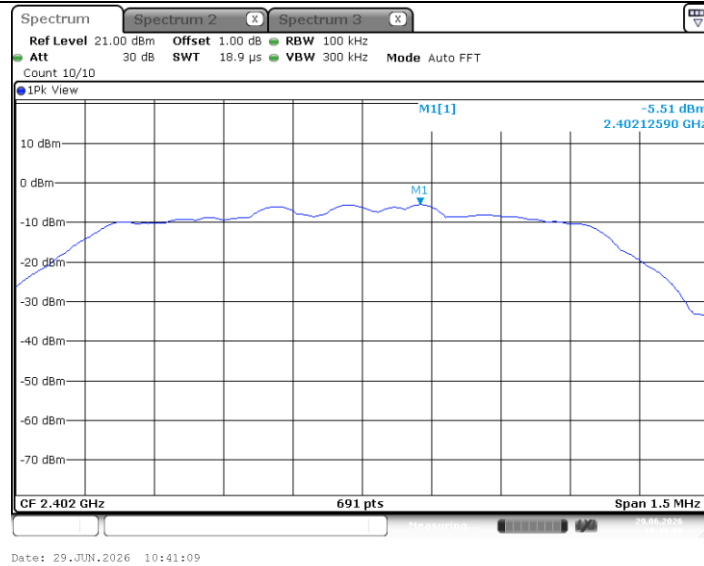


2DH5 Ant1_2402_30~1000

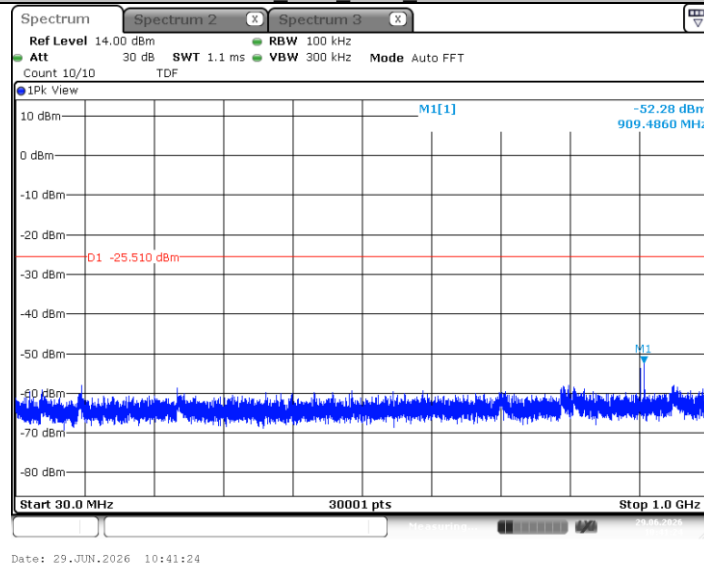


2DH5 Ant1_2402_1000~26500

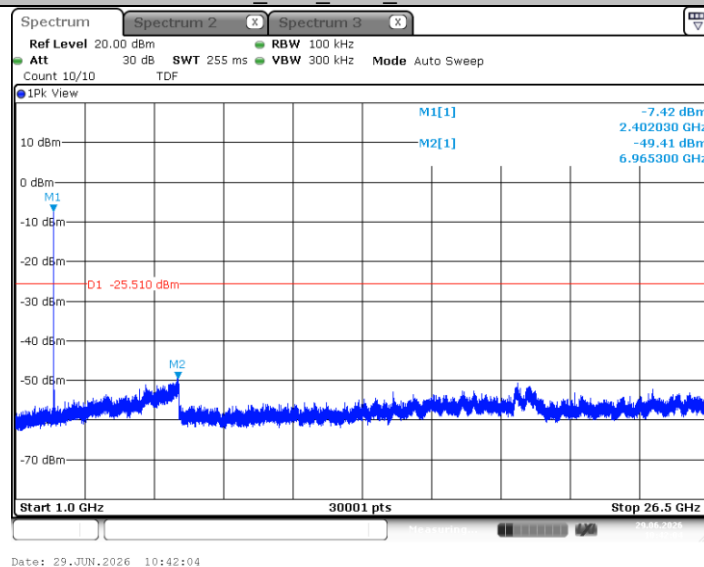


2DH5 Ant1_2441_0~Reference

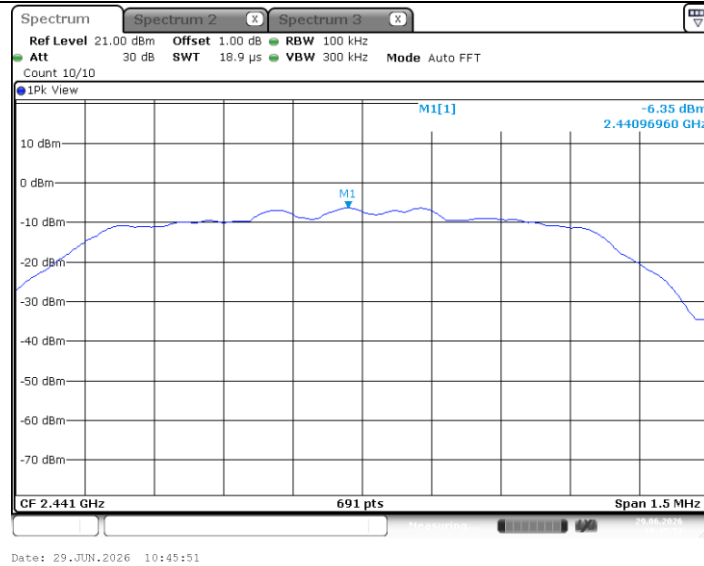


2DH5 Ant1_2441_30~1000

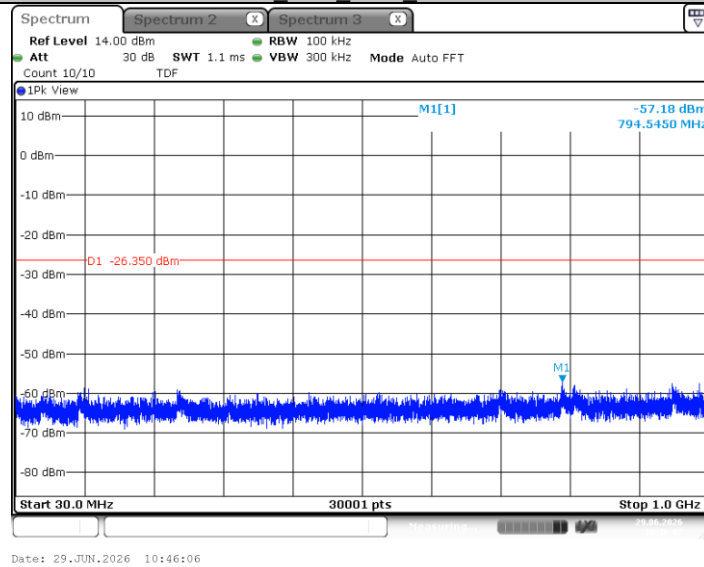


2DH5 Ant1_2441_1000~26500

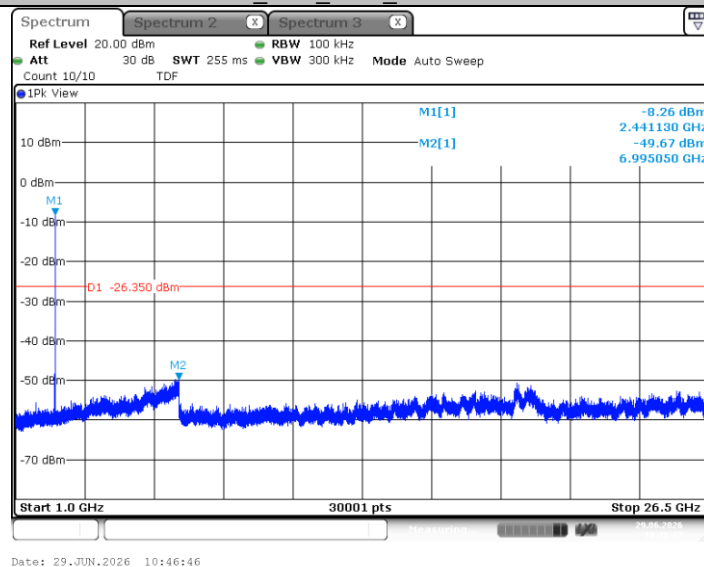


2DH5 Ant1_2480_0~Reference

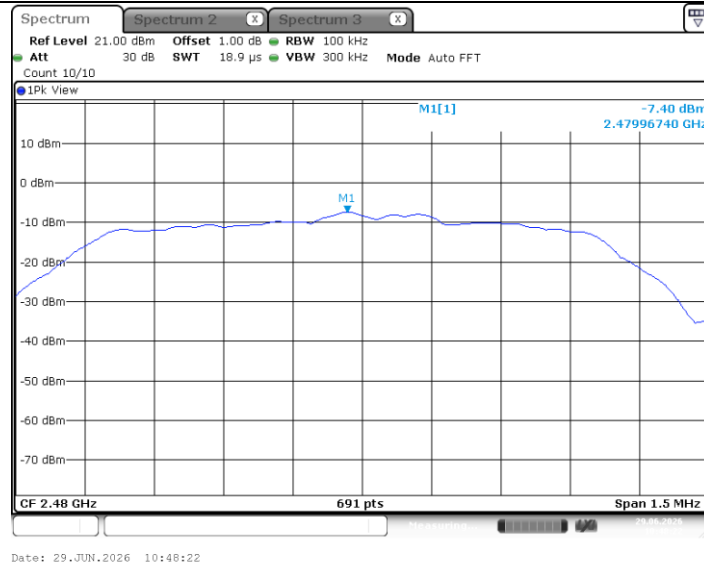


2DH5 Ant1_2480_30~1000

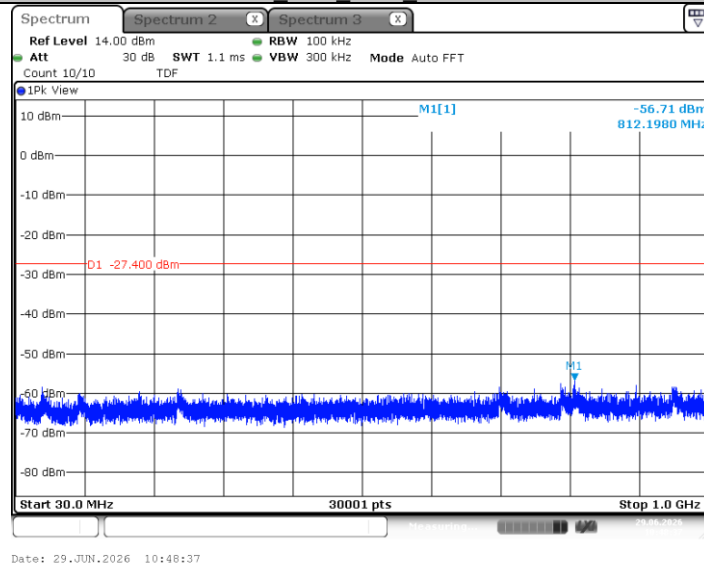


2DH5 Ant1_2480_1000~26500

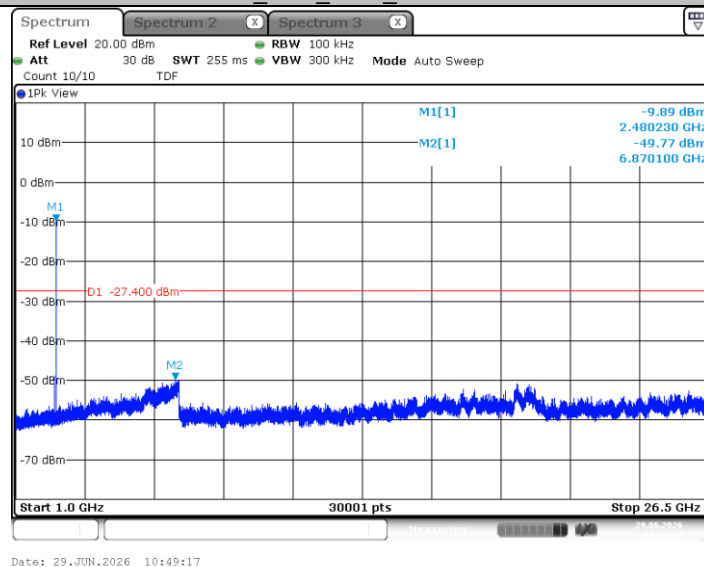


3DH5 Ant1_2402_0~Reference

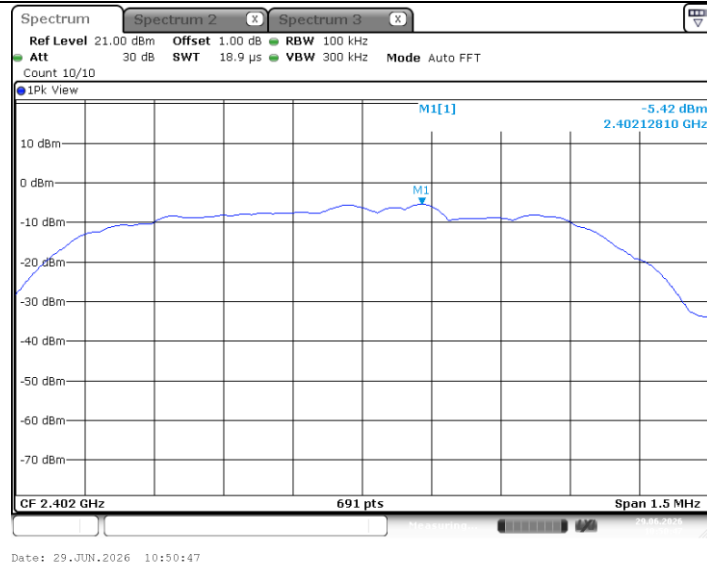


3DH5 Ant1_2402 30~1000

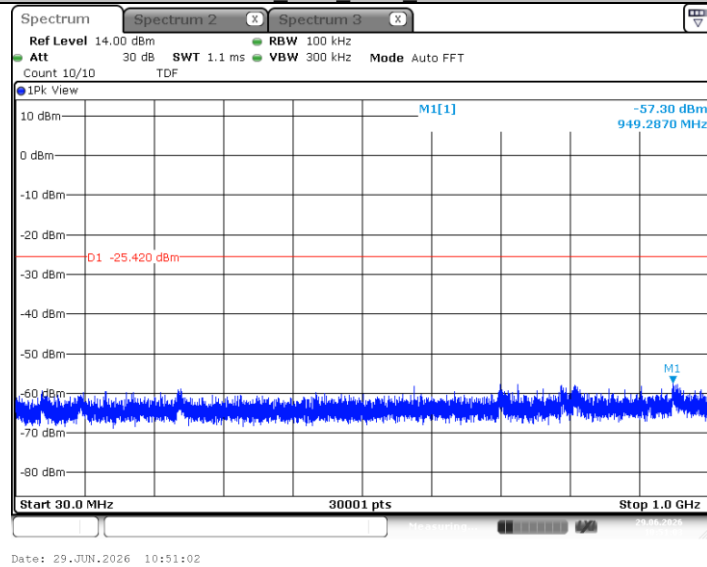


3DH5 Ant1_2402 1000~26500

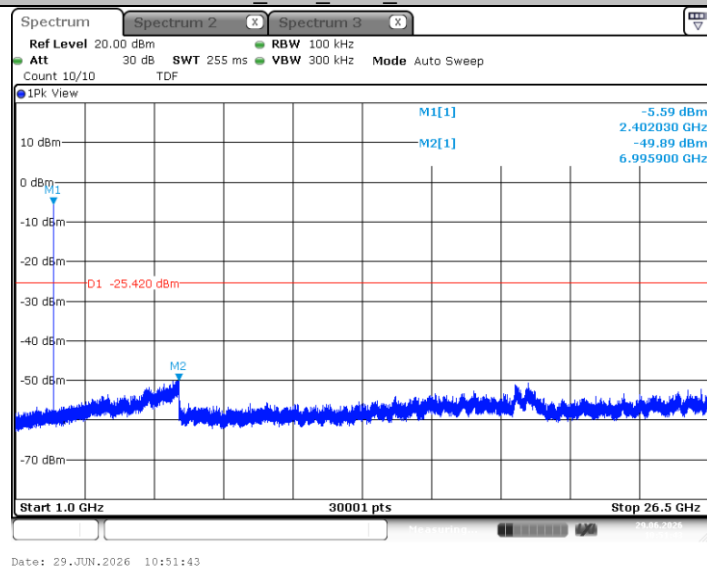


3DH5 Ant1_2441 0~Reference

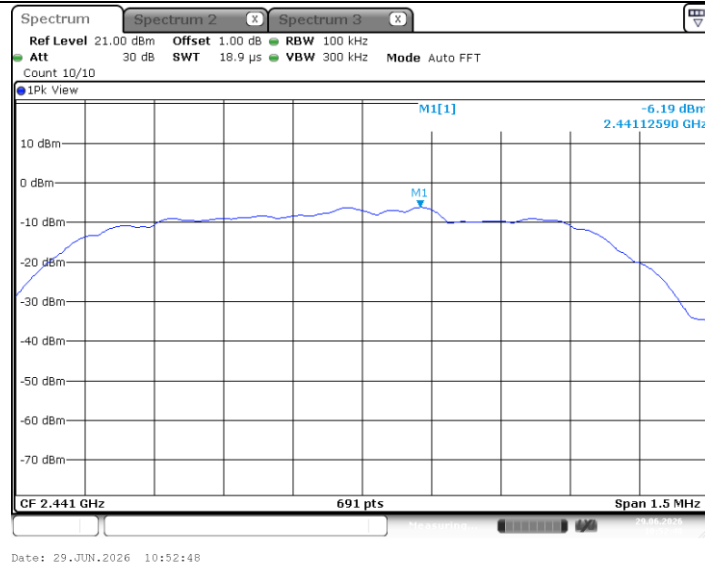


3DH5 Ant1_2441_30~1000

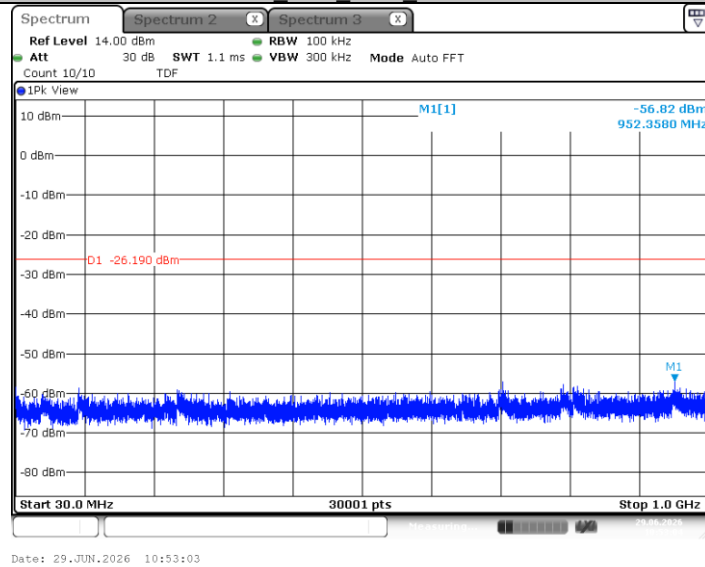


3DH5 Ant1_2441_1000~26500

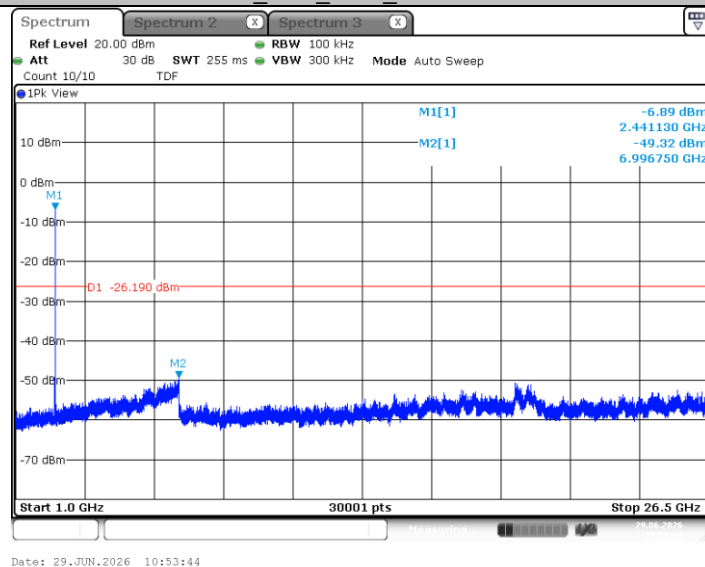


3DH5 Ant1_2480_0~Reference

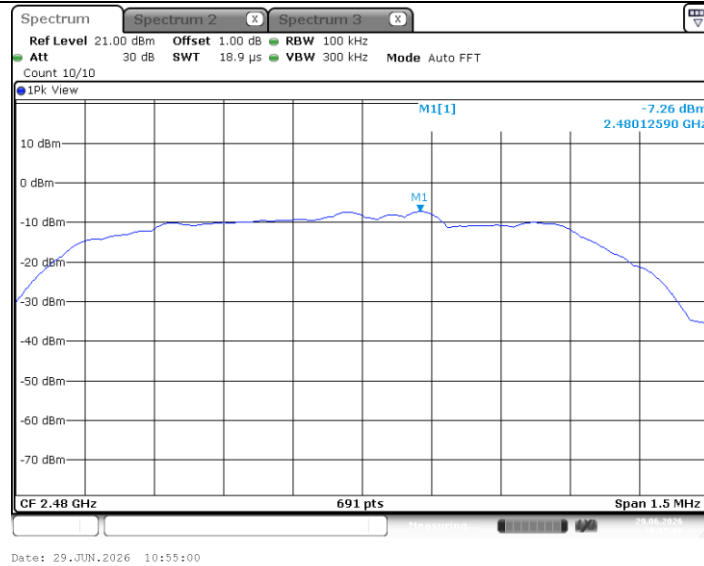

3DH5 Ant1_2480 30~1000

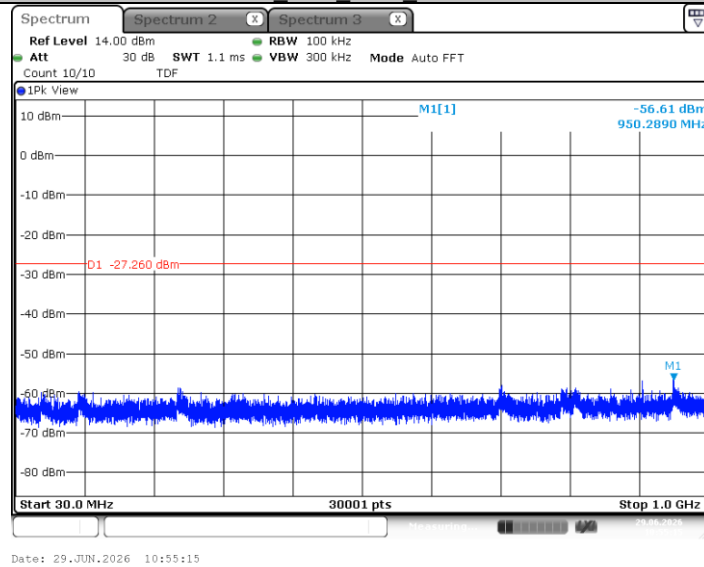

3DH5 Ant1_2480 1000~26500

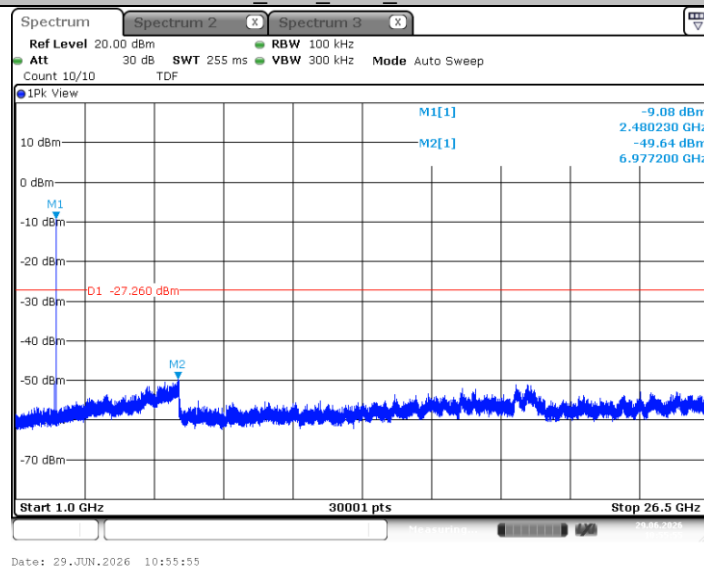


3.5. Bandwidth

Limit

N/A

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. OCB and 20dB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


Test Mode


Please refer to the clause 2.4.

Test Result


Test Mode	Antenna	Freq(MHz)	OCB [MHz]	20dB BW [MHz]	20dB BW*2/3 [MHz]
DH5	Ant1	2402	0.95904	1.04	0.69
		2441	0.95604	1.04	0.69
		2480	0.95604	1.04	0.69
2DH5	Ant1	2402	1.1868	1.29	0.86
		2441	1.1958	1.29	0.86
		2480	1.1988	1.29	0.86
3DH5	Ant1	2402	1.1838	1.27	0.85
		2441	1.1868	1.28	0.85
		2480	1.1868	1.28	0.85

99% Bandwidth:

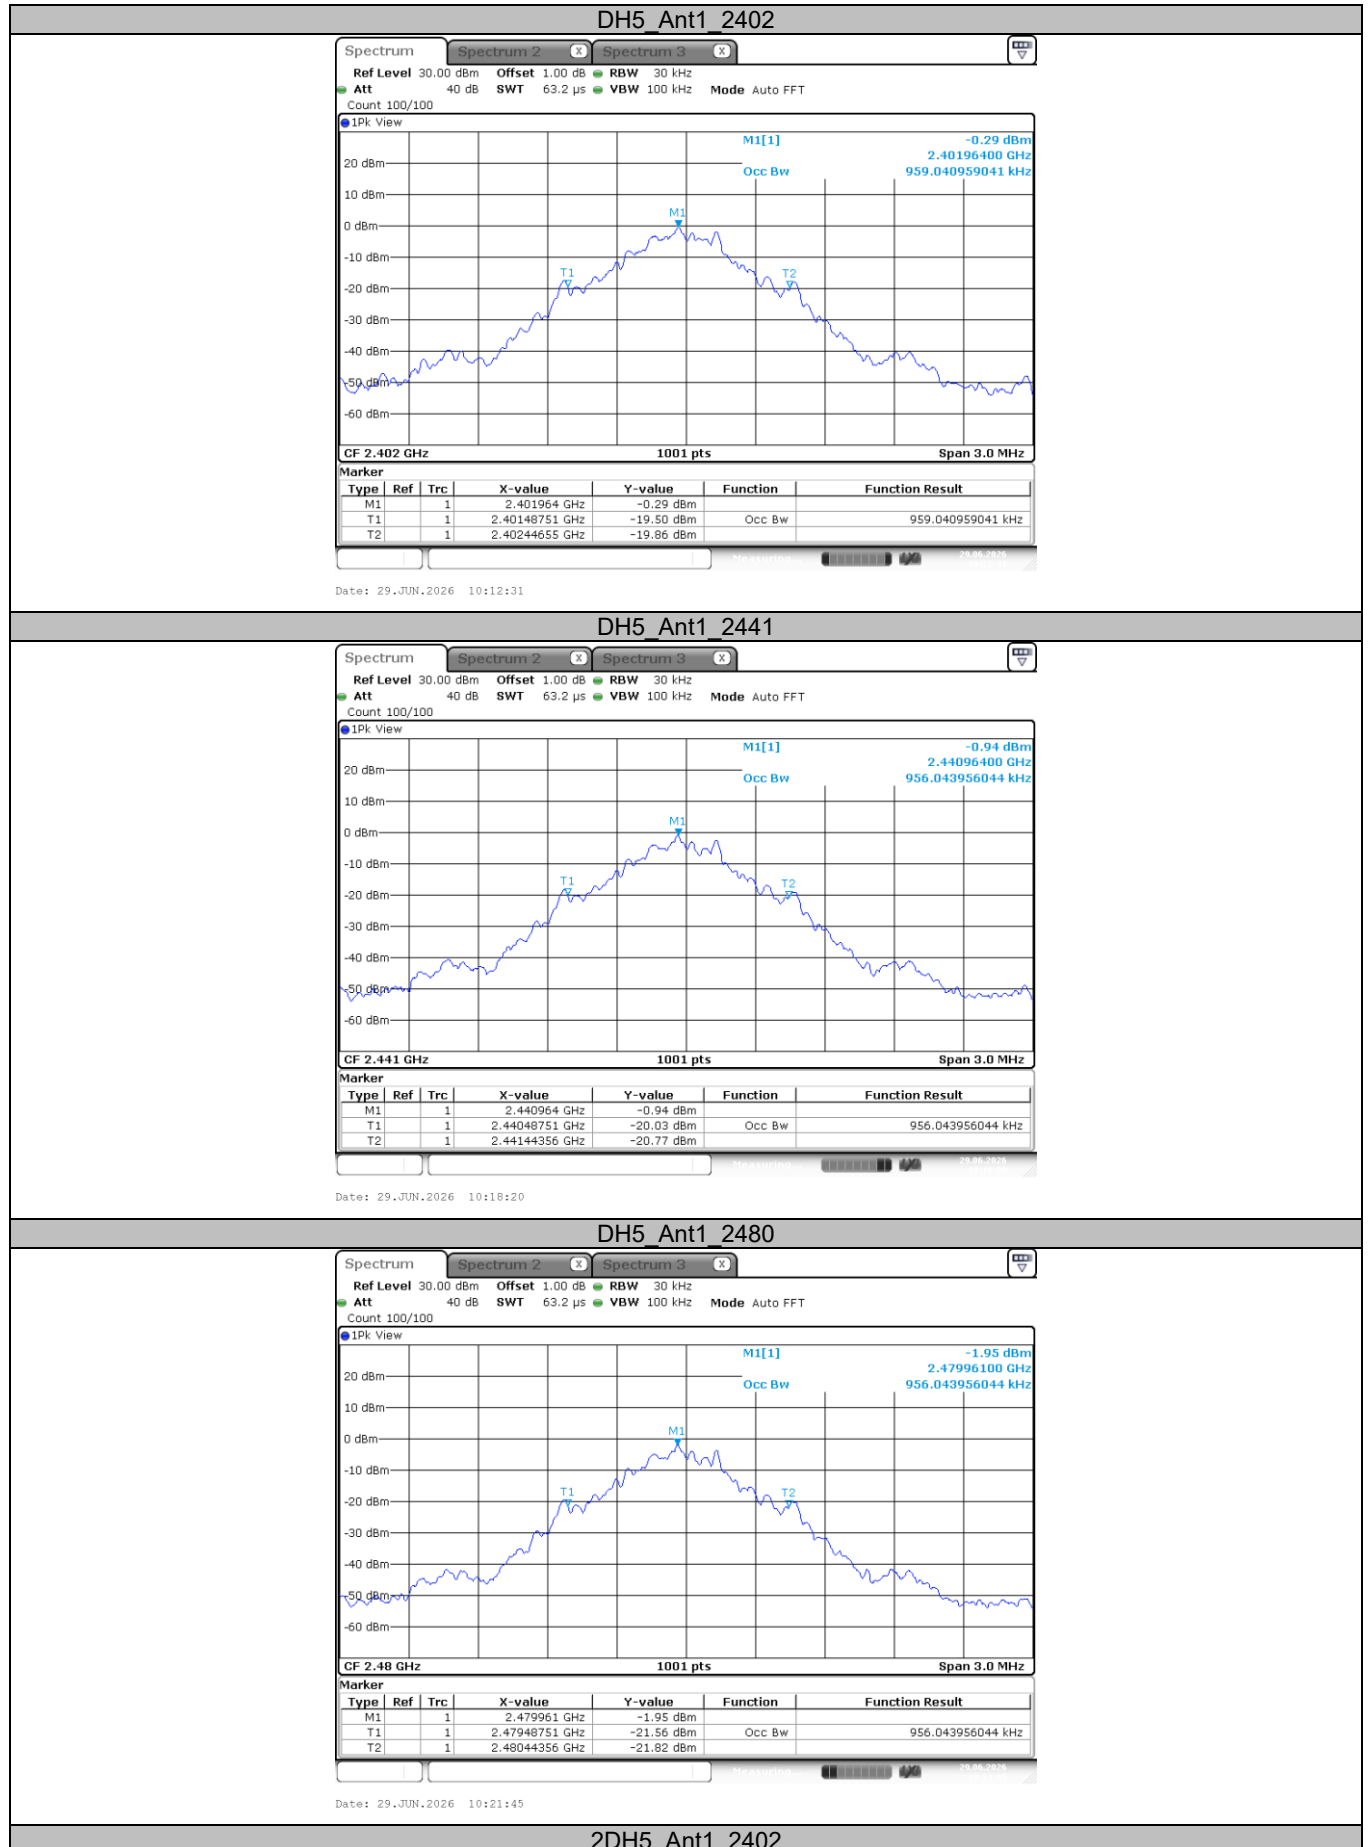


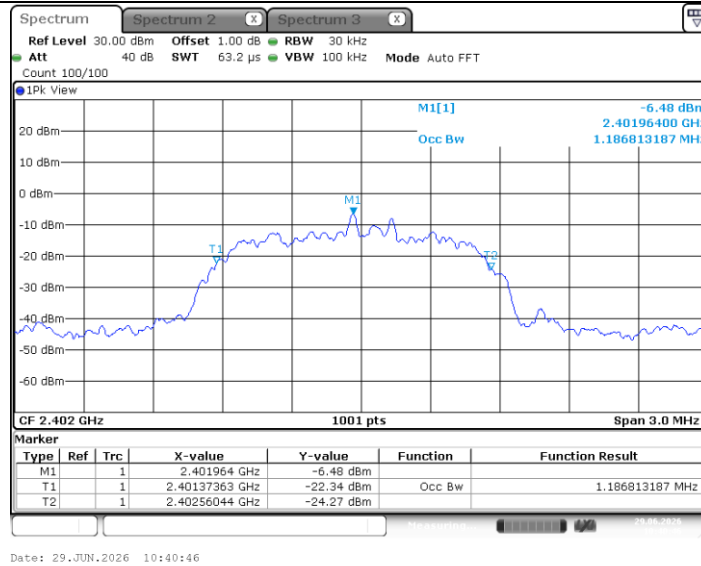


2DH5_Ant1_2441

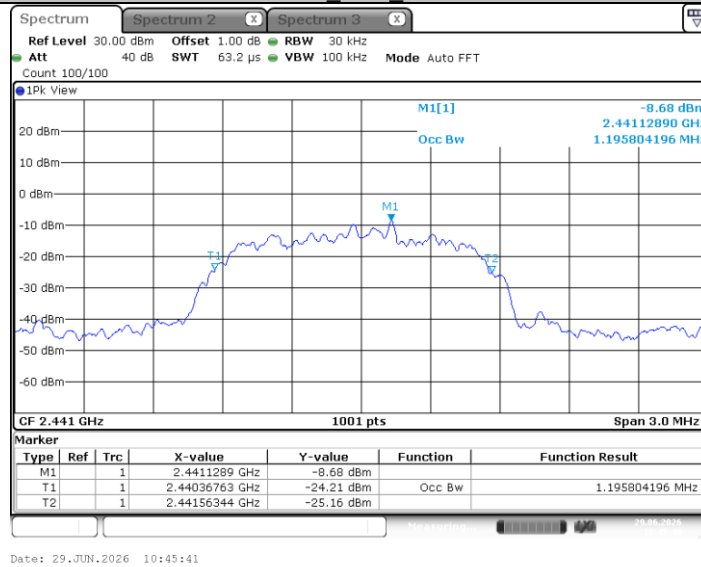


2DH5_Ant1_2480

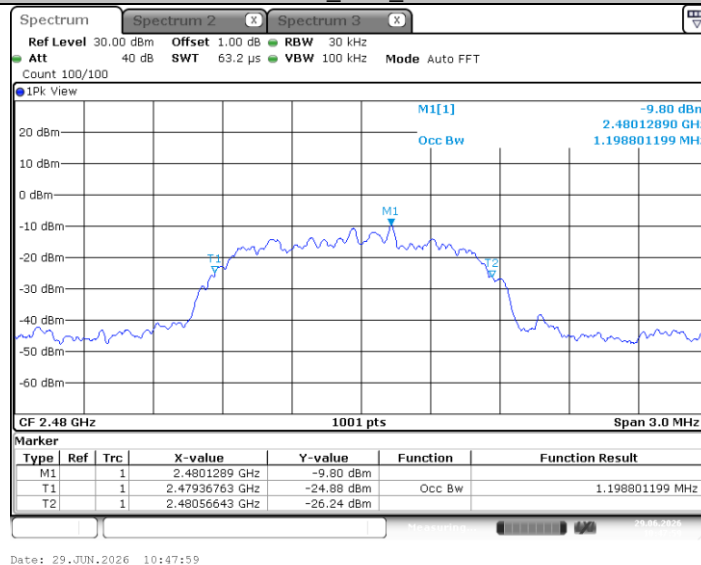


3DH5_Ant1_2402

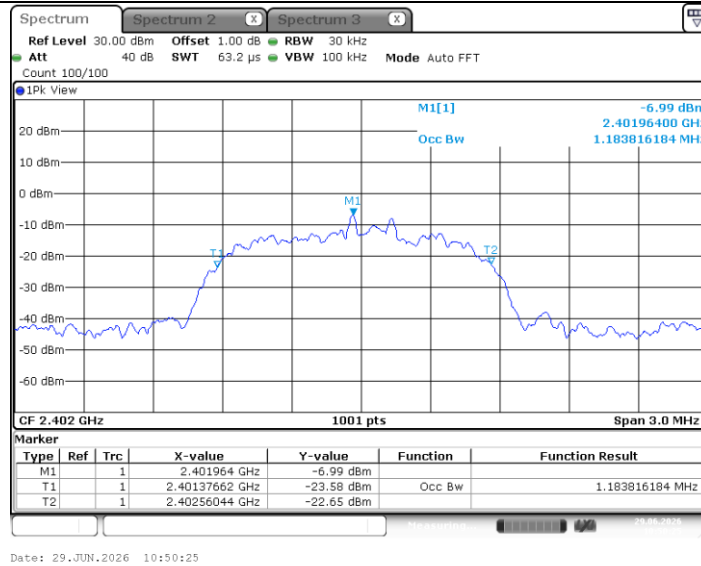


3DH5_Ant1_2441

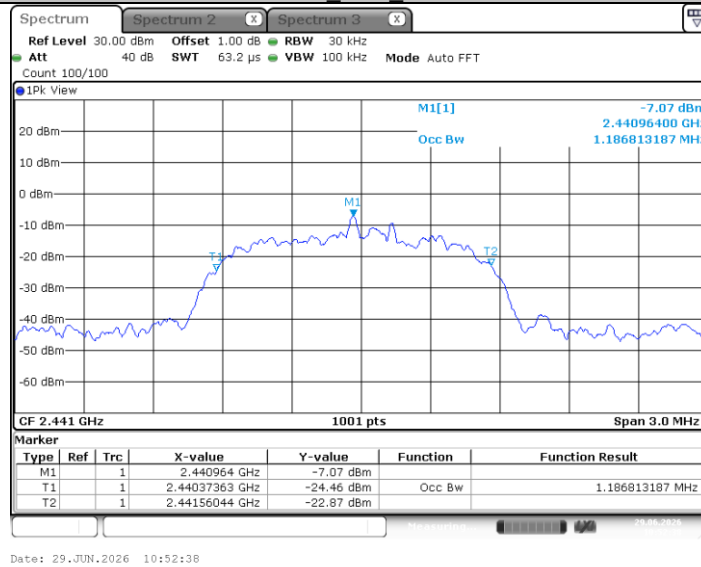


3DH5_Ant1_2480

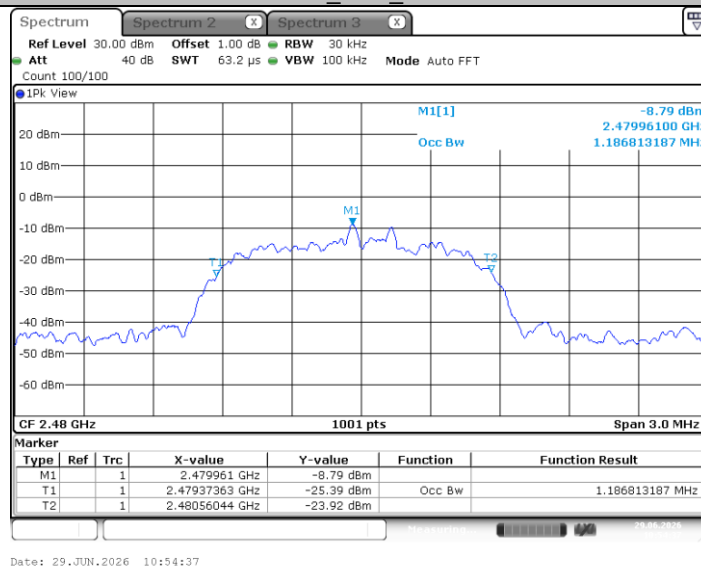


20dB Bandwidth:

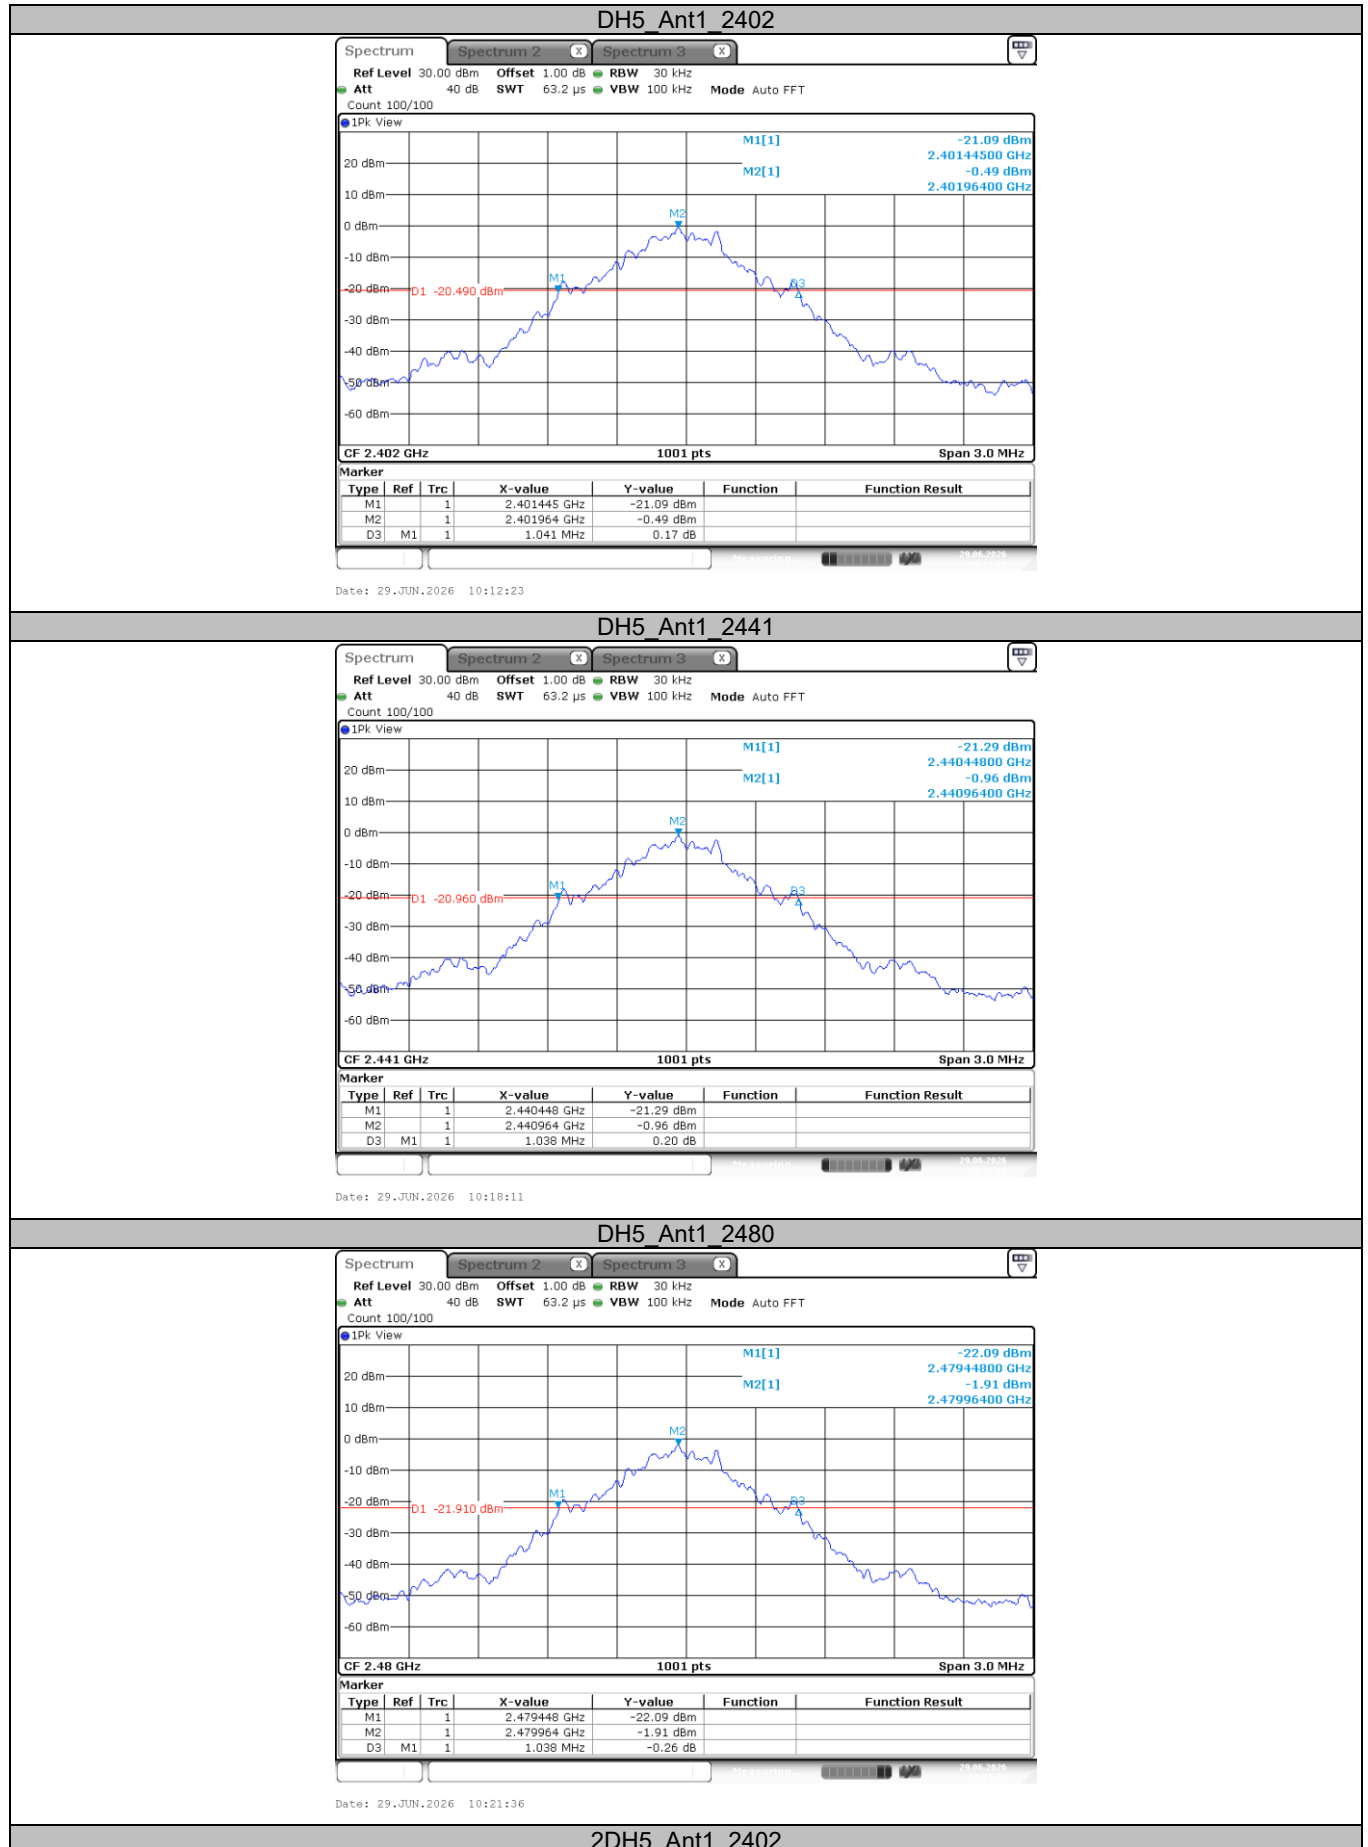


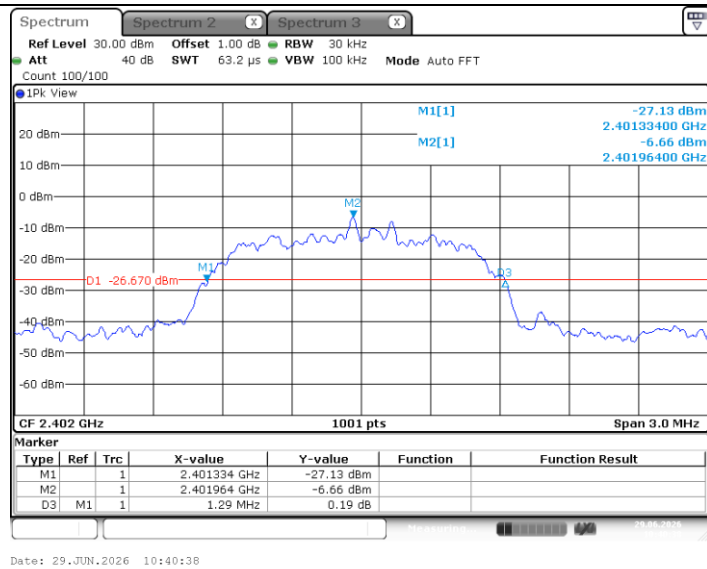


2DH5_Ant1_2441

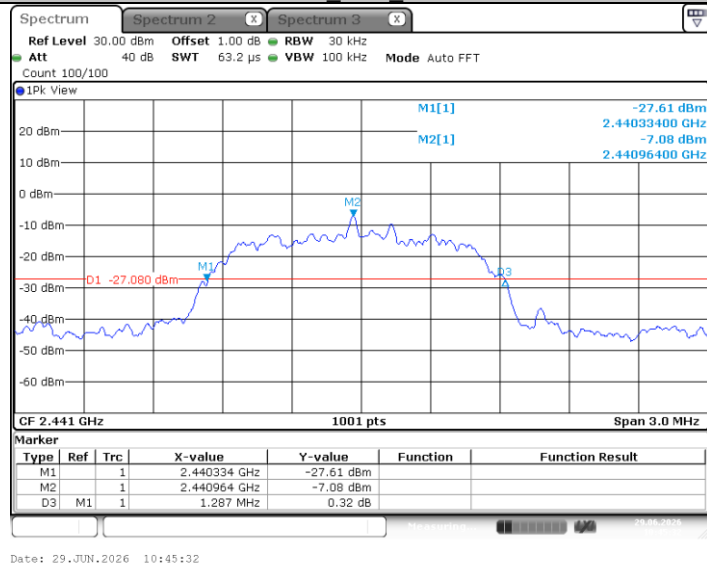


2DH5_Ant1_2480

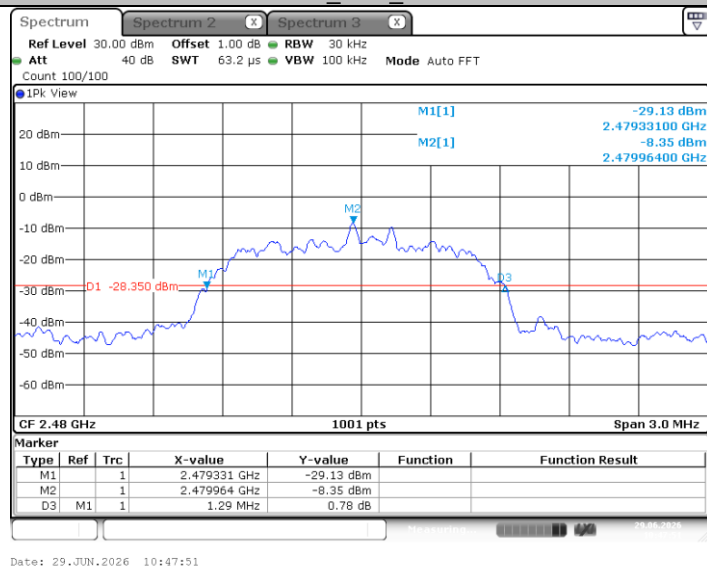


3DH5_Ant1_2402

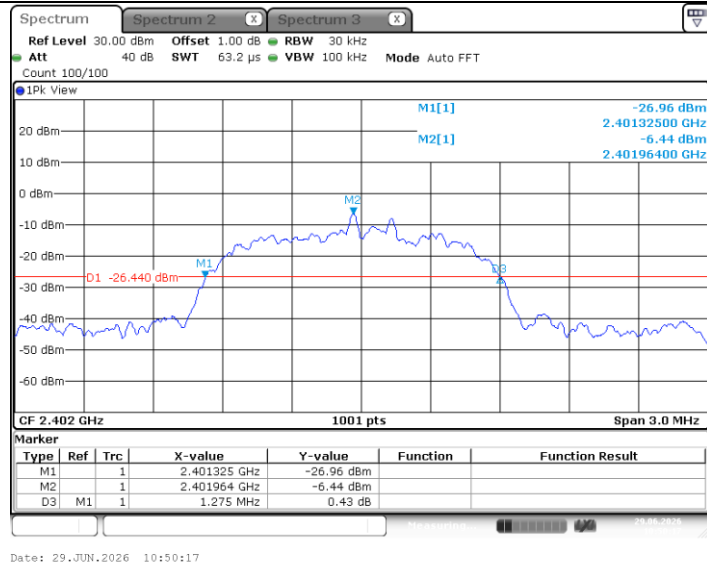

3DH5_Ant1_2441

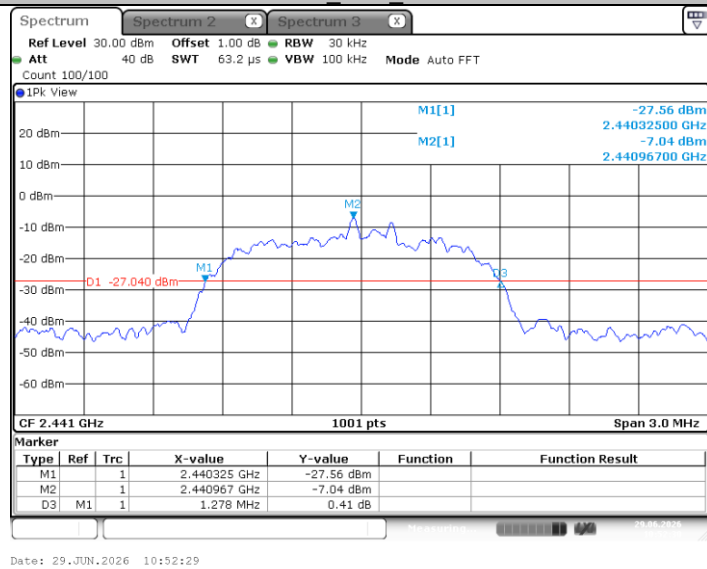

3DH5_Ant1_2480

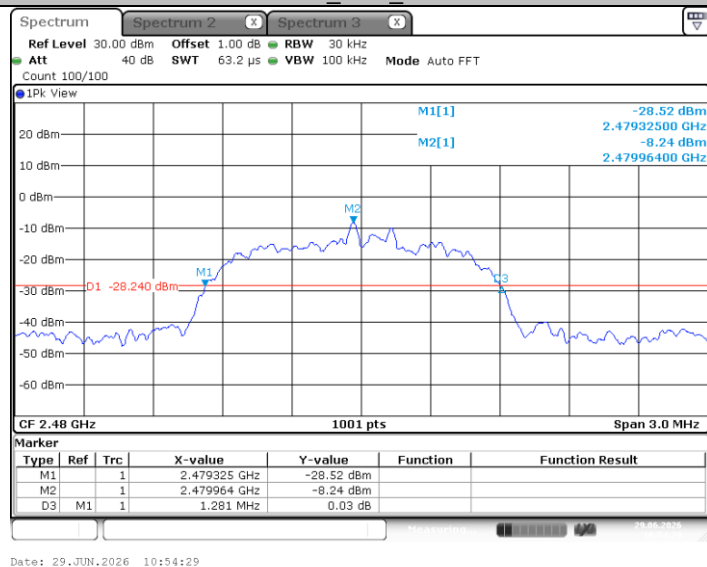


3.6. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1) / RSS-247 6.2.3.1 (a)

Test Item	Limit	Frequency Range (MHz)
Channel Separation	>25kHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


Test Mode

Please refer to the clause 2.4.

Test Result

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.000	≥ 0.69	PASS
2DH5	Ant1	Hop	1.000	≥ 0.86	PASS
3DH5	Ant1	Hop	1.003	≥ 0.85	PASS

Test Graphs

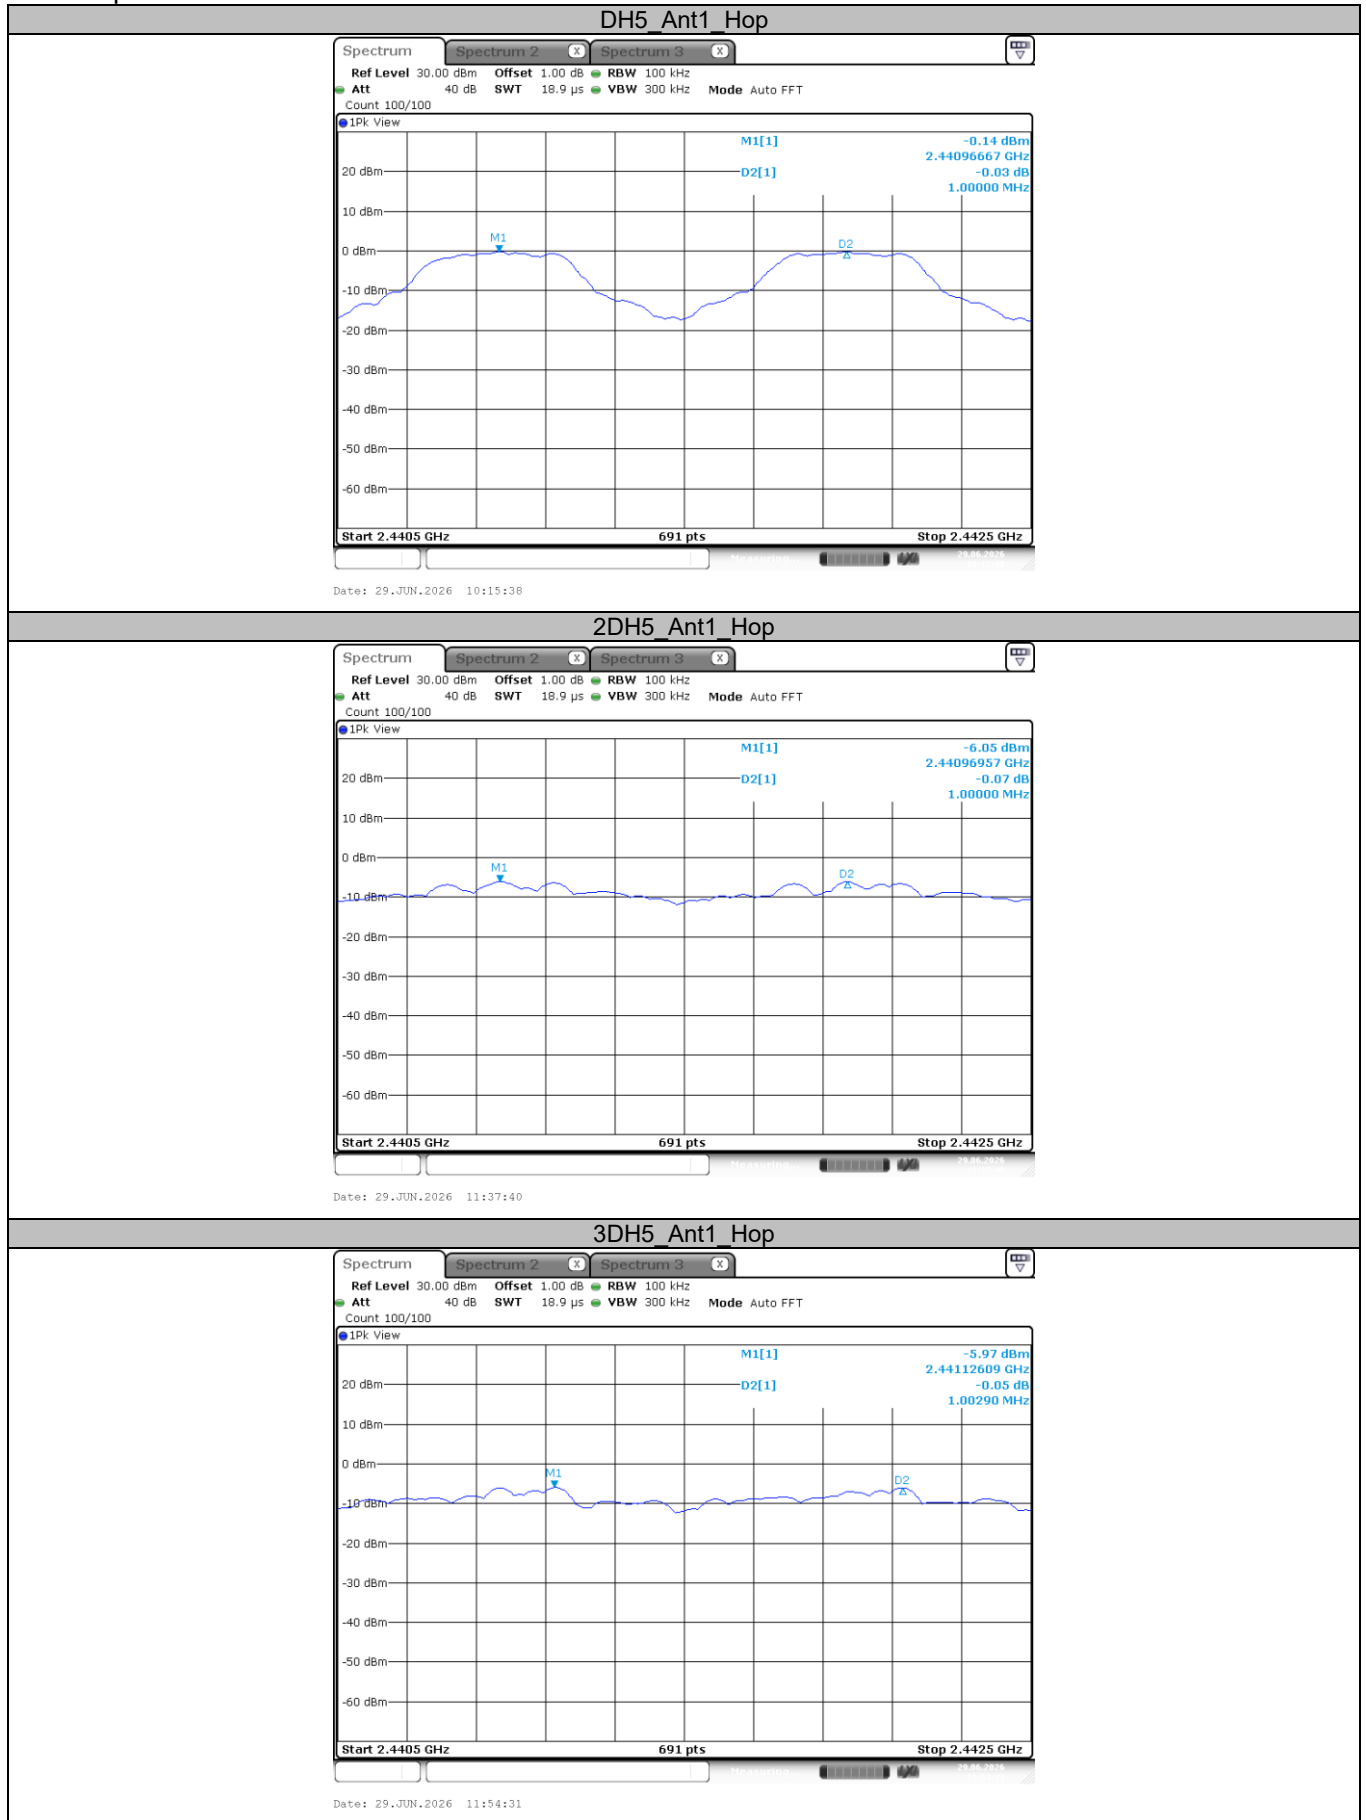


3.7. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 6.2.3.1 (b)

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 6.2.3.1 (b)	Number of Hopping Channel	≥ 15

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW $\geq$ RBW, Sweep time= Auto.


Test Mode

Please refer to the clause 2.4.

Test Result

Test Mode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

Test Graphs

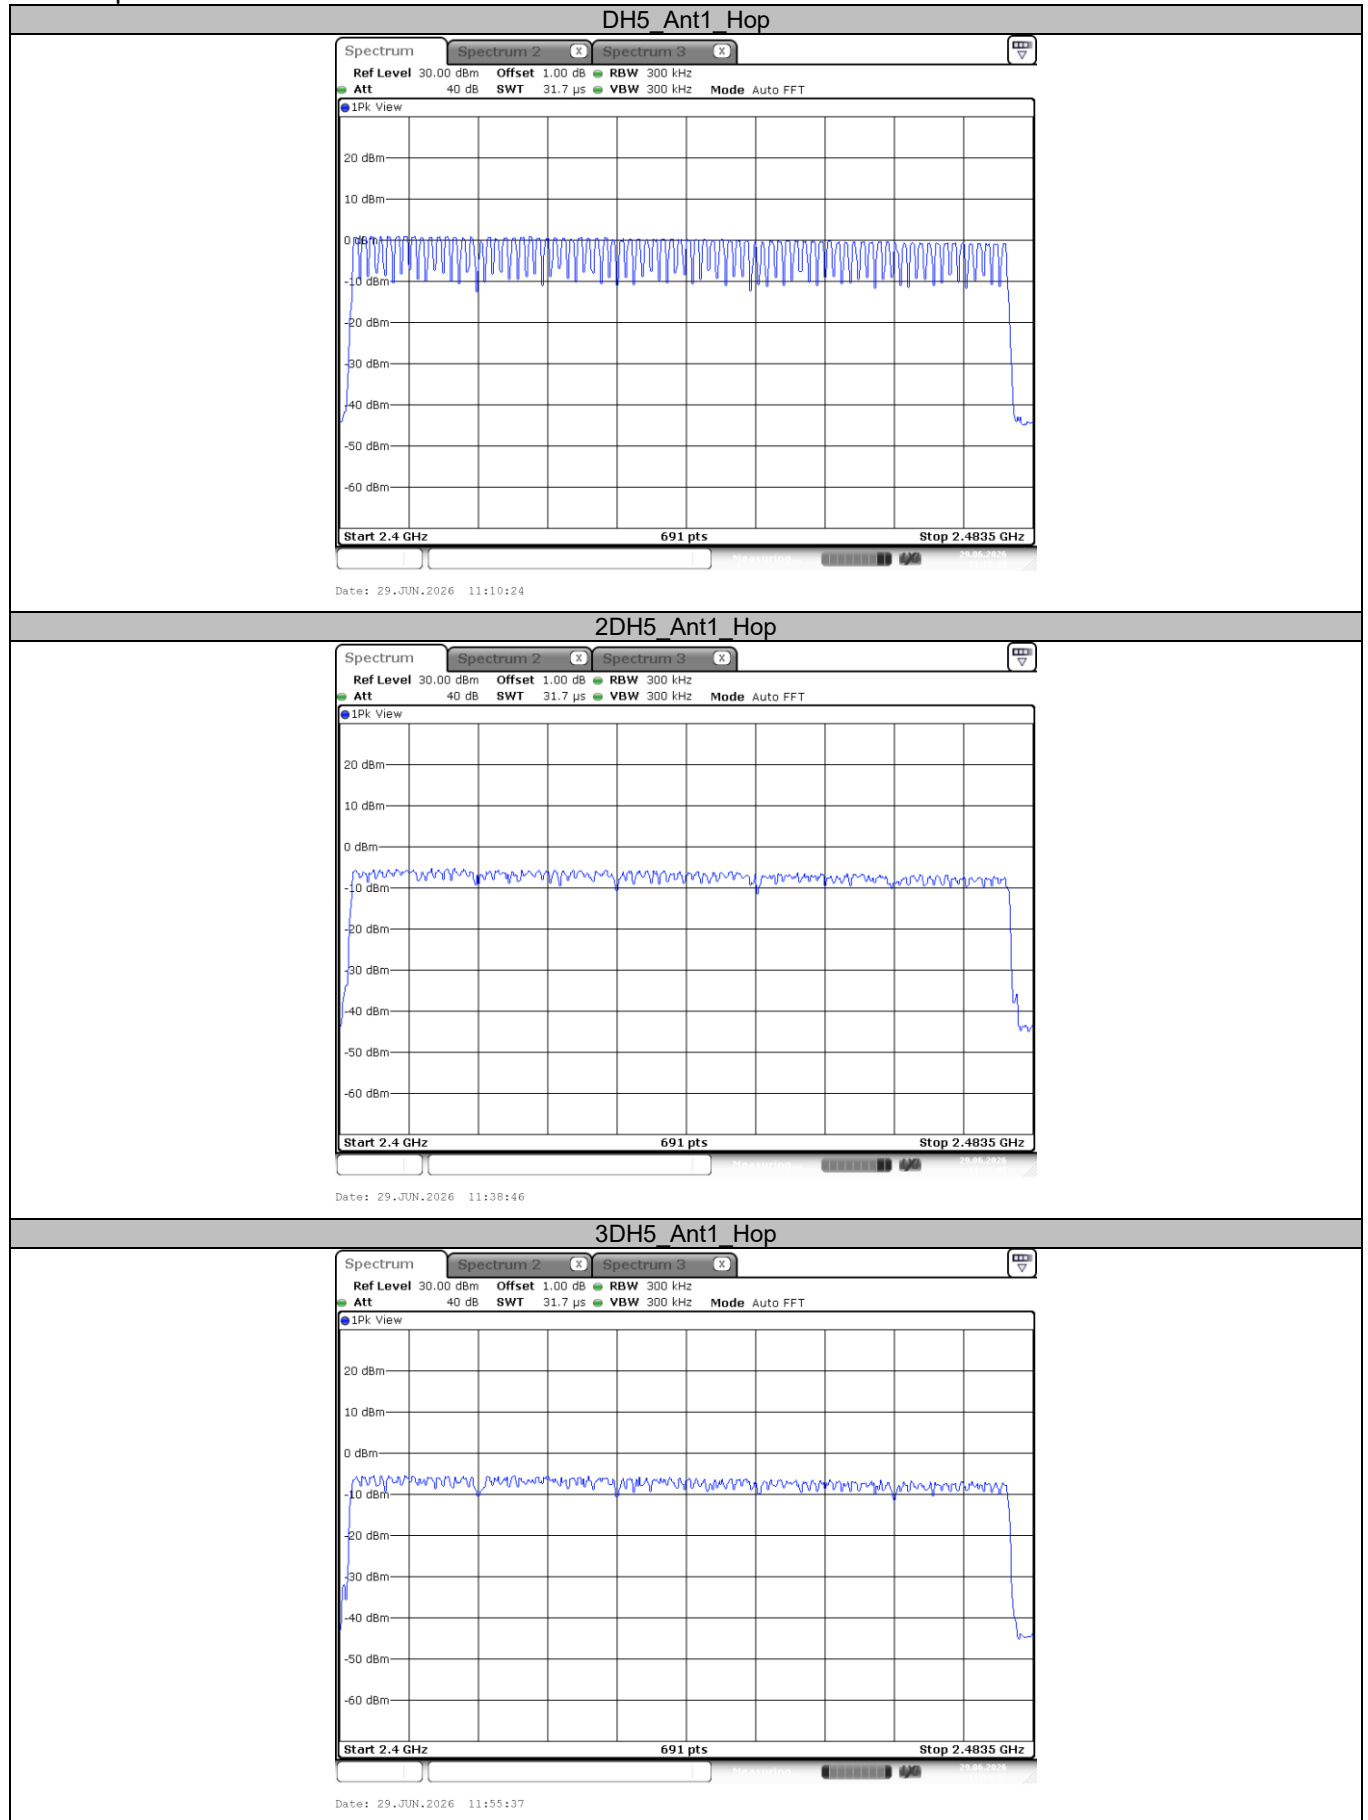


3.8. Dwell Time

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 6.2.3.1 (b)

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 6.2.3.1 (b)	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW $\geq$ RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.


Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Antenna	Freq(MHz)	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.862	70	0.200	≤ 0.4	PASS
2DH5	Ant1	Hop	2.868	100	0.287	≤ 0.4	PASS
3DH5	Ant1	Hop	2.868	90	0.258	≤ 0.4	PASS


Test Graphs

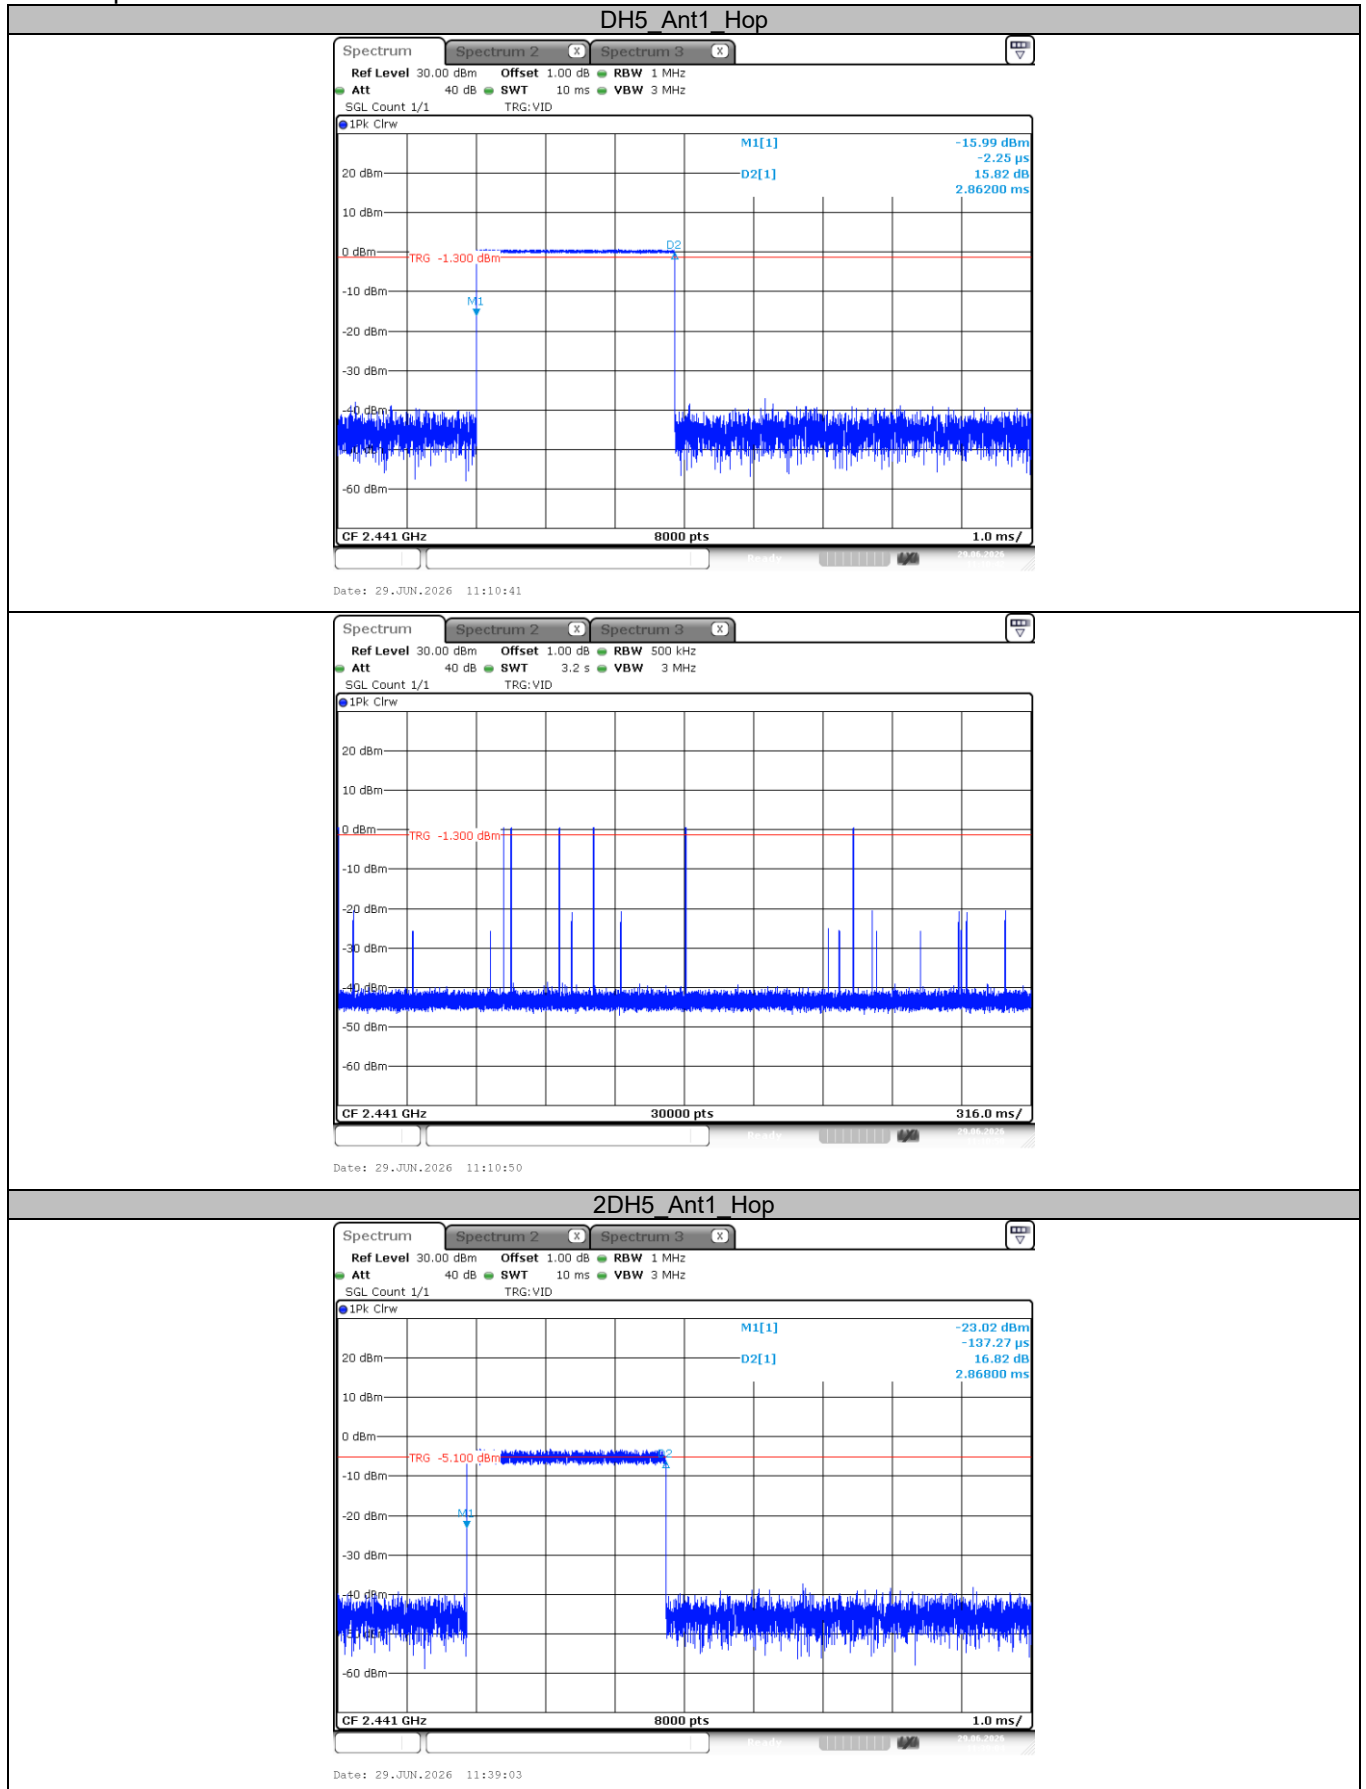

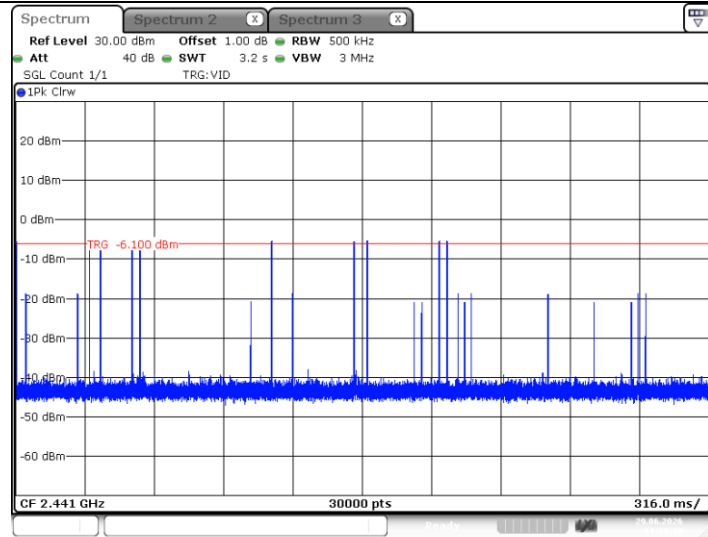


Date: 29.JUN.2026 11:39:18

3DH5_Ant1_Hop

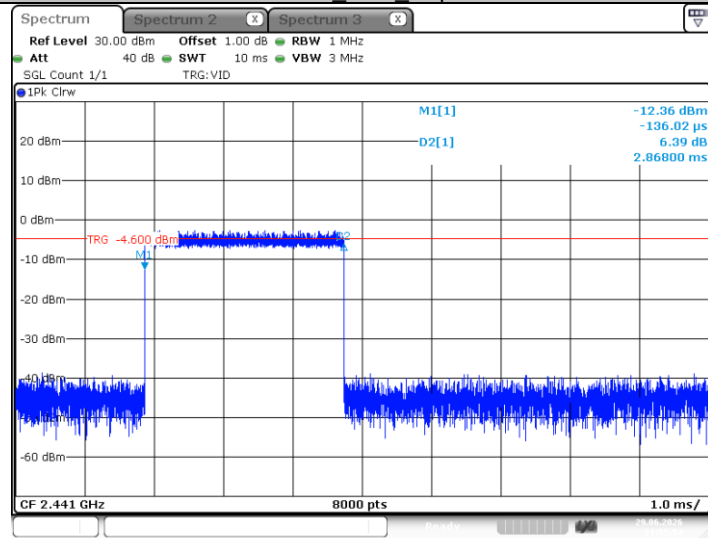

Date: 29.JUN.2026 11:55:55

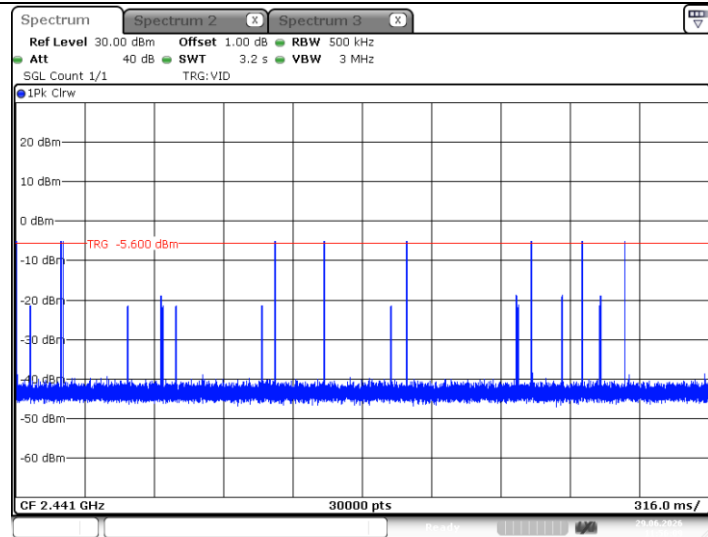

Date: 29.JUN.2026 11:56:09


3.9. Maximum Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 6.2.3.2

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part 15.247 (b)(1)	Maximum Conducted Output Power	Hopping Channels ≥ 75 , Power $< 1\text{W}$ (30dBm); Others $< 125\text{mW}$ (21dBm)	2400~2483.5
RSS-247 6.2.3.2	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5
	EIRP	4 Watt or 36dBm	2400~2483.5

Test Configuration

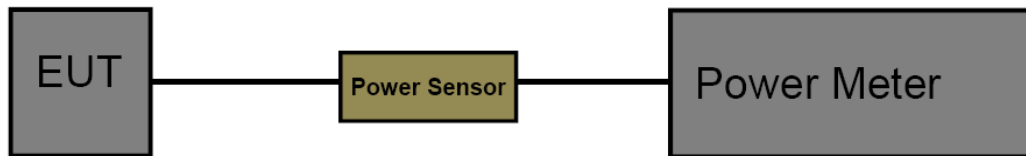

Test Procedure

1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
2. Peak power measurements were performed only when the EUT was transmitting at its peak power control level using a broadband power meter with a pulse sensor.
3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
Record the measurement data.

Test Mode

Please refer to the clause 2.4.

Test Result


Test Mode	Antenna	Freq.(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	1.07	≤30	3.98	≤36	PASS
		2441	0.87	≤30	3.78	≤36	PASS
		2480	0.72	≤30	3.63	≤36	PASS
2DH5	Ant1	2402	-1.33	≤30	1.58	≤36	PASS
		2441	-1.87	≤30	1.04	≤36	PASS
		2480	-2.97	≤30	-0.06	≤36	PASS
3DH5	Ant1	2402	-0.84	≤30	2.07	≤36	PASS
		2441	-1.59	≤30	1.32	≤36	PASS
		2480	-2.75	≤30	0.16	≤36	PASS

3.10. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to test channel center frequency.
Set the span to 0Hz.
Set the RBW to 10MHz.
Set the VBW to 10MHz.
Detector: Peak.
Sweep time: Auto.
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.


Test Result

Test Mode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
DH5	Ant1	2402	2.87	5.00	57.40	0.35	1
		2441	2.88	5.00	57.60	0.35	1
		2480	2.87	5.00	57.40	0.35	1
2DH5	Ant1	2402	2.90	5.03	57.65	0.34	1
		2441	2.88	5.00	57.60	0.35	1
		2480	2.87	5.00	57.40	0.35	1
3DH5	Ant1	2402	2.87	5.00	57.40	0.35	1
		2441	2.88	5.00	57.60	0.35	1
		2480	2.88	5.00	57.60	0.35	1


Note: Duty Cycle>98%, Final Setting for VBW=10Hz.

Test Graphs

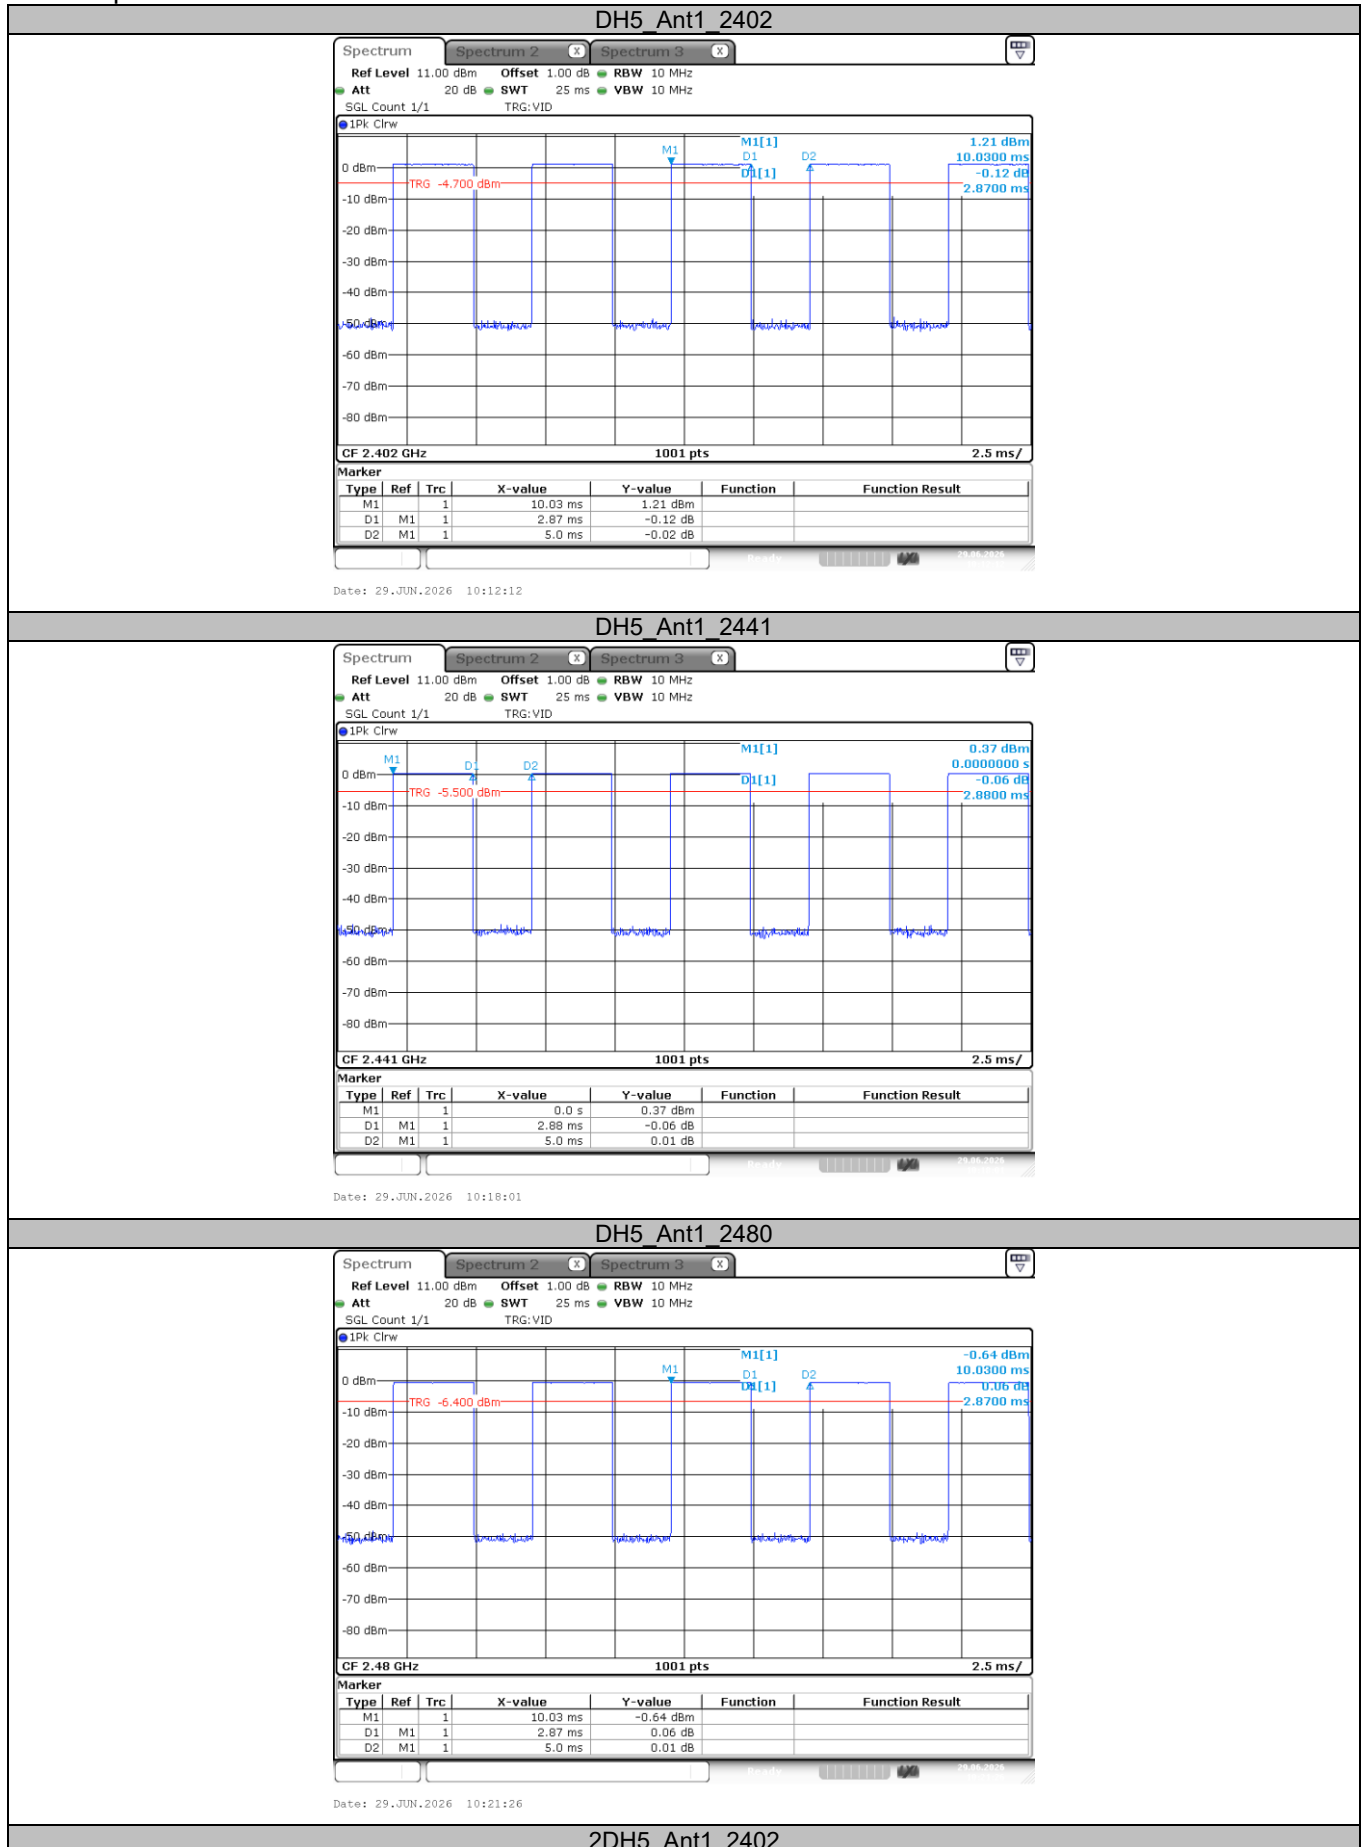


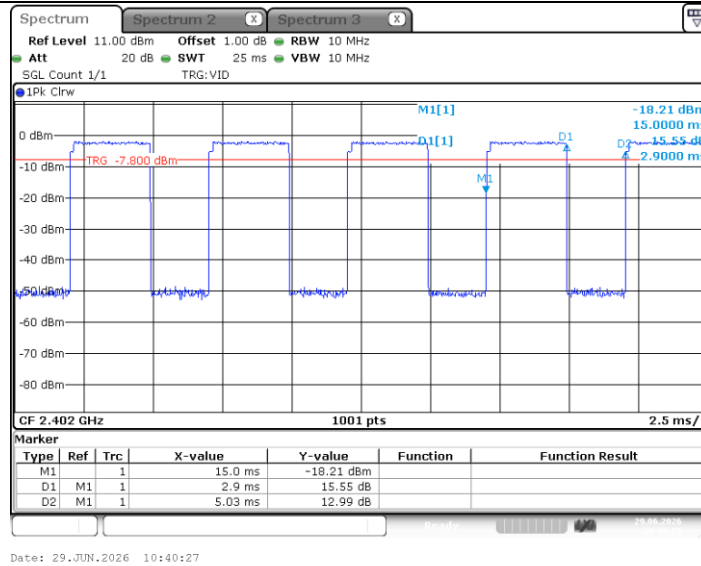


2DH5_Ant1_2441

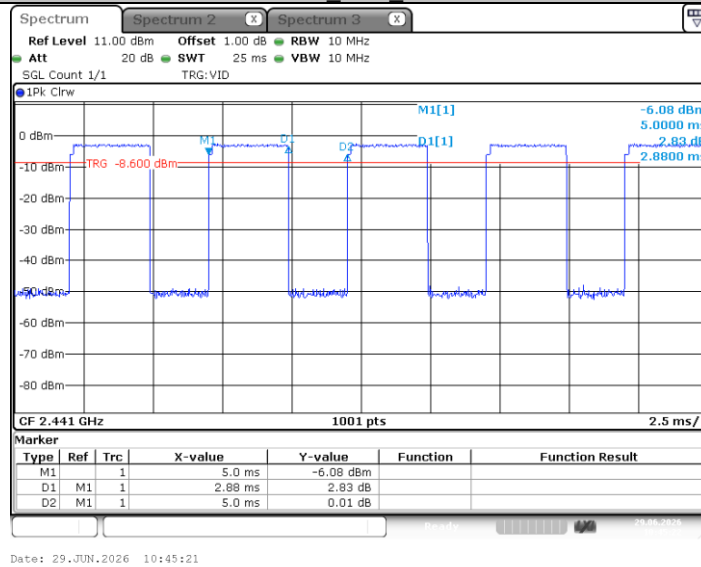


2DH5_Ant1_2480

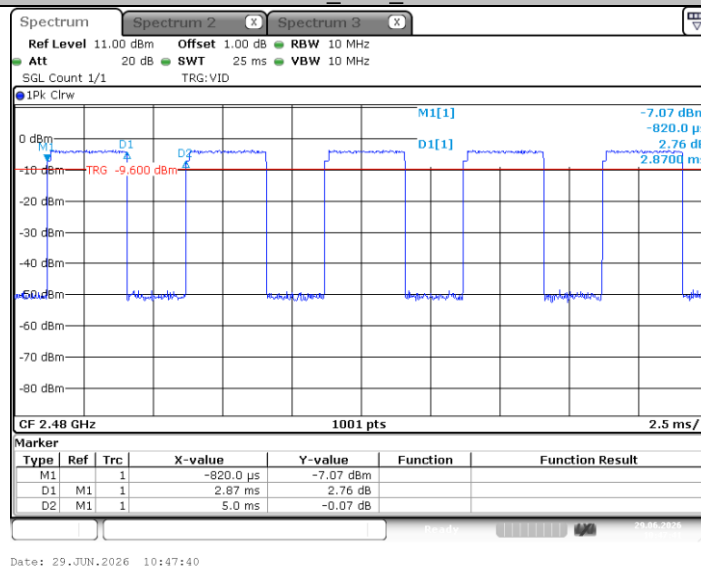


3DH5_Ant1_2402

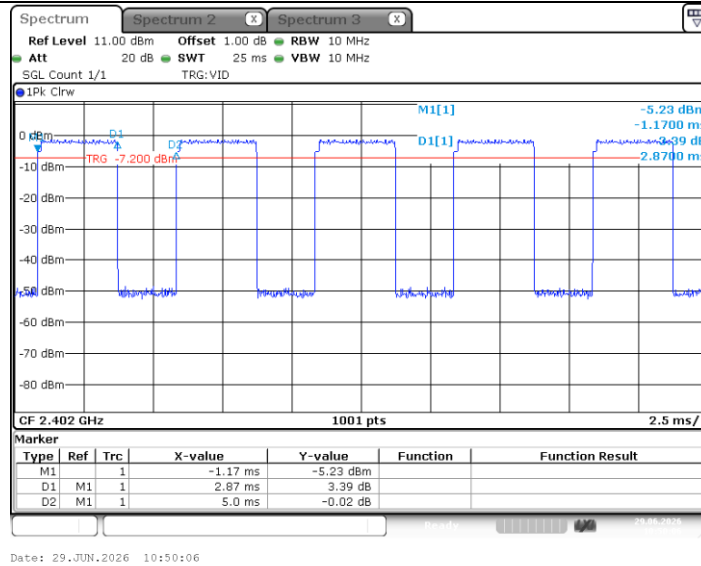

3DH5_Ant1_2441

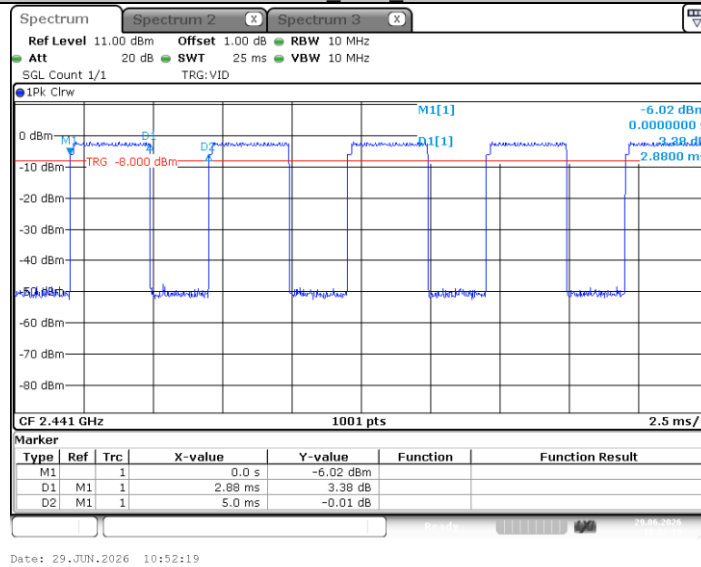

3DH5_Ant1_2480

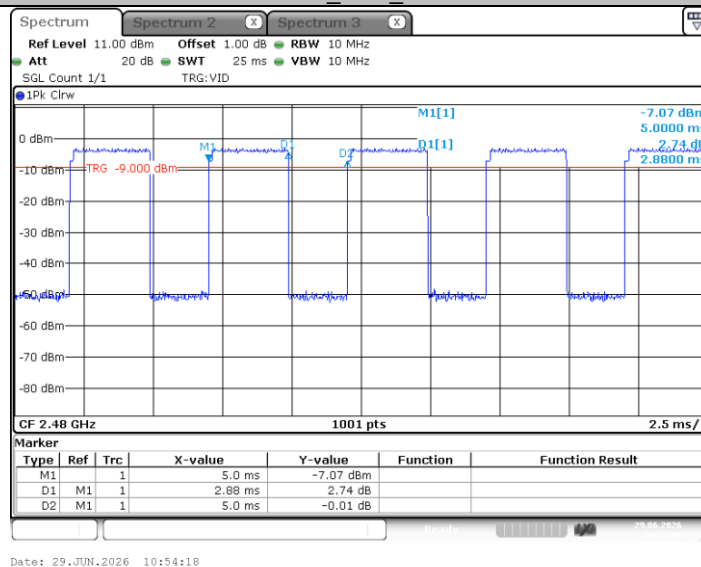

3.11. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(b) (4)

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RSS-Gen Issue 5 Section 6.8

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power(e.i.r.p.) limits specified in the applicable standard (RSS) for licence-exempt apparatus.

Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****