

FCC TEST REPORT

FCC ID:2BWSZ-SMARTDL-10

Applicant Name..... : HG STAR TECHNOLOGY CO.,LTD.

Address..... : NO. 697, XINGLONG STREET, XUSHANG STREET, SHANGHE COUNTY, JINAN CITY 251699 SHANDONG PROVINCE CHINA

Manufacturer Name..... : HG STAR TECHNOLOGY CO.,LTD.

Address..... : NO. 697, XINGLONG STREET, XUSHANG STREET, SHANGHE COUNTY, JINAN CITY 251699 SHANDONG PROVINCE CHINA

Product..... : Miniature multi-material laser marking machine

Model(s)..... : SMART DL-10

Additional Model(s)..... : /

Trademark..... : HGSTAR MEMBER OF HGTECH

Model Difference..... : /

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : June 16, 2026

Date of Test(s)..... : June 16, 2026 to July 1, 2026

Date of Issue..... : July 1, 2026

Test Requested..... : Select test(s) as requested by the client.

Test Standard(s)..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247


Test procedure..... : KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 +
Errata to C63.10a-2024

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:

Reviewed by:

Approved by:



Kimi Lu/ Engineer



Baret Wu/ Director



Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.



Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
3. TEST FACILITY AND TEST INSTRUMENT USED	8
3.1 TEST FACILITY	8
3.2 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3.3 TESTING SOFTWARE	10
3.4 MEASUREMENT UNCERTAINTY	10
4. EMC EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION Limits	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.1.6 TEST RESULT	13
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS	17
5. RADIATED BAND EMISSIONMEASUREMENT	22
5.1 TEST REQUIREMENT:	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM TEST STANDARD	22
5.4 TEST SETUP	23
5.5 EUT OPERATING CONDITIONS	23
5.6 TEST RESULT	24



6. POWER SPECTRAL DENSITY TEST	26
6.1 APPLIED PROCEDURES / LIMIT	26
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULT	27
7. CHANNEL BANDWIDTH	28
7.1 APPLIED PROCEDURES / LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	29
7.5 EUT OPERATION CONDITIONS	29
7.6 TEST RESULT	30
8. PEAK OUTPUT POWER TEST	31
8.1 APPLIED PROCEDURES/LIMIT	31
8.2 TEST PROCEDURE	31
8.3 DEVIATION FROM STANDARD	31
8.4 TEST SETUP	31
8.5 EUT OPERATION CONDITIONS	31
8.6 TEST RESULT	31
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	32
9.1 APPLICABLE STANDARD	32
9.2 TEST PROCEDURE	32
9.3 DEVIATION FROM STANDARD	32
9.4 TEST SETUP	32
9.5 EUT OPERATION CONDITIONS	32
9.6 TEST RESULTS	32
10. ANTENNA REQUIREMENT	33
10.1 DUTY CYCLE	34
10.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER	41
10.3 -6DB BANDWIDTH	42
10.4 OCCUPIED CHANNEL BANDWIDTH	49
10.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL	56
10.6 BAND EDGE	63
10.7 CONDUCTED RF SPURIOUS EMISSION	72
11. TEST SETUP PHOTO	85
12. EUT CONSTRUCTIONAL DETAILS	85

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Miniature multi-material laser marking machine
Test Model No.:	SMART DL-10
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11, /802.11n(HT40):7
Operation Frequency:	802.11b/802.11g /802.11n(HT20): 2412-2462MHz/802.11n(HT40): 2422-2452MHz
Channel separation:	5MHz
Modulation technology:	IEEE 802.11b: DQPSK/DBPSK/DSSS/CCK IEEE 802.11g: QPSK/BPSK/16QAM/64QAM/OFDM IEEE 802.11n: QPSK/BPSK/16QAM/64QAM/OFDM
Antenna Type:	Chip antenna
Antenna gain:	1.5dBi
Power supply:	Input: DC 20V
Sample Number:	260616103YP001
100W 3C1A GaN Fast Charger:	
Model.:	RRC010-100W-3C1A
Power supply:	Input: AC100-240V, 50/60Hz, 2.5A Max Type-C1: PD3.1: DC 5V/3A, 9V/3A,12V/3A,15V/3A, 20V/5A (100W Max) Type-C2: PD3.0: DC 5V/3A, 9V/3A,12V/3A,15V/3A, 20V/5A (100W Max) Type-C3 :PD3.0: DC 5V/3A, 9V/3A,12V/3A,15V/3A, 20V/5A (100W Max) USB-A:SCP: 4.5V/5A, 5V/4.5A (22.5W Max) QC3.0: DC 5V/3A, 9V/3A,12V/3A, 20V/1.5A (30W Max) Total Output: 100W Max
Remark:The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

Test channel	Frequency (MHz)
	802.11n(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

2.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: EUT use new battery during the test,the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13.5Mbps

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



RF Conducted Emission



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	/	AE
E-2	USB serial port board	/	/	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) The test software is the Adb V1.0 which can set the EUT into the individual test modes.TX Power:default.

**3. TEST FACILITY AND TEST INSTRUMENT USED****3.1 TEST FACILITY**

Guangdong Zhonghan Testing Technology Co., Ltd.
Add.: Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

3.2 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	Apr. 24, 2026	Apr. 23, 2027
2	Loop Antenna	TESEQ	HLA6121	58357	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	Apr. 24, 2026	Apr. 23, 2027
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 8, 2026	May 7, 2027
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	Apr. 25, 2026	Apr. 24, 2027
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	Apr. 25, 2026	Apr. 24, 2027
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	Apr. 24, 2026	Apr. 23, 2027
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	Apr. 24, 2026	Apr. 23, 2027
12	Single Generator	Agilent	N5182A	MY48180575	Apr. 24, 2026	Apr. 23, 2027
13	Power Sensor	MWRFTest	MW100-RFCB	/	Apr. 24, 2026	Apr. 23, 2027
14	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Apr. 11, 2026	Apr. 10, 2031
15	CABLE	EMToni	DA800-NM-NM-11000MM	/	Apr. 24, 2026	Apr. 23, 2027



Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	Apr. 24, 2026	Apr. 23, 2027
LISN	R&S	ENV216	102794	Aug. 22, 2025	Aug. 23, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	Apr. 24, 2026	Apr. 23, 2027
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	Apr. 24, 2026	Apr. 23, 2027
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2026	May 7, 2027
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2026	May 7, 2027
CABLE	EMToni	G223-NM-BNCM -2000MM	/	Apr. 24, 2026	Apr. 23, 2027

Conducted Test Instrument

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	Apr. 24, 2026	Apr. 23, 2027
3	Power Sensor	MWRTest	MW100-RFCB	/	Apr. 24, 2026	Apr. 23, 2027

3.3 TESTING SOFTWARE

Project	Software name	Edition
RF Conducted	MTS 8310	2.0.0.0
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	0.16dB
3	Conducted spurious emissions	0.21dB
4	All radiated emissions (9k-30MHz)	1.68dB
5	All radiated emissions (30-1GHz)	5.1dB
6	All radiated emissions (1-6GHz)	3.9dB
7	All radiated emissions (6GHz-18GHz)	4.3dB
8	All radiated emissions (18-40GHz)	4.65dB
9	Temperature	0.5°C
10	Humidity	2%
11	Occupied Bandwidth	4.96%
12	Power Spectral Density	0.71dB

Decision Rule

- ☒ Uncertainty is not included
- ☐ Uncertainty is included



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBUV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:


(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

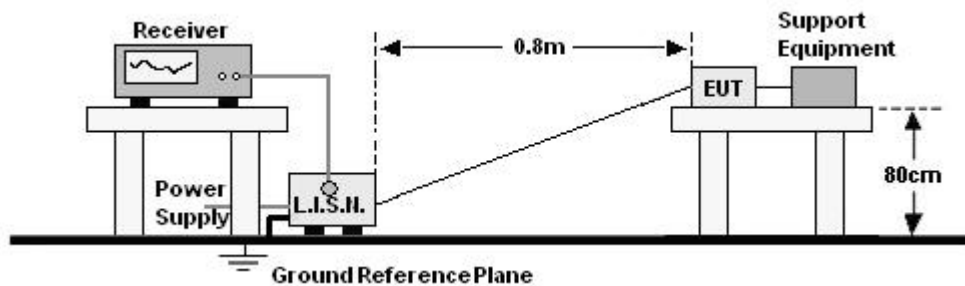


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature:	24.3℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

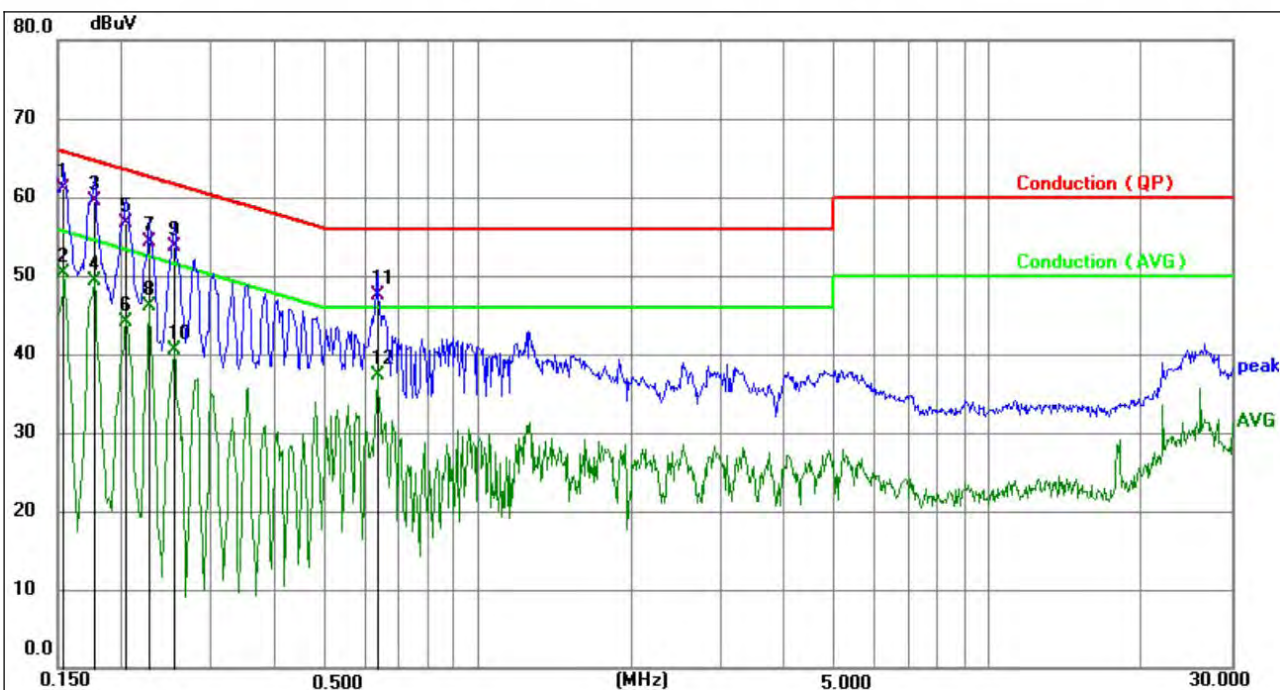


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1539	51.17	9.89	61.06	65.79	-4.73	QP	P	
2	0.1539	40.32	9.89	50.21	55.79	-5.58	AVG	P	
3	0.1766	49.51	9.90	59.41	64.64	-5.23	QP	P	
4	0.1766	39.34	9.90	49.24	54.64	-5.40	AVG	P	
5	0.2040	46.81	9.91	56.72	63.45	-6.73	QP	P	
6	0.2040	34.13	9.91	44.04	53.45	-9.41	AVG	P	
7	0.2265	44.46	9.92	54.38	62.58	-8.20	QP	P	
8	0.2265	36.11	9.92	46.03	52.58	-6.55	AVG	P	
9	0.2534	43.85	9.93	53.78	61.64	-7.86	QP	P	
10	0.2534	30.53	9.93	40.46	51.64	-11.18	AVG	P	
11	0.6360	37.52	10.03	47.55	56.00	-8.45	QP	P	
12	0.6360	27.27	10.03	37.30	46.00	-8.70	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11b mode (High Channel:2462MHz).



Temperature:	24.3℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

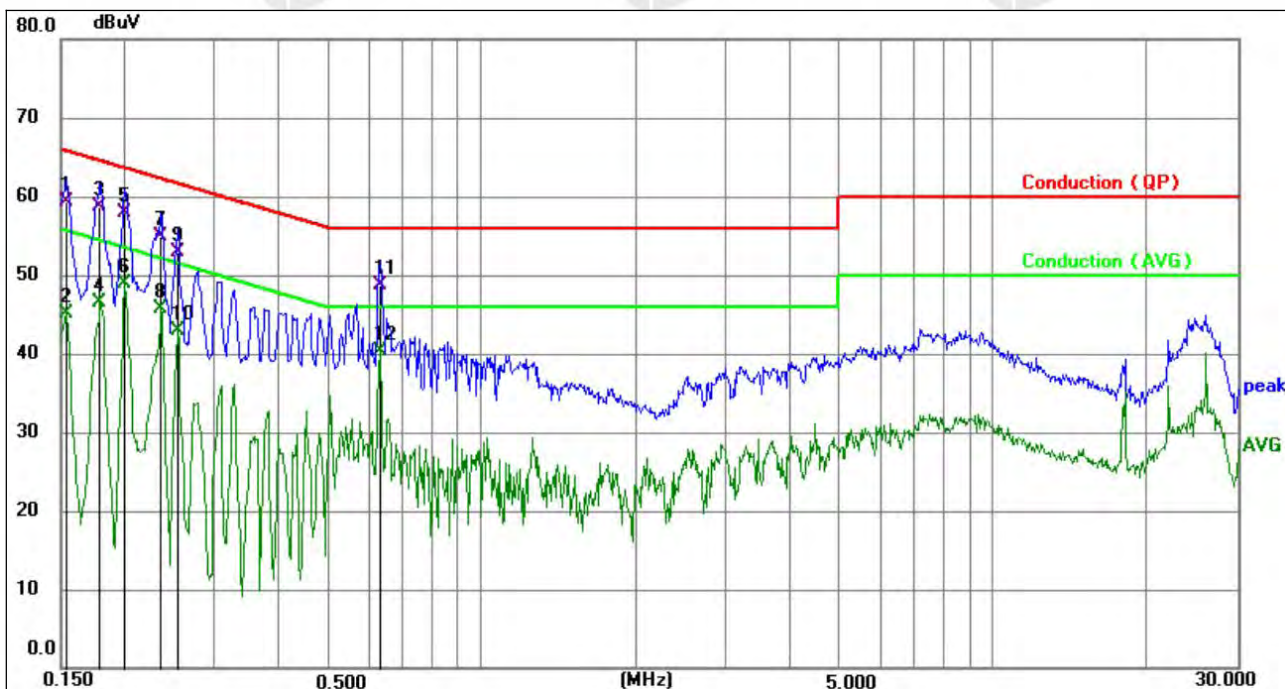

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1532	49.41	9.89	59.30	65.82	-6.52	QP	P	
2	0.1532	35.20	9.89	45.09	55.82	-10.73	AVG	P	
3	0.1785	48.88	9.90	58.78	64.56	-5.78	QP	P	
4	0.1785	36.62	9.90	46.52	54.56	-8.04	AVG	P	
5	0.1995	48.07	9.91	57.98	63.63	-5.65	QP	P	
6 *	0.1995	39.09	9.91	49.00	53.63	-4.63	AVG	P	
7	0.2353	44.93	9.92	54.85	62.26	-7.41	QP	P	
8	0.2353	35.77	9.92	45.69	52.26	-6.57	AVG	P	
9	0.2534	42.91	9.93	52.84	61.64	-8.80	QP	P	
10	0.2534	33.00	9.93	42.93	51.64	-8.71	AVG	P	
11	0.6312	38.61	10.03	48.64	56.00	-7.36	QP	P	
12	0.6312	30.27	10.03	40.30	46.00	-5.70	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor
- 4.The test data shows only the worst case 802.11b mode (High Channel:2462MHz).



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

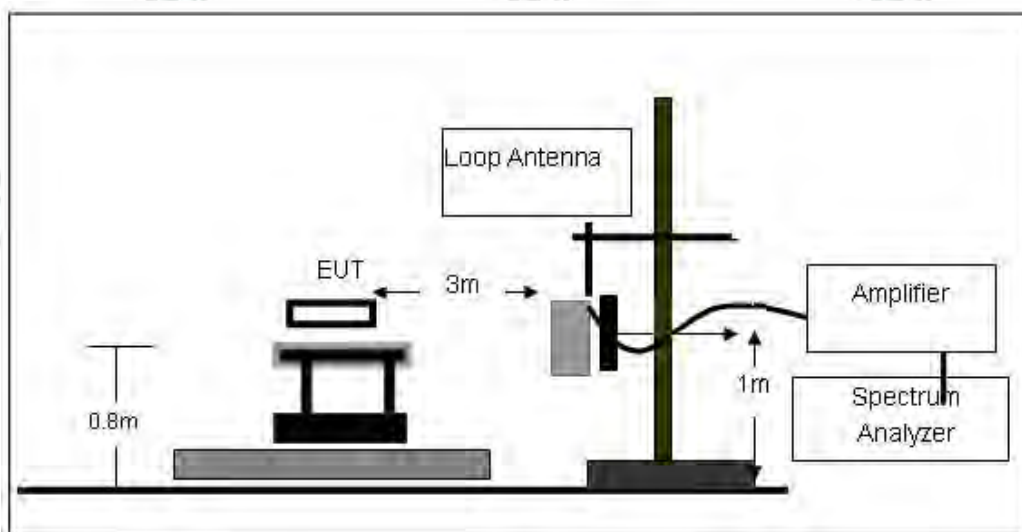

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

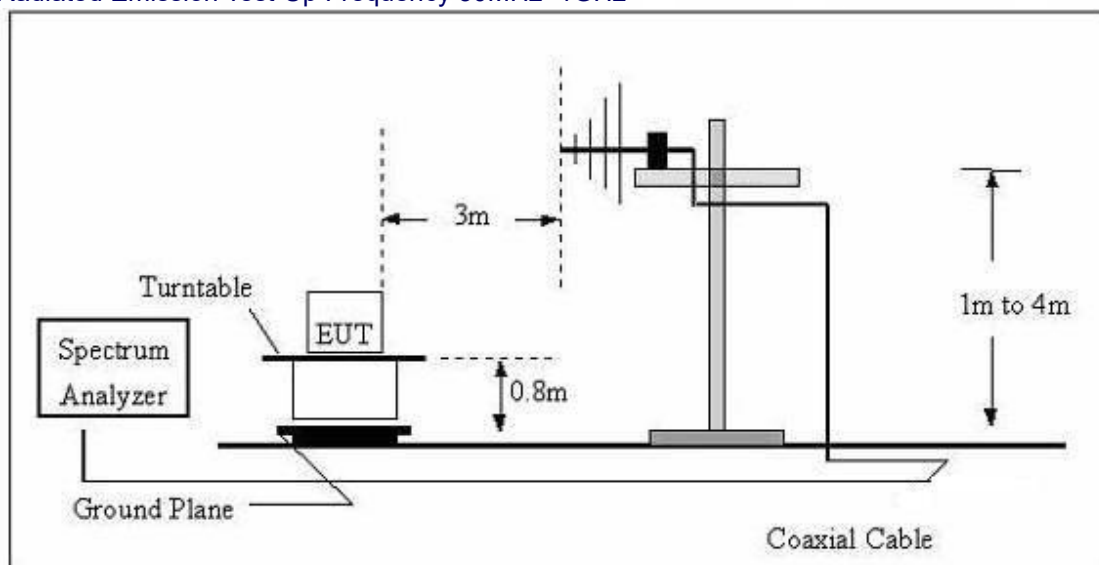

(C) Radiated Emission Test-Up Frequency Above 1GHz

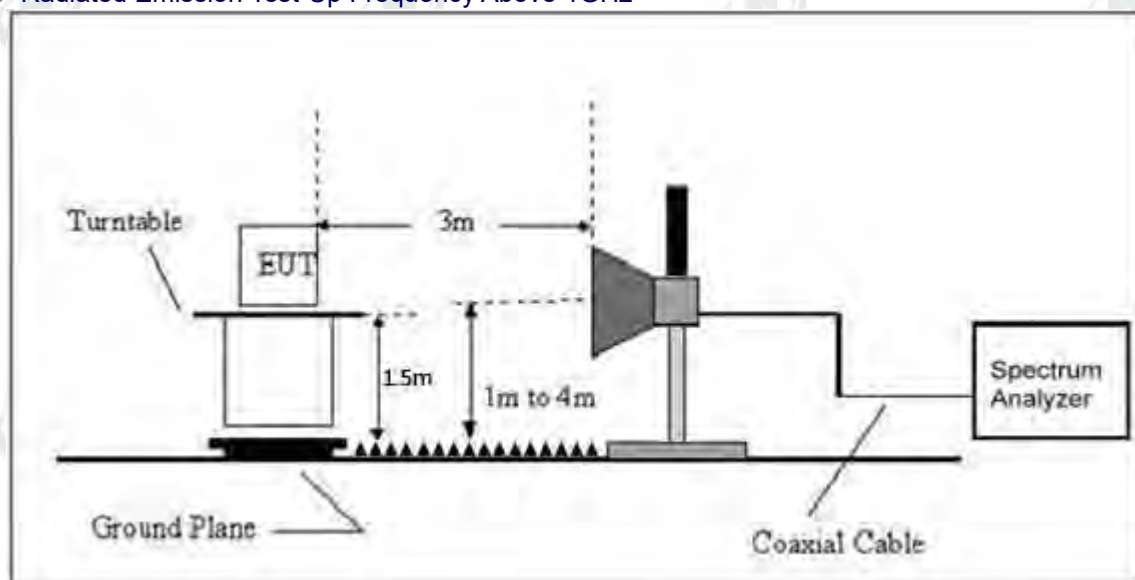

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		

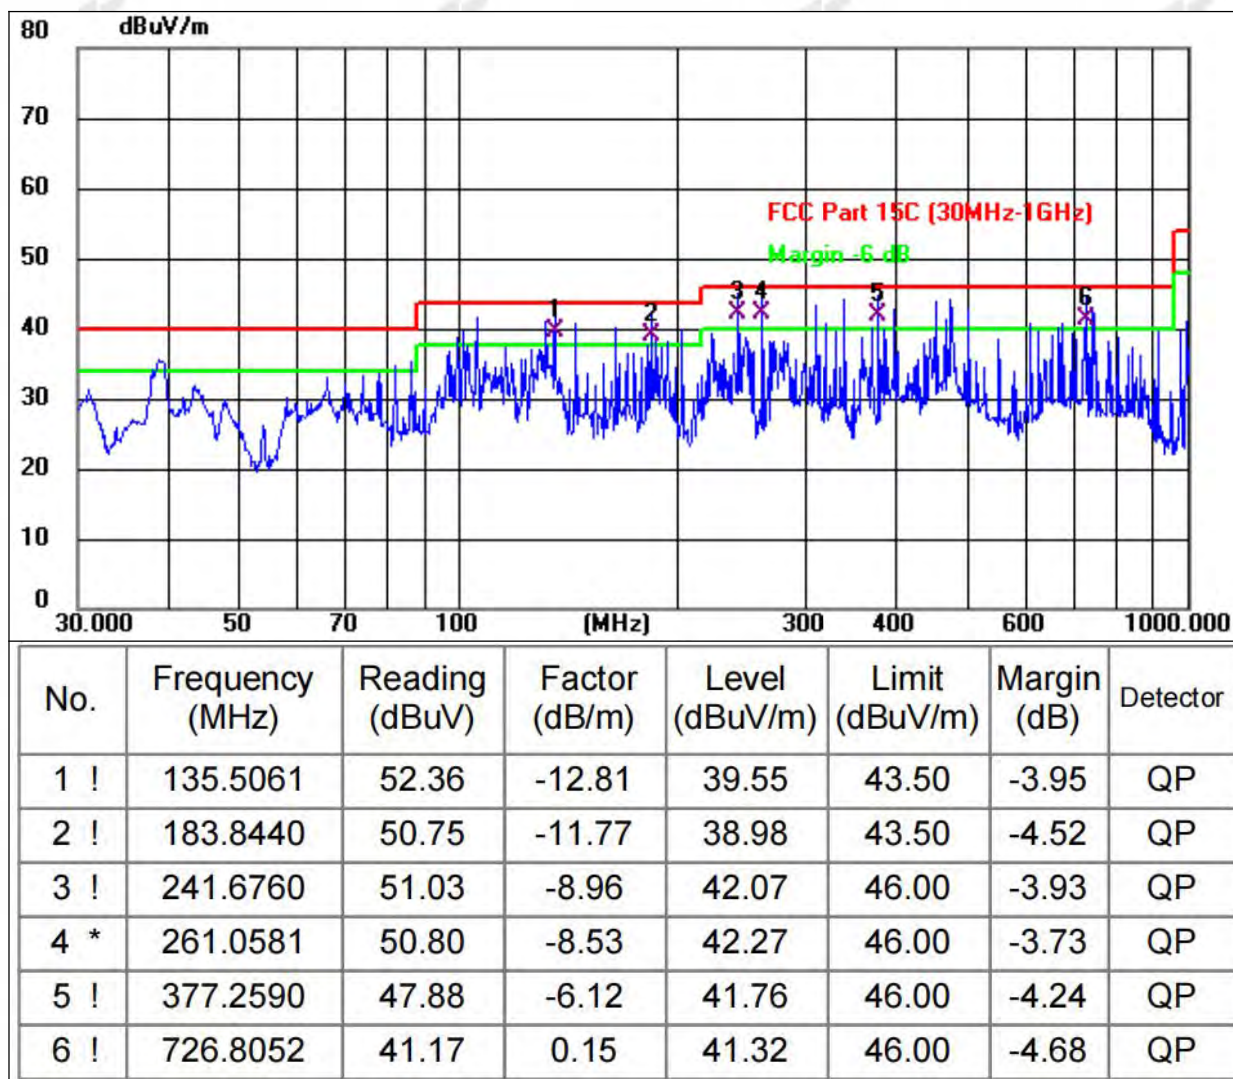



Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		

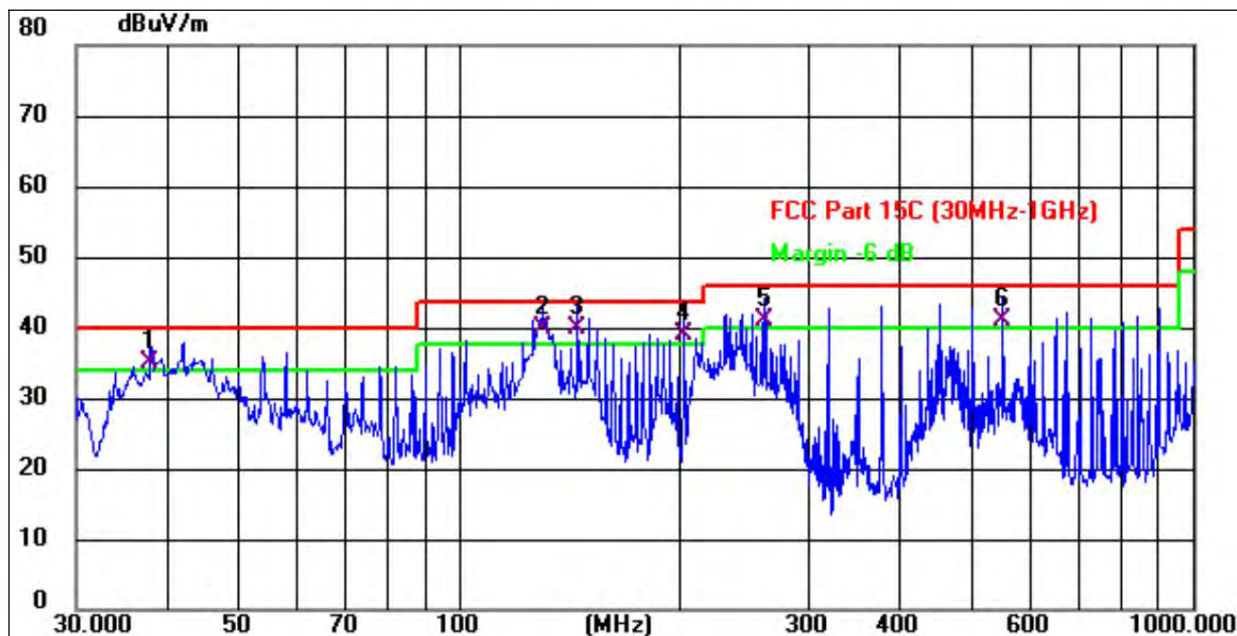

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	37.8121	44.46	-9.53	34.93	40.00	-5.07	QP
2 !	129.9225	52.32	-12.57	39.75	43.50	-3.75	QP
3 *	144.8417	53.10	-13.20	39.90	43.50	-3.60	QP
4 !	202.8103	49.20	-10.24	38.96	43.50	-4.54	QP
5 !	261.0581	49.64	-8.53	41.11	46.00	-4.89	QP
6 !	550.9480	43.61	-2.54	41.07	46.00	-4.93	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and show in test report.
3. The test data shows only the worst case 802.11b mode (High Channel:2462MHz).



1GHz~25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
802.11b									
Low Channel:2412MHz									
V	4824.00	59.62	30.55	5.77	24.66	59.5	74	-14.5	Pk
V	4824.00	41.07	30.55	5.77	24.66	40.95	54	-13.05	AV
H	4824.00	59.44	30.33	6.32	24.55	59.98	74	-14.02	Pk
H	4824.00	42.94	30.33	6.32	24.55	43.48	54	-10.52	AV
Middle Channel:2437MHz									
V	4874.00	57.64	30.55	5.77	24.66	57.52	74	-16.48	Pk
V	4874.00	41.22	30.55	5.77	24.66	41.1	54	-12.9	AV
H	4874.00	57.91	30.33	6.32	24.55	58.45	74	-15.55	Pk
H	4874.00	41.79	30.33	6.32	24.55	42.33	54	-11.67	AV
High Channel:2462MHz									
V	4924.00	58.23	30.55	5.77	24.66	58.11	74	-15.89	Pk
V	4924.00	41.11	30.55	5.77	24.66	40.99	54	-13.01	AV
H	4924.00	59.36	30.33	6.32	24.55	59.9	74	-14.1	Pk
H	4924.00	44.83	30.33	6.32	24.55	45.37	54	-8.63	AV
802.11g									
Low Channel:2412MHz									
V	4824.00	58.05	30.55	5.77	24.66	57.93	74	-16.07	Pk
V	4824.00	41.8	30.55	5.77	24.66	41.68	54	-12.32	AV
H	4824.00	59.57	30.33	6.32	24.55	60.11	74	-13.89	Pk
H	4824.00	41.84	30.33	6.32	24.55	42.38	54	-11.62	AV
Middle Channel:2437MHz									
V	4874.00	58.66	30.55	5.77	24.66	58.54	74	-15.46	Pk
V	4874.00	41.87	30.55	5.77	24.66	41.75	54	-12.25	AV
H	4874.00	56.99	30.33	6.32	24.55	57.53	74	-16.47	Pk
H	4874.00	43.71	30.33	6.32	24.55	44.25	54	-9.75	AV
High Channel:2462MHz									
V	4924.00	58.6	30.55	5.77	24.66	58.48	74	-15.52	Pk
V	4924.00	42.53	30.55	5.77	24.66	42.41	54	-11.59	AV
H	4924.00	59.36	30.33	6.32	24.55	59.9	74	-14.1	Pk
H	4924.00	43.26	30.33	6.32	24.55	43.8	54	-10.2	AV
802.11n 20									
Low Channel:2412MHz									
V	4824.00	57.54	30.55	5.77	24.66	57.42	74	-16.58	Pk
V	4824.00	44.72	30.55	5.77	24.66	44.6	54	-9.4	AV
H	4824.00	56.75	30.33	6.32	24.55	57.29	74	-16.71	Pk
H	4824.00	42.84	30.33	6.32	24.55	43.38	54	-10.62	AV
Middle Channel:2437MHz									
V	4874.00	56.62	30.55	5.77	24.66	56.5	74	-17.5	Pk
V	4874.00	42.93	30.55	5.77	24.66	42.81	54	-11.19	AV
H	4874.00	55.24	30.33	6.32	24.55	55.78	74	-18.22	Pk
H	4874.00	44.71	30.33	6.32	24.55	45.25	54	-8.75	AV
High Channel:2462MHz									
V	4924.00	58.11	30.55	5.77	24.66	57.99	74	-16.01	Pk
V	4924.00	41.21	30.55	5.77	24.66	41.09	54	-12.91	AV
H	4924.00	56.25	30.33	6.32	24.55	56.79	74	-17.21	Pk
H	4924.00	42.95	30.33	6.32	24.55	43.49	54	-10.51	AV



802.11n 40									
Low Channel:2422MHz									
V	4844.00	58.07	30.55	5.77	24.66	57.95	74	-16.05	Pk
V	4844.00	41.55	30.55	5.77	24.66	41.43	54	-12.57	AV
H	4844.00	55.7	30.33	6.32	24.55	56.24	74	-17.76	Pk
H	4844.00	41.33	30.33	6.32	24.55	41.87	54	-12.13	AV
Middle Channel:2437MHz									
V	4874.00	55.97	30.55	5.77	24.66	55.85	74	-18.15	Pk
V	4874.00	41.61	30.55	5.77	24.66	41.49	54	-12.51	AV
H	4874.00	56.81	30.33	6.32	24.55	57.35	74	-16.65	Pk
H	4874.00	44.2	30.33	6.32	24.55	44.74	54	-9.26	AV
High Channel:2452MHz									
V	4904.00	59.25	30.55	5.77	24.66	59.13	74	-14.87	Pk
V	4904.00	41.82	30.55	5.77	24.66	41.7	54	-12.3	AV
H	4904.00	55.91	30.33	6.32	24.55	56.45	74	-17.55	Pk
H	4904.00	44.95	30.33	6.32	24.55	45.49	54	-8.51	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

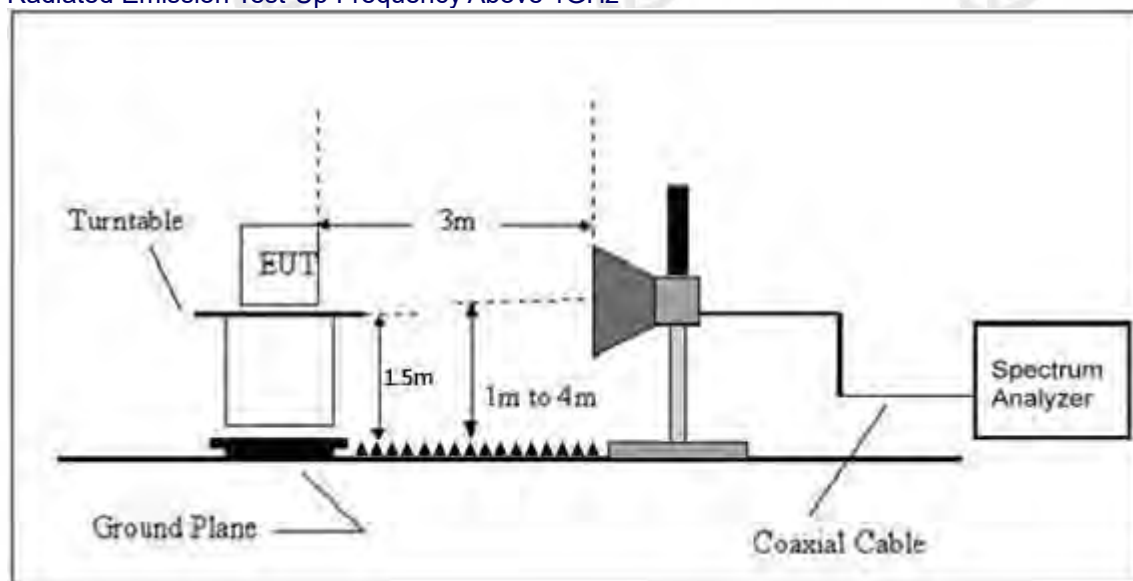

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margi n (dB)	Detec tor Type	Result
802.11b	Low Channel 2412MHz										
	H	2390.00	62.96	30.22	4.85	23.98	61.57	74.00	-12.43	PK	PASS
	H	2390.00	46.08	30.22	4.85	23.98	44.69	54.00	-9.31	AV	PASS
	H	2400.00	60.34	30.22	4.85	23.98	58.95	74.00	-15.05	PK	PASS
	H	2400.00	47.42	30.22	4.85	23.98	46.03	54.00	-7.97	AV	PASS
	V	2390.00	61.61	30.22	4.85	23.98	60.22	74.00	-13.78	PK	PASS
	V	2390.00	46.47	30.22	4.85	23.98	45.08	54.00	-8.92	AV	PASS
	V	2400.00	60.95	30.22	4.85	23.98	59.56	74.00	-14.44	PK	PASS
	V	2400.00	46.13	30.22	4.85	23.98	44.74	54.00	-9.26	AV	PASS
	High Channel 2462MHz										
	H	2483.50	62.11	30.22	4.85	23.98	60.72	74.00	-13.28	AV	PASS
	H	2483.50	47.50	30.22	4.85	23.98	46.11	54.00	-7.89	PK	PASS
	H	2500.00	60.06	30.22	4.85	23.98	58.67	74.00	-15.33	AV	PASS
	H	2500.00	48.67	30.22	4.85	23.98	47.28	54.00	-6.72	PK	PASS
	V	2483.50	61.78	30.22	4.85	23.98	60.39	74.00	-13.61	AV	PASS
	V	2483.50	46.51	30.22	4.85	23.98	45.12	54.00	-8.88	PK	PASS
	V	2500.00	60.83	30.22	4.85	23.98	59.44	74.00	-14.56	AV	PASS
	V	2500.00	48.58	30.22	4.85	23.98	47.19	54.00	-6.81	AV	PASS
802.11g	Low Channel 2412MHz										
	H	2390.00	62.23	30.22	4.85	23.98	60.84	74.00	-13.16	PK	PASS
	H	2390.00	47.97	30.22	4.85	23.98	46.58	54.00	-7.42	AV	PASS
	H	2400.00	59.67	30.22	4.85	23.98	58.28	74.00	-15.72	PK	PASS
	H	2400.00	46.39	30.22	4.85	23.98	45.00	54.00	-9.00	AV	PASS
	V	2390.00	60.85	30.22	4.85	23.98	59.46	74.00	-14.54	PK	PASS
	V	2390.00	47.49	30.22	4.85	23.98	46.10	54.00	-7.90	AV	PASS
	V	2400.00	60.63	30.22	4.85	23.98	59.24	74.00	-14.76	PK	PASS
	V	2400.00	46.36	30.22	4.85	23.98	44.97	54.00	-9.03	AV	PASS
	High Channel 2462MHz										
	H	2483.50	62.92	30.22	4.85	23.98	61.53	74.00	-12.47	PK	PASS
	H	2483.50	46.88	30.22	4.85	23.98	45.49	54.00	-8.51	AV	PASS
	H	2500.00	59.26	30.22	4.85	23.98	57.87	74.00	-16.13	PK	PASS
	H	2500.00	46.63	30.22	4.85	23.98	45.24	54.00	-8.76	AV	PASS
	V	2483.50	60.44	30.22	4.85	23.98	59.05	74.00	-14.95	PK	PASS
	V	2483.50	47.03	30.22	4.85	23.98	45.64	54.00	-8.36	AV	PASS
	V	2500.00	59.04	30.22	4.85	23.98	57.65	74.00	-16.35	PK	PASS
	V	2500.00	46.01	30.22	4.85	23.98	44.62	54.00	-9.38	AV	PASS
802.11n2 0	Low Channel 2412MHz										
	H	2390.00	61.69	30.22	4.85	23.98	60.30	74.00	-13.70	PK	PASS
	H	2390.00	46.85	30.22	4.85	23.98	45.46	54.00	-8.54	AV	PASS
	H	2400.00	59.81	30.22	4.85	23.98	58.42	74.00	-15.58	PK	PASS
	H	2400.00	46.62	30.22	4.85	23.98	45.23	54.00	-8.77	AV	PASS
	V	2390.00	61.96	30.22	4.85	23.98	60.57	74.00	-13.43	PK	PASS
	V	2390.00	48.45	30.22	4.85	23.98	47.06	54.00	-6.94	AV	PASS
	V	2400.00	62.39	30.22	4.85	23.98	61.00	74.00	-13.00	PK	PASS
	V	2400.00	47.70	30.22	4.85	23.98	46.31	54.00	-7.69	AV	PASS
	High Channel 2462MHz										
	H	2483.50	60.32	30.22	4.85	23.98	58.93	74.00	-15.07	PK	PASS
	H	2483.50	46.26	30.22	4.85	23.98	44.87	54.00	-9.13	AV	PASS
	H	2500.00	59.37	30.22	4.85	23.98	57.98	74.00	-16.02	PK	PASS
	H	2500.00	46.62	30.22	4.85	23.98	45.23	54.00	-8.77	AV	PASS
	V	2483.50	61.94	30.22	4.85	23.98	60.55	74.00	-13.45	PK	PASS
	V	2483.50	46.09	30.22	4.85	23.98	44.70	54.00	-9.30	AV	PASS





802.11n 40	V	2500.00	59.31	30.22	4.85	23.98	57.92	74.00	-16.08	PK	PASS
	V	2500.00	46.21	30.22	4.85	23.98	44.82	54.00	-9.18	AV	PASS
	Low Channel 2422MHz										
	H	2390.00	61.11	30.22	4.85	23.98	59.72	74.00	-14.28	PK	PASS
	H	2390.00	47.05	30.22	4.85	23.98	45.66	54.00	-8.34	AV	PASS
	H	2400.00	60.50	30.22	4.85	23.98	59.11	74.00	-14.89	PK	PASS
	H	2400.00	48.98	30.22	4.85	23.98	47.59	54.00	-6.41	AV	PASS
	V	2390.00	61.11	30.22	4.85	23.98	59.72	74.00	-14.28	PK	PASS
	V	2390.00	46.66	30.22	4.85	23.98	45.27	54.00	-8.73	AV	PASS
	V	2400.00	61.92	30.22	4.85	23.98	60.53	74.00	-13.47	PK	PASS
	V	2400.00	48.38	30.22	4.85	23.98	46.99	54.00	-7.01	AV	PASS
	High Channel 2452MHz										
	H	2483.50	59.87	30.22	4.85	23.98	58.48	74.00	-15.52	PK	PASS
	H	2483.50	46.90	30.22	4.85	23.98	45.51	54.00	-8.49	AV	PASS
	H	2500.00	62.56	30.22	4.85	23.98	61.17	74.00	-12.83	PK	PASS
	H	2500.00	47.91	30.22	4.85	23.98	46.52	54.00	-7.48	AV	PASS
	V	2483.50	62.62	30.22	4.85	23.98	61.23	74.00	-12.77	PK	PASS
	V	2483.50	47.68	30.22	4.85	23.98	46.29	54.00	-7.71	AV	PASS
	V	2500.00	60.85	30.22	4.85	23.98	59.46	74.00	-14.54	PK	PASS
	V	2500.00	46.83	30.22	4.85	23.98	45.44	54.00	-8.56	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D01 15.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



Temperature :	25.9℃	Relative Humidity :	52.3%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

Please refer to APPENDIX WIFI



7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D01 15.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

99% Bandwidth test:

Set the spectrum as follows:

- Set RBW = 1% to 5% of the OBW.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6dB Bandwidth test:

Set the spectrum as follows:

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100kHz
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measured the spectrum width with power higher than 6dB below carrier.

7.3 DEVIATION FROM STANDARD

No deviation.



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



ZHONGHAN

7.6 TEST RESULT

Project No.: ZHT-260616103W01-2

Page 30 of 85

Temperature :	25.9℃	Relative Humidity :	52.3%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode		

Please refer to APPENDIX WIFI

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D01 15.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power Analyzer

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Temperature :	25.9℃	Relative Humidity :	52.3%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

Please refer to APPENDIX WIFI



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D01 15.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to APPENDIX WIFI

**10. ANTENNA REQUIREMENT**

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is Chip antenna, the best case gain of the antenna is 1.5dBi, reference to the appendix II for details	




10.1 DUTY CYCLE

Mode	Frequency (MHz)	T _{on} ms	T _{total} ms	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
b	2412	32.96	32.98	99.94	0.00	0.03
b	2437	32.95	32.98	99.91	0.00	0.03
b	2462	32.98	32.98	100.00	0.00	0.03
g	2412	5.48	5.51	99.46	0.02	0.18
g	2437	5.49	5.51	99.64	0.02	0.18
g	2462	5.49	5.51	99.64	0.02	0.18
n20	2412	5.08	5.10	99.61	0.02	0.20
n20	2437	5.08	5.10	99.61	0.02	0.20
n20	2462	5.08	5.11	99.41	0.03	0.20
n40	2422	2.47	2.49	99.20	0.04	0.40
n40	2437	2.47	2.50	98.80	0.05	0.40
n40	2452	2.47	2.50	98.80	0.05	0.40


Note:

1. Duty Cycle = T_{on} / T_{total} 2. Correction Factor = $10 \log (1 / \text{Duty Cycle})$.3. $1/T = 1/T_{on}$

Test Graphs Duty Cycle NVNT b 2412MHz Ant1

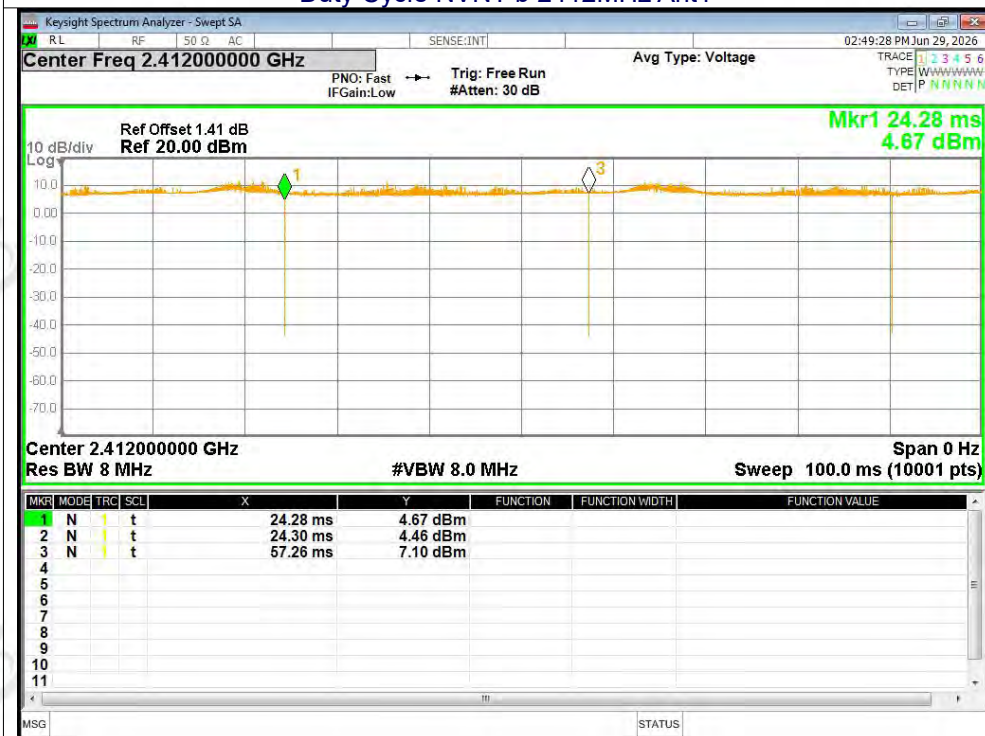


Duty Cycle NVNT b 2437MHz Ant1

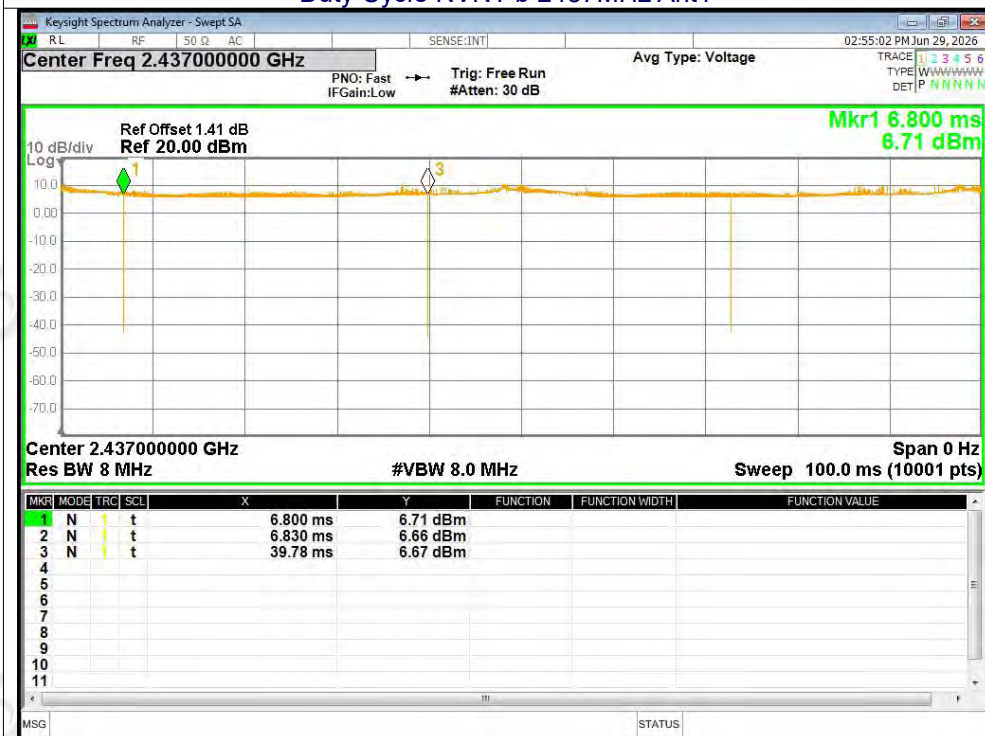




Duty Cycle NVNT b 2462MHz Ant1

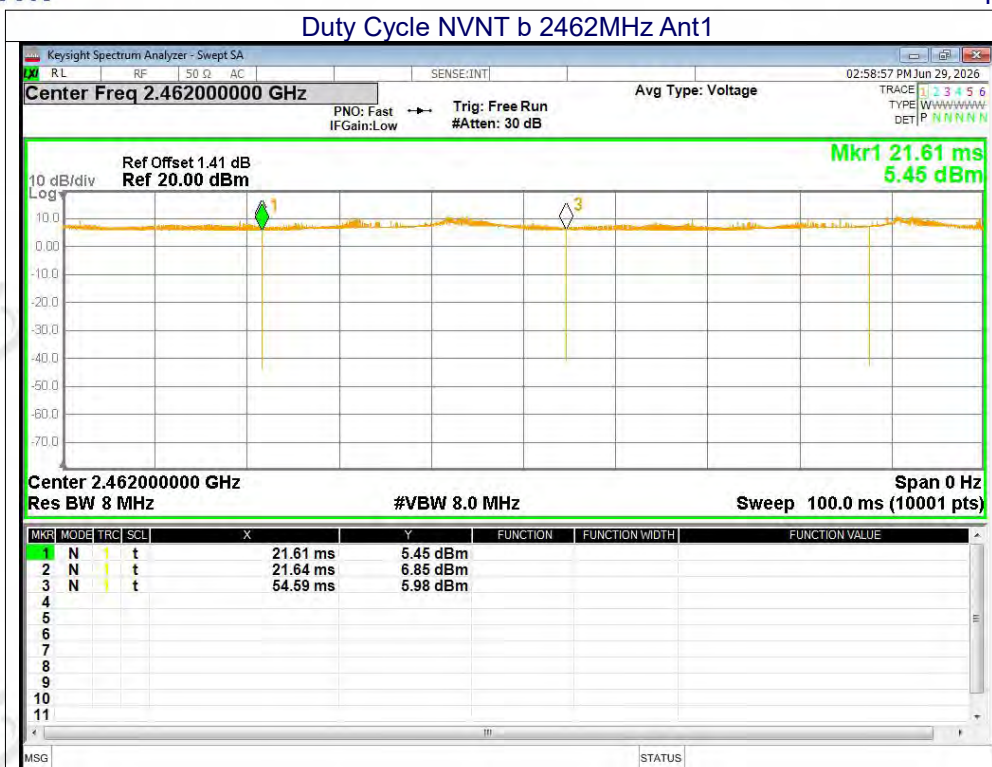


Duty Cycle NVNT g 2412MHz Ant1

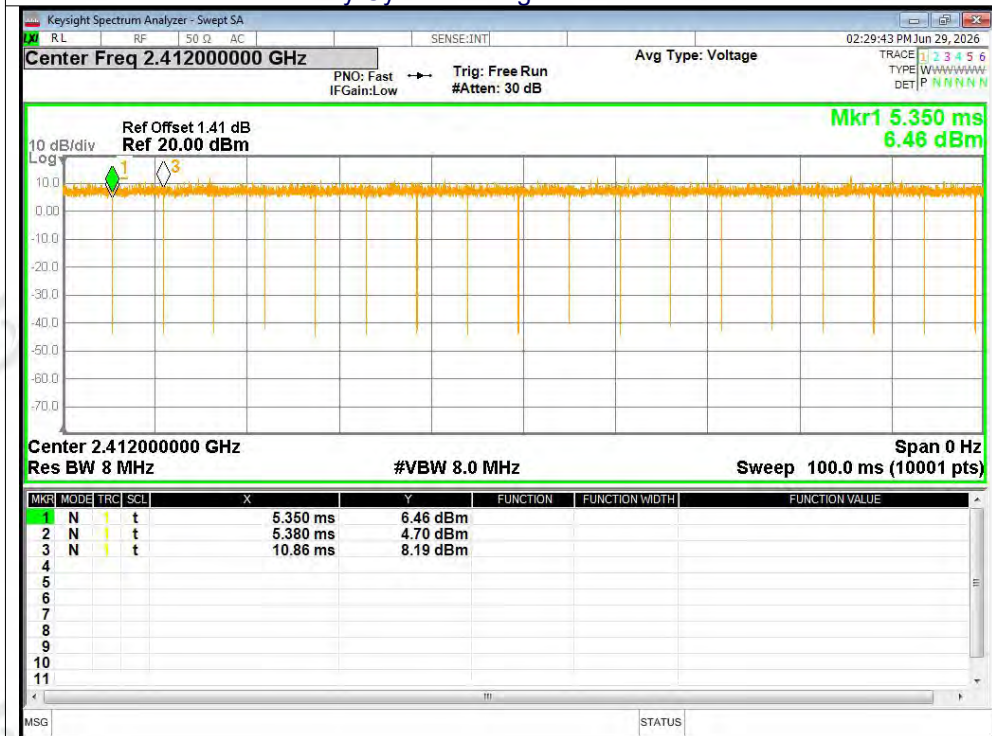




Duty Cycle NVNT g 2437MHz Ant1

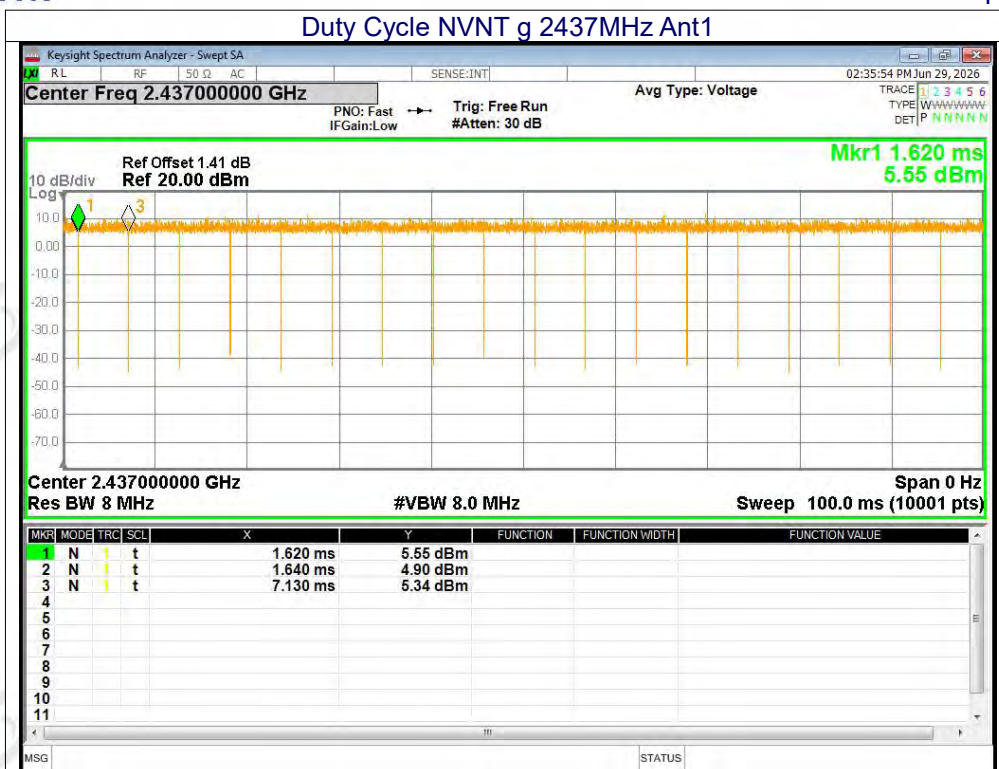


Duty Cycle NVNT g 2462MHz Ant1

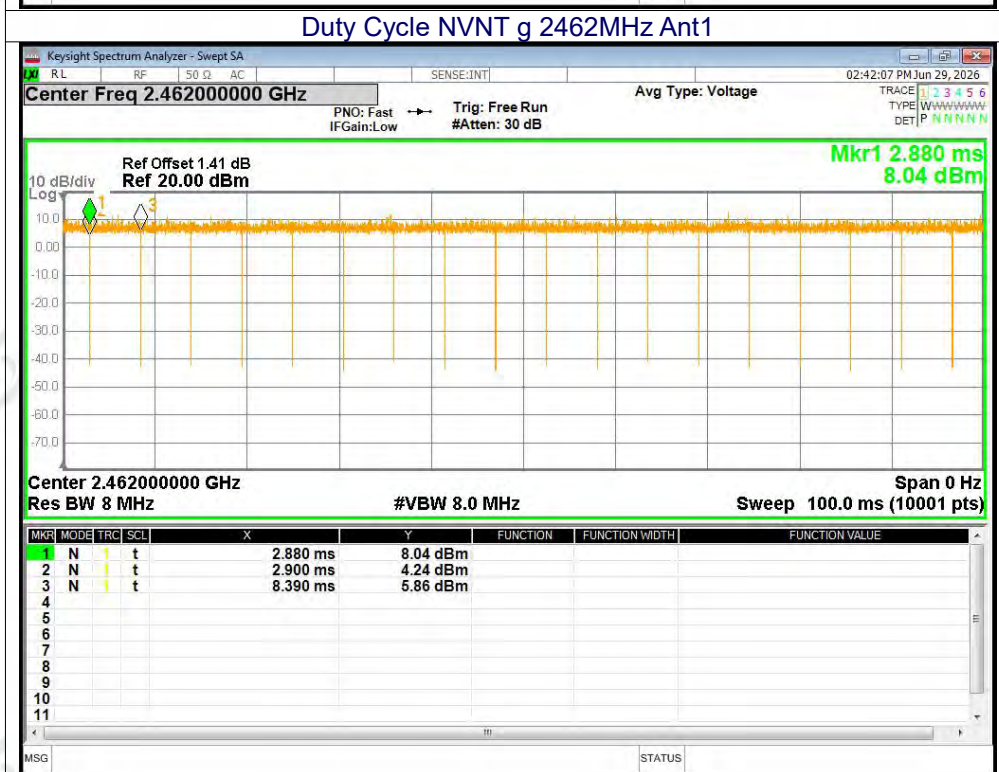




Duty Cycle NVNT n20 2412MHz Ant1

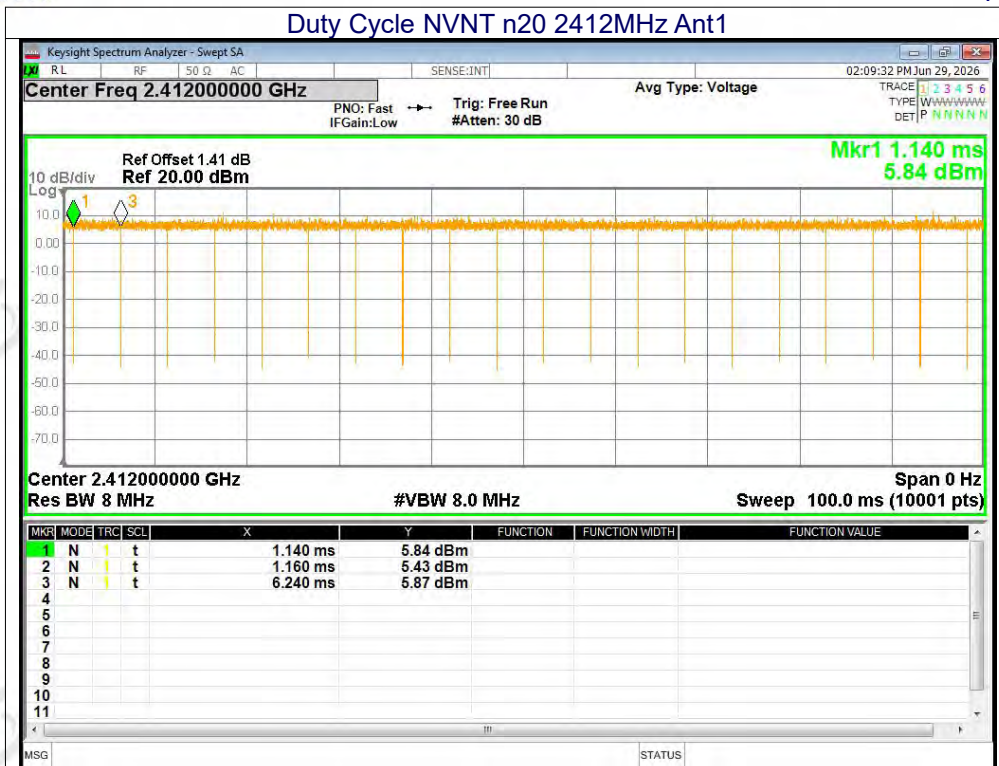


Duty Cycle NVNT n20 2437MHz Ant1

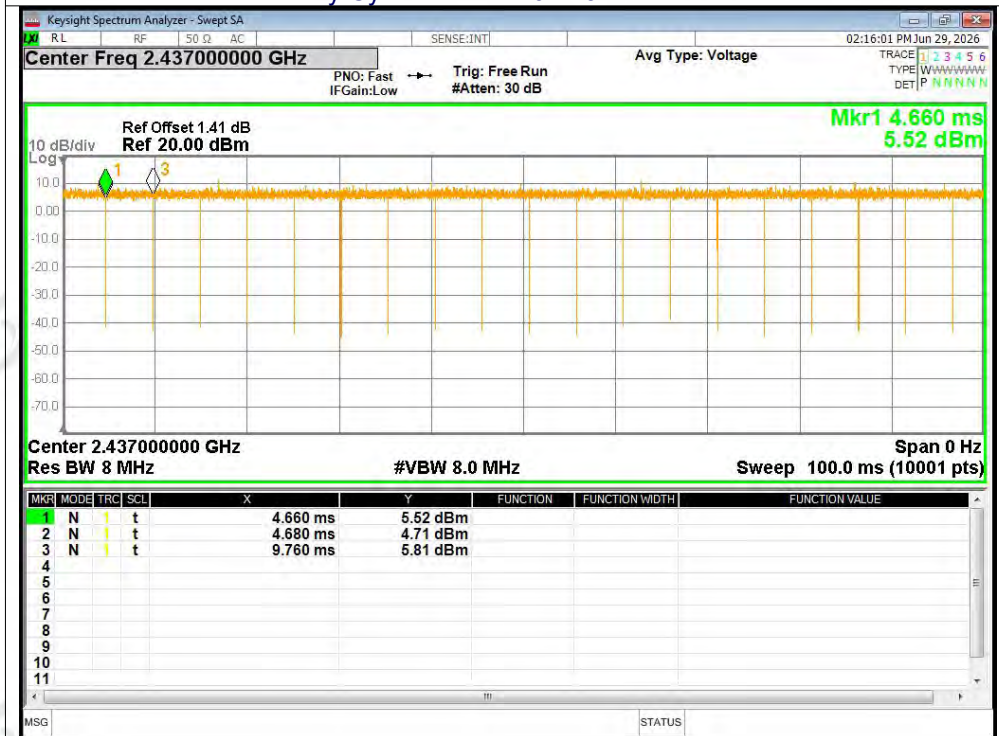




Duty Cycle NVNT n20 2462MHz Ant1

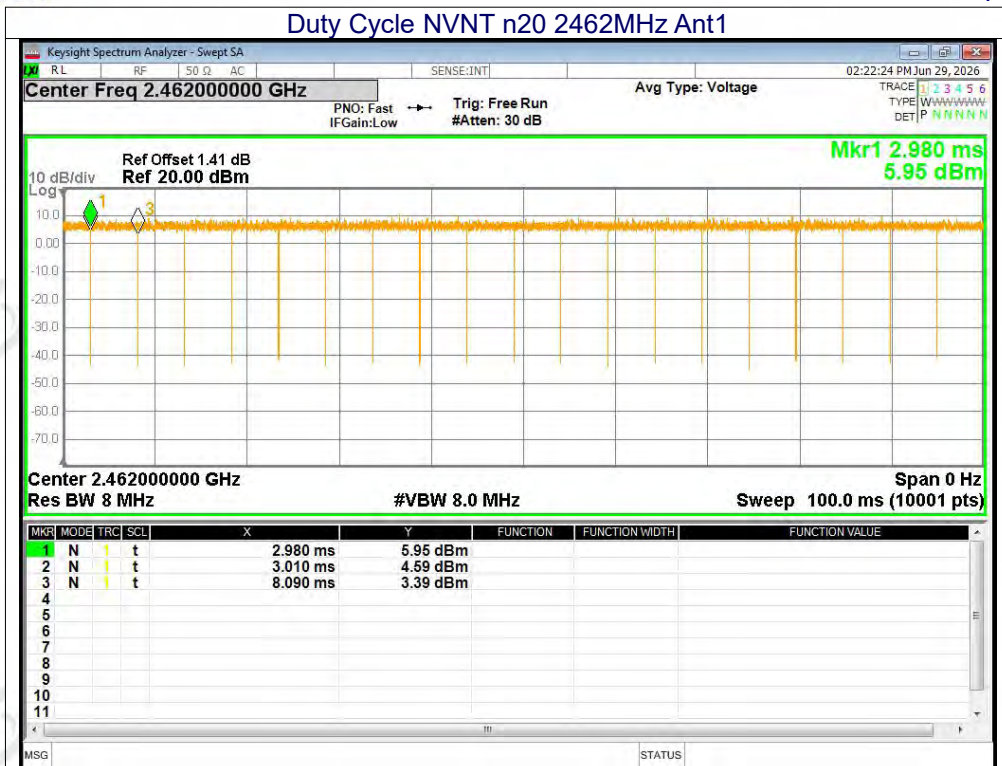


Duty Cycle NVNT n40 2422MHz Ant1

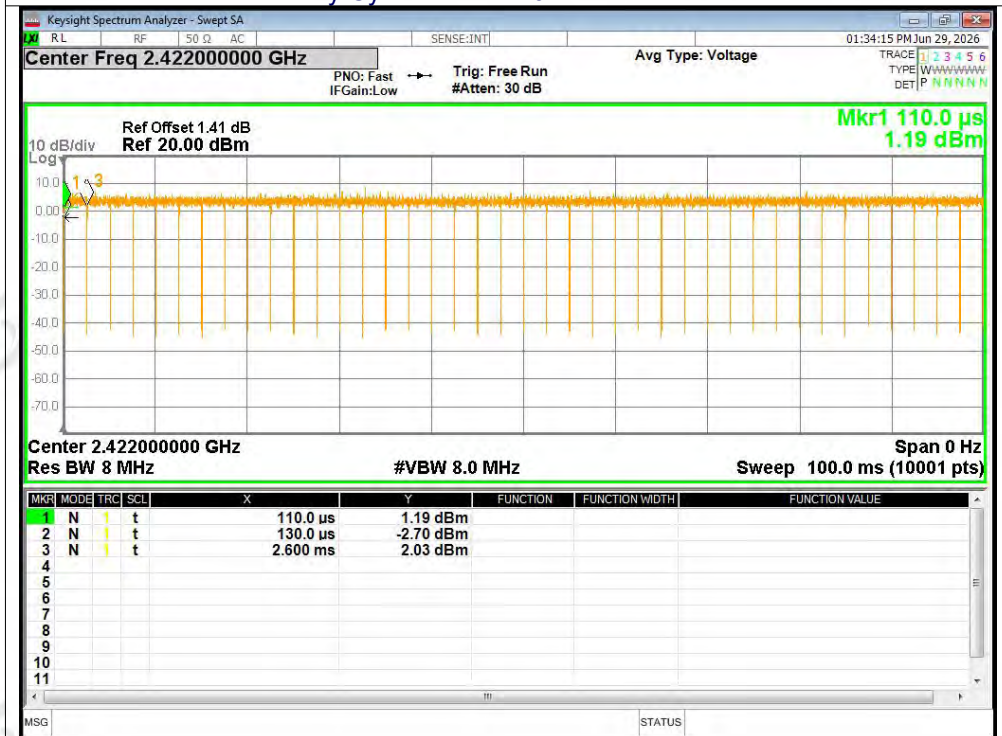




Duty Cycle NVNT n40 2437MHz Ant1

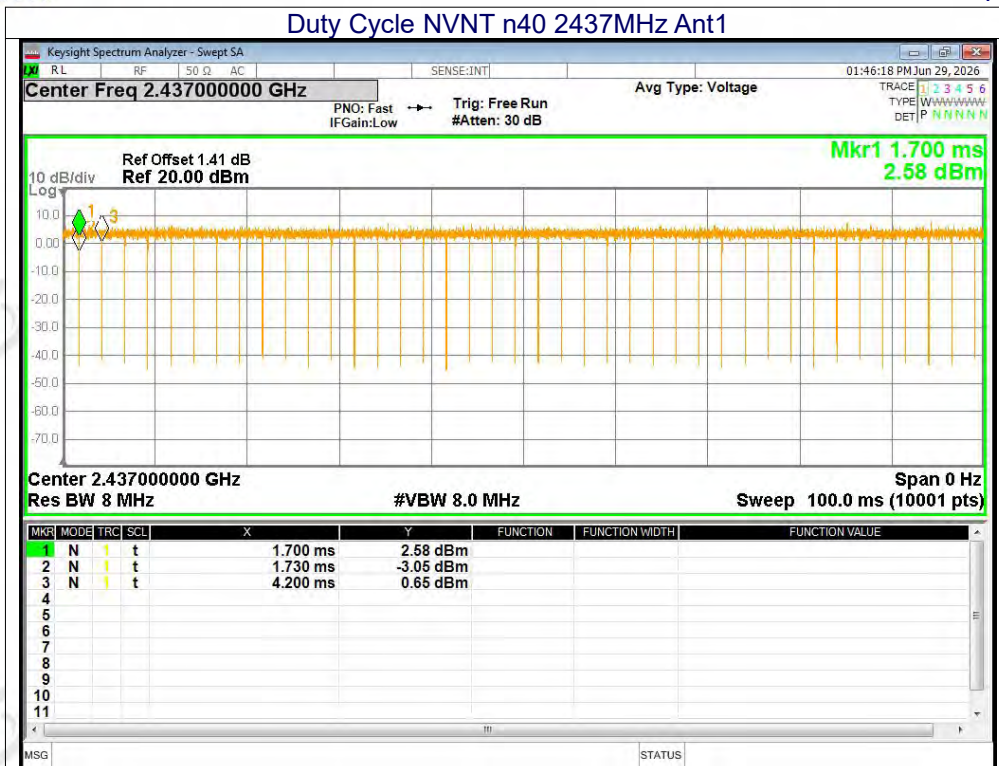

Duty Cycle NVNT n40 2452MHz Ant1

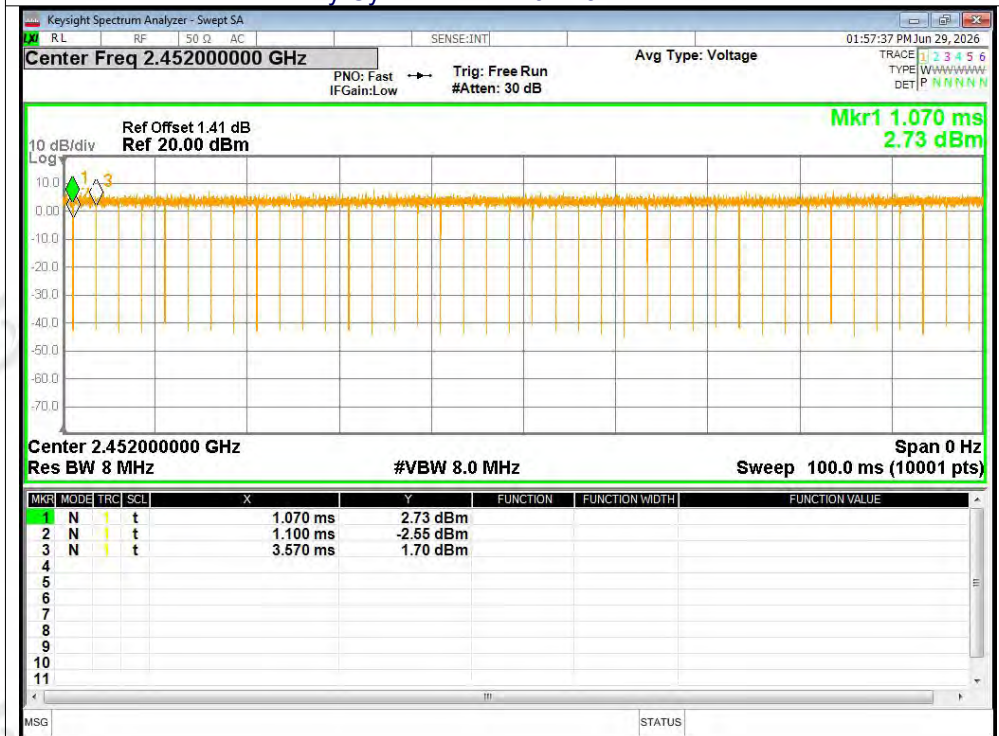



10.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	7.69	30	Pass
b	2437	Ant1	7.19	30	Pass
b	2462	Ant1	7.36	30	Pass
g	2412	Ant1	7.76	30	Pass
g	2437	Ant1	7.35	30	Pass
g	2462	Ant1	7.61	30	Pass
n20	2412	Ant1	7.62	30	Pass
n20	2437	Ant1	7.19	30	Pass
n20	2462	Ant1	7.49	30	Pass
n40	2422	Ant1	7.36	30	Pass
n40	2437	Ant1	6.92	30	Pass
n40	2452	Ant1	7.38	30	Pass




10.3 -6DB BANDWIDTH

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	9.016	0.5	Pass
b	2437	Ant1	8.548	0.5	Pass
b	2462	Ant1	8.542	0.5	Pass
g	2412	Ant1	16.364	0.5	Pass
g	2437	Ant1	16.248	0.5	Pass
g	2462	Ant1	16.343	0.5	Pass
n20	2412	Ant1	17.195	0.5	Pass
n20	2437	Ant1	17.233	0.5	Pass
n20	2462	Ant1	17.267	0.5	Pass
n40	2422	Ant1	35.404	0.5	Pass
n40	2437	Ant1	34.472	0.5	Pass
n40	2452	Ant1	35.511	0.5	Pass




Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1

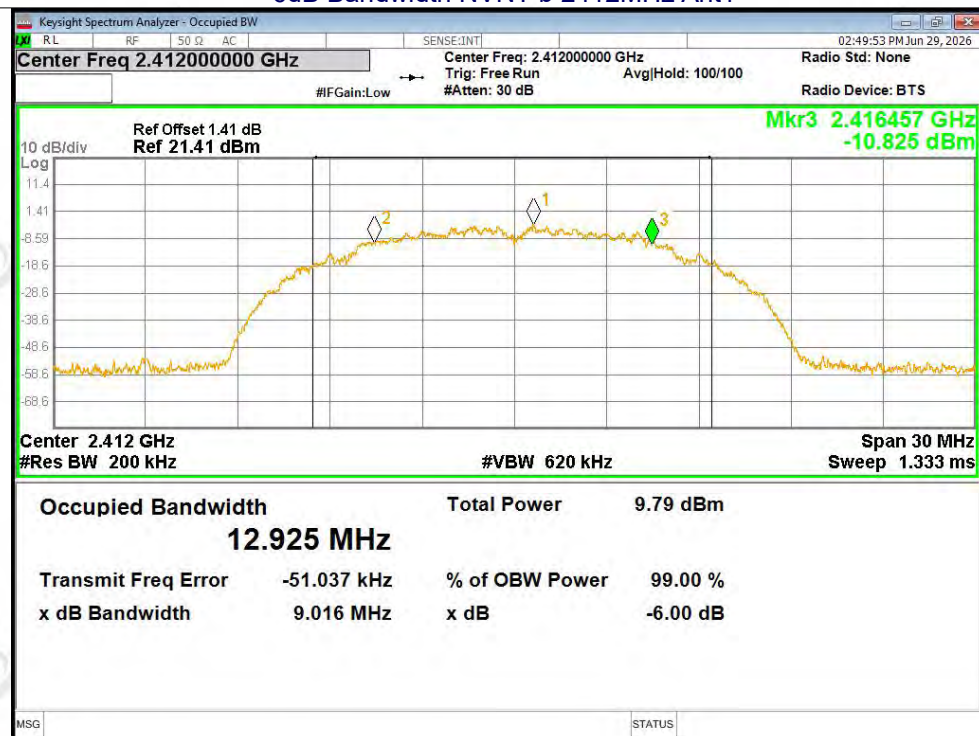


-6dB Bandwidth NVNT b 2437MHz Ant1

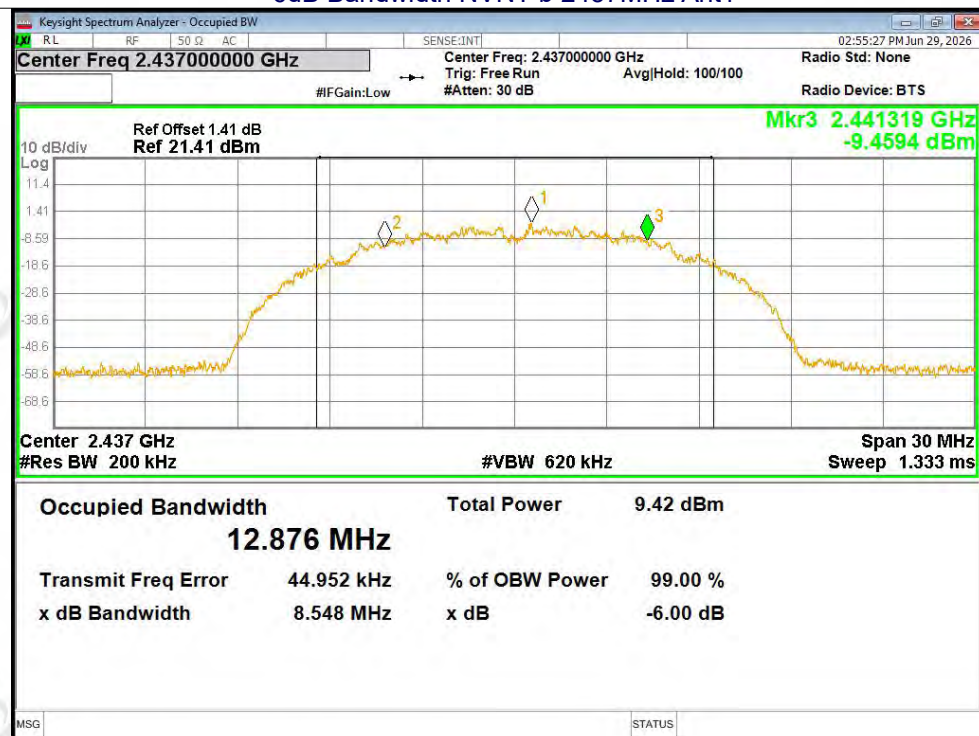






-6dB Bandwidth NVNT b 2462MHz Ant1

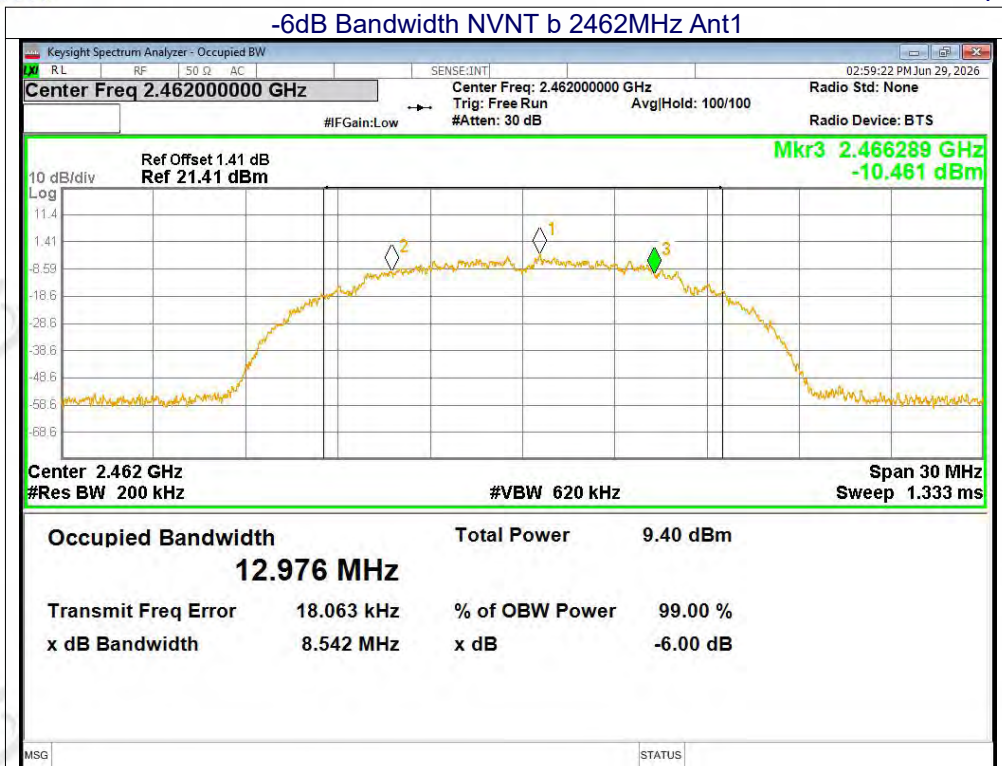


-6dB Bandwidth NVNT g 2412MHz Ant1

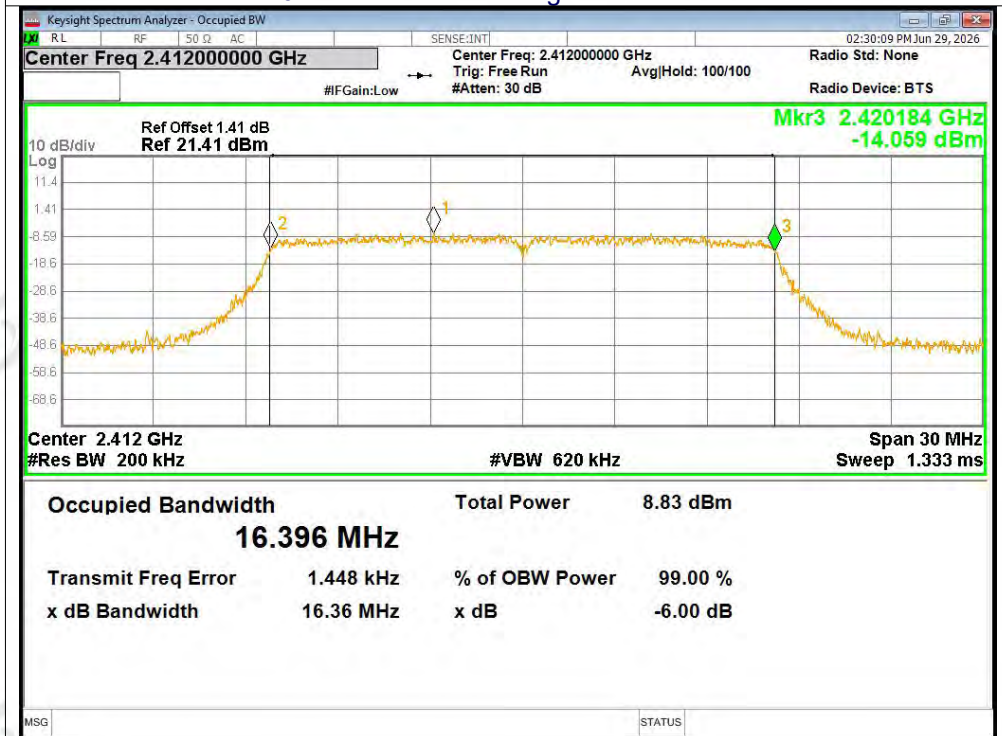

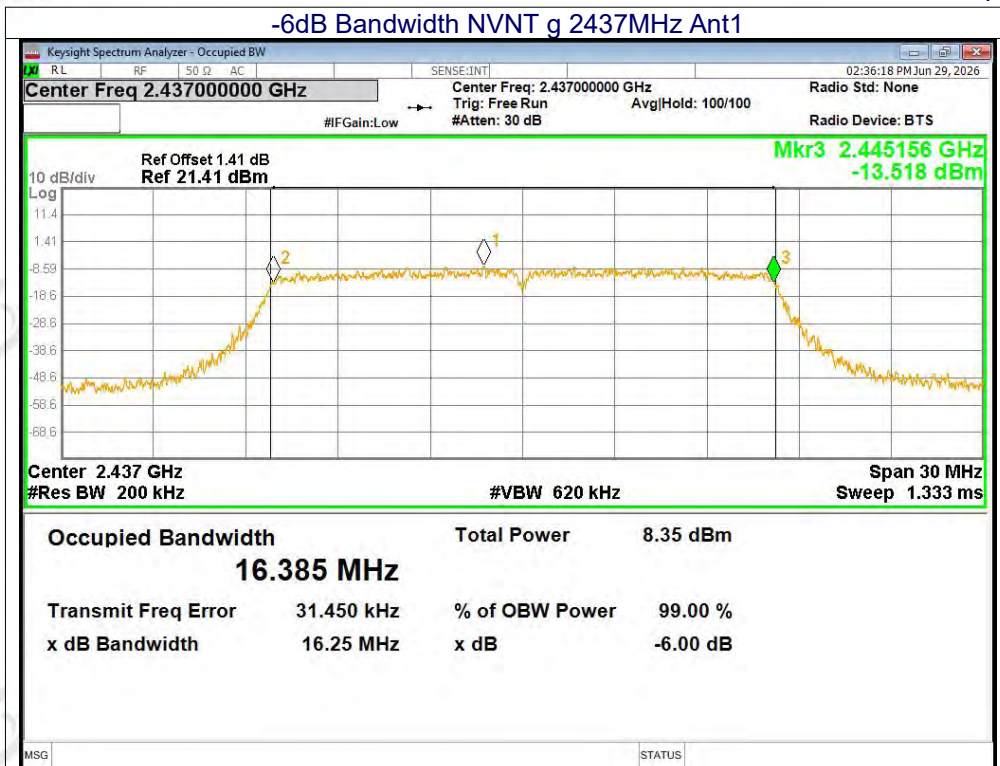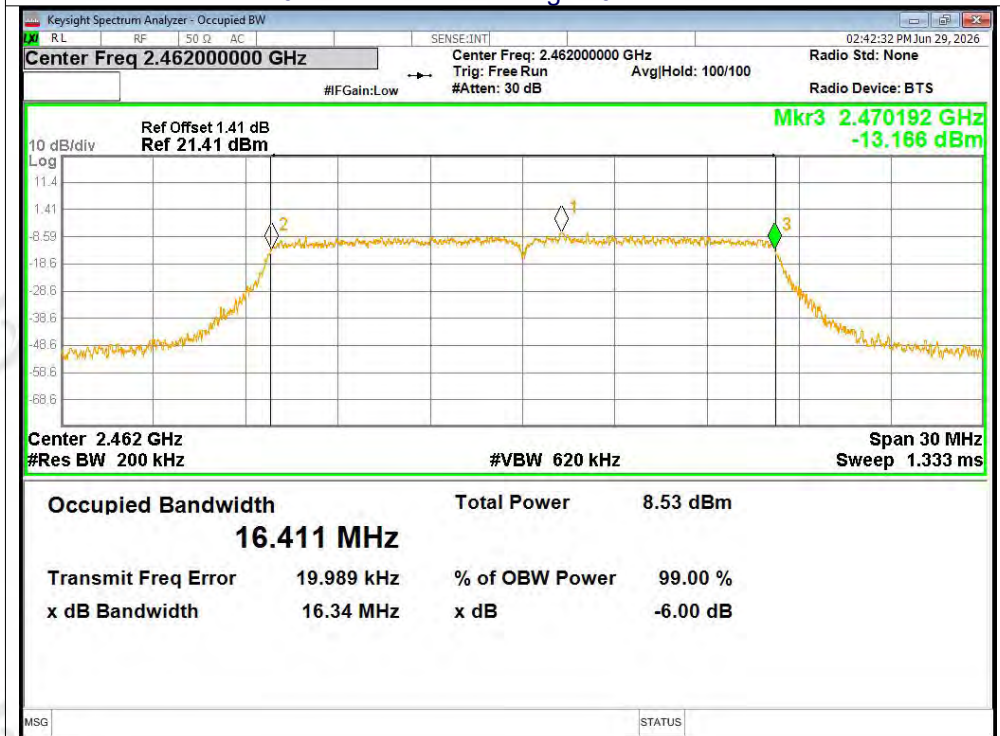
**-6dB Bandwidth NVNT g 2437MHz Ant1****-6dB Bandwidth NVNT g 2462MHz Ant1**



-6dB Bandwidth NVNT n20 2412MHz Ant1

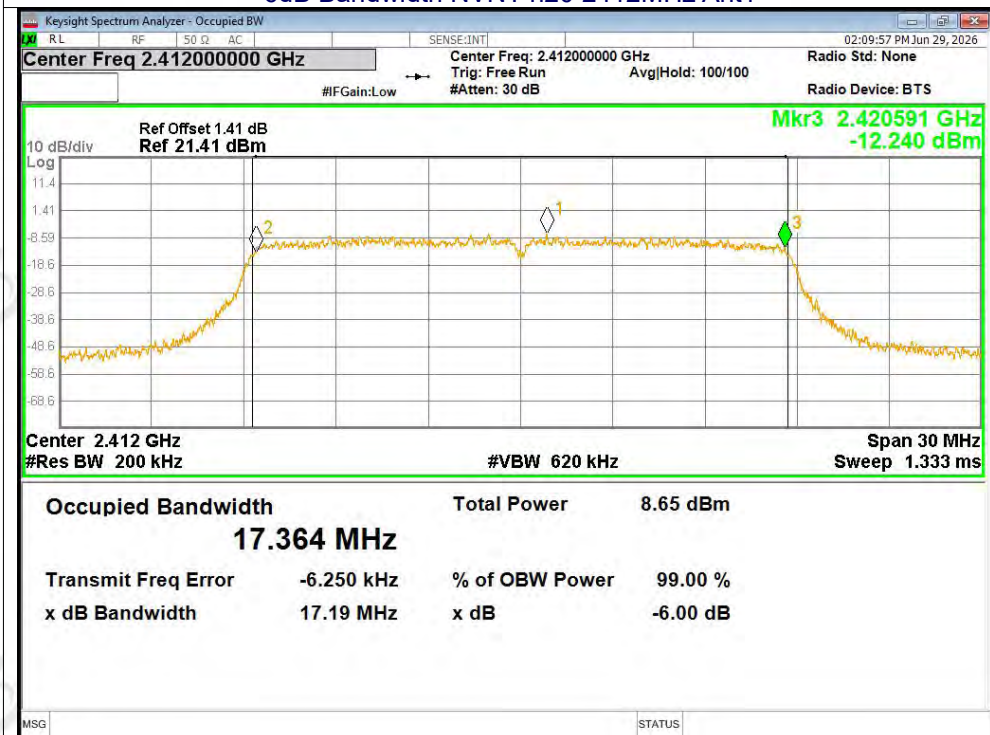


-6dB Bandwidth NVNT n20 2437MHz Ant1

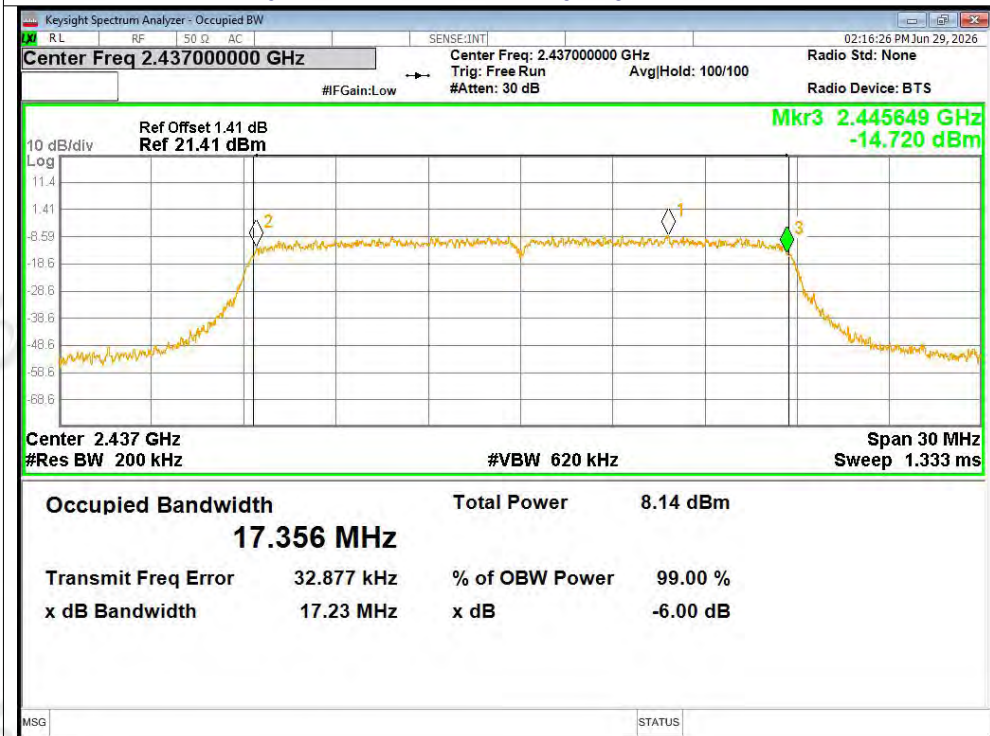




-6dB Bandwidth NVNT n20 2462MHz Ant1

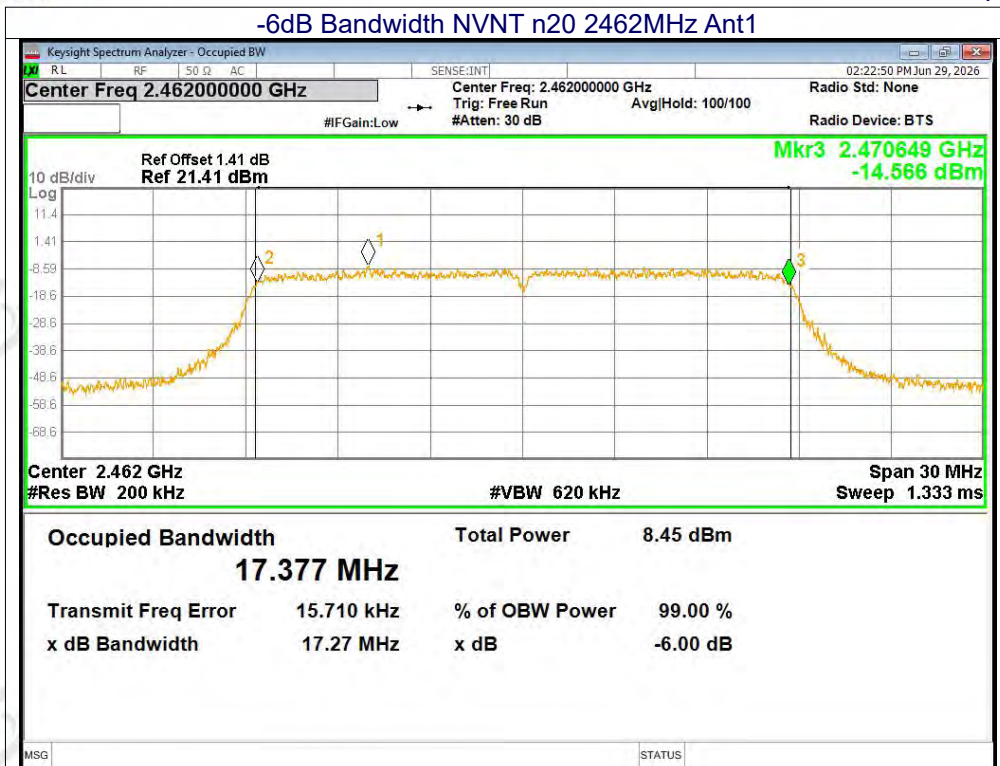


-6dB Bandwidth NVNT n40 2422MHz Ant1

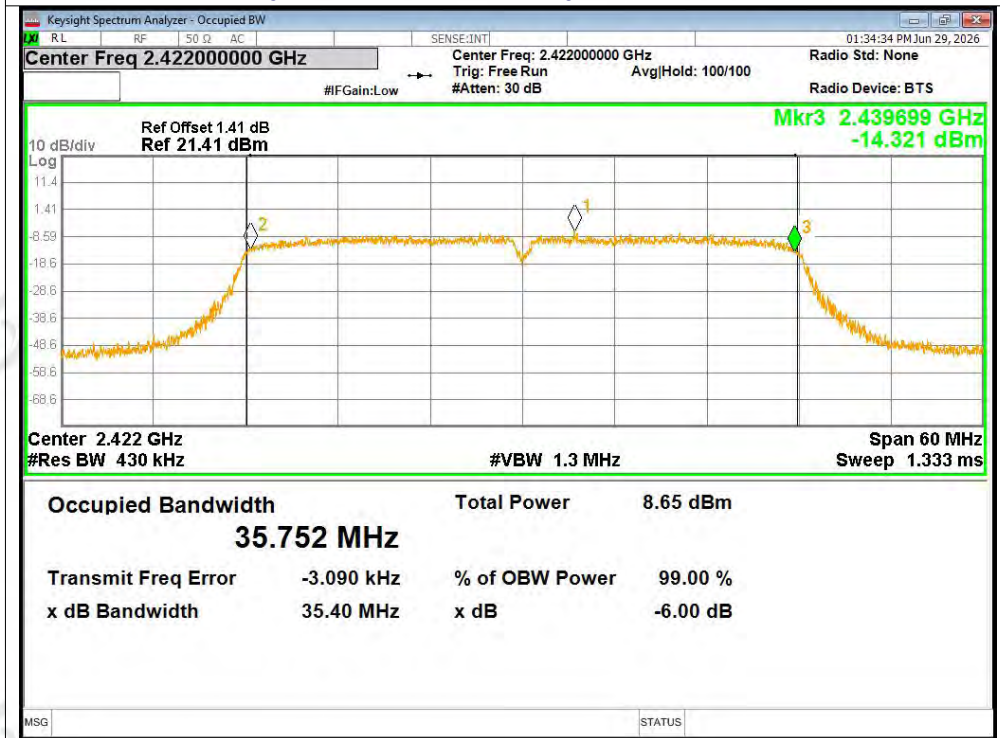




-6dB Bandwidth NVNT n40 2437MHz Ant1

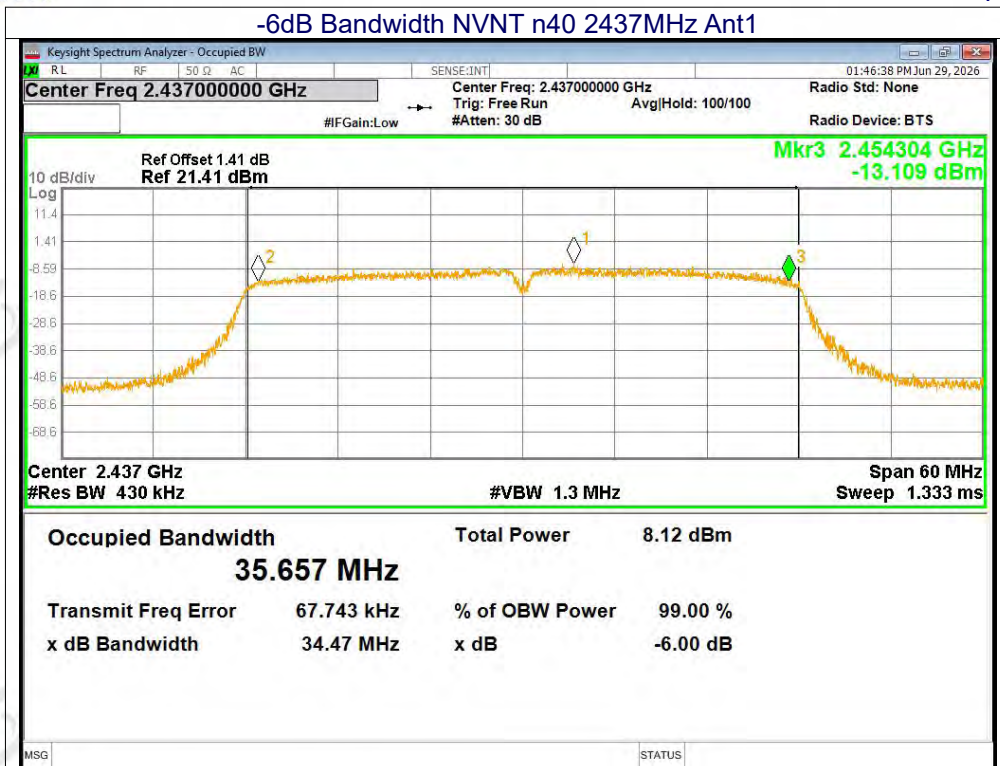


-6dB Bandwidth NVNT n40 2452MHz Ant1

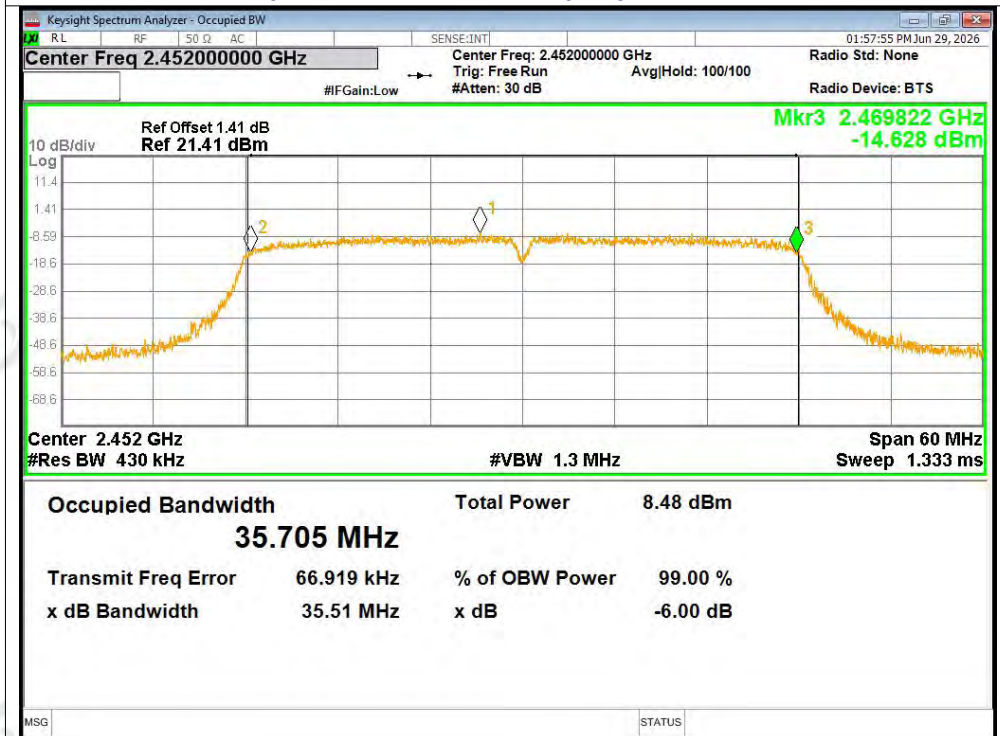




10.4 OCCUPIED CHANNEL BANDWIDTH

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
b	2412	Ant1	12.931
b	2437	Ant1	12.923
b	2462	Ant1	12.891
g	2412	Ant1	16.396
g	2437	Ant1	16.386
g	2462	Ant1	16.416
n20	2412	Ant1	17.348
n20	2437	Ant1	17.332
n20	2462	Ant1	17.382
n40	2422	Ant1	35.693
n40	2437	Ant1	35.549
n40	2452	Ant1	35.62

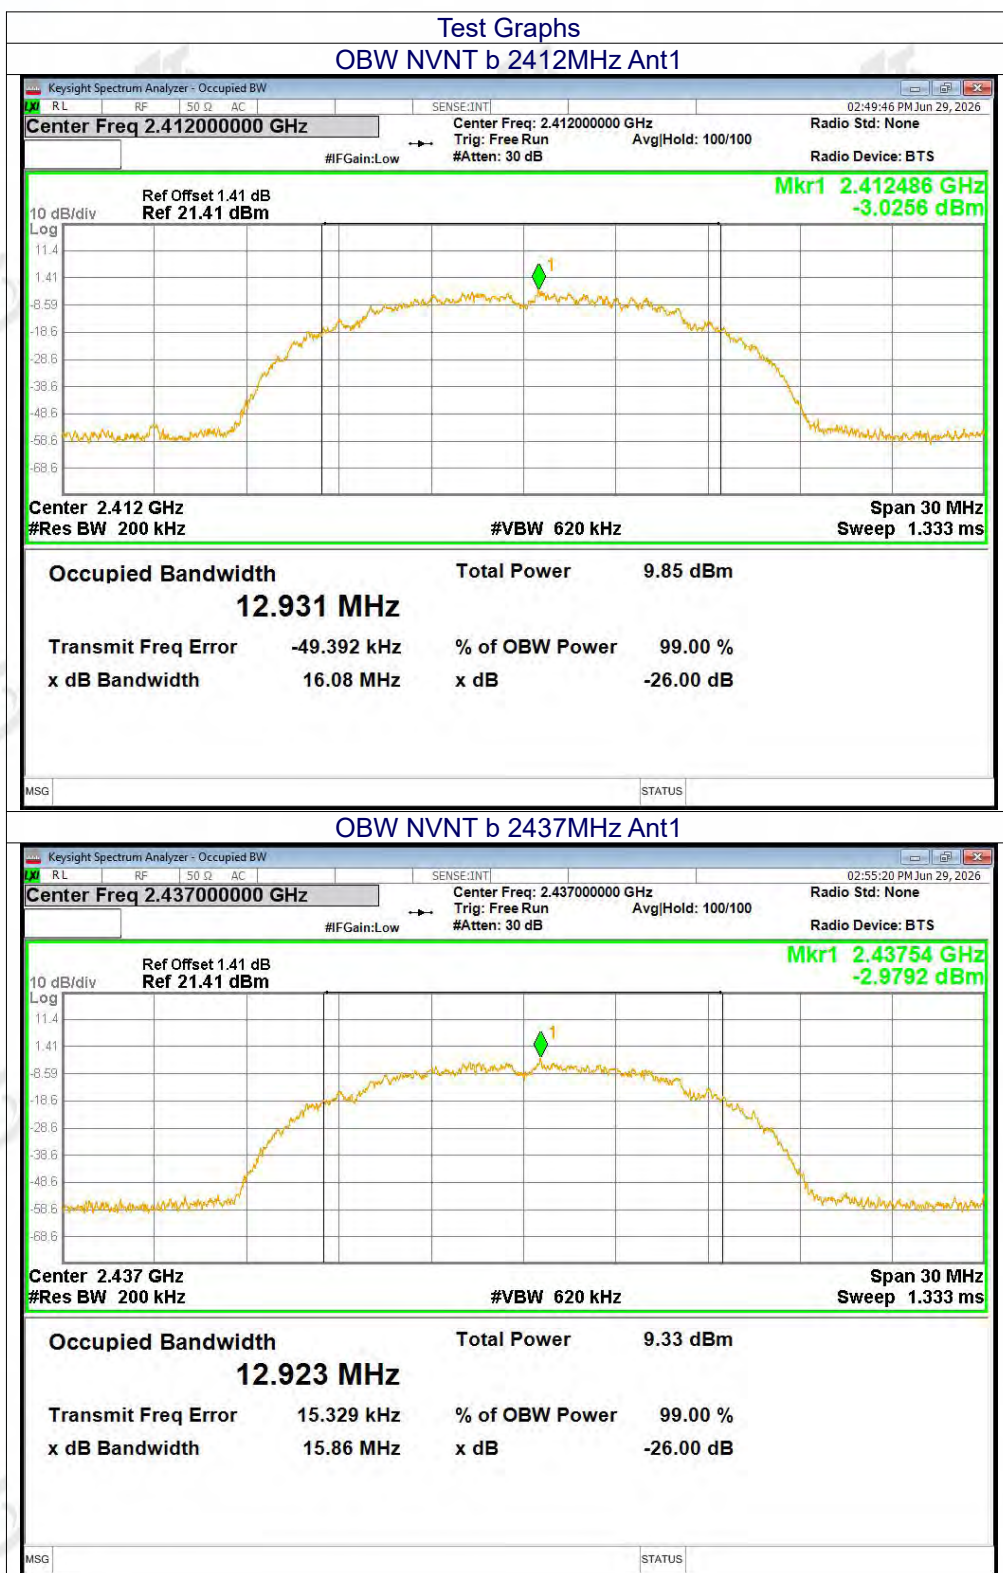




OBW NVNT b 2462MHz Ant1

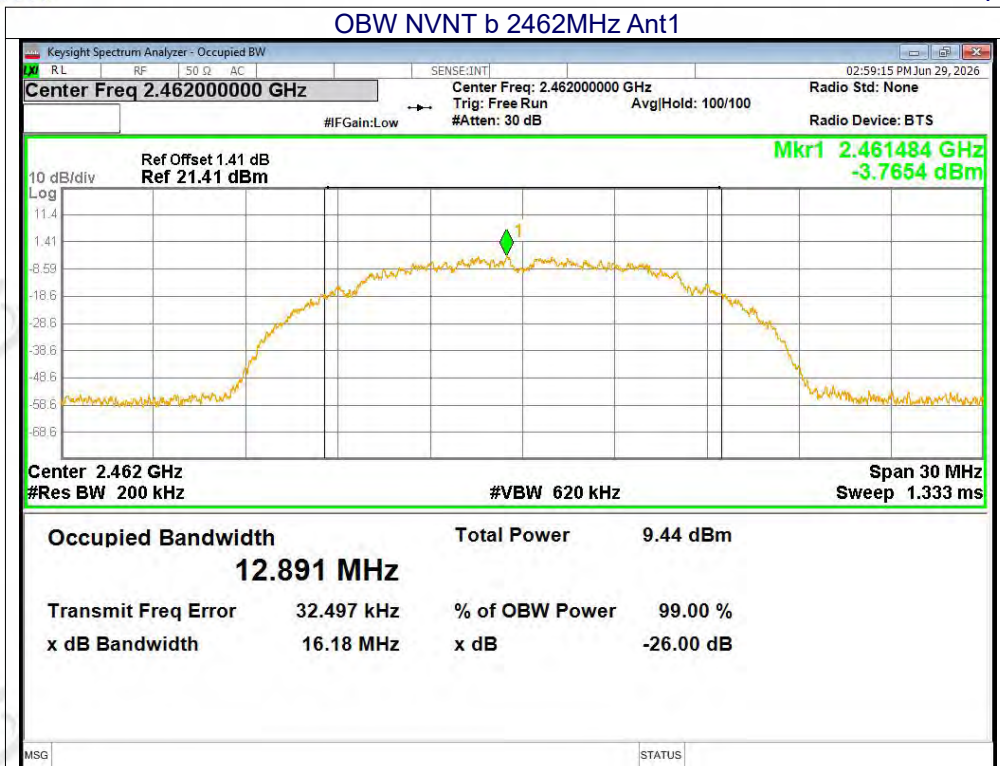


OBW NVNT g 2412MHz Ant1

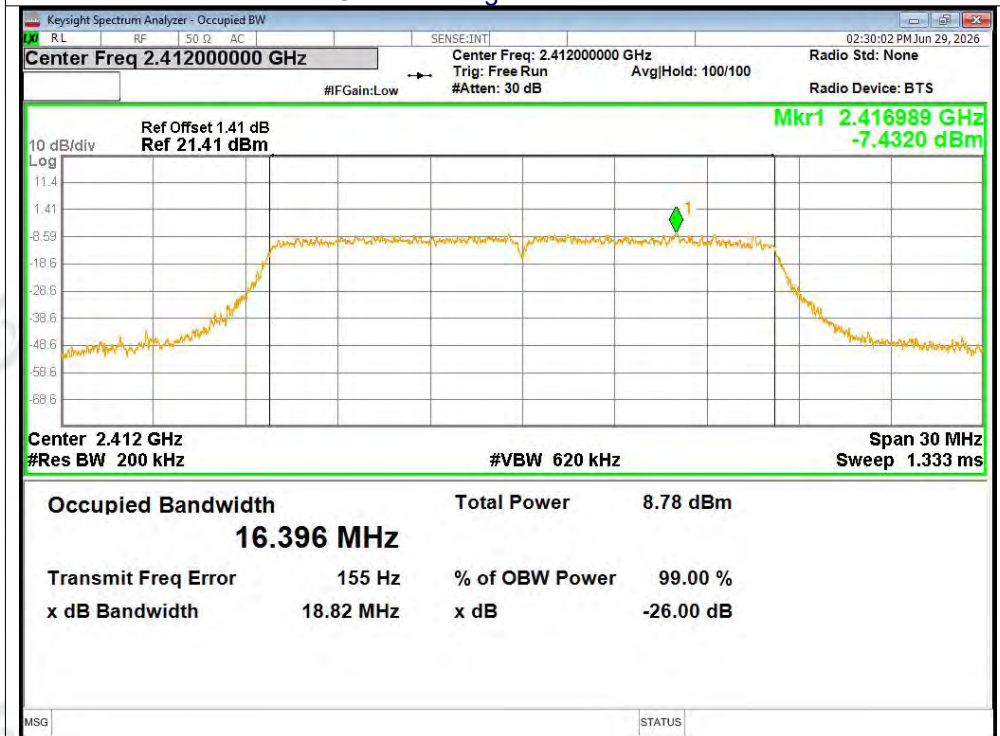




OBW NVNT g 2437MHz Ant1

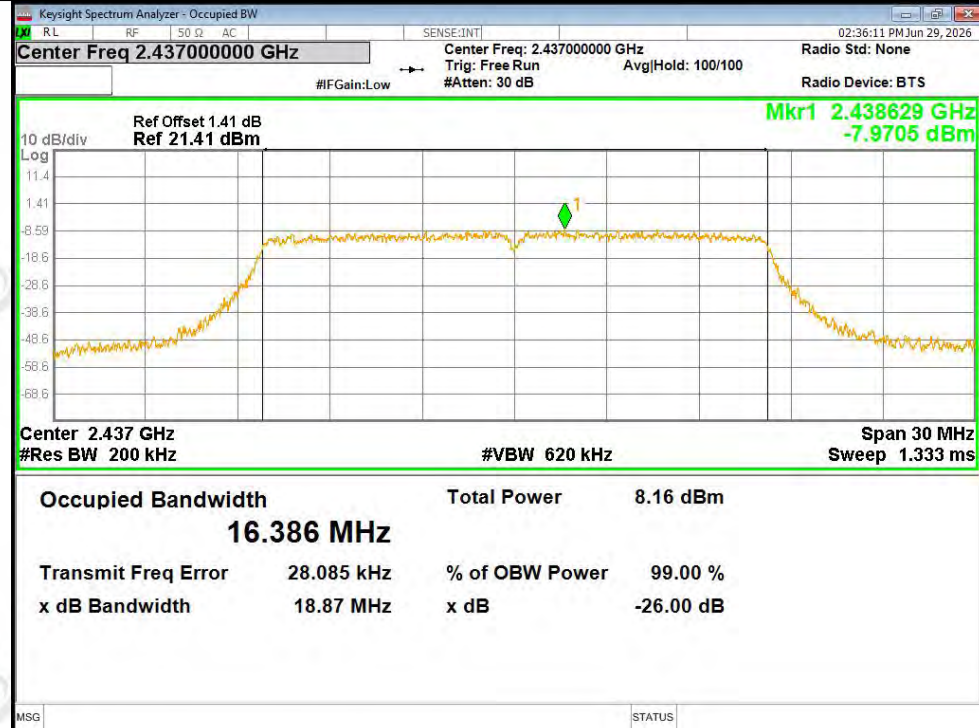


OBW NVNT g 2462MHz Ant1

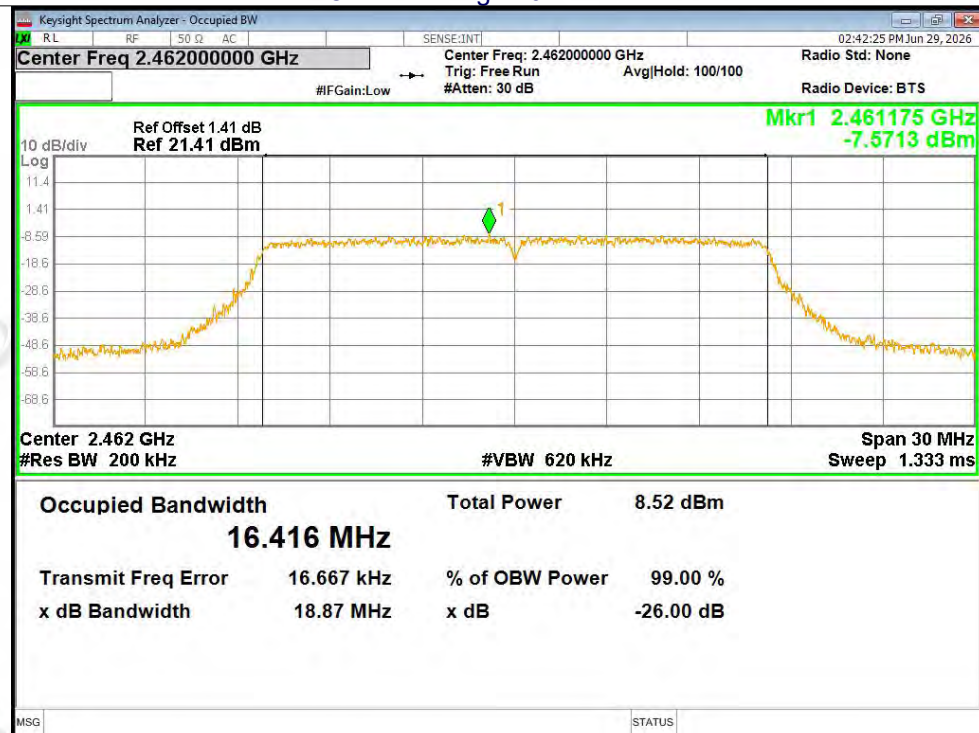




OBW NVNT n20 2412MHz Ant1

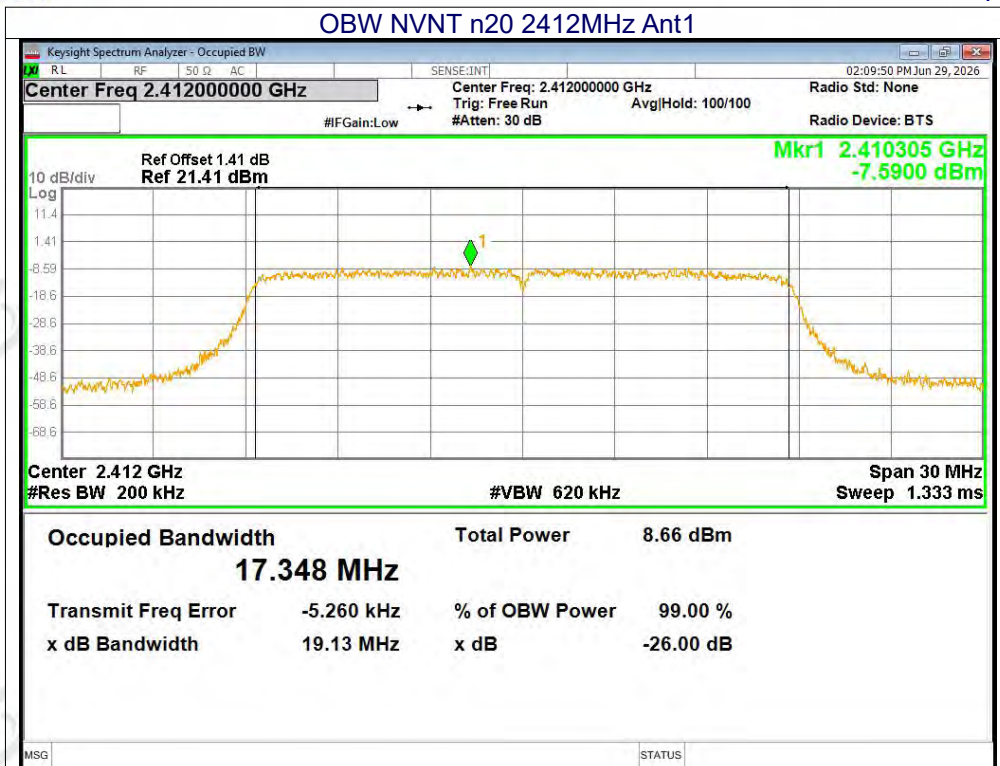


OBW NVNT n20 2437MHz Ant1

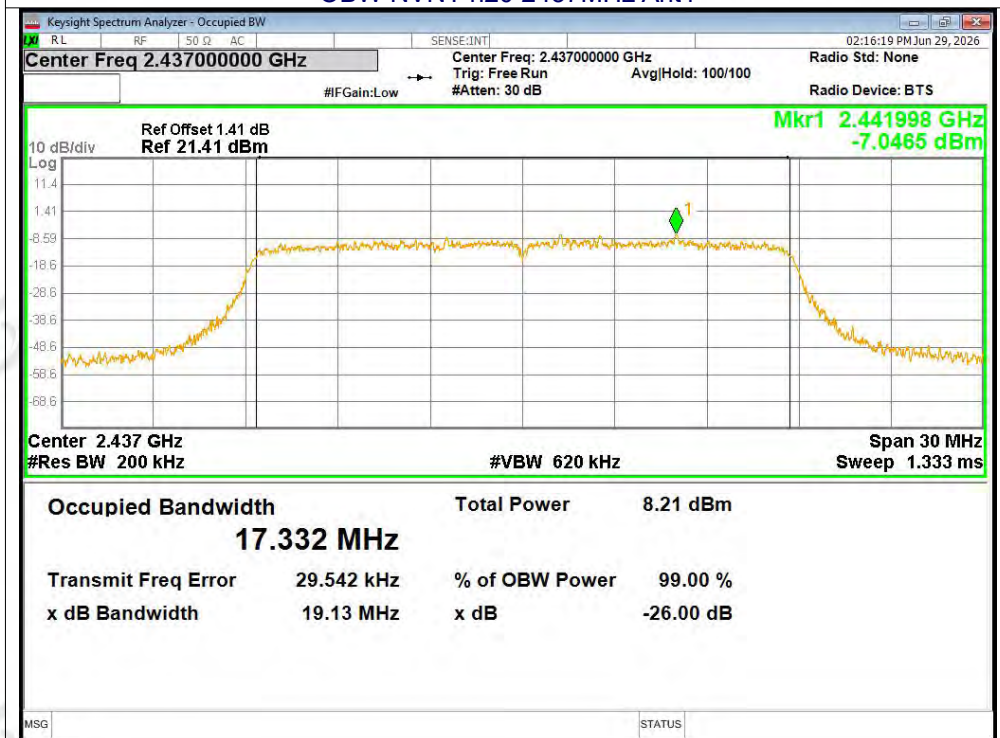




OBW NVNT n20 2462MHz Ant1

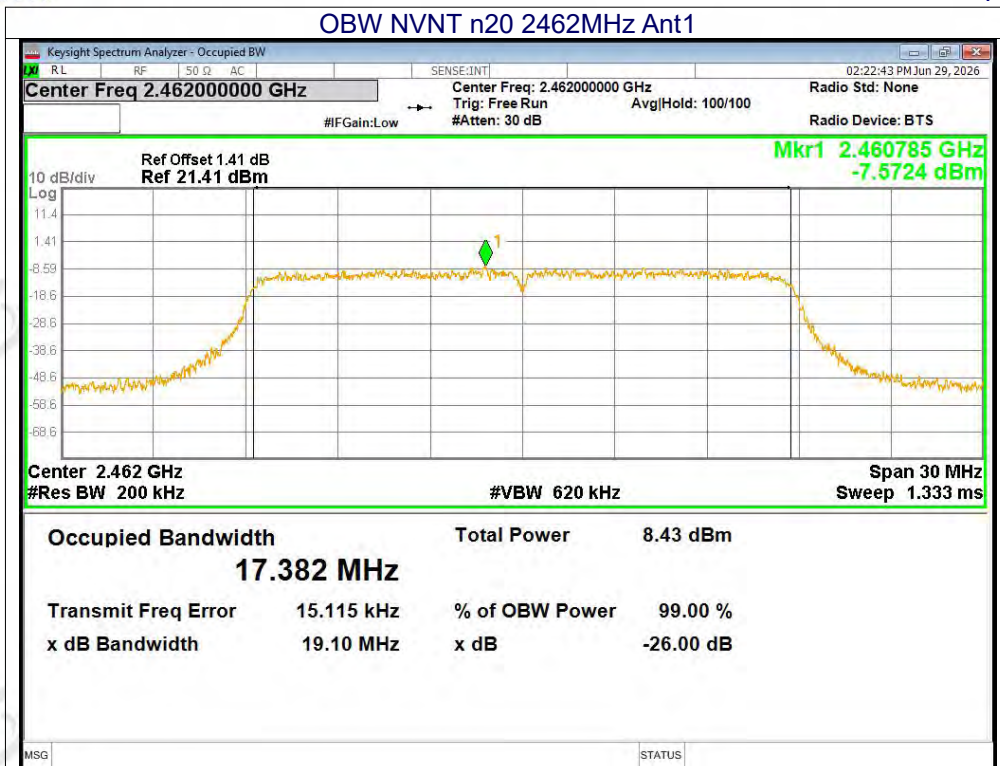


OBW NVNT n40 2422MHz Ant1

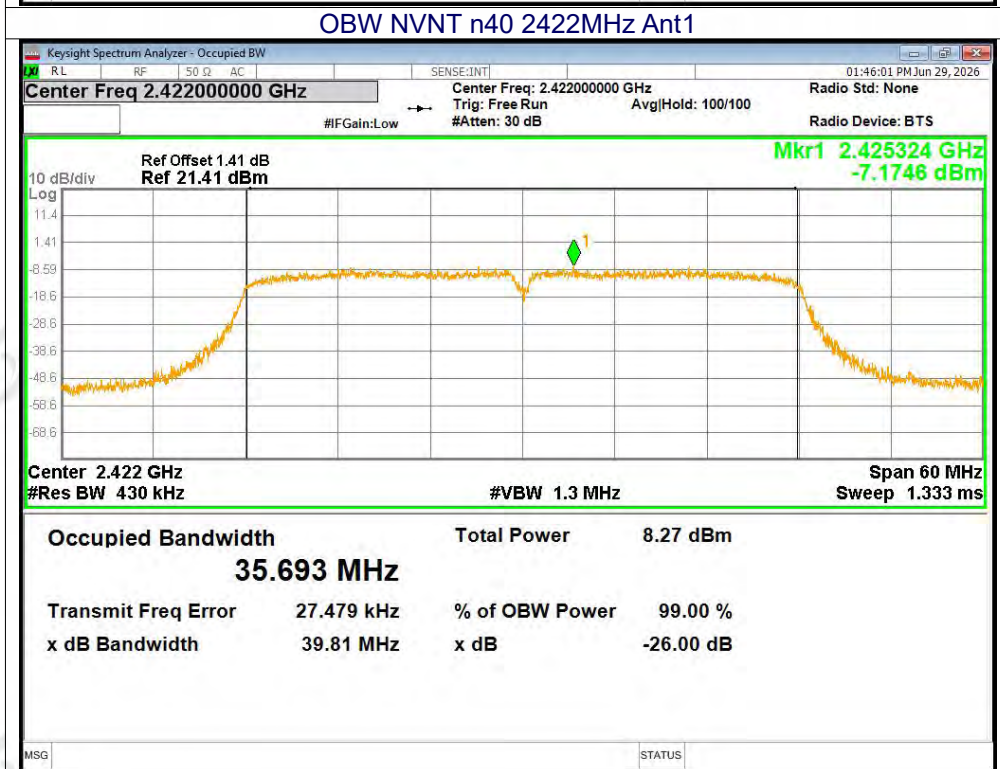




OBW NVNT n40 2437MHz Ant1

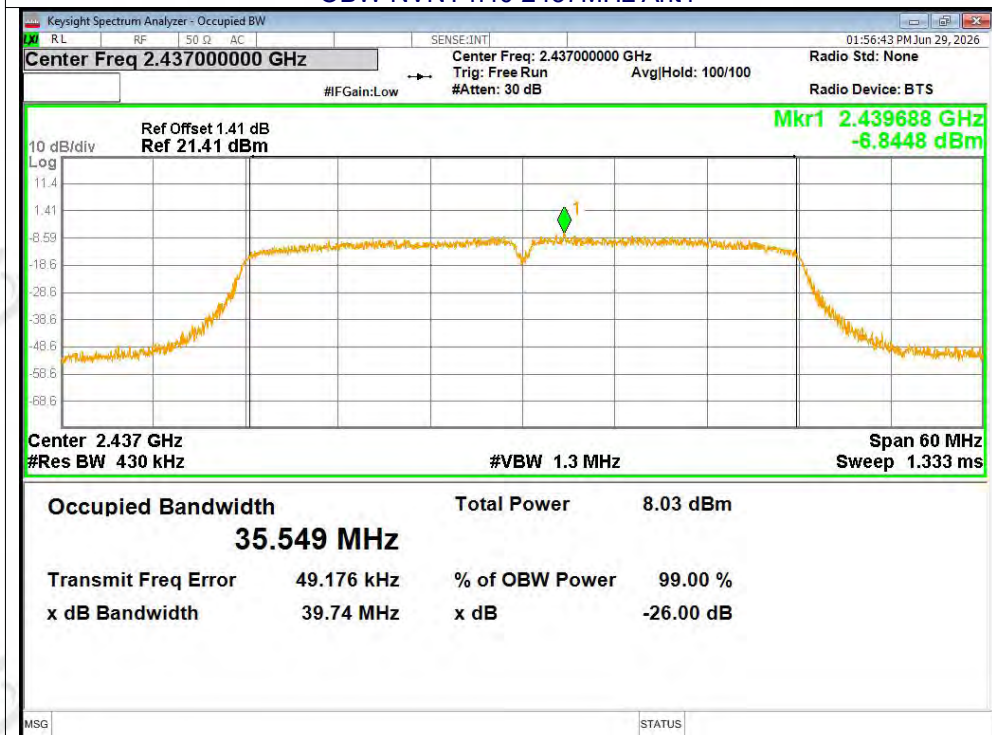


OBW NVNT n40 2452MHz Ant1

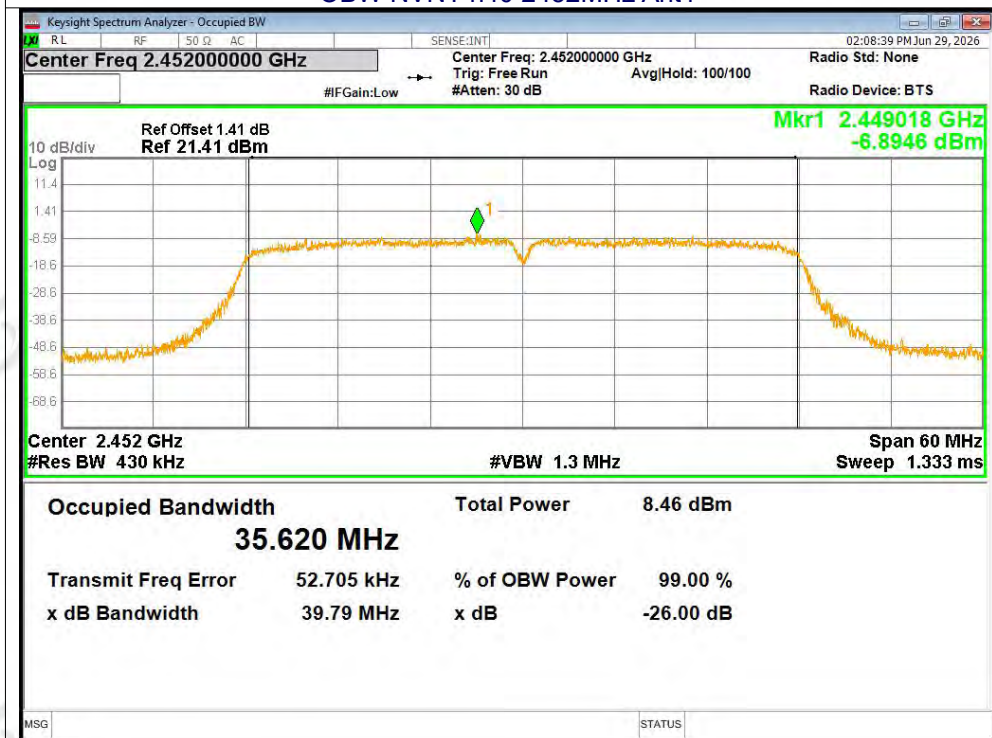




10.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-17.91	8	Pass
b	2437	Ant1	-17.49	8	Pass
b	2462	Ant1	-18.71	8	Pass
g	2412	Ant1	-21.49	8	Pass
g	2437	Ant1	-21.68	8	Pass
g	2462	Ant1	-21.52	8	Pass
n20	2412	Ant1	-21.13	8	Pass
n20	2437	Ant1	-21.72	8	Pass
n20	2462	Ant1	-21.32	8	Pass
n40	2422	Ant1	-24.16	8	Pass
n40	2437	Ant1	-23.94	8	Pass
n40	2452	Ant1	-23.98	8	Pass

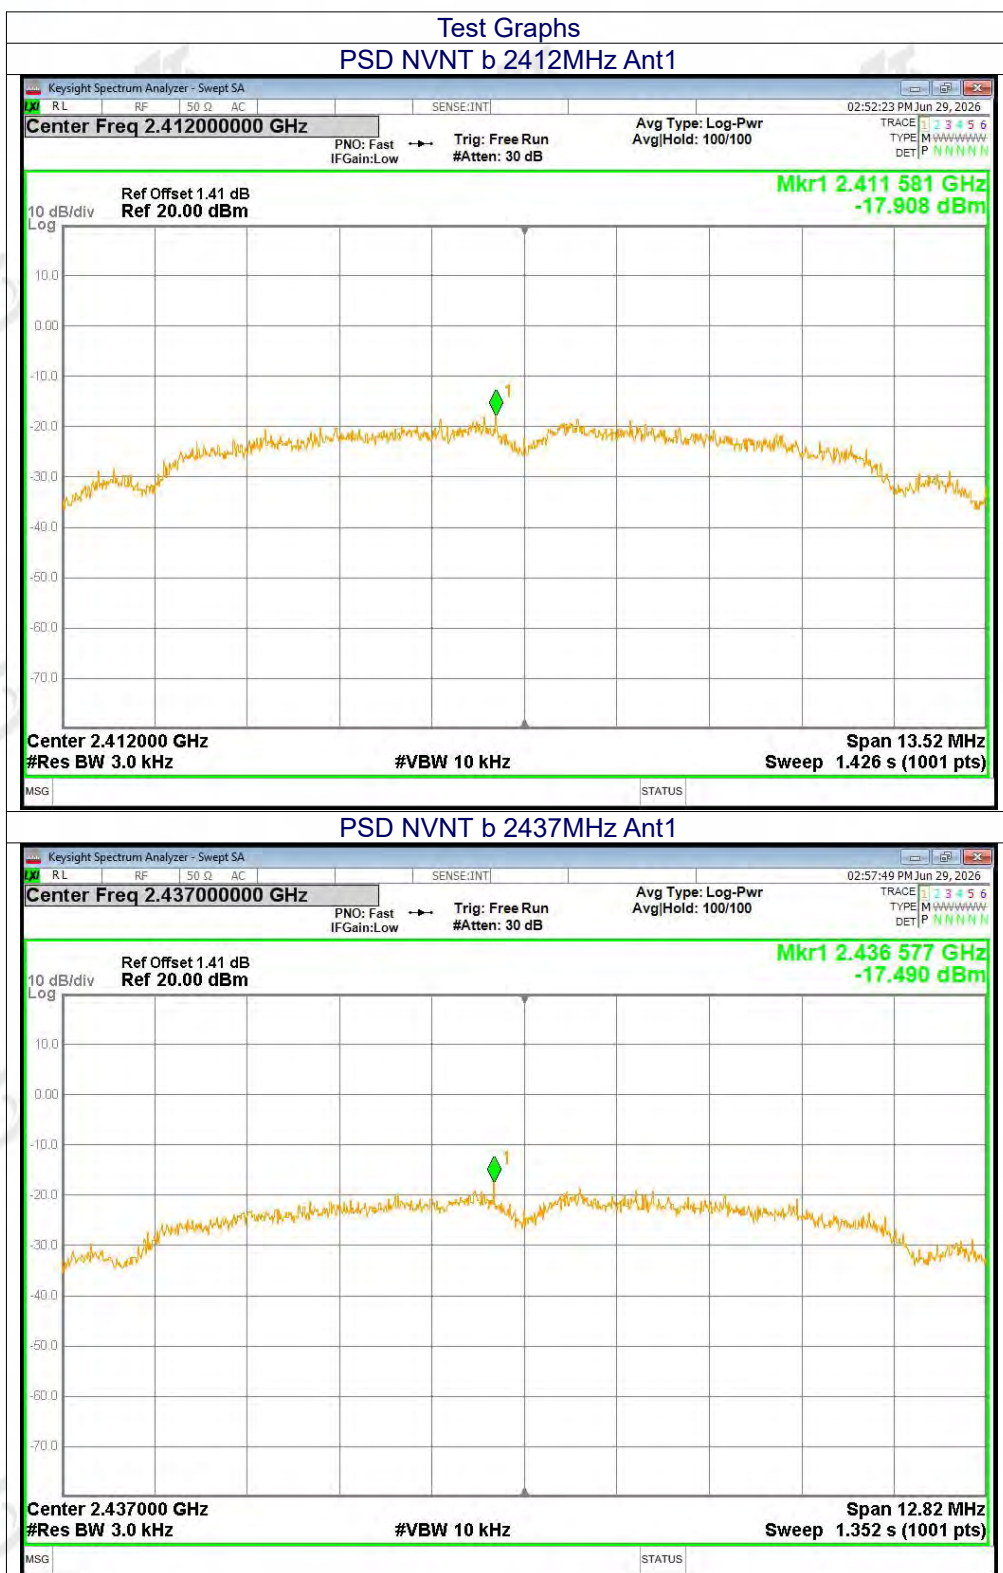




PSD NVNT b 2462MHz Ant1

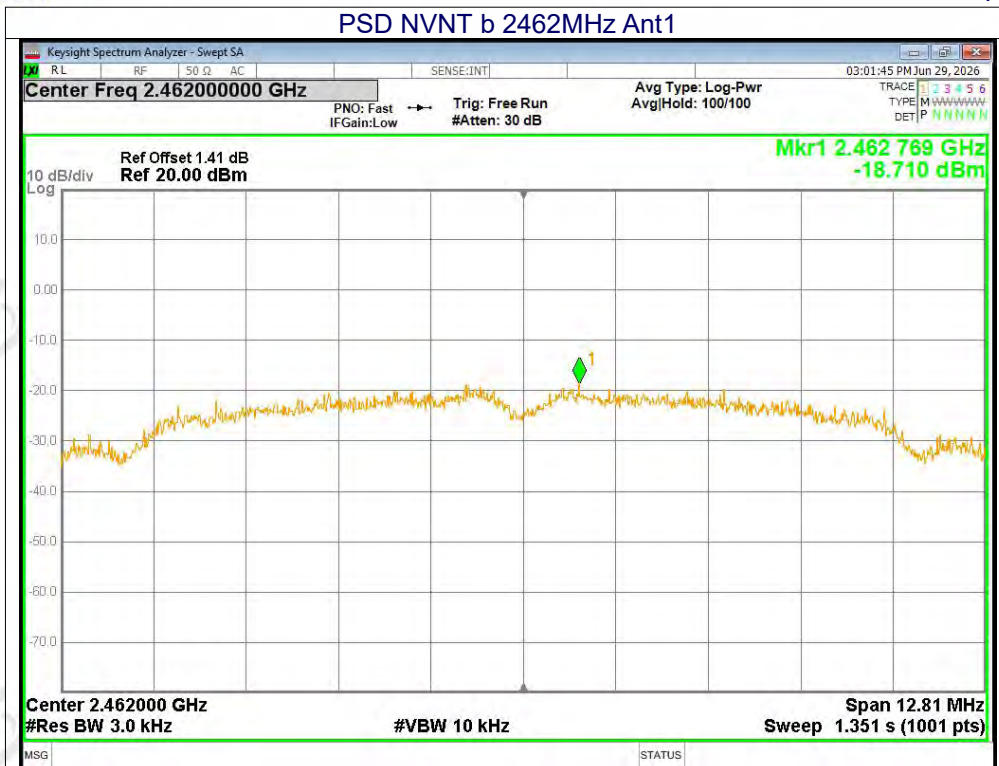


PSD NVNT g 2412MHz Ant1

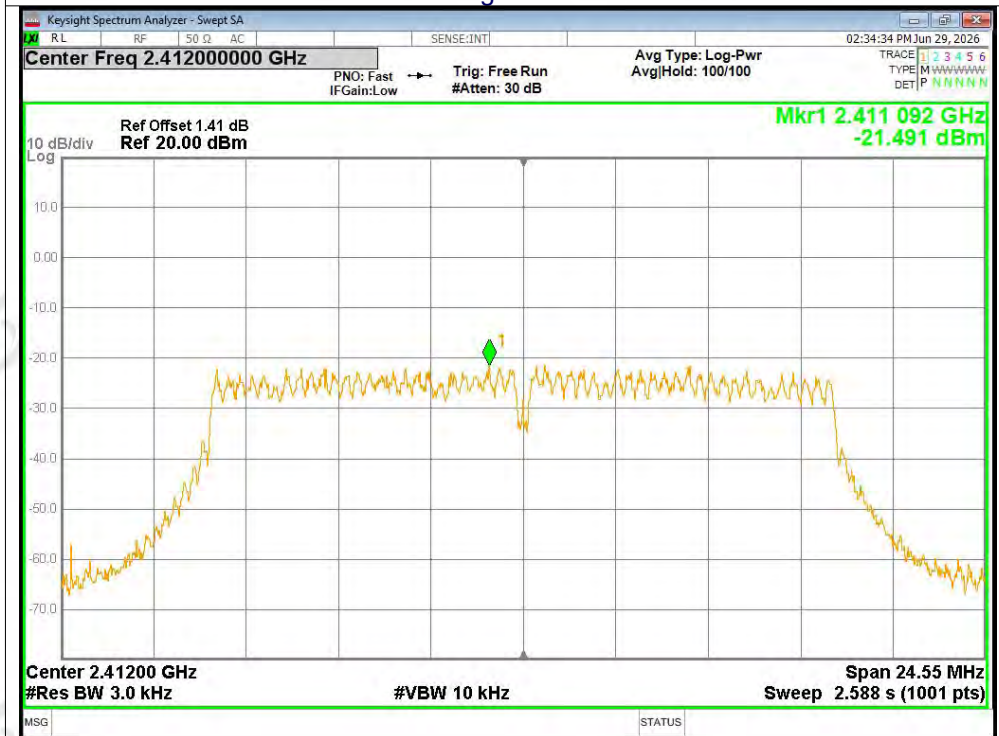




PSD NVNT g 2437MHz Ant1

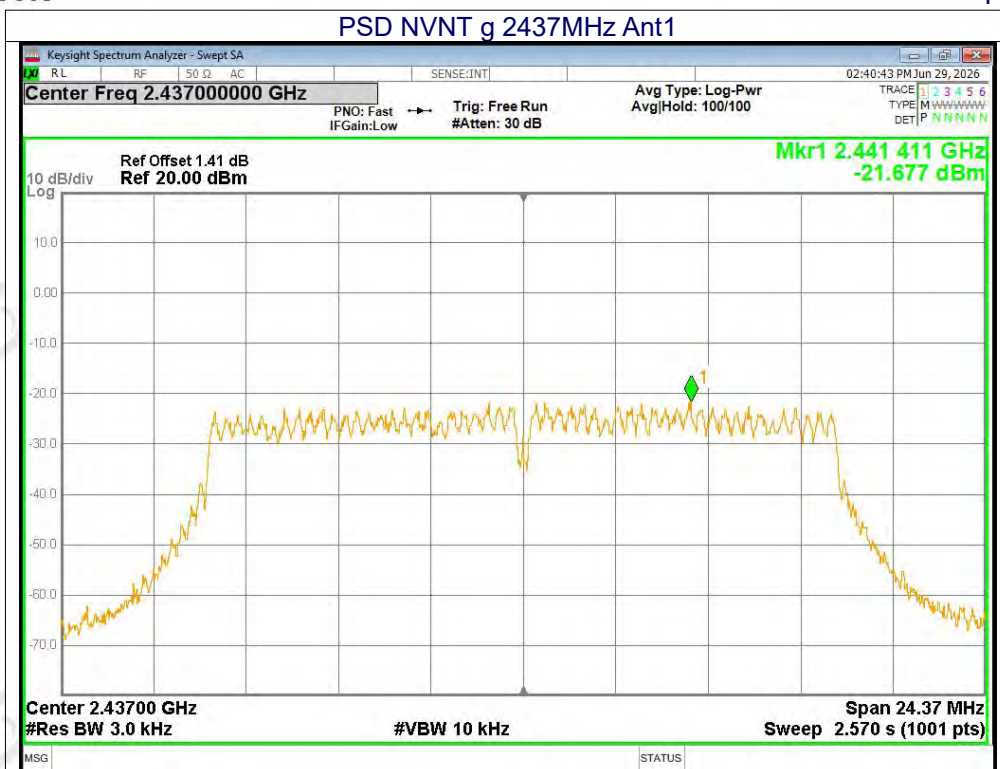


PSD NVNT g 2462MHz Ant1

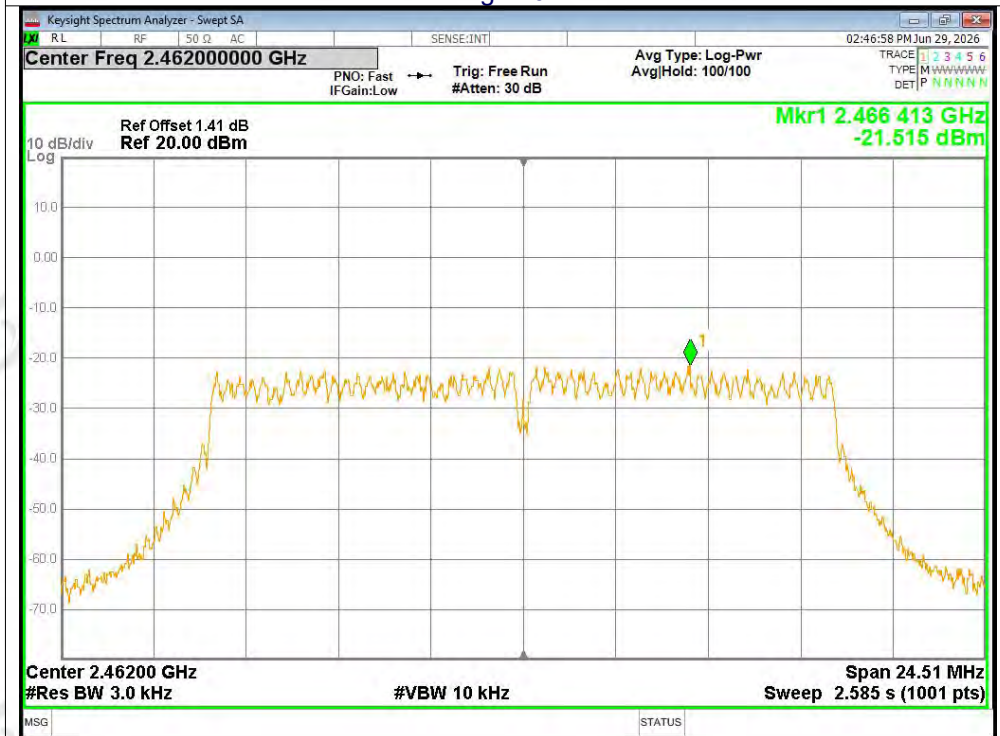



PSD NVNT n20 2412MHz Ant1

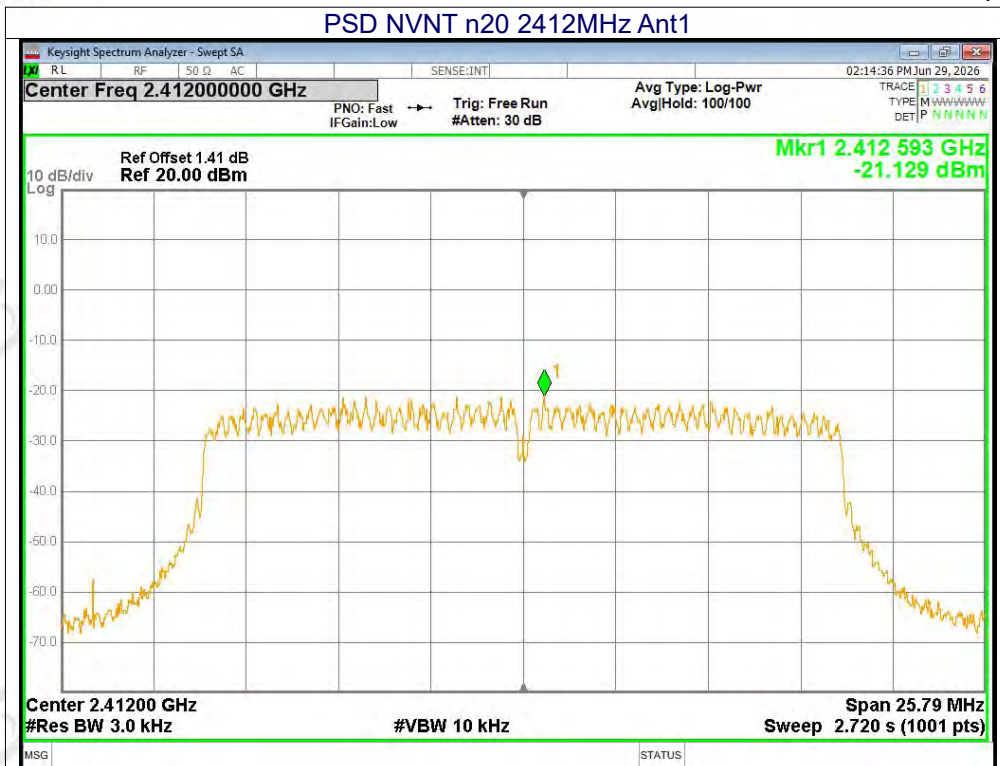


PSD NVNT n20 2437MHz Ant1






PSD NVNT n20 2462MHz Ant1

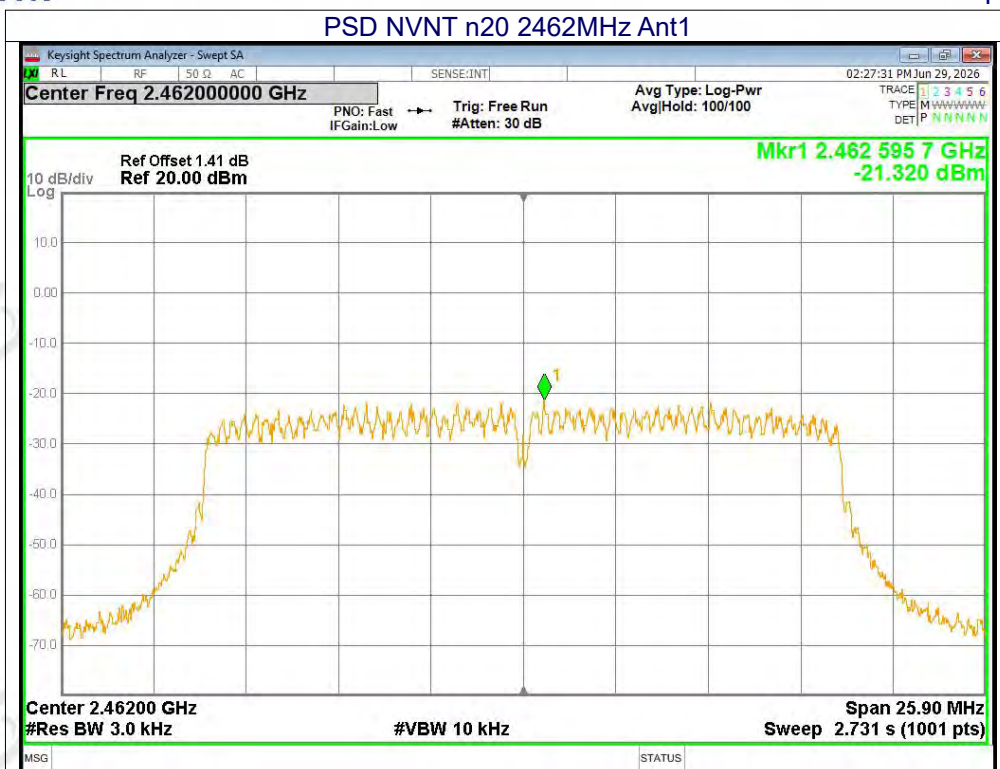


PSD NVNT n40 2422MHz Ant1

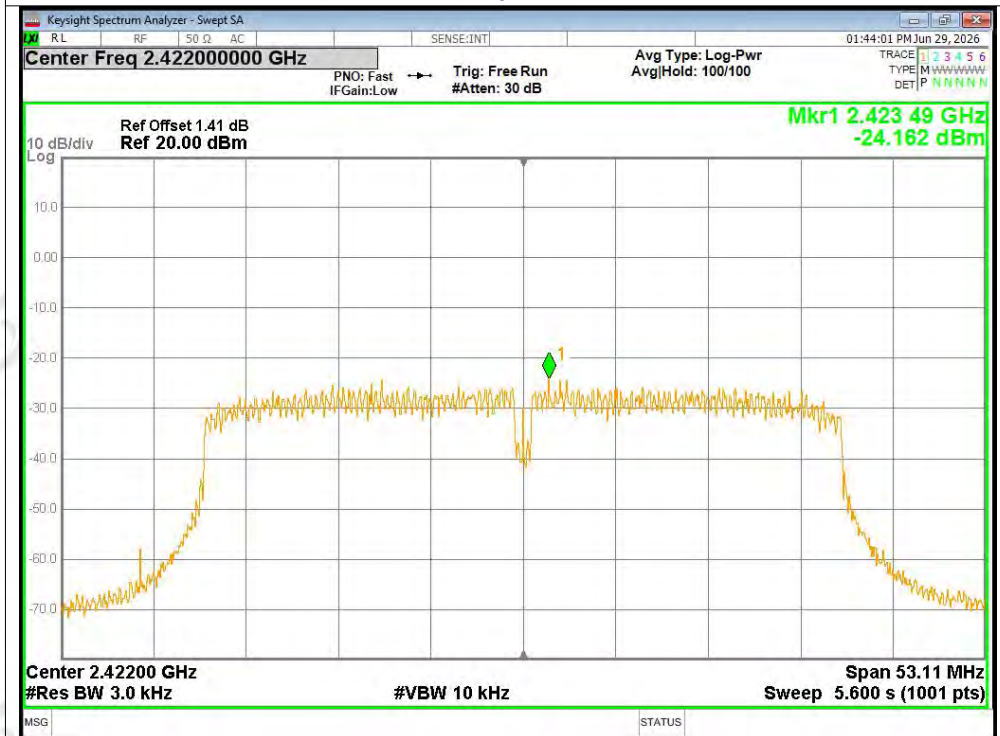




PSD NVNT n40 2437MHz Ant1

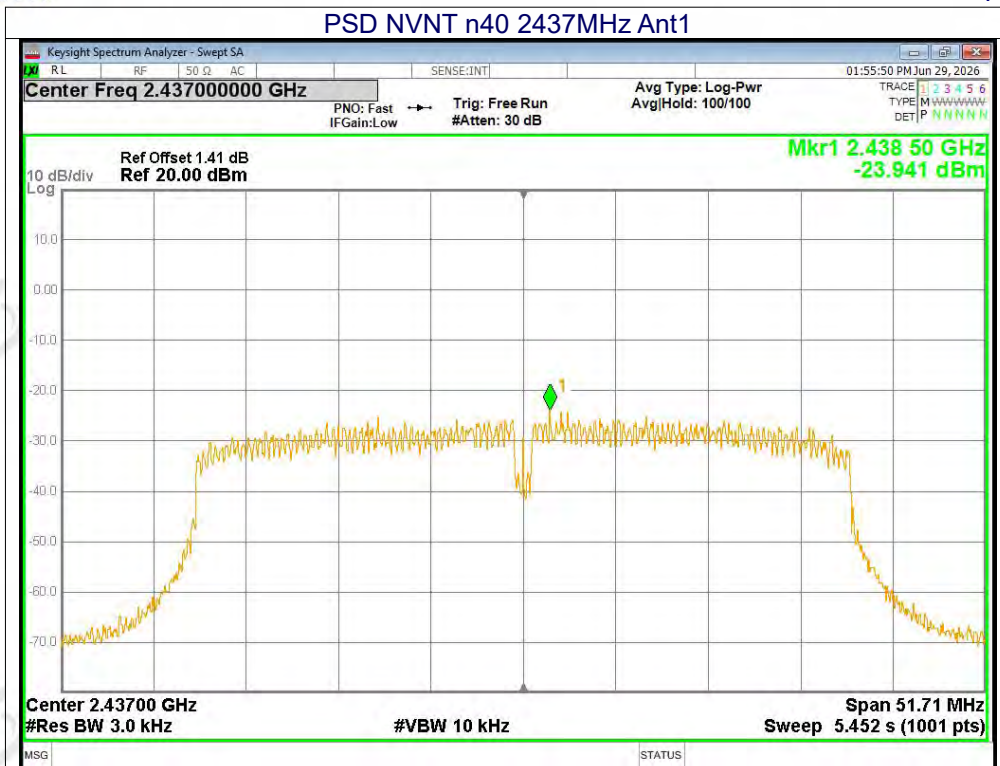


PSD NVNT n40 2452MHz Ant1

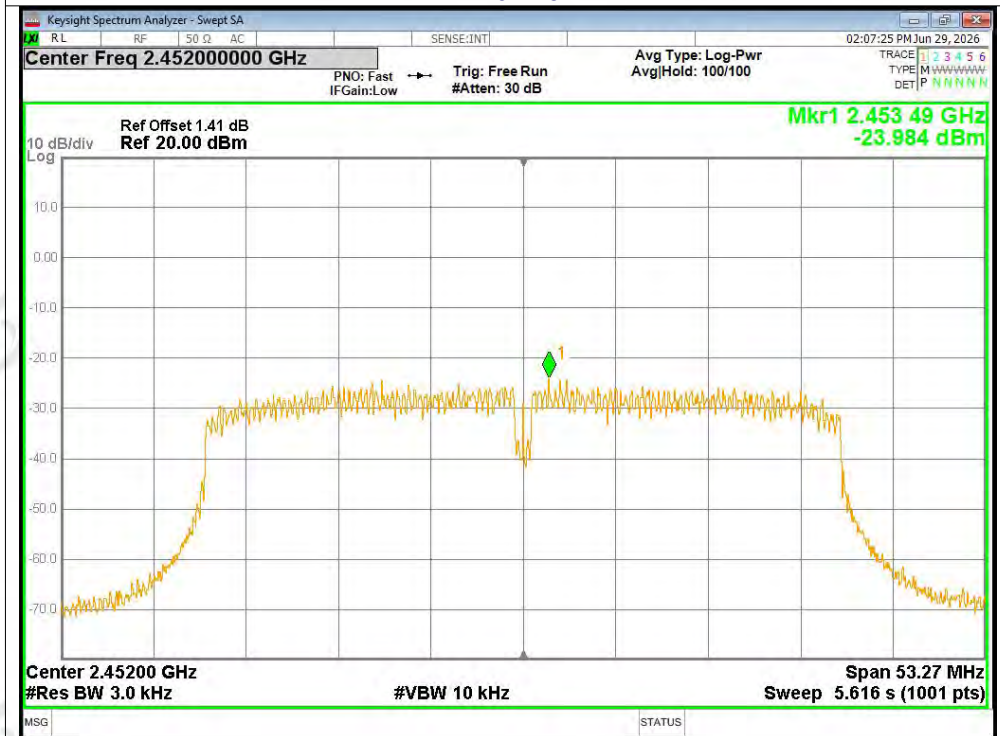




Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-48.55	-20	Pass
b	2462	Ant1	-52.43	-20	Pass
g	2412	Ant1	-40.3	-20	Pass
g	2462	Ant1	-46.05	-20	Pass
n20	2412	Ant1	-41.33	-20	Pass
n20	2462	Ant1	-46.33	-20	Pass
n40	2422	Ant1	-36.98	-20	Pass
n40	2452	Ant1	-43.34	-20	Pass

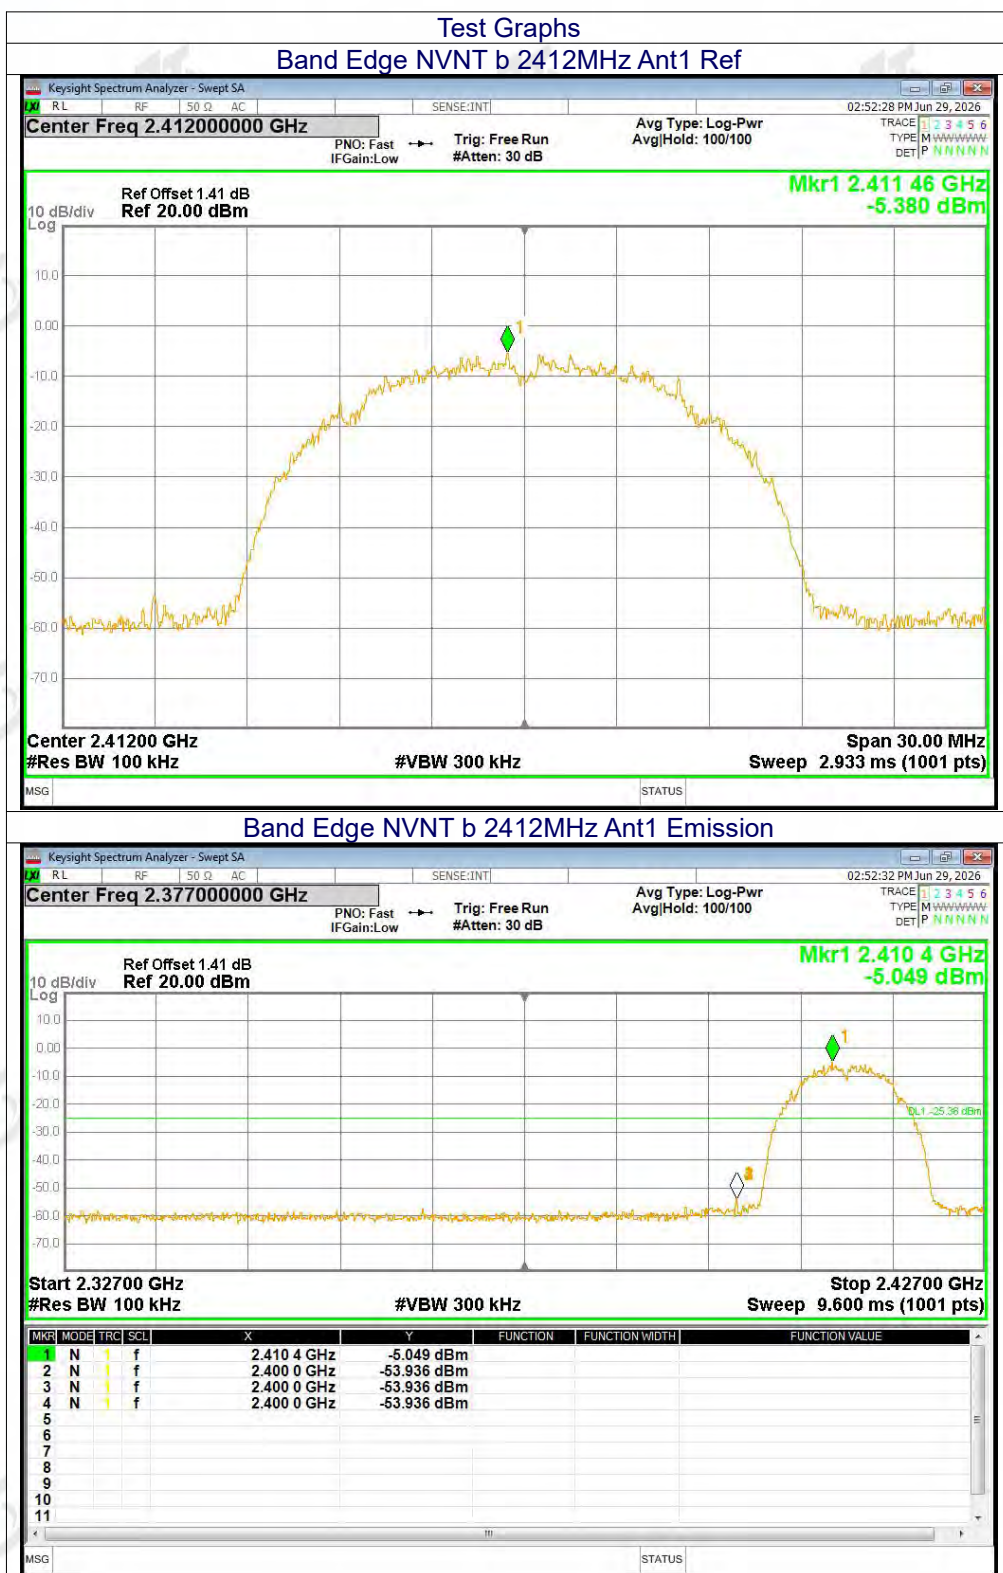




Band Edge NVNT b 2462MHz Ant1 Ref

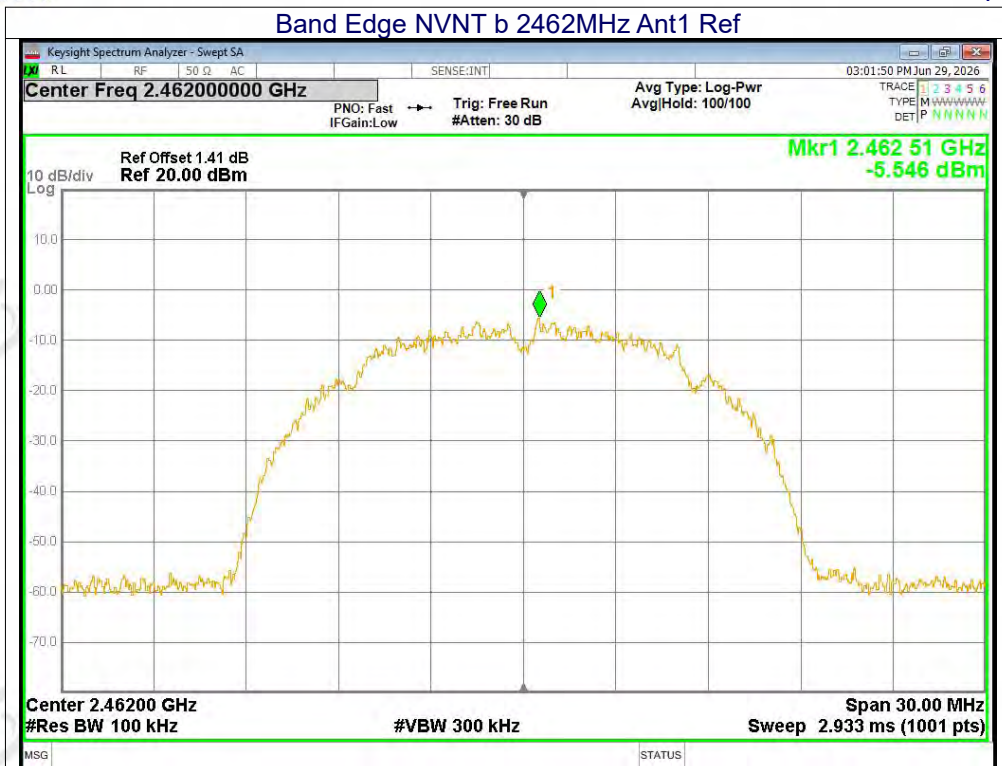

Band Edge NVNT b 2462MHz Ant1 Emission

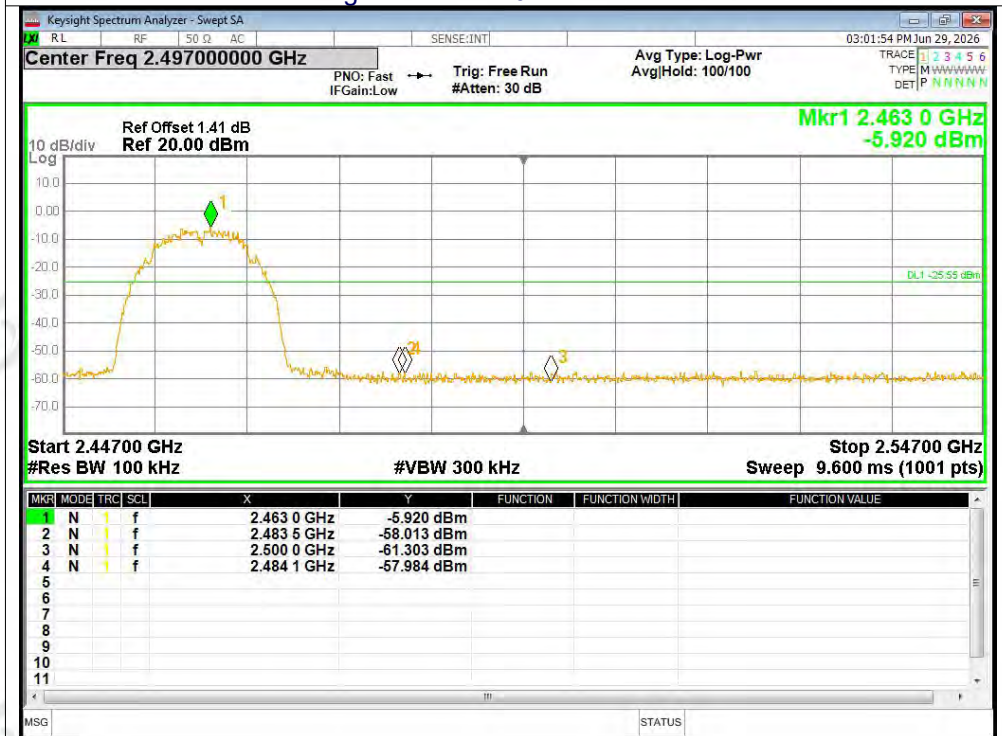




Band Edge NVNT g 2412MHz Ant1 Ref




Band Edge NVNT g 2412MHz Ant1 Emission

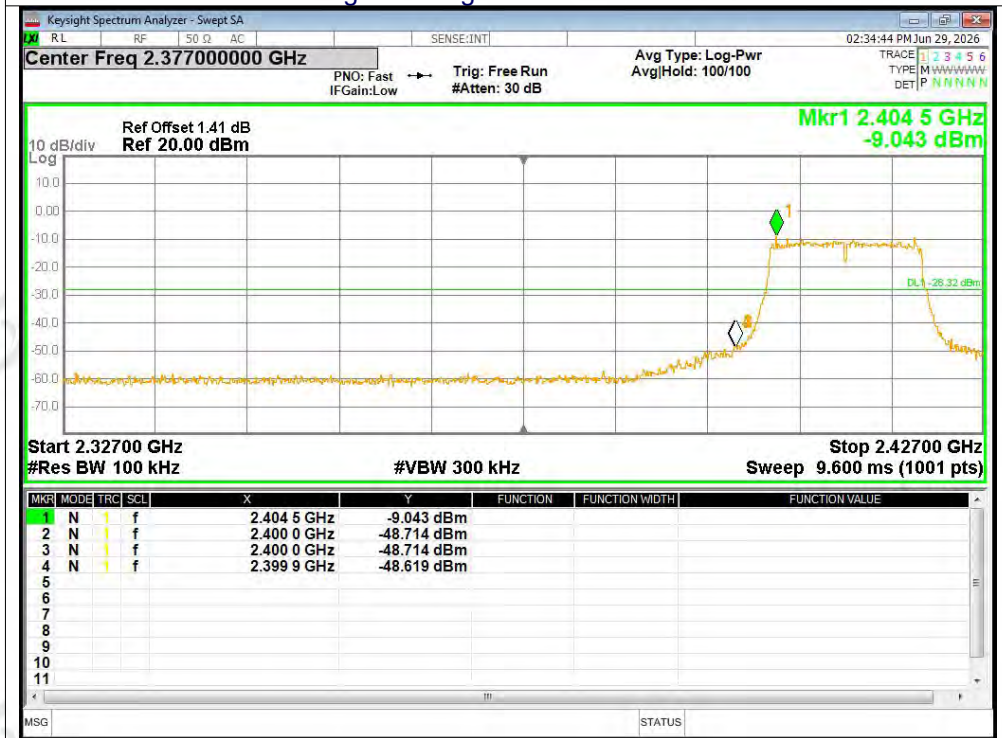




Band Edge NVNT g 2462MHz Ant1 Ref

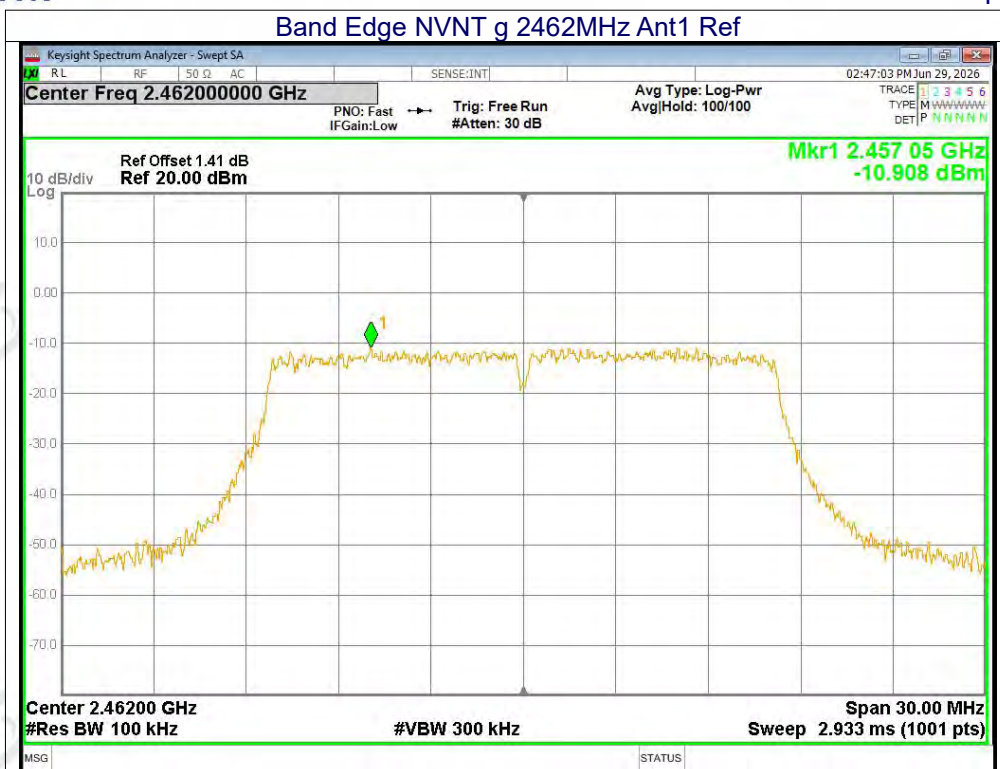


Band Edge NVNT g 2462MHz Ant1 Emission

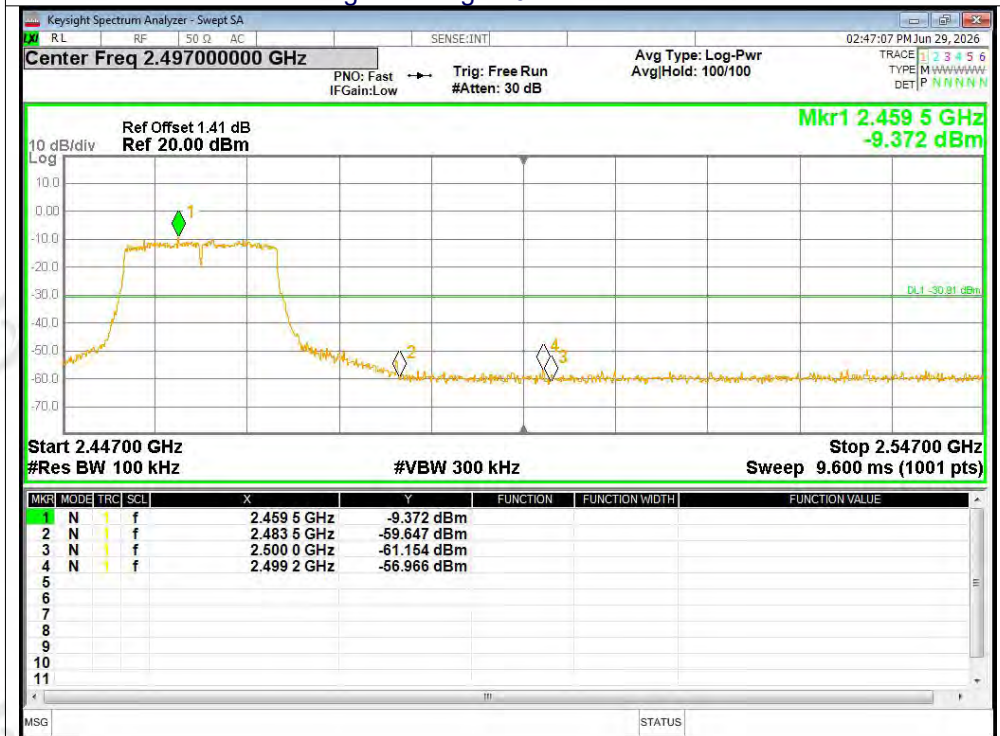




Band Edge NVNT n20 2412MHz Ant1 Ref

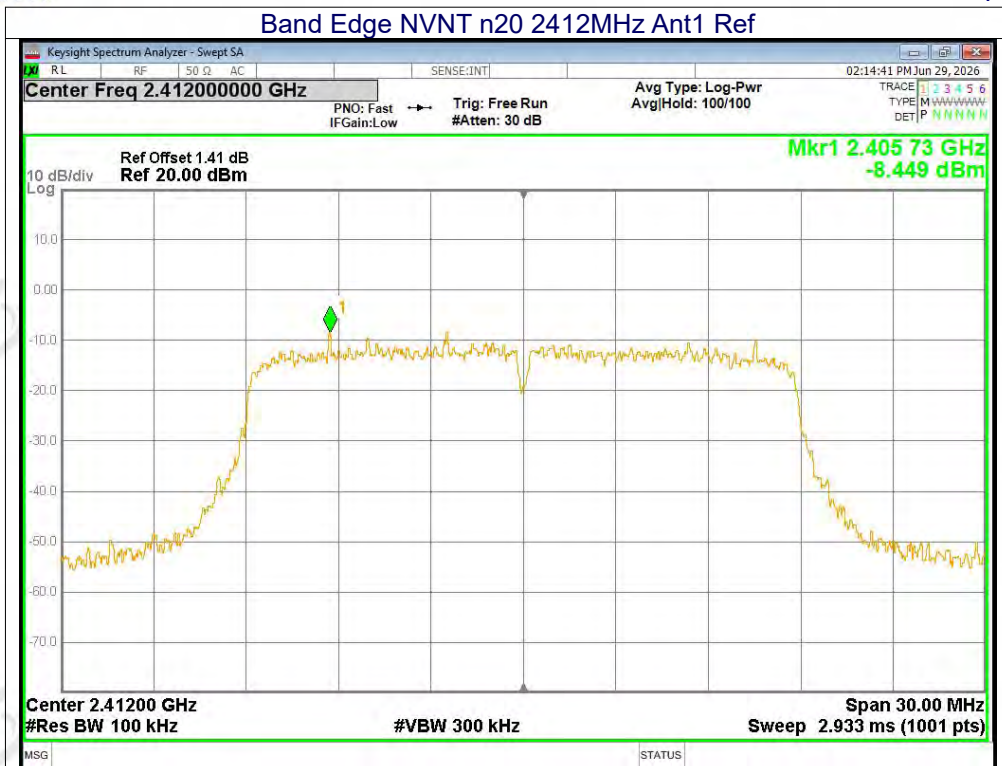


Band Edge NVNT n20 2412MHz Ant1 Emission

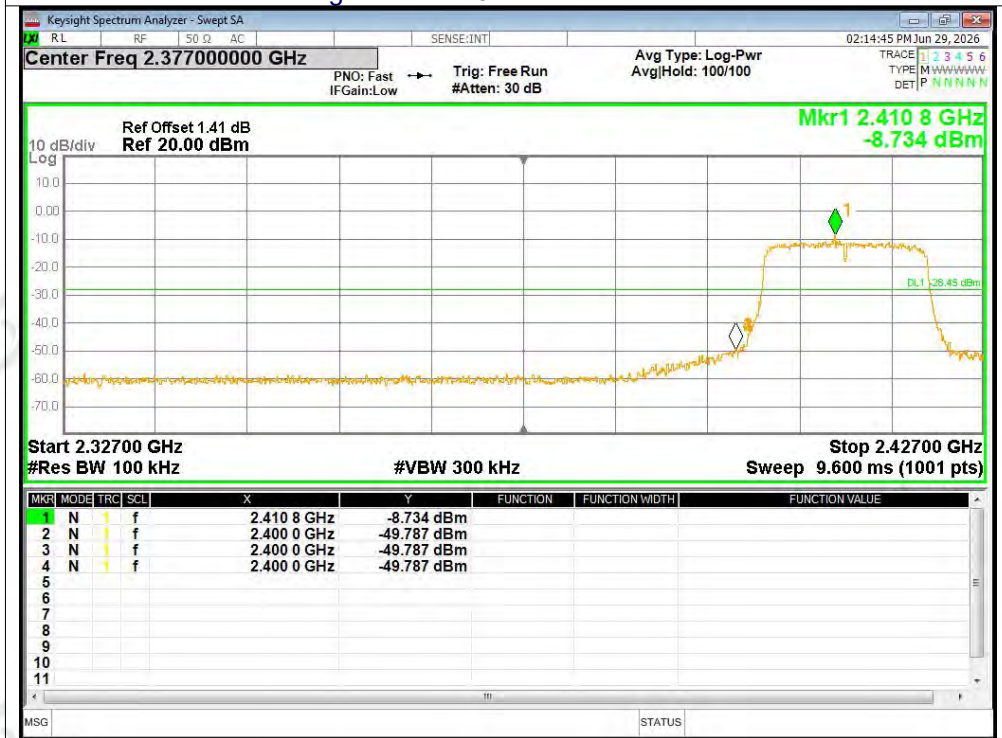




Band Edge NVNT n20 2462MHz Ant1 Ref

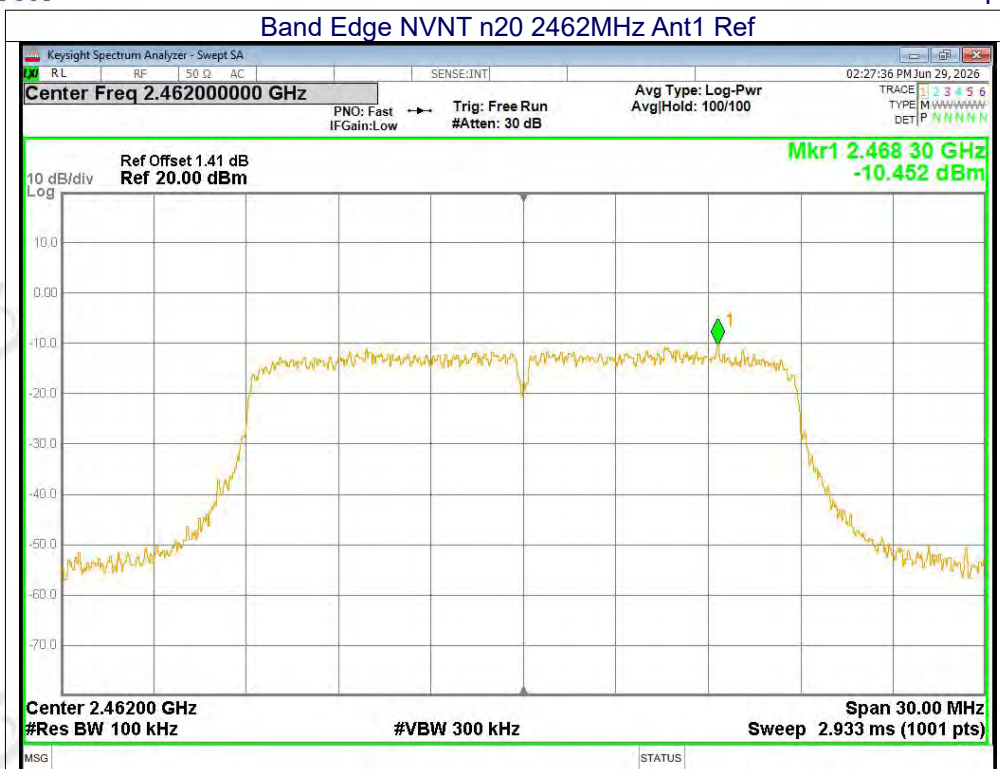


Band Edge NVNT n20 2462MHz Ant1 Emission

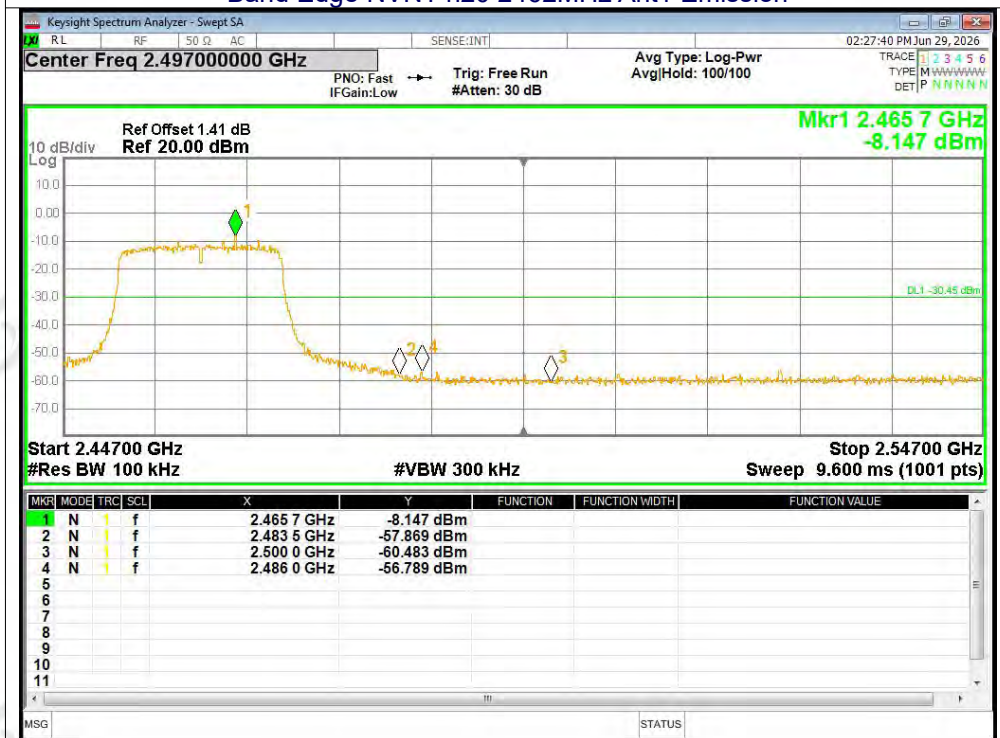




Band Edge NVNT n40 2422MHz Ant1 Ref

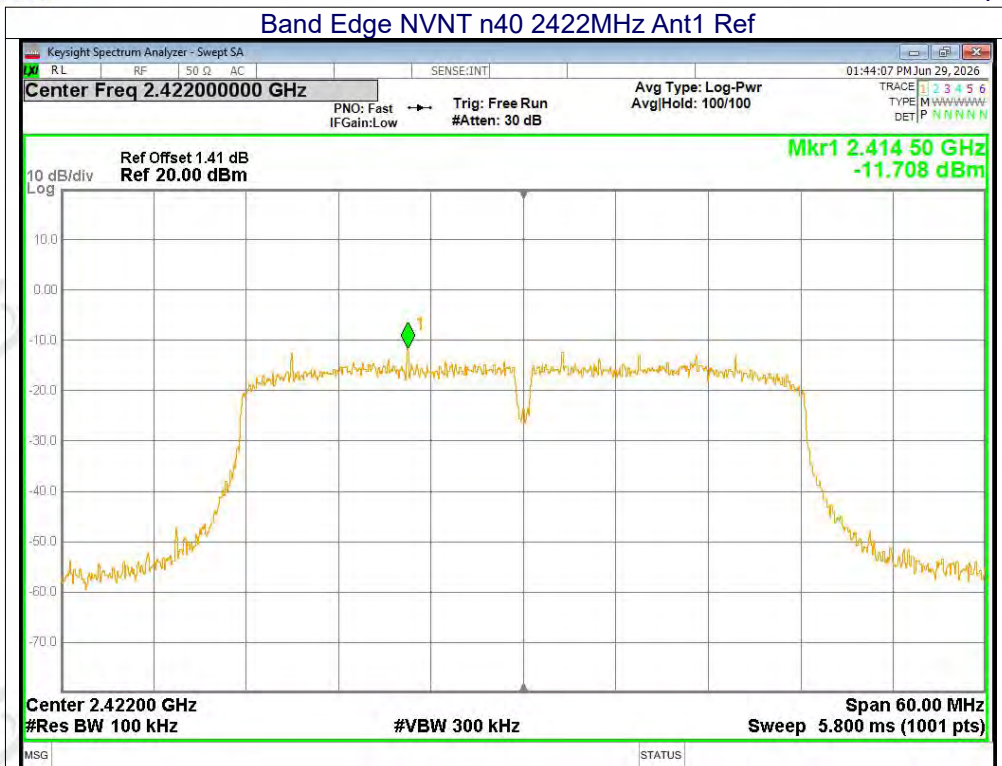


Band Edge NVNT n40 2422MHz Ant1 Emission

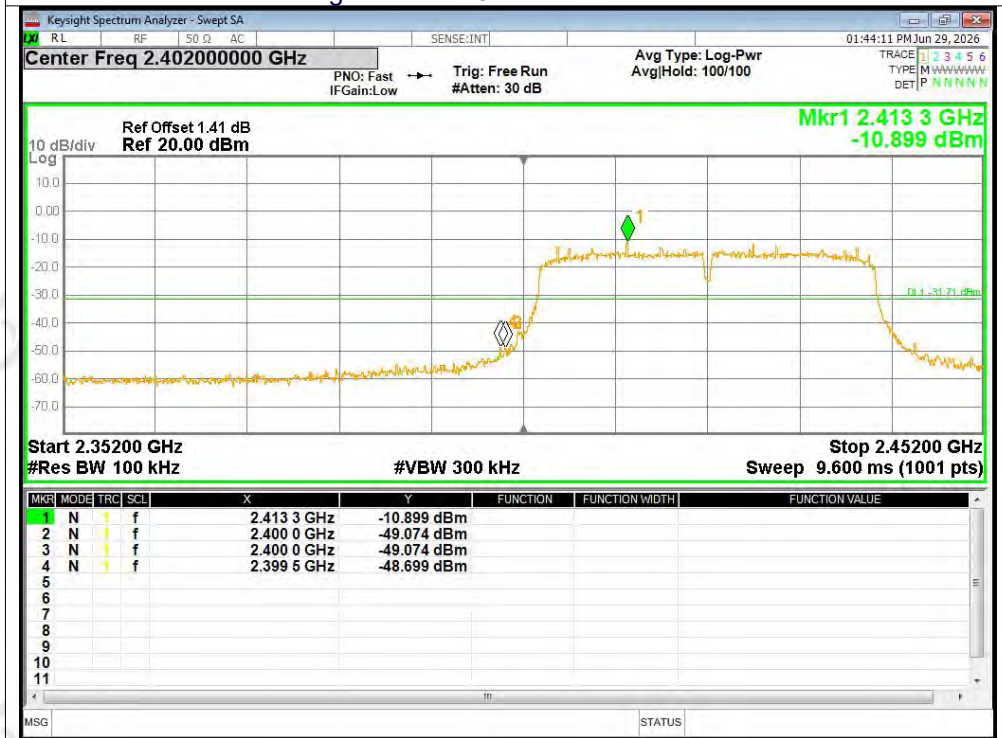




Band Edge NVNT n40 2452MHz Ant1 Ref

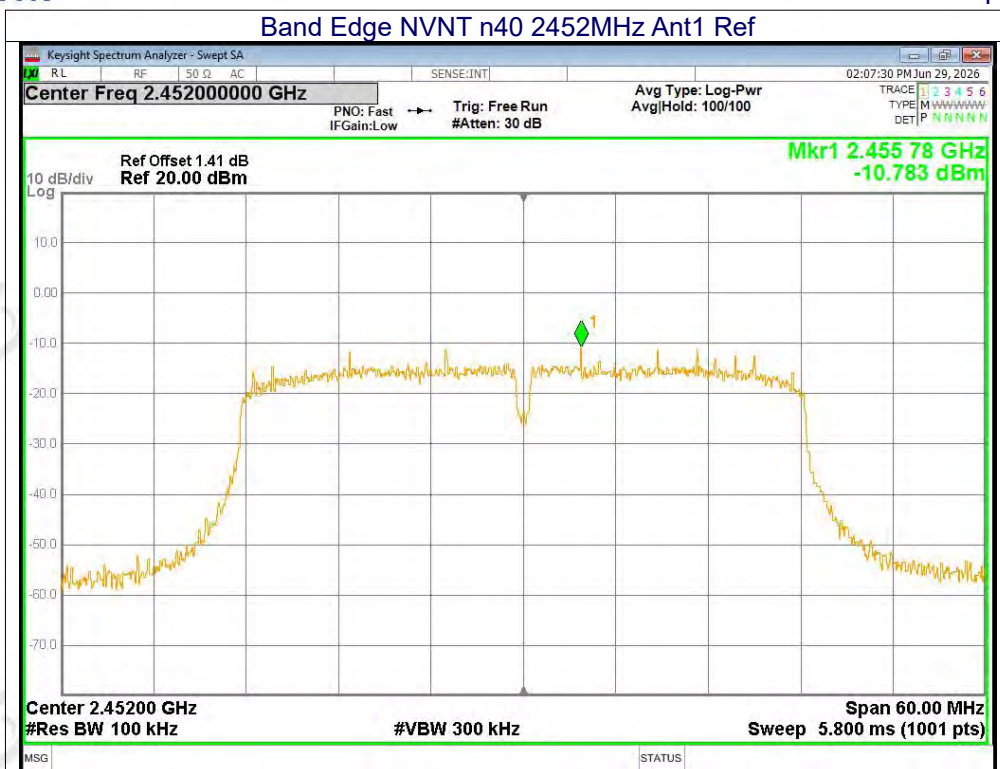

Band Edge NVNT n40 2452MHz Ant1 Emission

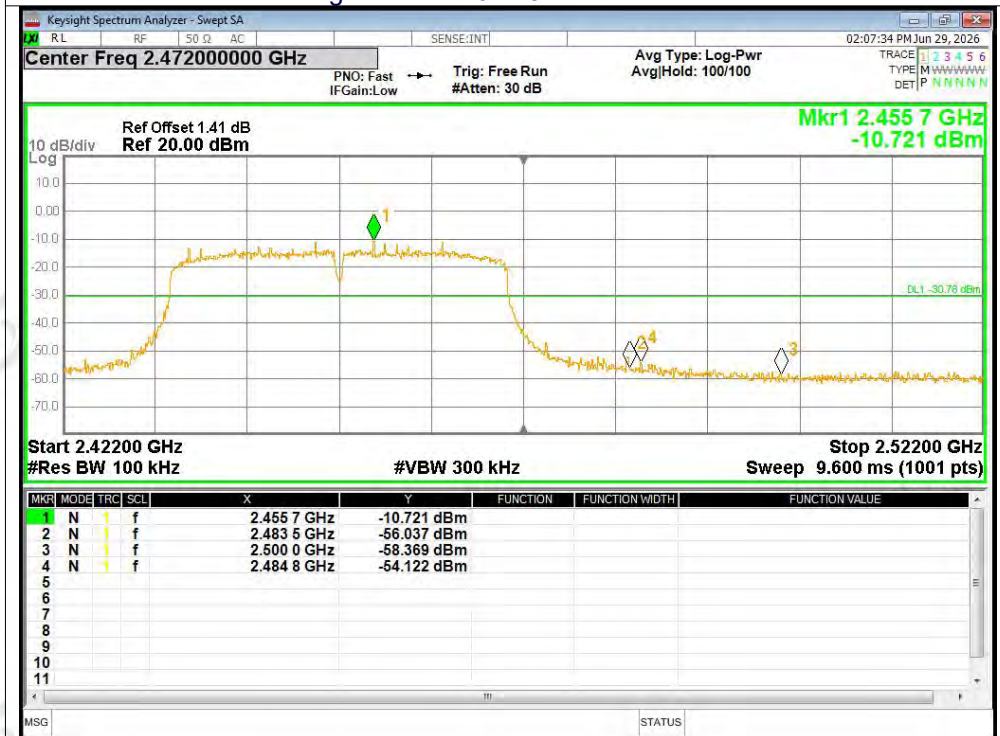



10.7 CONDUCTED RF SPURIOUS EMISSION


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-41.92	-20	Pass
b	2437	Ant1	-41.54	-20	Pass
b	2462	Ant1	-41.67	-20	Pass
g	2412	Ant1	-38.39	-20	Pass
g	2437	Ant1	-38.01	-20	Pass
g	2462	Ant1	-37.08	-20	Pass
n20	2412	Ant1	-38.75	-20	Pass
n20	2437	Ant1	-39.12	-20	Pass
n20	2462	Ant1	-39.23	-20	Pass
n40	2422	Ant1	-36.03	-20	Pass
n40	2437	Ant1	-35.57	-20	Pass
n40	2452	Ant1	-35.85	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref




Tx. Spurious NVNT b 2412MHz Ant1 Emission

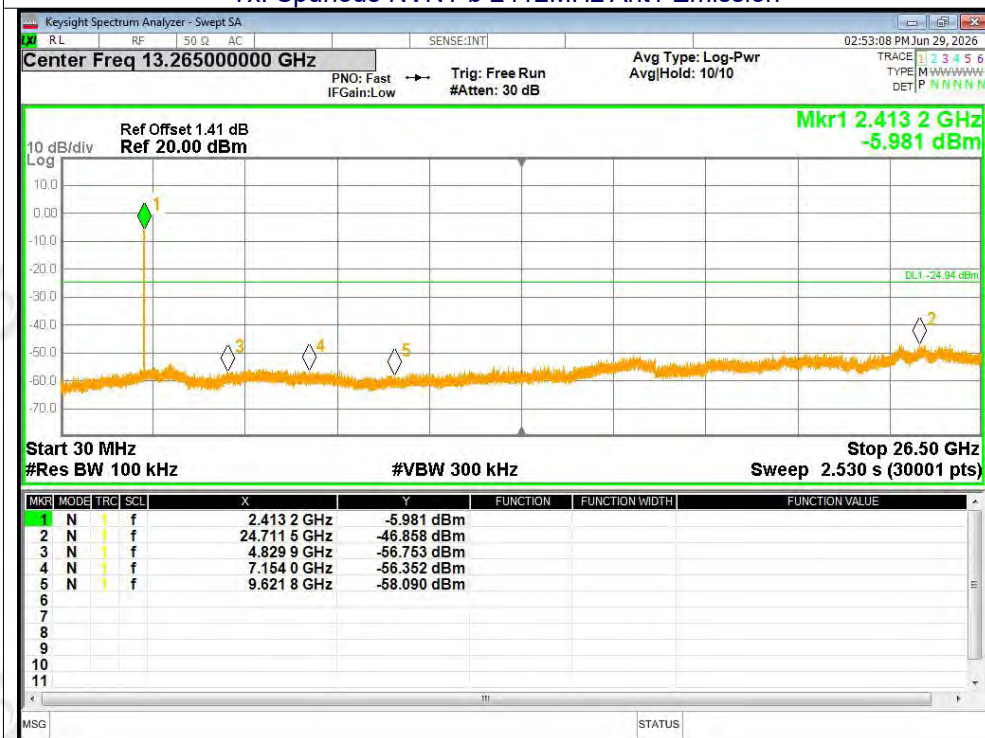




Tx. Spurious NVNT b 2437MHz Ant1 Ref

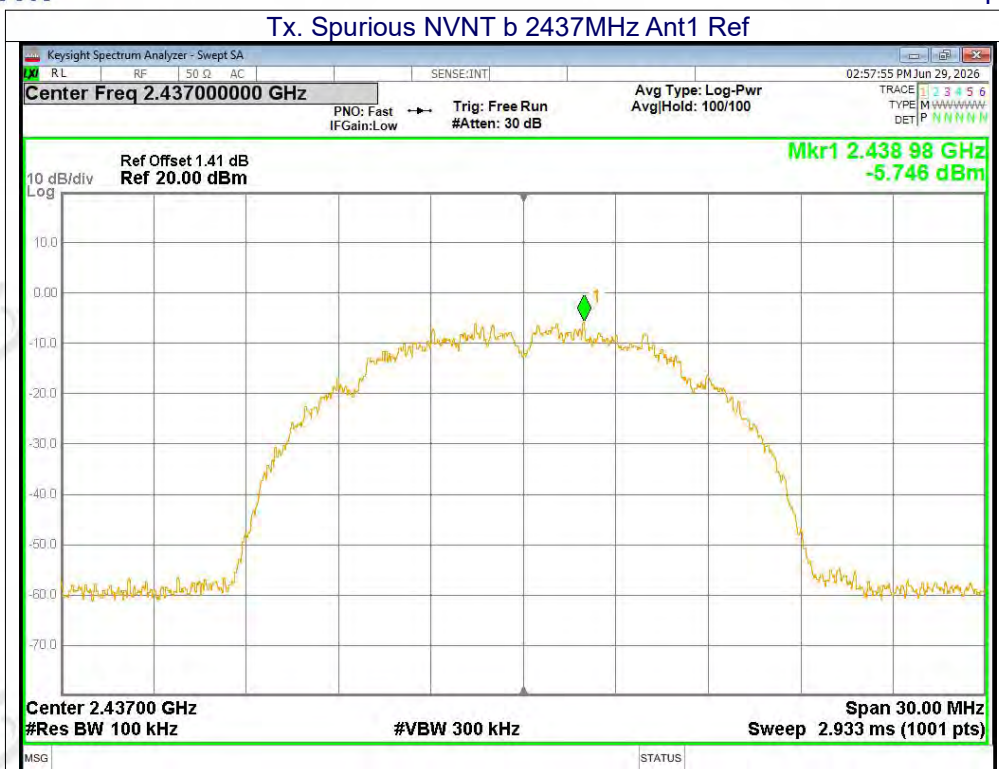


Tx. Spurious NVNT b 2437MHz Ant1 Emission

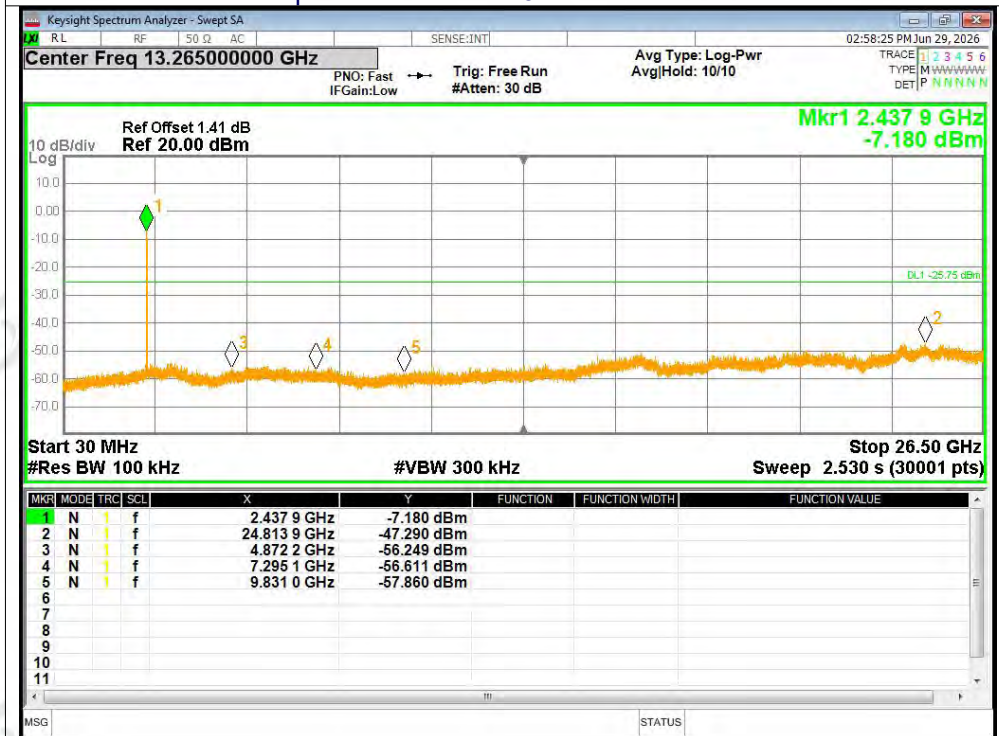




Tx. Spurious NVNT b 2462MHz Ant1 Ref

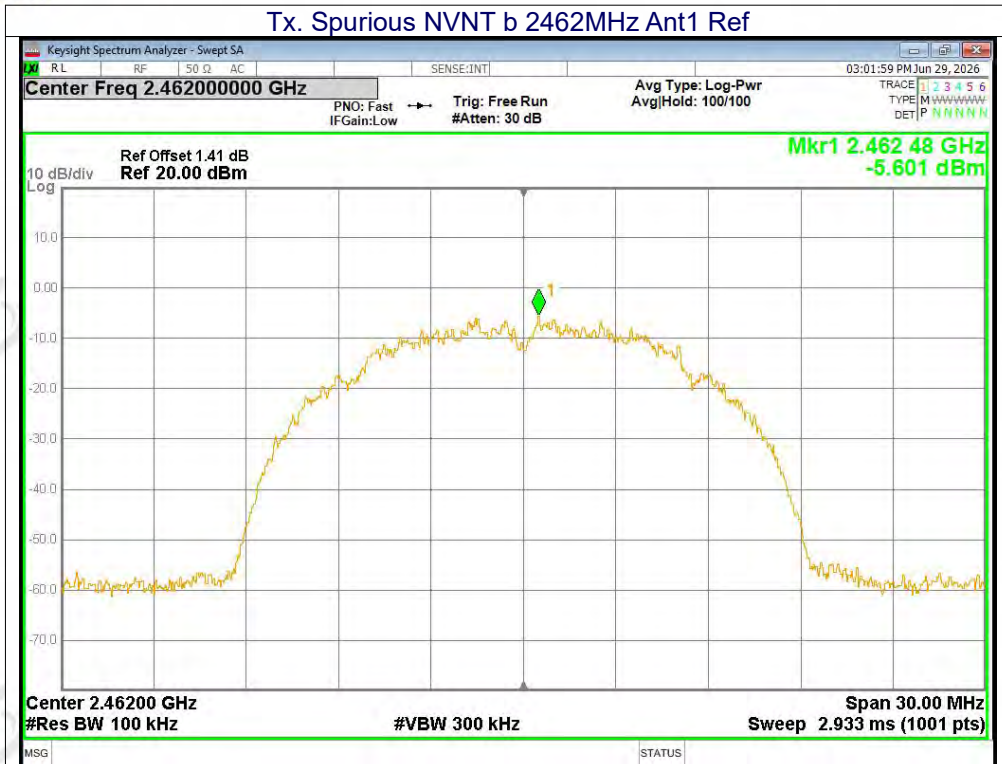


Tx. Spurious NVNT b 2462MHz Ant1 Emission

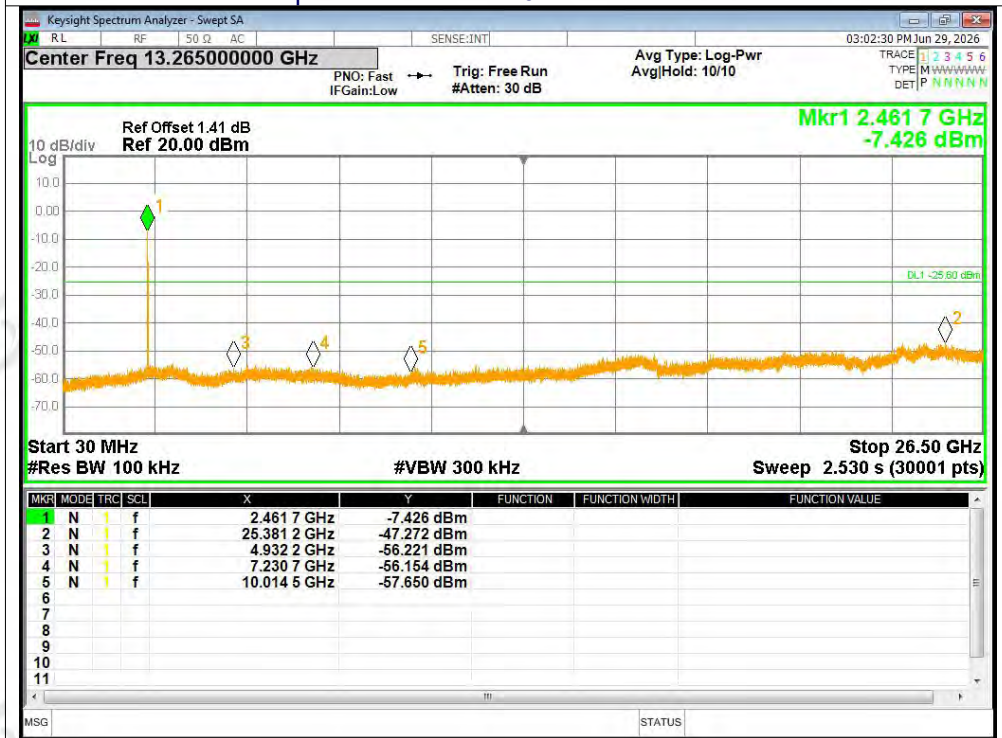




Tx. Spurious NVNT g 2412MHz Ant1 Ref

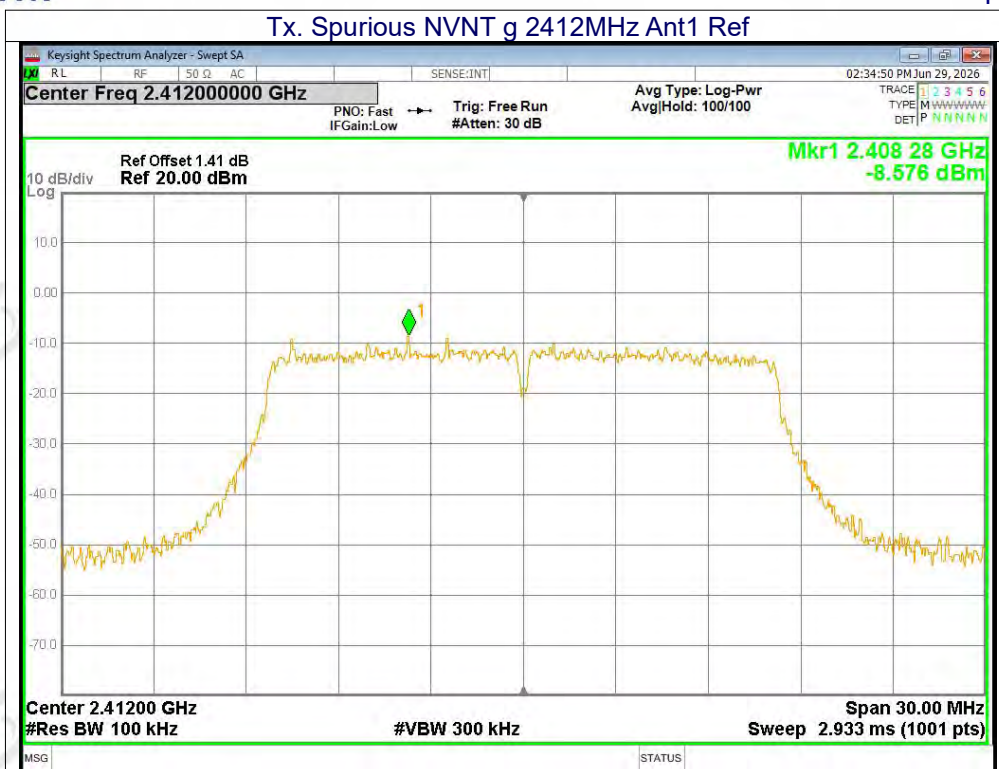


Tx. Spurious NVNT g 2412MHz Ant1 Emission

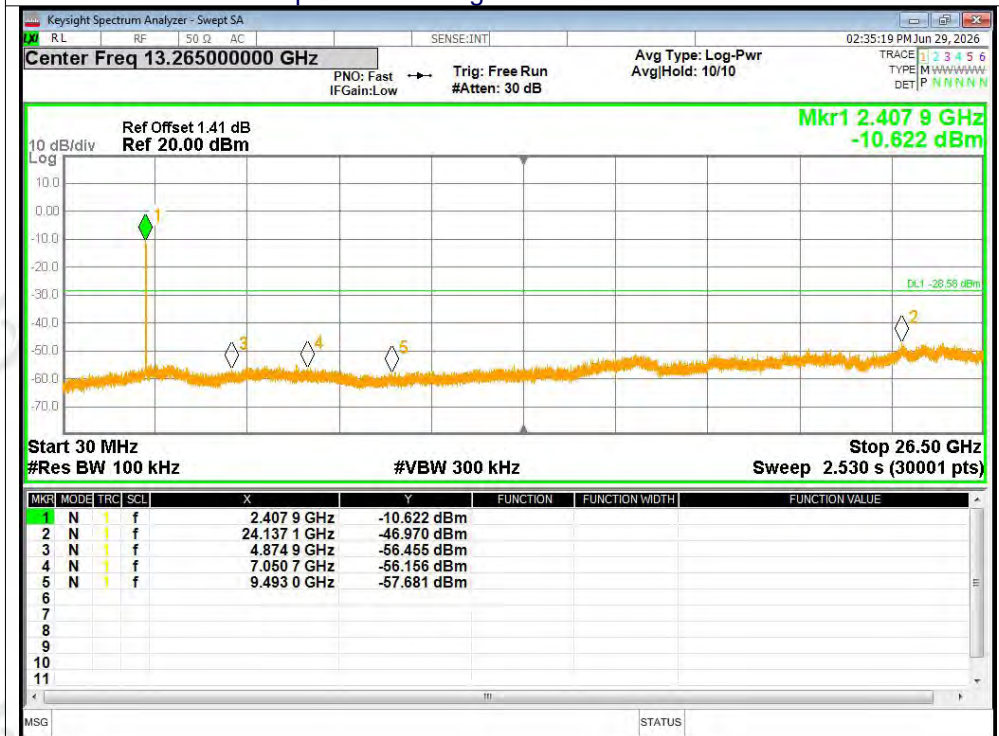




Tx. Spurious NVNT g 2437MHz Ant1 Ref

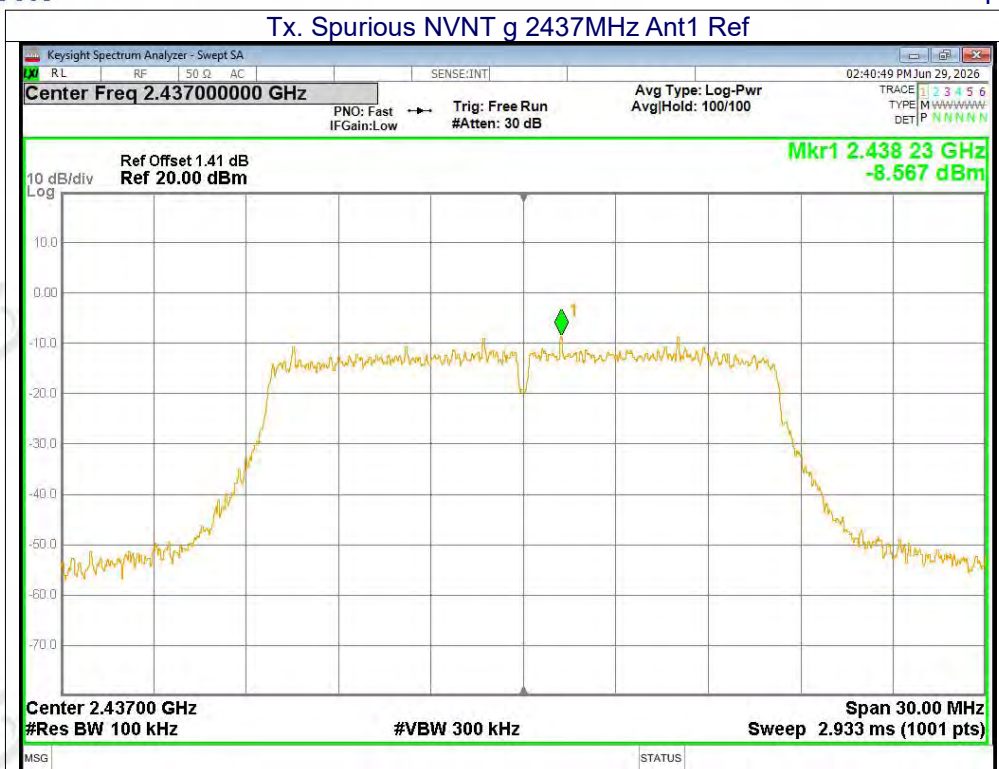


Tx. Spurious NVNT g 2437MHz Ant1 Emission

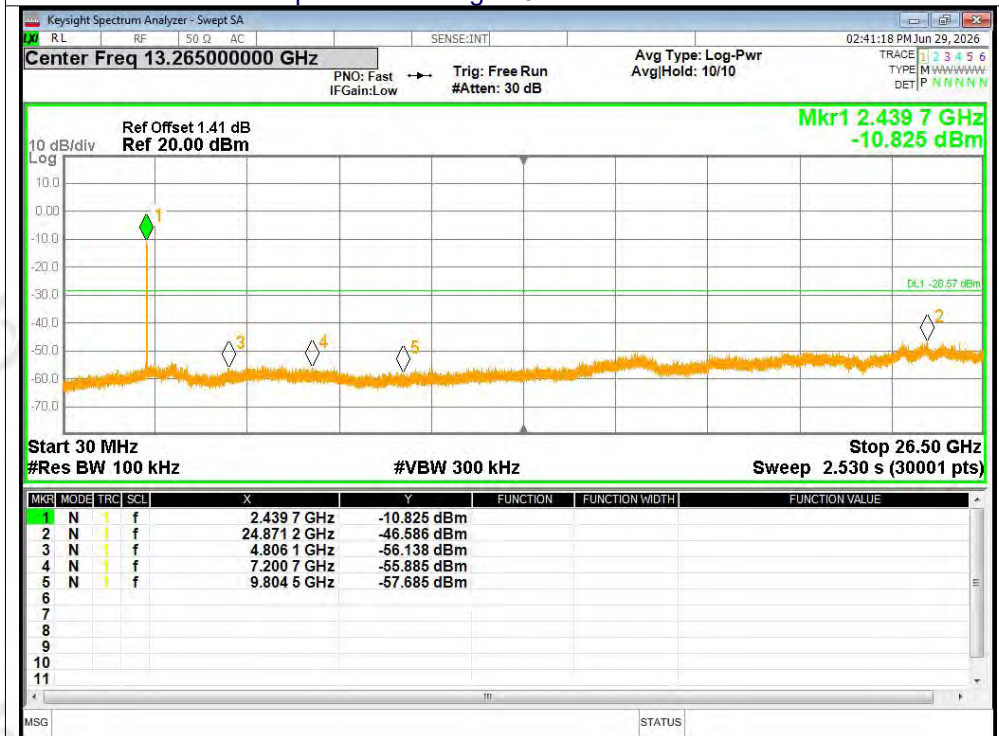




Tx. Spurious NVNT g 2462MHz Ant1 Ref

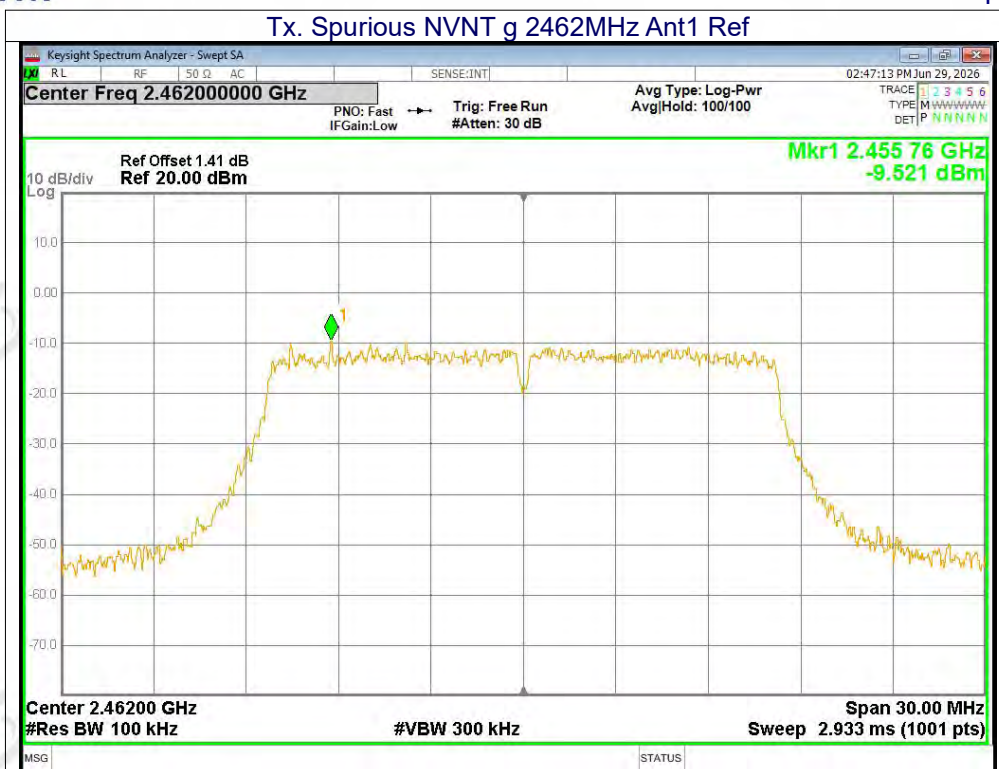


Tx. Spurious NVNT g 2462MHz Ant1 Emission

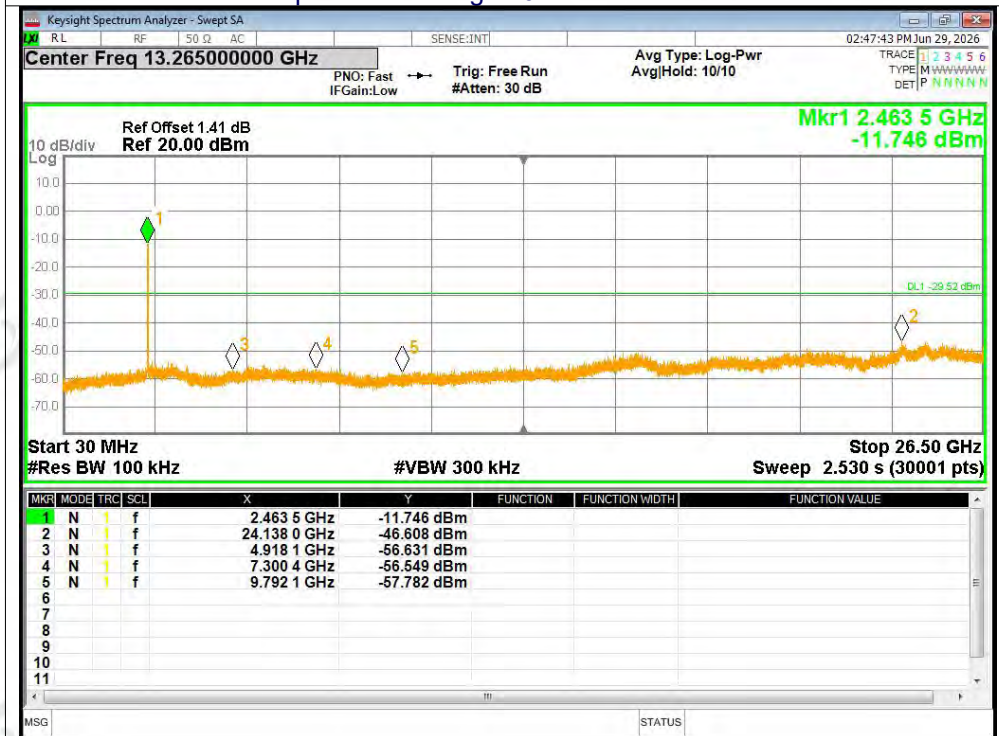




Tx. Spurious NVNT n20 2412MHz Ant1 Ref

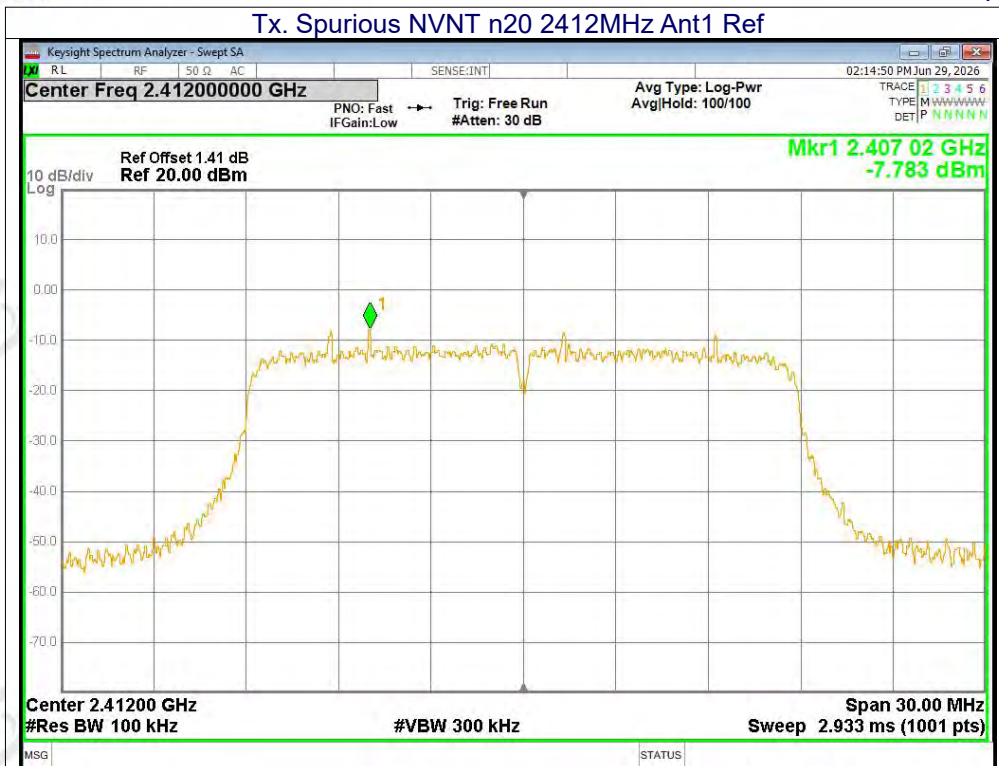


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

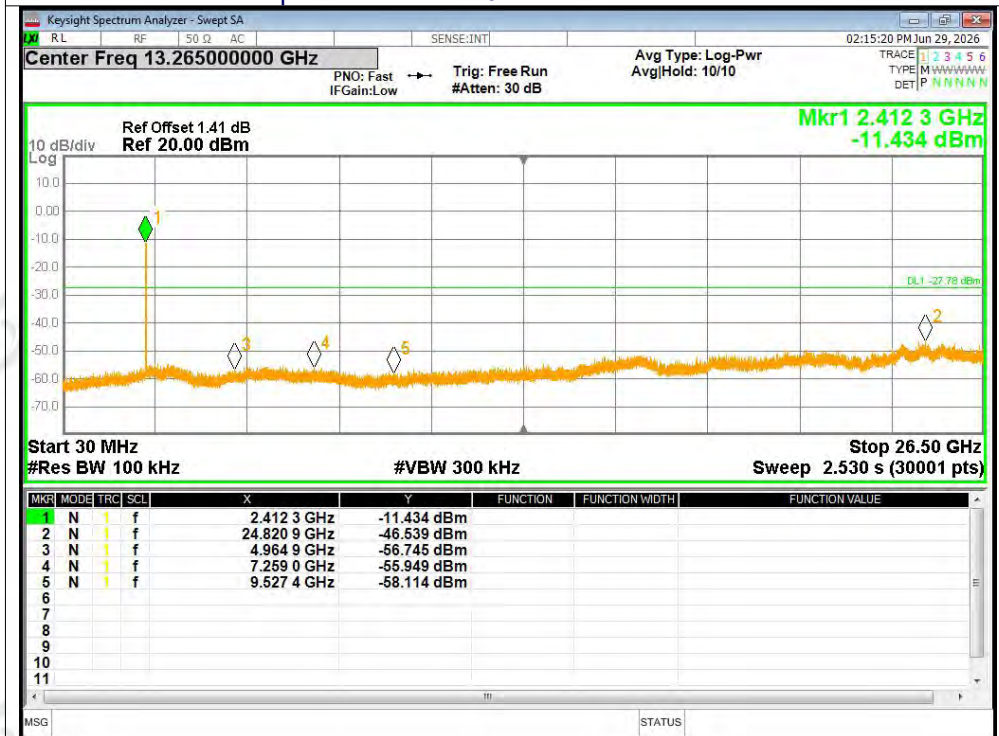




Tx. Spurious NVNT n20 2437MHz Ant1 Ref

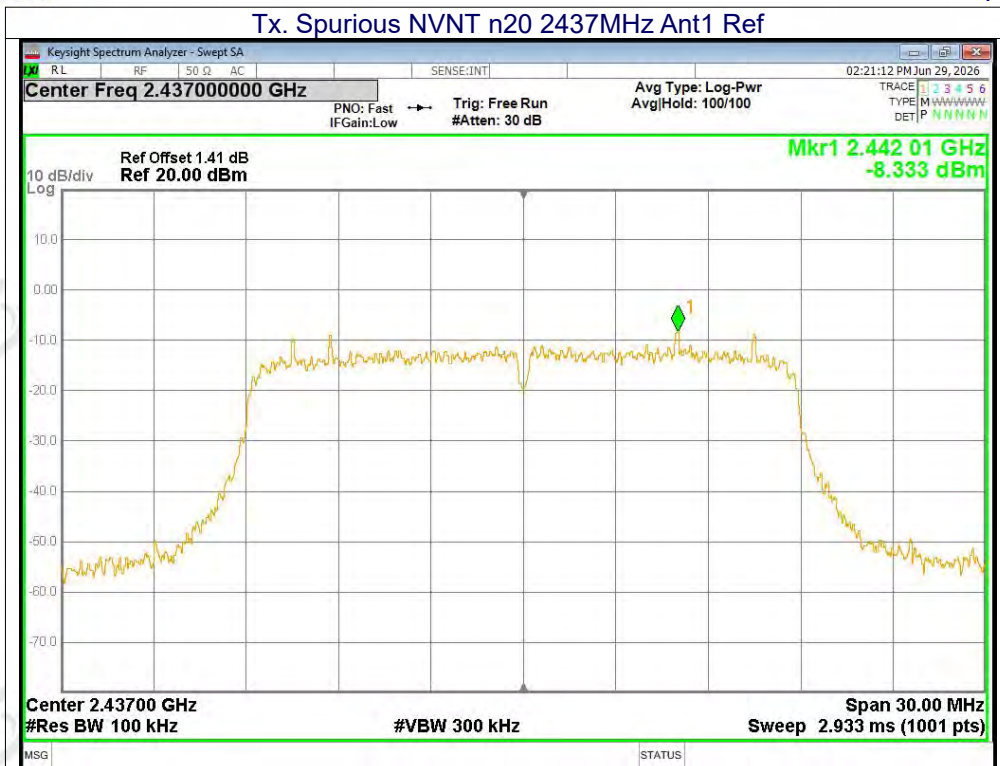


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

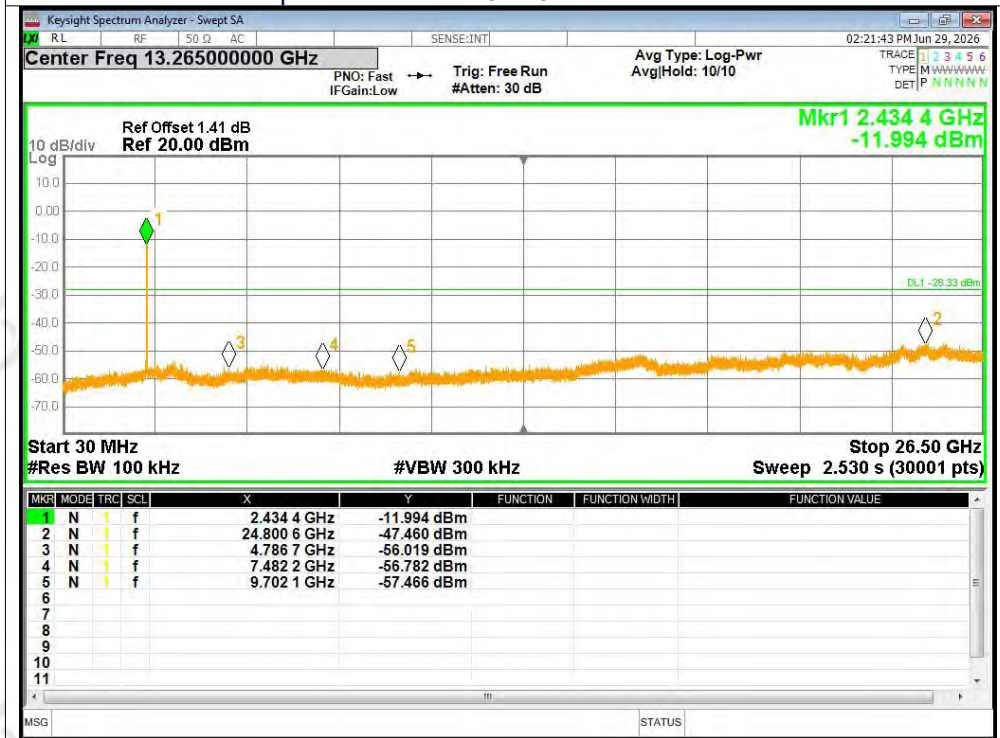




Tx. Spurious NVNT n20 2462MHz Ant1 Ref

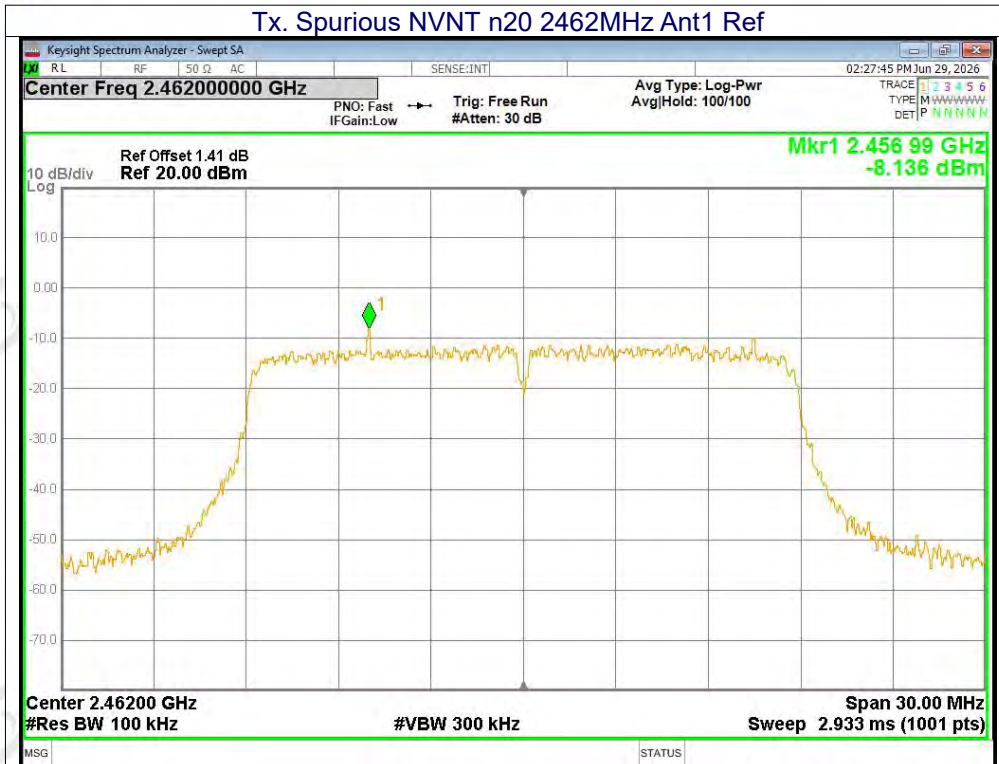


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

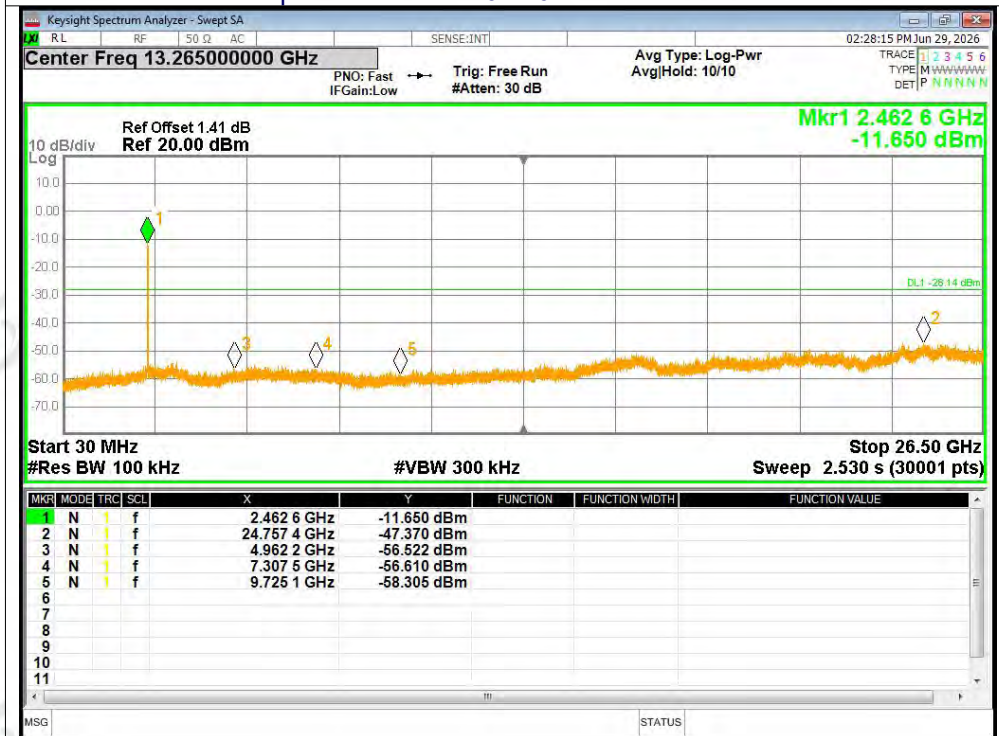






Tx. Spurious NVNT n40 2422MHz Ant1 Ref

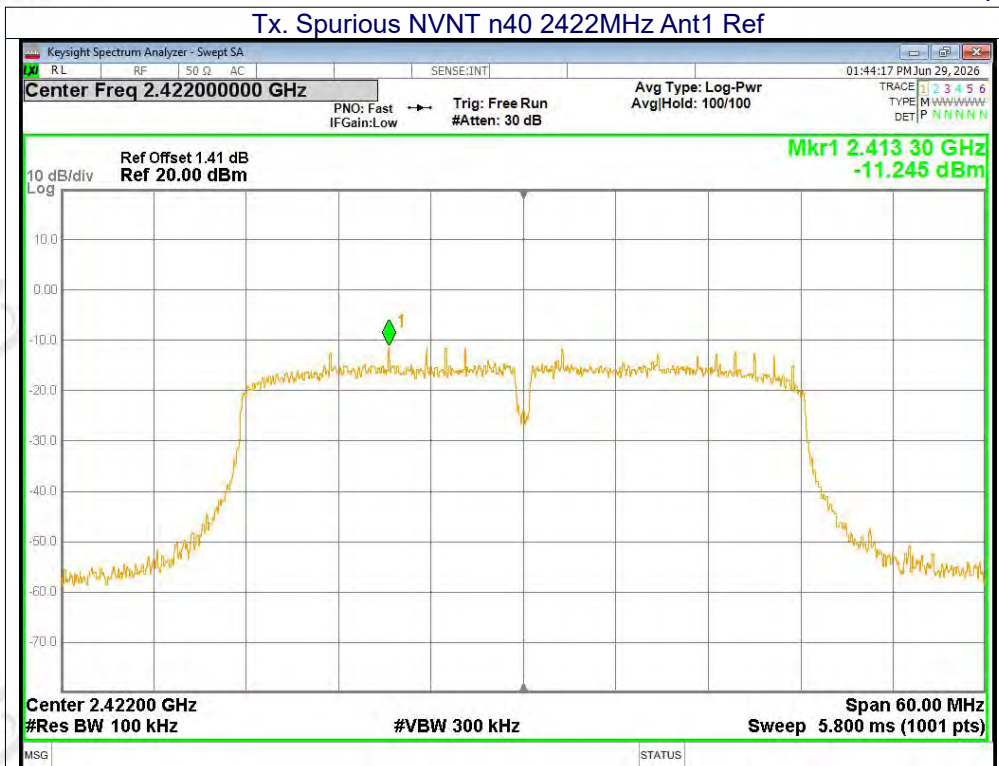

Tx. Spurious NVNT n40 2422MHz Ant1 Emission

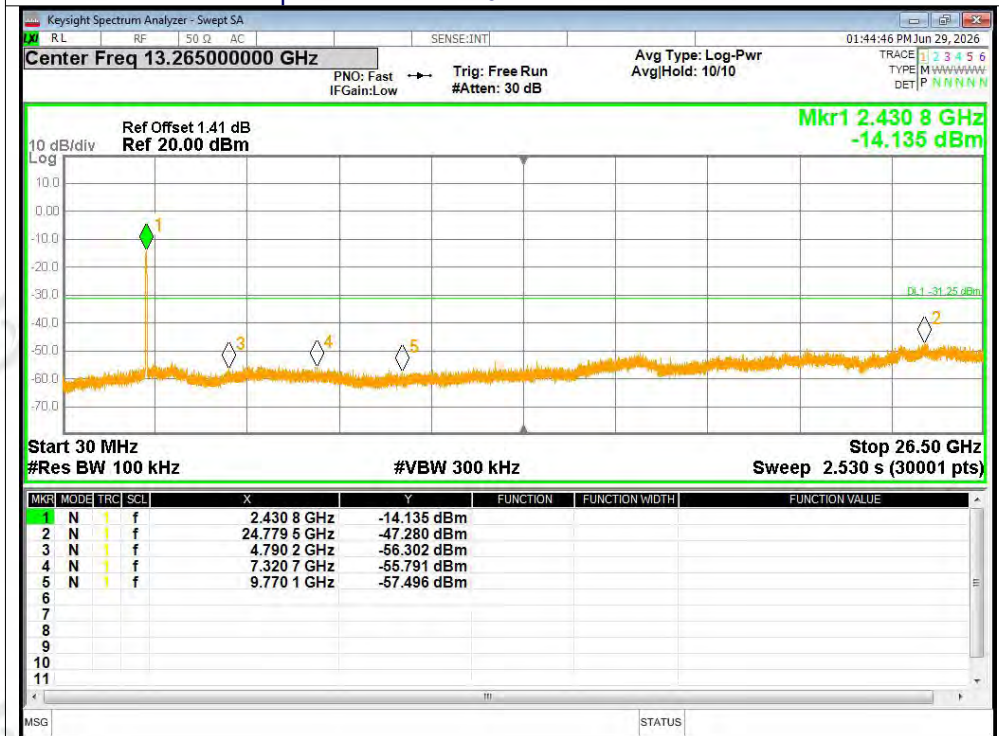

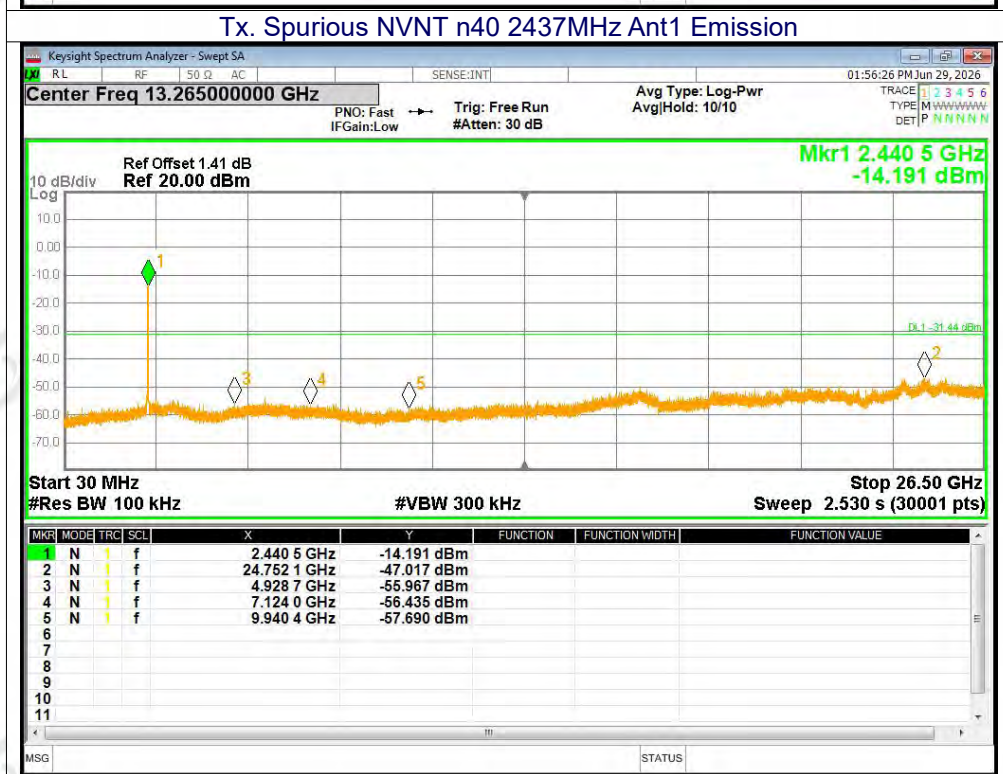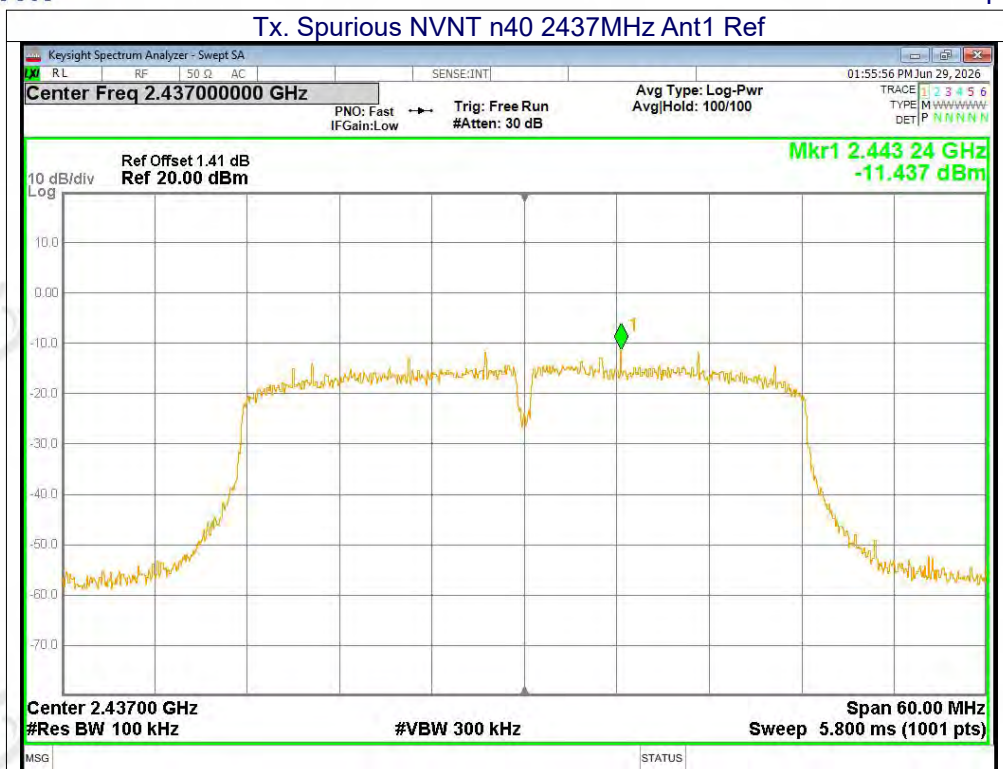




Tx. Spurious NVNT n40 2452MHz Ant1 Ref



Tx. Spurious NVNT n40 2452MHz Ant1 Emission

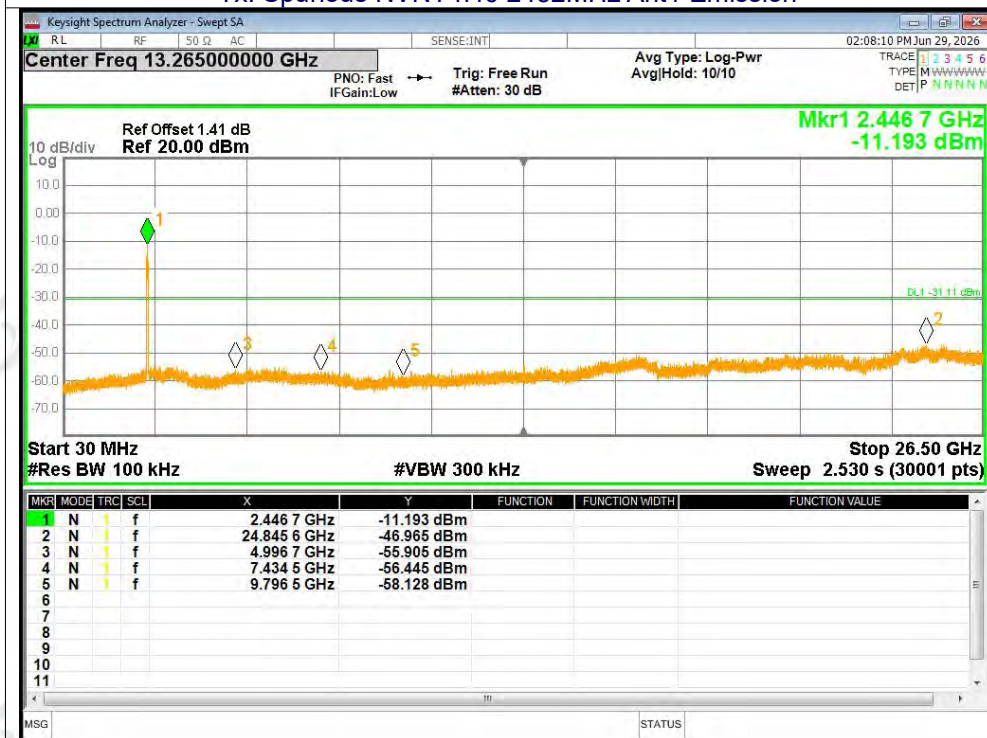



11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****