



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: Sorenson Communications, LLC

Product Name: 2.4G Antenna

Product Model: P3

Part Number: LJT02-23112508-R0A

Write By : Mingjin Li

Issued Date: 2023-11-25

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2023/11/25	

Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	5
8. Product Drawing	6

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2525 MHz
VSWR	<2.0
Efficiency	≥40%
Impedance	50Ohm
Polarization	Linear
Gain(2.4G)	2.07dBi
B. Material & Mechanical Characteristics	
Material of Radiator	Copper tube
Cable Type	Φ1.13mm,L70mm,black
Connector Type	IPX1
Dimension	Φ4.4mm*24.0mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- 1.Network Analyzers Agilent 8753D/5071C
- 2.HSPA and LTE protocol test set R&S CMW500 -PT
- 3.Communications Test Set Agilent 8960
- 4.3D Chamber Test System

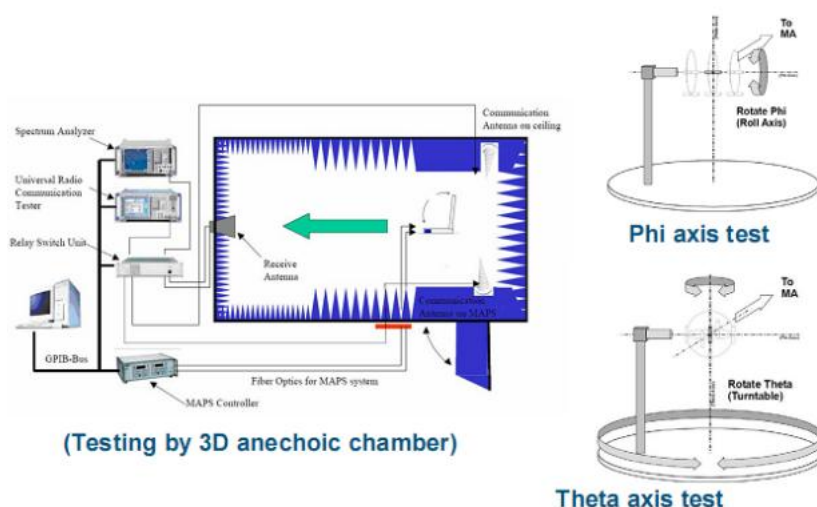


Chart 1 Test topology



5.Test Report

5.1 Voltage Standing Wave Ratio(VSWR).


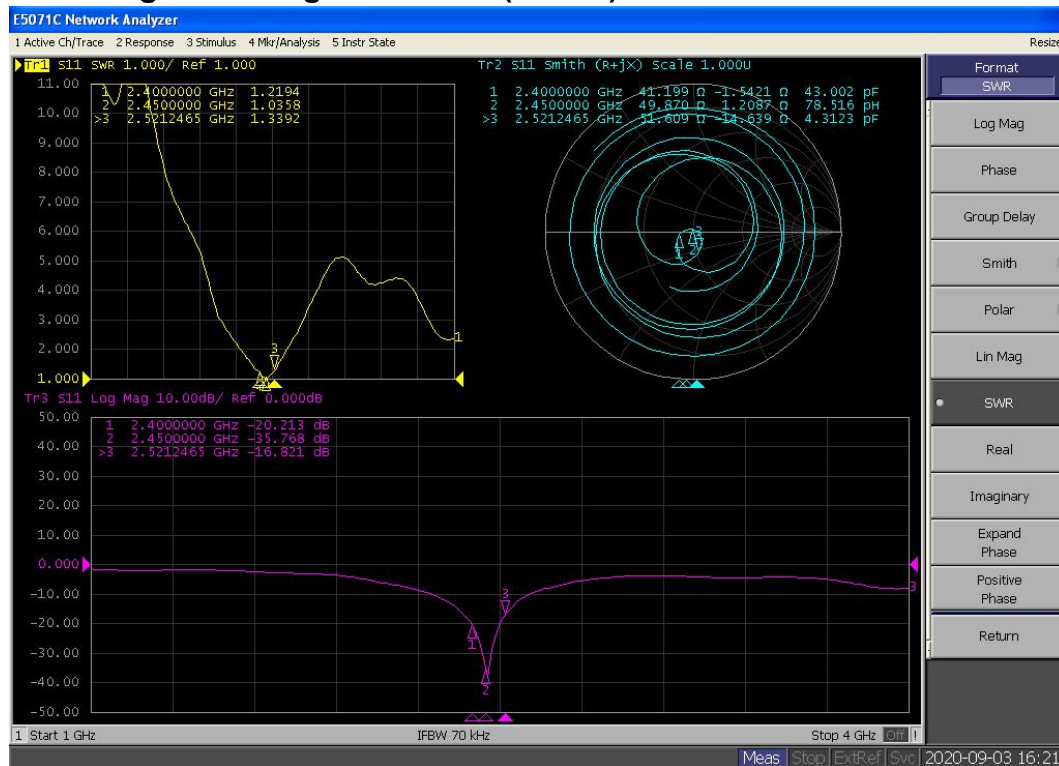



Chart 2 VSWR

5.2 Efficient and gain.

Passive	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500	2510	2520	2530
Test For	Effi(%)	57.66	63.34	56.48	57.02	59.82	59.12	55.64	60.81	55.18	50.44	51.01	49.47	53.37	51.65
2.4GHz	Gain(dBi)	1.93	1.97	1.86	2.02	2.07	2.02	1.91	1.83	1.85	1.85	1.87	1.85	1.79	1.88

5.3 Radiation pattern.

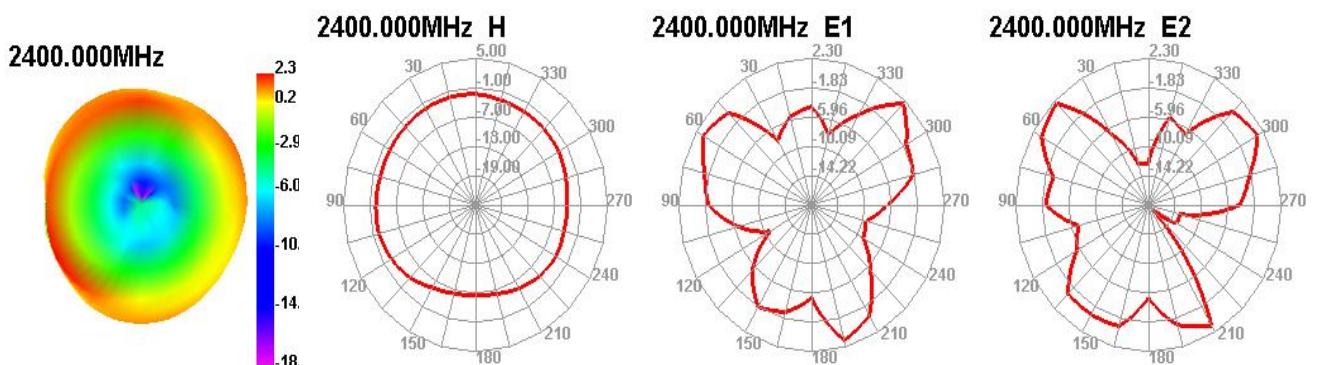

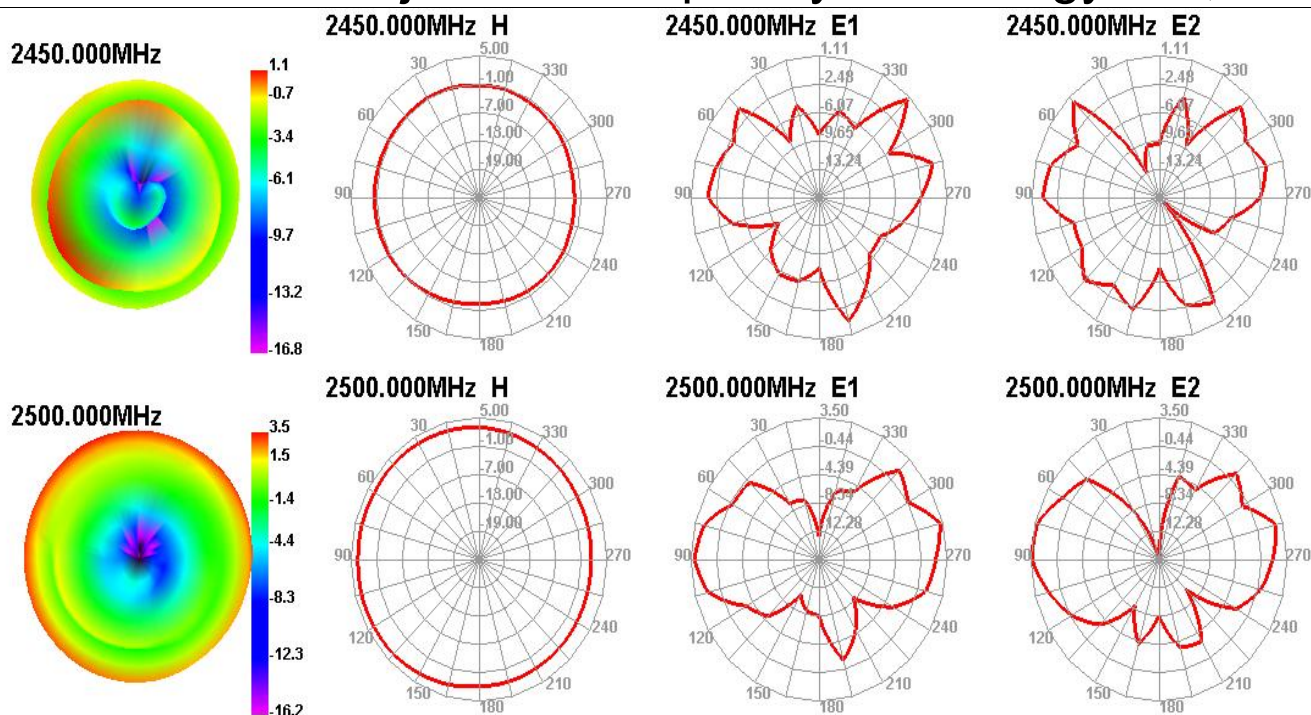


6. Reliability Test


Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp.&Hum. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp.&Hum. Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: 35±2℃ Humidity: 85% NaCl salt spray :5±1%.PH value :6.5~7.2 Testtime:24hours	Salt-Spray Tester	No color change No appear rusting	PASS

7. Assemble type

8. Product Drawing



线材焊铜管图

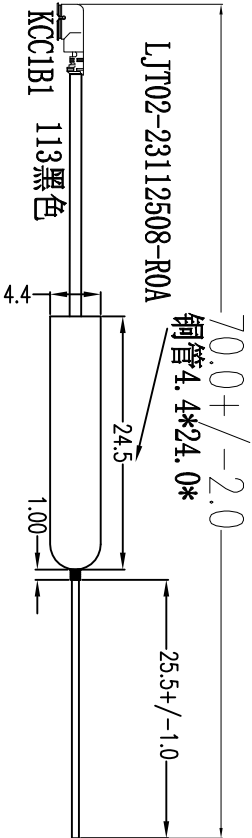

A										B										C										D																																																																					
Rohs Compliant G P																																								线材焊铜管图																																																											
LJT02-23112508-R0A 铜管4.4*24.0* 70.0+/-2.0 24.5 25.5+/-1.0 1.00 4.4 KCC1B1 113黑色																																																																																																			
Rev										Description										Date										Remark																																																																					
1										2										3										4																																																																					
A										New drawing																																																																																									
1										2										3										4																																																																					
5										6										7										8																																																																					
深 圳 市 乐 进 射 频 科 技 有 限 公 司																																																																																																			
										Third Angle										Project										ALK										Date										2023-11-25																																																	
0~10										±0.05										○										0.02										Part Name																																																											
10~18										±0.10										◎										ø0.03										Part No.																																																											
18~30										±0.12										⊥										0.02										Material																																																											
30~40										±0.15										∠										0.04										DWG No.																																																											
40~										±0.20										Angle										±0.5°										Unit										mm										Scale										1:1										Rev										A									