

Meas.1 Left Head with Cheek on 26365 Channel in LTE Band25 mode with Antenna 1

Date: 2026.07.16

Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.648$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.12, 8.12, 8.12); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26365/Area Scan (91x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0605 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.303 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.036 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 68.3%

Maximum value of SAR (measured) = 0.0625 W/kg

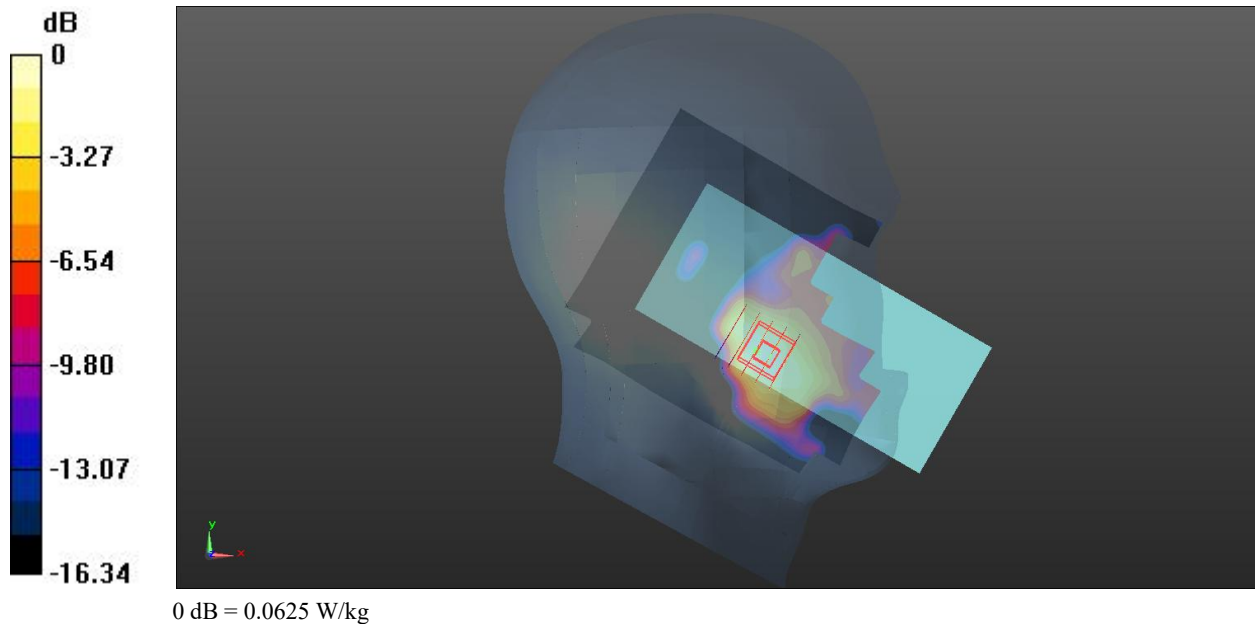

Meas.2 Right Head with Cheek on 26765 Channel in LTE Band26 mode with Antenna 1

Date: 2026.07.12

Communication System Band: Band26,E-UTRA/FDD(814-849); Frequency: 821.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.88$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.6°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73, 9.73, 9.73); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26765/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0988 W/kg

Ch26765/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.465 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 86.6%

Maximum value of SAR (measured) = 0.0977 W/kg

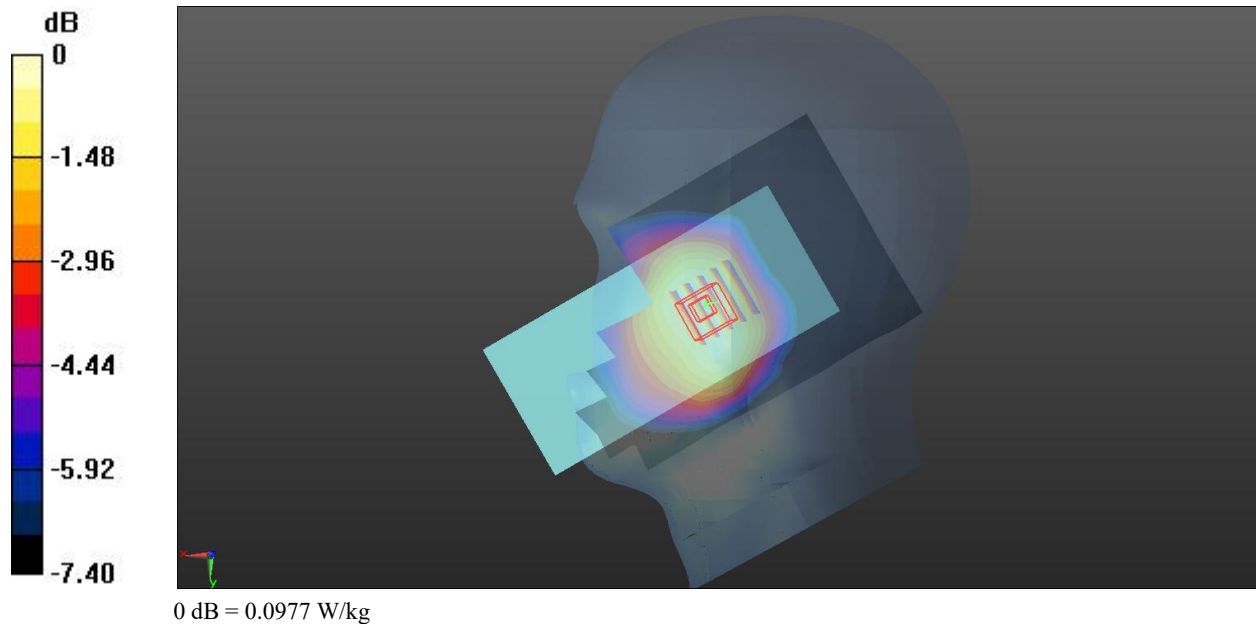

Meas.3 Right Head with Cheek on 41490 Channel in LTE Band41 mode with Antenna 1

Date: 2026.08.09

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.08$ S/m; $\epsilon_r = 38.26$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.52, 7.52, 7.52); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.183 W/kg

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.511 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.172 W/kg

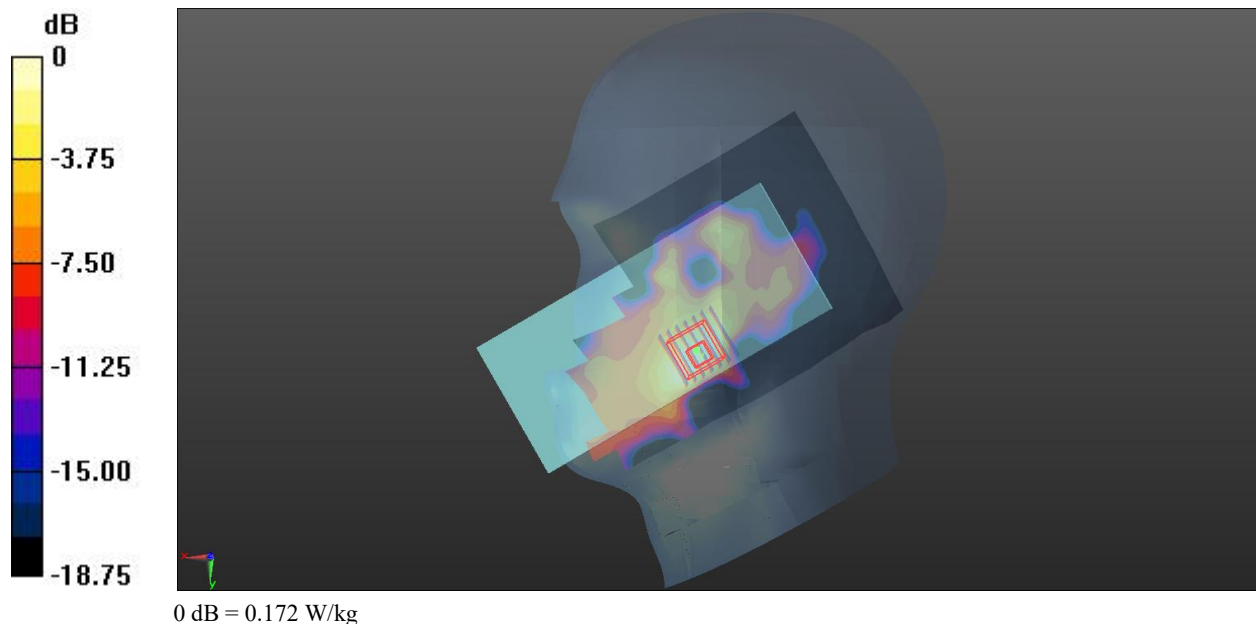

Meas.4 Body Plane with Back Side 5mm on 26365 Channel in LTE Band25 mode with Antenna 1

Date: 2026.07.16

Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.648$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.12, 8.12, 8.12); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26365/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.869 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.553 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.31 W/kg

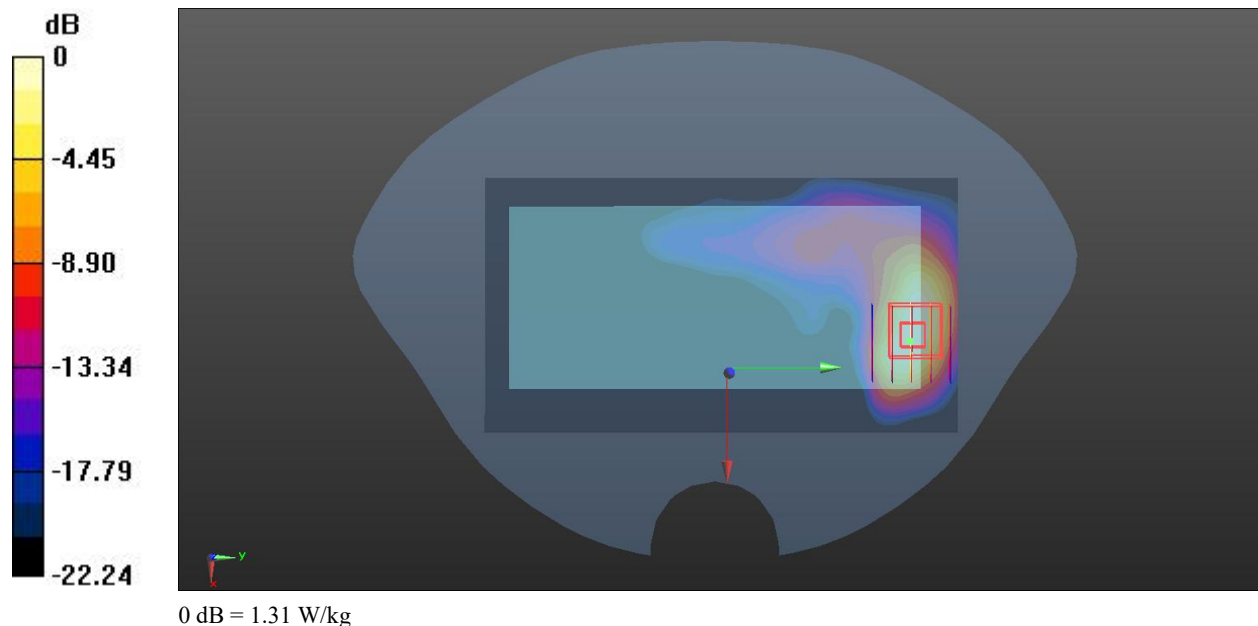

Meas.5 Body Plane with Back Side 5mm on 26765 Channel in LTEBand26 mode with Antenna 1

Date: 2026.07.12

Communication System Band: Band26,E-UTRA/FDD(814-849); Frequency: 821.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.88$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73, 9.73, 9.73); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26765/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.568 W/kg

Ch26765/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.15 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.482 W/kg

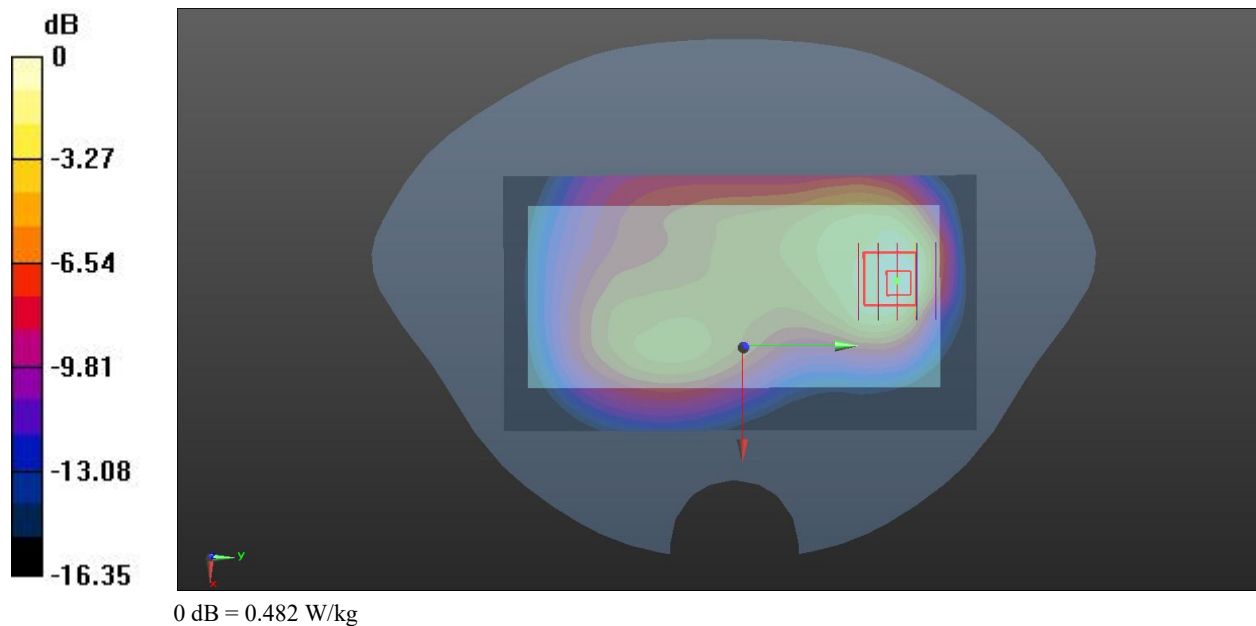

Meas.6 Body Plane with Bottom Edge 5mm on 41490 Channel in LTE Band41 mode with Antenna 1

Date: 2026.08.09

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.08$ S/m; $\epsilon_r = 38.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.52, 7.52, 7.52); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Area Scan (51x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.737 W/kg

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.02 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.748 W/kg

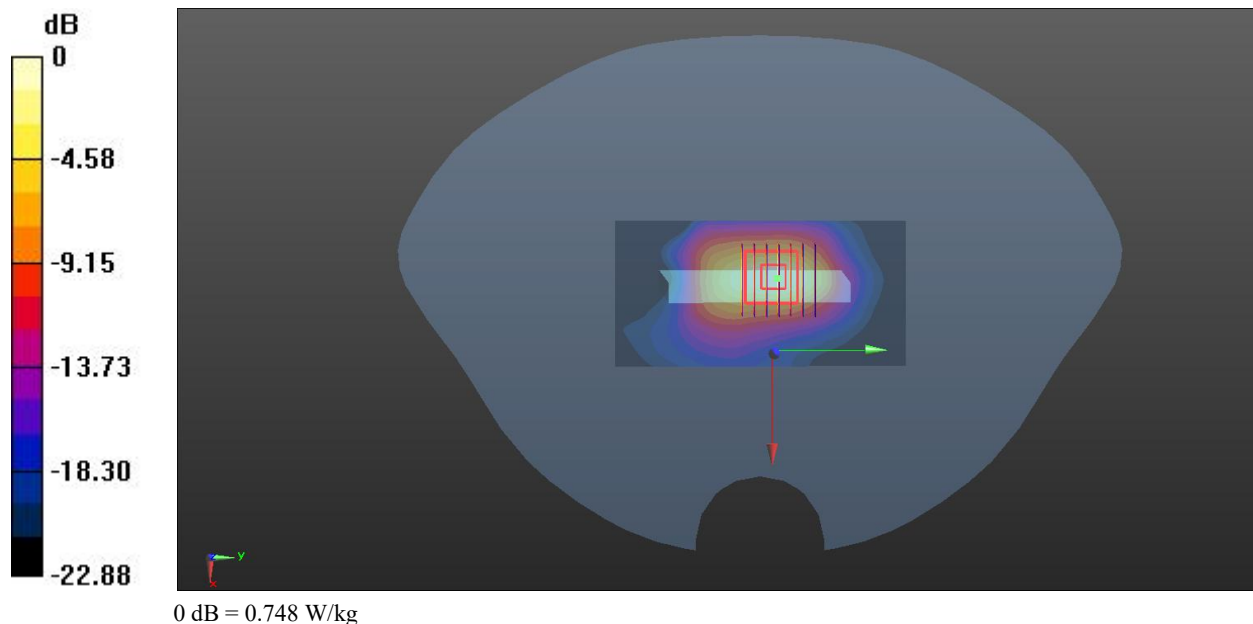

Meas.7 Right Head with Cheek on 11 Channel in IEEE802.11b mode

Date: 2026.07.30

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 39.197$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

C11/Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.114 W/kg

C11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8410 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.0505 W/kg

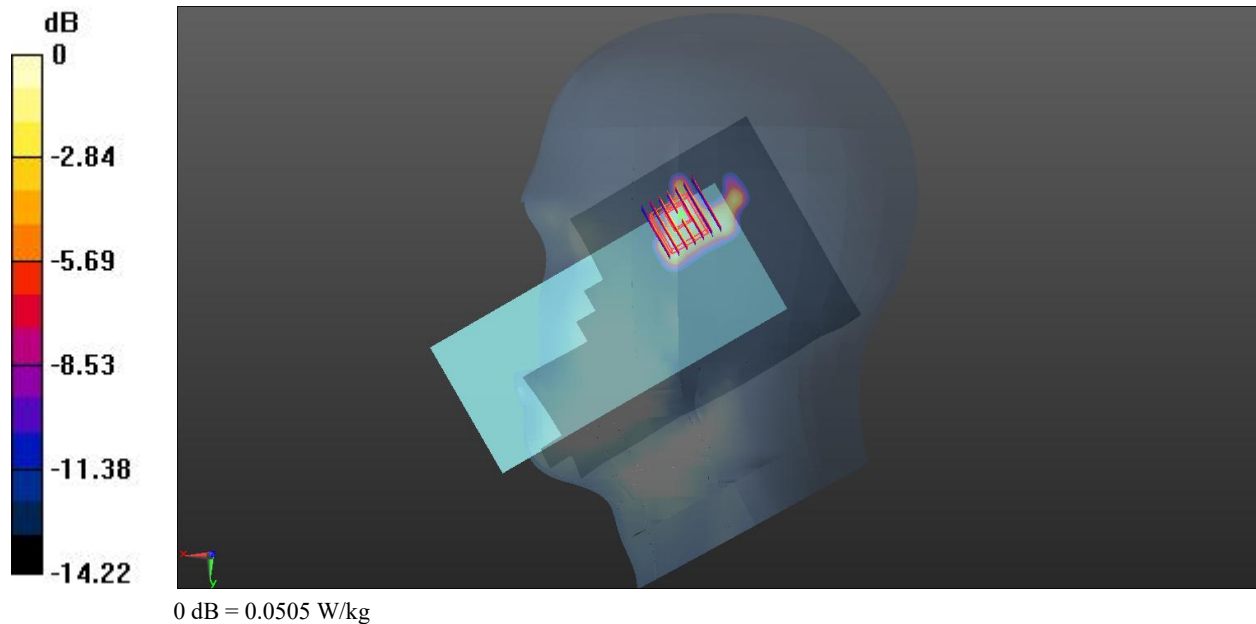

Meas.8 Body Plane with Back Side 5mm on 11 Channel in IEEE802.11b mode

Date: 2026.07.30

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 39.197$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.127 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.394 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 36.7%

Maximum value of SAR (measured) = 0.116 W/kg

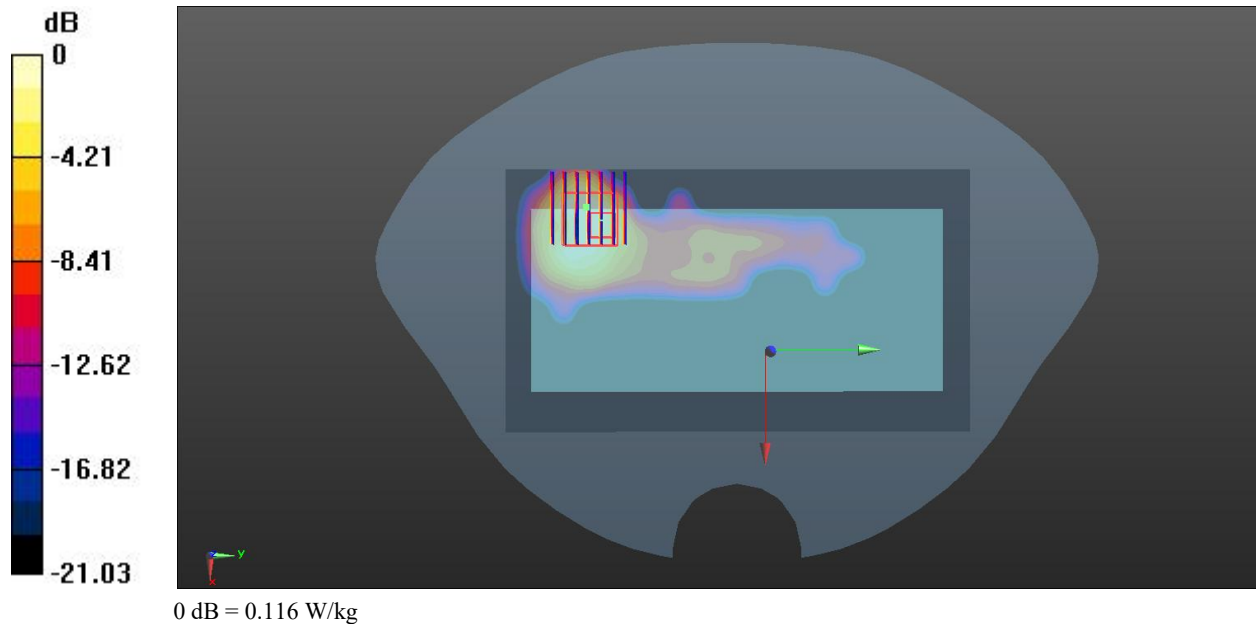

Meas.9 Right Head with Cheek on 42 Channel in IEEE802.11ac80 mode

Date: 2026.08.11

Communication System Band: 5.2G; Frequency: 5210 MHz; Duty Cycle: 1:1.135

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.097$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.5, 5.5, 5.5); Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42/Area Scan (121x201x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.207 W/kg

Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.5630 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 0.181 W/kg

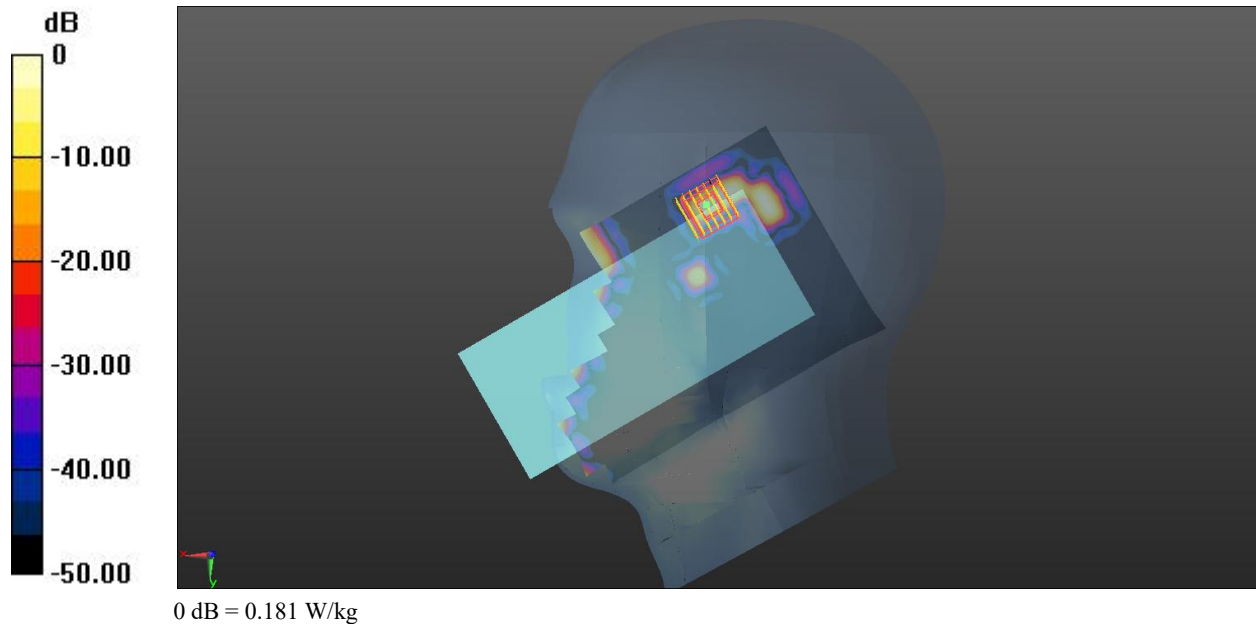

Meas.10 Right Head with Cheek on 155 Channel in IEEE802.11ac80 mode

Date: 2026.08.19

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.135

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.325$ S/m; $\epsilon_r = 35.008$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.99, 4.99, 4.99); Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (121x201x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.219 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.8920 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.022 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.154 W/kg

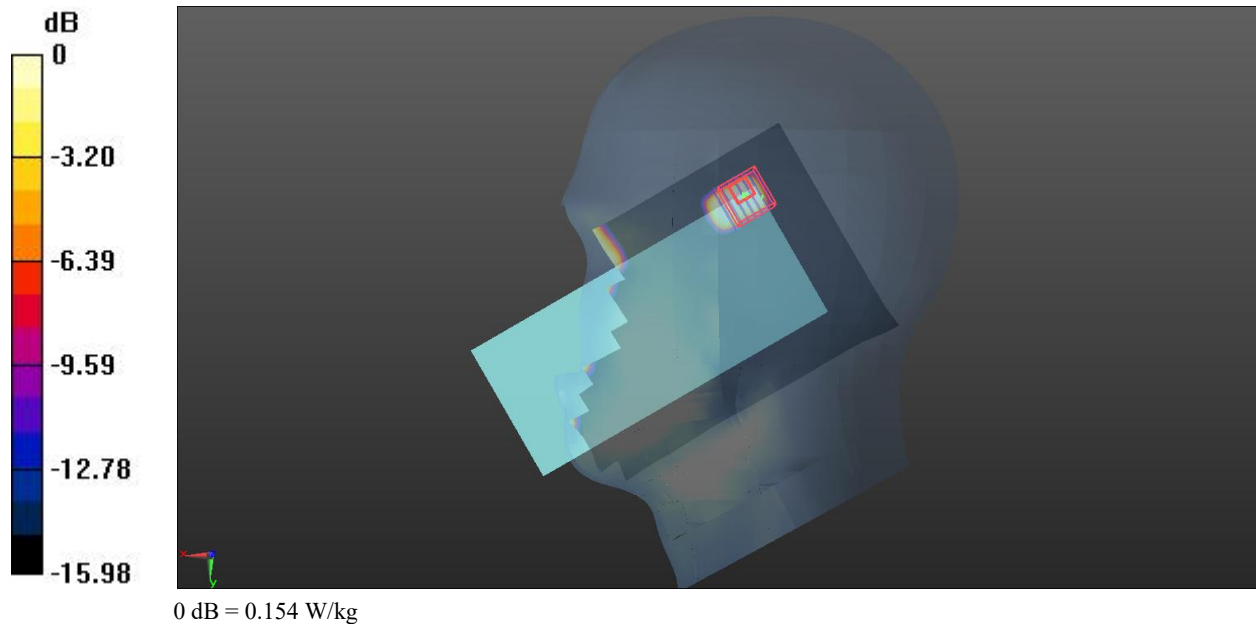

Meas.11 Body Plane with Left Edge 5mm on 42 Channel in IEEE802.11ac80 mode

Date: 2026.08.11

Communication System Band: 5.2G; Frequency: 5210 MHz; Duty Cycle: 1:1.135

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.5, 5.5, 5.5); Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42/Area Scan (61x201x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0900 W/kg

Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.507 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.111 W/kg

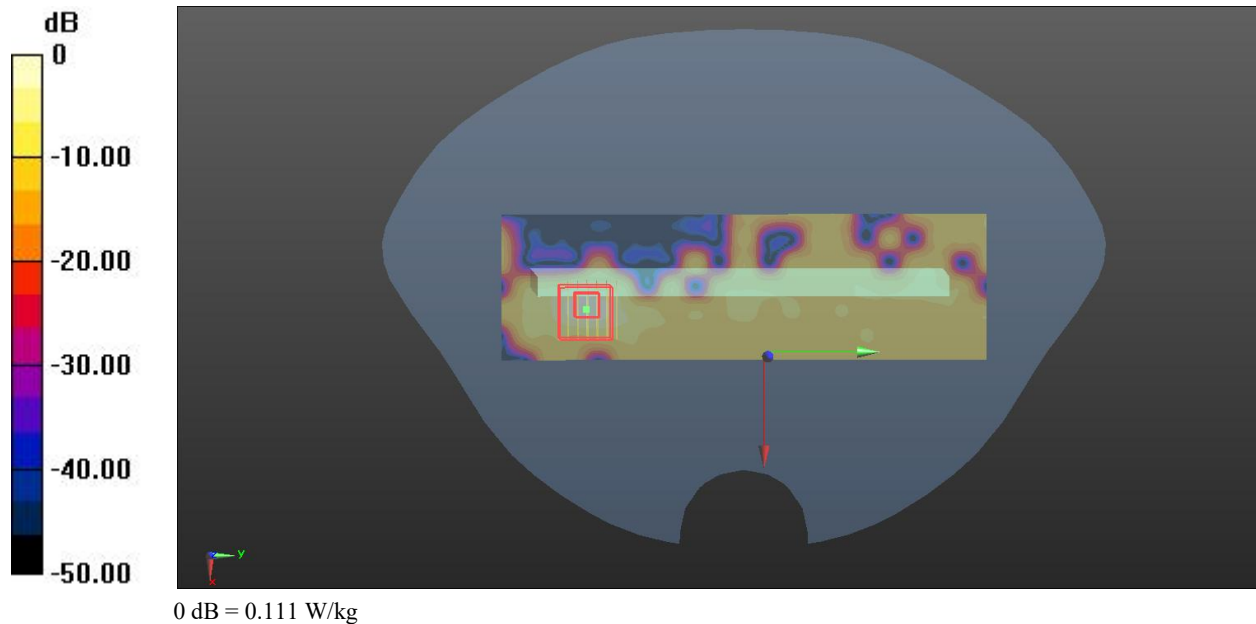

Meas.12 Body Plane with Back Side 5mm on 155 Channel in IEEE802.11ac80 mode

Date: 2026.08.19

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.135

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.325$ S/m; $\epsilon_r = 35.008$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.99, 4.99, 4.99); Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (101x201x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0632 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.5430 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.00583 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.9%

Maximum value of SAR (measured) = 0.0660 W/kg

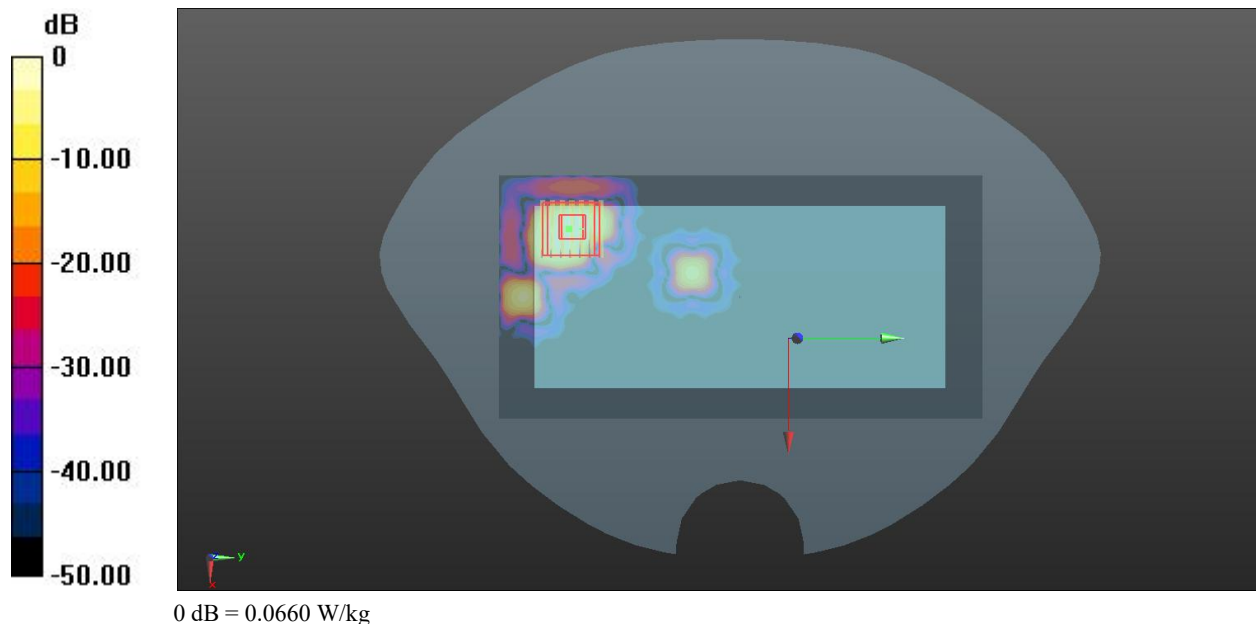

Meas.13 Right Head with Cheek on 78 Channel in Bluetooth mode

Date: 2026.07.30

Communication System Band: BT; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.047$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch78/Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0239 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.263 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 0.0293 W/kg

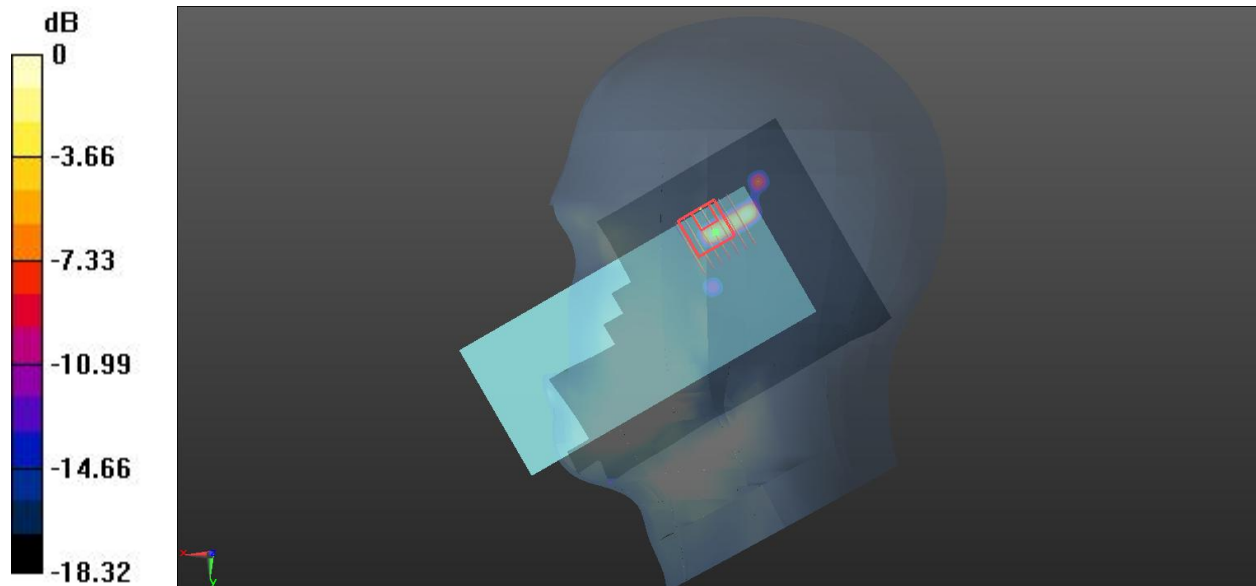

0 dB = 0.0293 W/kg

Meas.14 Body Plane with Back Side 5mm on 78 Channel in Bluetooth mode

Date: 2026.07.30

Communication System Band: BT; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.047$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28); Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch78/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.113 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.138 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 35.7%

Maximum value of SAR (measured) = 0.100 W/kg

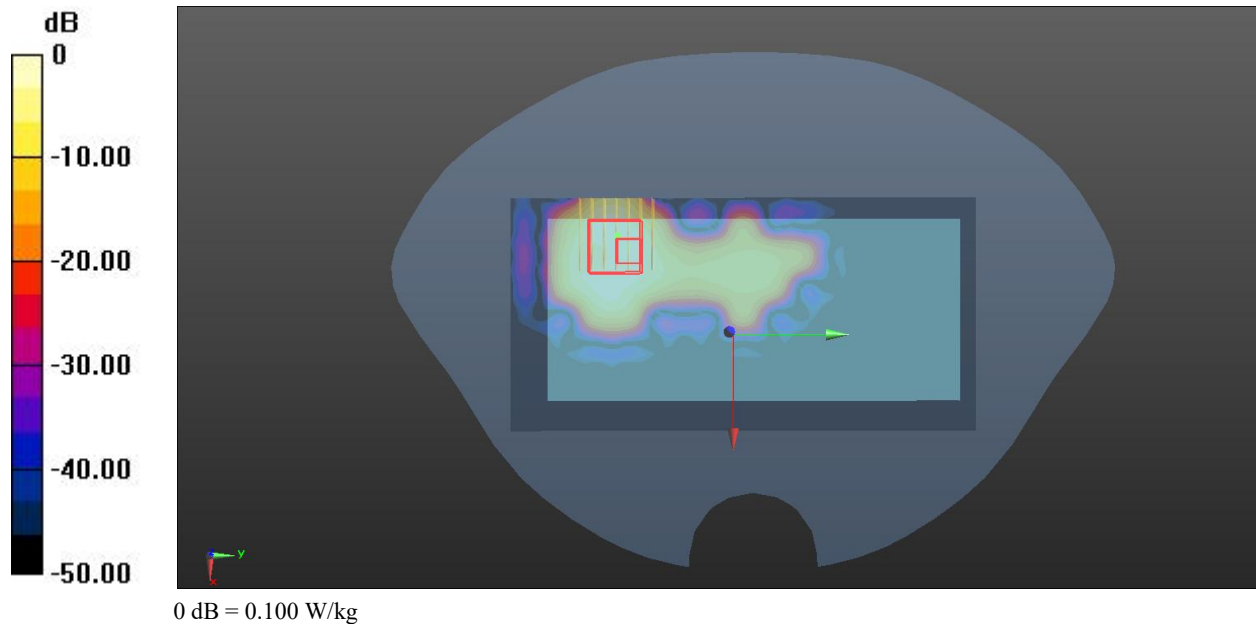

Meas.15 Right Head with Cheek on 190 Channel in GSM850 Voice mode with Antenna 1

Date: 2026.07.12

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.31$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73, 9.73, 9.73); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch190/Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.194 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.097 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.5%

Maximum value of SAR (measured) = 0.192 W/kg

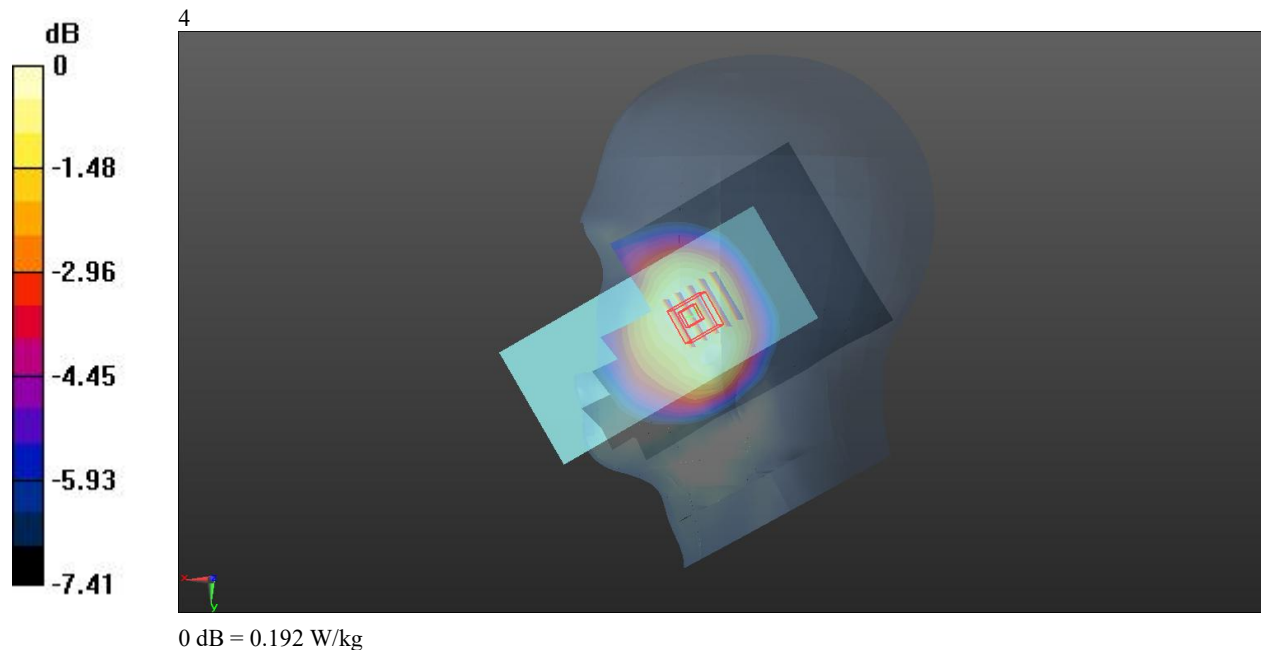

Meas.16 Body Plane with Back Side 5mm on 20300 Channel in LTE Band4 mode with Antenna 1

Date: 2026.07.16

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 40.402$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.45, 8.45, 8.45); Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20300/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.47 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.711 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.551 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 1.31 W/kg

