

MEASUREMENT 1**Device under Test Properties**

Manufacturer	Model	Dimensions [mm]	Speaker Position[mm]
		166.0×76.0×10.0	165

Hardware Setup

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4092	2026-07-30	DAE4 Sn1710	2026-01-12

Communication Systems


Band Name	Communication Systems Name	Channel	Frequency[MHz]
GSM850	GSM-FDD (TDMA,GMSK)	128	824.2

Grid Settings

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
50.0	50.0	10.0	10.0	15.0

Results

E _{max} [dB(V/m)]	E _{avg} 50×50 [dB(V/m)]	MIF [dB]	RFail [dB(V/m)]
24.08	22.55	3.63	26.18

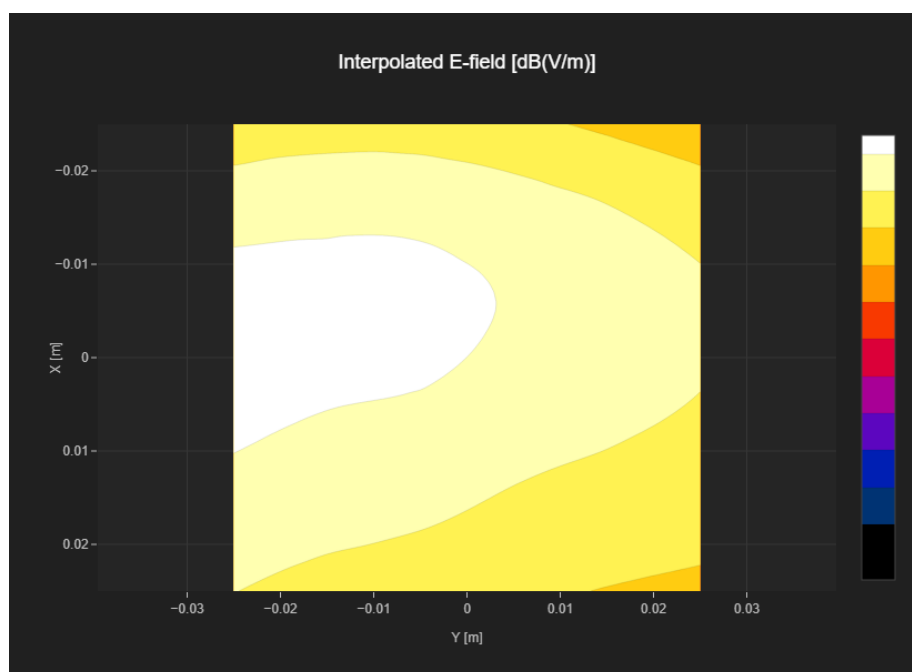

MEASUREMENT 2**Device under Test Properties**

Manufacturer	Model	Dimensions [mm]	Speaker Position[mm]
		166.0×76.0×10.0	165

Hardware Setup

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4092	2026-07-30	DAE4 Sn1710	2026-01-12

Communication Systems


Band Name	Communication Systems Name	Channel	Frequency[MHz]
GSM850	GSM-FDD (TDMA,GMSK)	190	836.6

Grid Settings

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
50.0	50.0	10.0	10.0	15.0

Results

E _{max} [dB(V/m)]	E _{avg} 50×50 [dB(V/m)]	MIF [dB]	R _{Fail} [dB(V/m)]
24.3	22.8	3.63	26.43

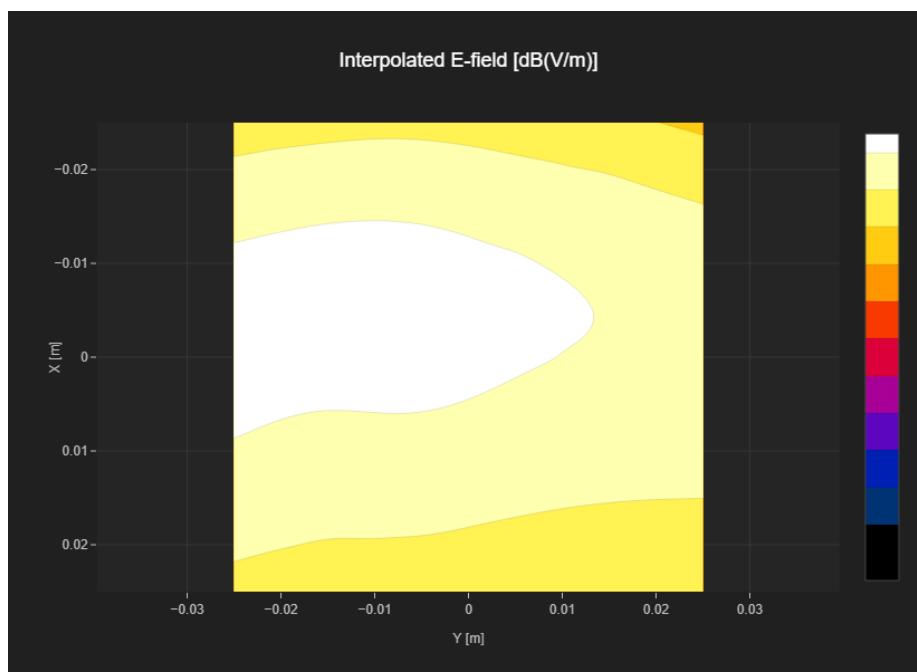

MEASUREMENT 3

Device under Test Properties

Manufacturer	Model	Dimensions [mm]	Speaker Position[mm]
		166.0×76.0×10.0	165

Hardware Setup

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4092	2026-07-30	DAE4 Sn1710	2026-01-12

Communication Systems


Band Name	Communication Systems Name	Channel	Frequency[MHz]
GSM850	GSM-FDD (TDMA,GMSK)	251	848.8

Grid Settings

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
50.0	50.0	10.0	10.0	15.0

Results

E _{max} [dB(V/m)]	E _{avg} 50×50 [dB(V/m)]	MIF [dB]	R _{Fail} [dB(V/m)]
26.07	24.58	3.63	28.21

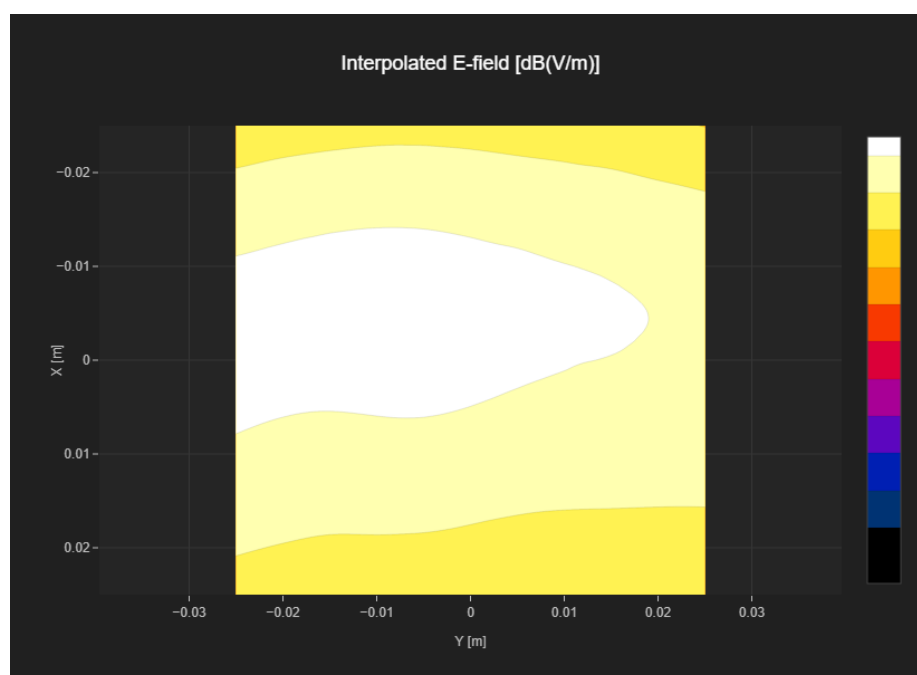

MEASUREMENT 4

Device under Test Properties

Manufacturer	Model	Dimensions [mm]	Speaker Position[mm]
		166.0×76.0×10.0	165

Hardware Setup

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4092	2026-07-30	DAE4 Sn1710	2026-01-12

Communication Systems


Band Name	Communication Systems Name	Channel	Frequency[MHz]
PCS 1900	GSM-FDD (TDMA, GMSK)	512	1850.2

Grid Settings

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
50.0	50.0	10.0	10.0	15.0

Results

E _{max} [dB(V/m)]	E _{avg50×50} [dB(V/m)]	MIF [dB]	R _{Fail} [dB(V/m)]
14.22	13.39	3.63	17.02

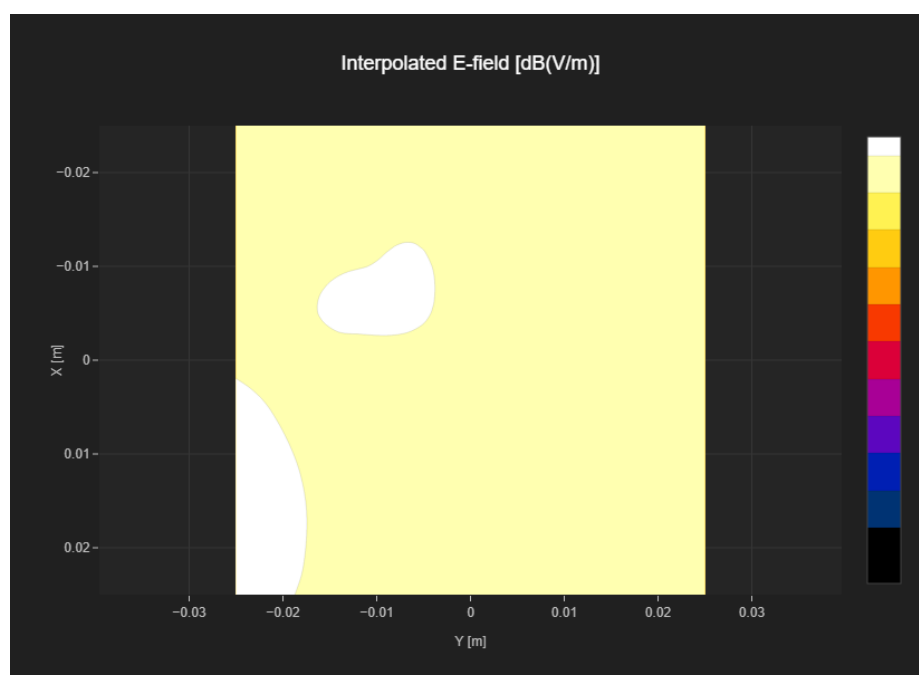

MEASUREMENT 5

Device under Test Properties

Manufacturer	Model	Dimensions [mm]	Speaker Position[mm]
		166.0×76.0×10.0	165

Hardware Setup

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4092	2026-07-30	DAE4 Sn1710	2026-01-12

Communication Systems


Band Name	Communication Systems Name	Channel	Frequency[MHz]
PCS 1900	GSM-FDD (TDMA,GMSK)	661	1880.0

Grid Settings

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
50.0	50.0	10.0	10.0	15.0

Results

E _{max} [dB(V/m)]	E _{avg50×50} [dB(V/m)]	MIF [dB]	R _{Fail} [dB(V/m)]
14.23	13.64	3.63	17.27

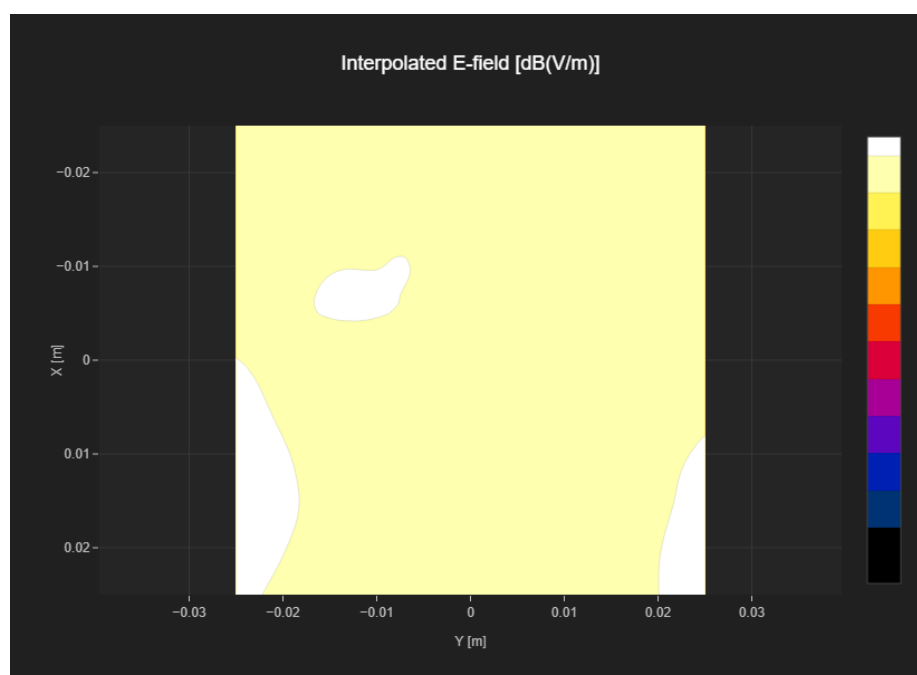

MEASUREMENT 6

Device under Test Properties

Manufacturer	Model	Dimensions [mm]	Speaker Position[mm]
		166.0×76.0×10.0	165

Hardware Setup

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4092	2026-07-30	DAE4 Sn1710	2026-01-12

Communication Systems

Band Name	Communication Systems Name	Channel	Frequency[MHz]
PCS 1900	GSM-FDD (TDMA,GMSK)	810	1909.8

Grid Settings

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
50.0	50.0	10.0	10.0	15.0

Results

E _{max} [dB(V/m)]	E _{avg50×50} [dB(V/m)]	MIF [dB]	R _{Fail} [dB(V/m)]
16.94	14.43	3.63	18.06

