

FCC Test Report

Report No. : 1815C60295916202

Applicant : ZONGOO TECHNOLOGY LIMITED

Address : RM D,10/F.,TOWER A BILLION CTR 1 WANG
KWONGRDKLN BAYHONGKONG

Product Name : Power Bank

Report Date : 2026-07-13

Shenzhen Anbotek Compliance Laboratory Limited



Contents

- 1. General Information 5
 - 1.1. Client Information5
 - 1.2. Description of Device (EUT) 5
 - 1.3. Auxiliary Equipment Used During Test.....5
 - 1.4. Description of Test Modes 5
 - 1.5. Test Equipment List 7
 - 1.6. Measurement Uncertainty 7
 - 1.7. Description of Test Facility8
 - 1.8. Disclaimer8
- 2. Measurement and Result9
 - 2.1. Limits For Maximum Permissible Exposure (MPE) 9
 - 2.2. Test Setup 9
 - 2.3. Test Procedure 10
 - 2.4. Test Result 11
- APPENDIX I -- TEST SETUP PHOTOGRAPH 16
- APPENDIX II -- EXTERNAL PHOTOGRAPH16
- APPENDIX III -- INTERNAL PHOTOGRAPH 16

TEST REPORT

Applicant : ZONNGOO TECHNOLOGY LIMITED

Manufacturer : Jiangxi Shengquan New Energy Technology Co., Ltd

Product Name : Power Bank

Model No. : 10MC8

Trade Mark : N/A

Rating(s) : Battery Energy:10000mAh;
Rate Capacity:6300mAh(5V= 2A);
Wireless Output:15W Max;
USB-C Input:5V= 2.8A, 9V= 2A,12V= 1.5A;
USB-C Output:5V= 3A, 9V= 2.22A,12V= 1.67A,10V= 2.25A.

Test Standard(s) : **FCC Part 1.1310*, 1.1307(b), FCC Part 2.1093**

Test Method(s) : **KDB680106 D01 RF Exposure Wireless Charging Apps v04***
October 25, 2023 TCB Workshop

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & FCC Part 2.1093 & KDB680106 D01 & TCB Workshop, October 25, 2023 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt 2026-06-05

Date of Test 2026-06-05 to 2026-06-18

Prepared By

Yuki Long

(Yuki Long)

Approved & Authorized Signer

Jules Guo

(Jules Guo)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2026-07-13

1. General Information

1.1. Client Information

Applicant	:	ZONNGOO TECHNOLOGY LIMITED
Address	:	RM D,10/F.,TOWER A BILLION CTR 1 WANG KWONGRDKLN BAYHONGKONG
Manufacturer	:	Jiangxi Shengquan New Energy Technology Co., Ltd
Address	:	Ganzhou City, Jiangxi Province, Quannan County, Hainuo Road, 5G Intelligent Industrial Park, 3 buildings, 1st floor and 7 buildings
Factory	:	Jiangxi Shengquan New Energy Technology Co., Ltd
Address	:	Ganzhou City, Jiangxi Province, Quannan County, Hainuo Road, 5G Intelligent Industrial Park, 3 buildings, 1st floor and 7 buildings

1.2. Description of Device (EUT)

Product Name	:	Power Bank
Model No.	:	10MC8
Trade Mark	:	N/A
Test Power Supply	:	DC 12V via Adapter,DC 3.7V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	112-205kHz
Modulation Type	:	ASK
Antenna Type	:	Inductive loop coil Antenna
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Wireless charging load	Shenzhen Ouju Technology Co., Ltd.	CD2577	/
Xiaomi 67W adapter	Xiaomi	MDY-13-ES	WA622091100375G
IPHONE 14	IPHONE	MQ0M3CH/A	CLKXM6H94J

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Modes	Descriptions
TM1	Adapter+WPT Mode (15W 1% Load)
TM2	Adapter+WPT Mode (15W 50% Load)
TM3	Adapter+WPT Mode (15W 99% Load)
TM4	WPT Mode (15W 1% Load)
TM5	WPT Mode (15W 50% Load)
TM6	WPT Mode (15W 99% Load)
TM7	Adapter+WPT Mode (10W 1% Load)
TM8	Adapter+WPT Mode (10W 50% Load)
TM9	Adapter+WPT Mode (10W 99% Load)
TM10	WPT Mode (10W 1% Load)
TM11	WPT Mode (10W 50% Load)
TM12	WPT Mode (10W 99% Load)
TM13	Adapter+WPT Mode (7.5W 1% Load)
TM14	Adapter+WPT Mode (7.5W 50% Load)
TM15	Adapter+WPT Mode (7.5W 99% Load)
TM16	WPT Mode (7.5W 1% Load)
TM17	WPT Mode (7.5W 50% Load)
TM18	WPT Mode (7.5W 99% Load)
TM19	Adapter+WPT Mode (5W 1% Load)
TM20	Adapter+WPT Mode (5W 50% Load)
TM21	Adapter+WPT Mode (5W 99% Load)
TM22	WPT Mode (5W 1% Load)
TM23	WPT Mode (5W 50% Load)
TM24	WPT Mode (5W 99% Load)
TM25	Standby Mode
TM26	WPT Mode (1% battery on phone)
TM27	WPT Mode (50% battery on phone)
TM28	WPT Mode (99% battery on phone)

1.5. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
1	Electric and Magnetic field Analyzer	NARDA	EHP-200A	2025-10-14	1 Year

1.6. Measurement Uncertainty

Parameter	Uncertainty
Magnetic Field Reading(A/m)	+/-0.04282(A/m)
Electric Field Reading(V/m)	+/-0.03679(V/m)

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.
8. “*” denotes that this* test standard is not included in CNAS accredited scope.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Measurement and Result

2.1. Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

2.2. Test Setup

1) H-field data are taken along all three axes the device, from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.

2) "Large size" probes may prevent the measurement of E- and/or H-fields near the surface of the radiating structure (e.g., a WPT source coil), as in the example shown in Figure 1.

If the center of the probe sensing element is located more than 5 mm from the probe outer surface, the field strengths need to be estimated through modeling for those positions that are not reachable. The estimates may be done either via numerical calculation, or via analytic model: e.g., approximated formulas for circular coils, dipoles, etc., may be acceptable if it is shown that the model is applicable for the design parameters considered. A typical example is the use of a quasi-static approximation formula for a low-frequency magnetic field source.

These estimates shall include points spaced no more than 2 cm from each other. Thus, in the example of Figure 1, at least the estimates at 0 cm² and 2 cm are required, while only one point would not be sufficient. In addition, the model needs to be validated through the probe measurements for the two

closest points to the device surface, and with 2-cm increments, as indicated in Figure 1. In that example, the same model must also be applied to the 4 cm and 6 cm positions, and then compared with the measured data, for validation purposes. The validation is considered sufficient if a 30% agreement between the model and the (E- and/or H-field) probe measurements is demonstrated. If such a level of agreement cannot be shown, a more accurate model (and/or a smaller probe) shall be used.

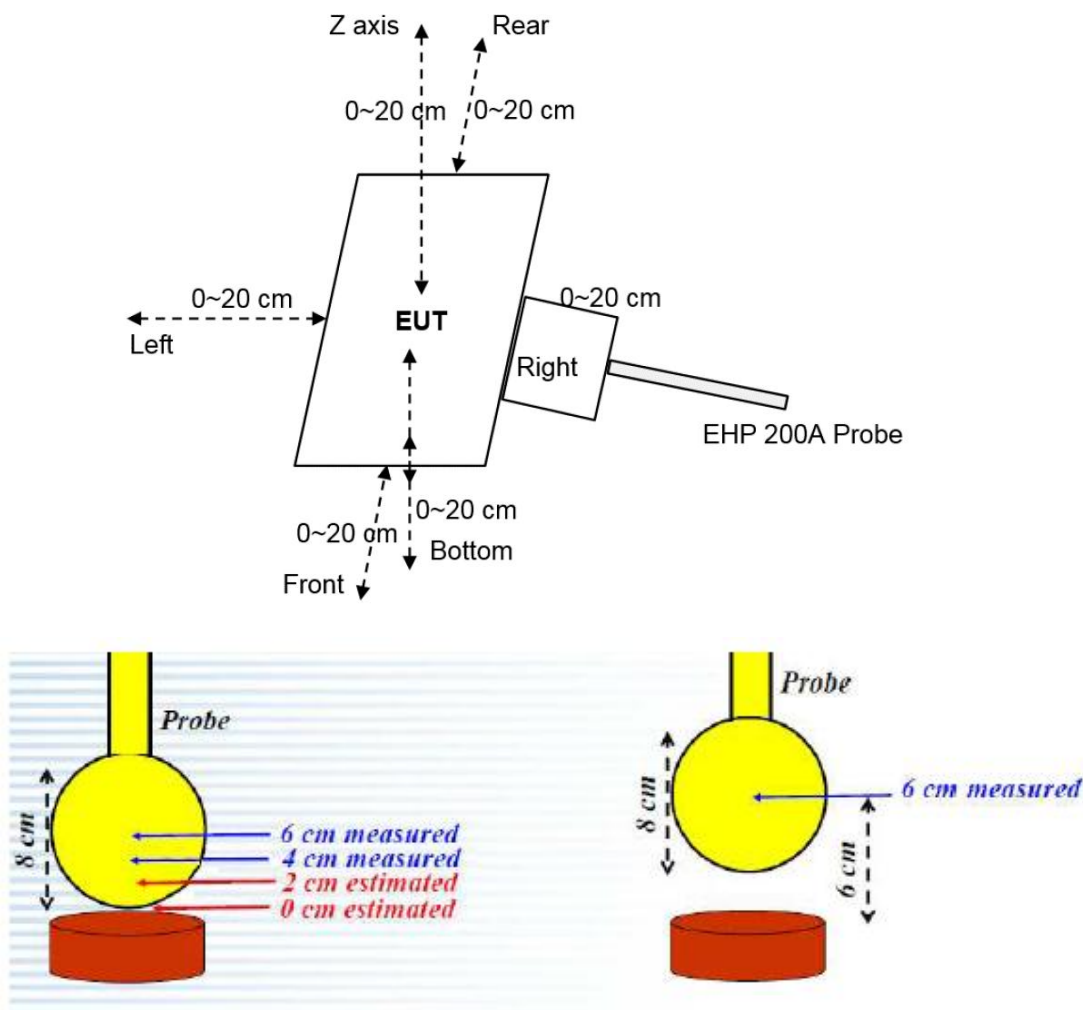


Figure 1

2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance (from 0 cm to 20 cm, in 2 cm minimum increment) which is between the edge/top surface of the charger and the center of the probe. and the measurement probe was placed at required test distance 15cm and 20cm which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (Left, Right, Front, Rear, Z axis, Bottom) were completed.
- 4) The EUT was measured according to the dictates of TCB Workshop, October 25, 2023 and KDB 680106 D01 v04.

Remark;

The EUT's test position Left, Right, Front, Rear, Top, Bottom is valid for the E and H field measurements.



2.4. Test Result

2.4.1. Estimated method for portable RF Exposure condition:

According to Calibration information and specification about EHP200A, The Probe EHP200A's sensitive elements center are 8mm below the external surface, and the dimensions is 92x92x109 mm. So the actual 0cm field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please Refer to below formula). And the result of test distance 6cm~20cm was measured value.

Probe	Length	Width	Height
	109mm	92mm	92mm



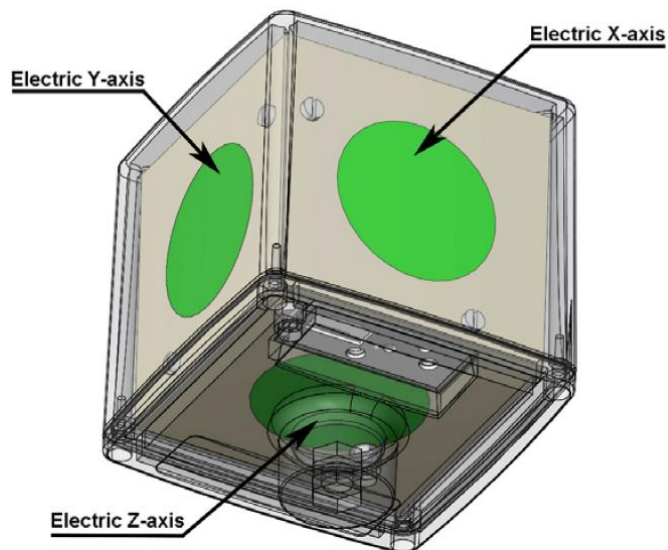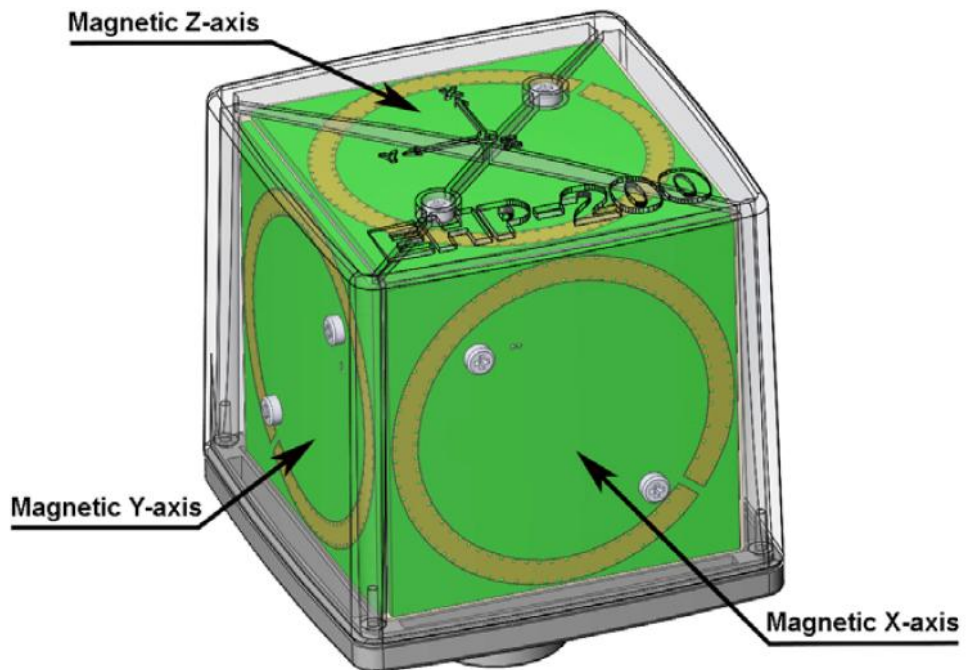


EHP-200A/EHP-200AC axes

The sensitive elements are located approximately 8 mm below the external surface


We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

Top & Bottom Side:

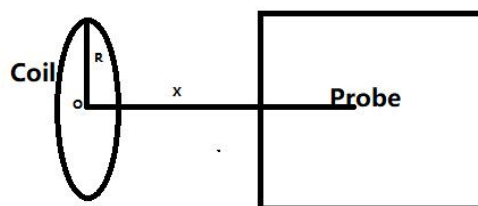

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

Front, left, right & rear Side:

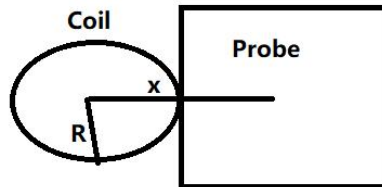


$$B = \frac{\mu_0 * I * N}{2 * x}$$

B: means H-field value;

μ_0 is space permeability; $\mu_0=4\pi*10^{-7}$;

I: A current element passing through a coil;

R: means the Radius of coil, the minimum $R=37\text{mm}/2=18.5\text{mm}=0.0185\text{m}$, EUT photos shows below.

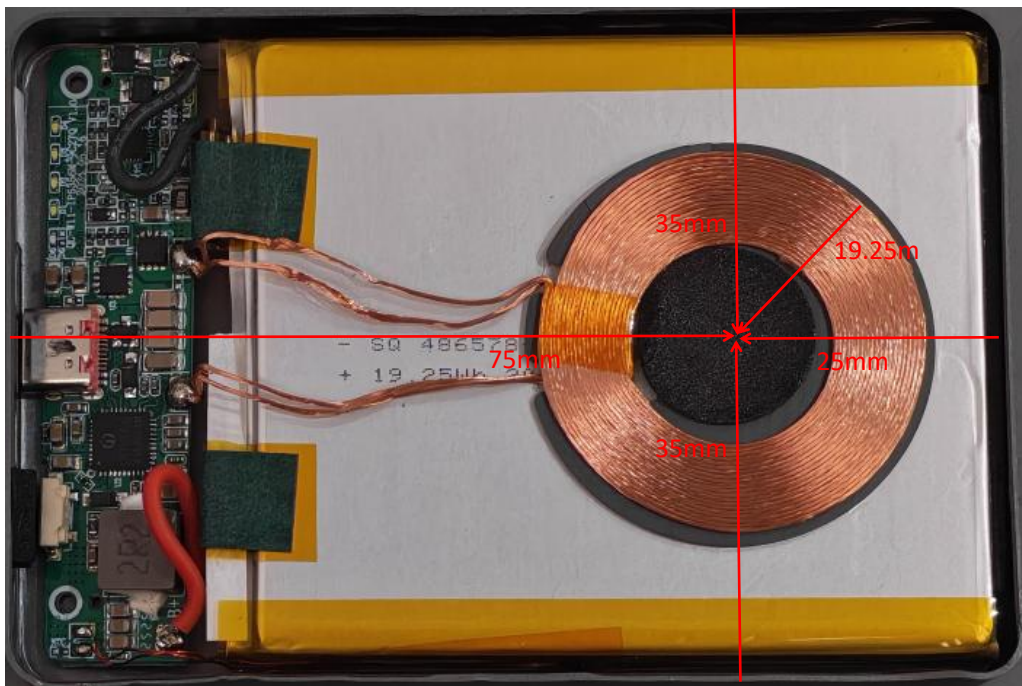

Location(s)- coli to the outer surface of the enclosure(s)

Emitter to top: $1\pm0.1\text{mm}$

Emitter to bottom: $11\pm0.2\text{mm}$

Emitter to left: $15.75\pm0.02\text{mm}$

Emitter to right: $15.75\pm0.02\text{mm}$

Emitter to front: $5.75\pm0.02\text{mm}$

Emitter to back: $55.75\pm0.02\text{mm}$

Test distance: The distance from the sensing element of the probe to the edge of the device surface.

x: means the evaluated point to the coil center (For top & bottom side: $x=\text{test distance}$; For other side:

$x = \text{test distance} + R$)

N: Number of turns, According to provided "Antenna specification" files: $N=10$.

For validation purposes: If the value to show a **30% agreement** between the mode and the (E- and/or H-field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

Note: The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.

EUT is a loop/coil emitting structure, so E-field not required. Just recorded the H-field value.

2.4.3. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	24.8 °C	Humidity:	50 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Between the edge/top surface of the charger and the center of probe

Distance(x)(mm)	Result(A/m)							Limit(A/m)	Limit(%)
	Type	Top	Bottom	Left	Right	Front	back		
0	Estimate	1.1794	0.998	0.0351	0.0263	0.0014	0.0308	1.63	/
20	Estimate	0.3883	0.2665	0.0258	0.0193	0.0012	0.022	1.63	/
40	Estimate	0.0998	0.0732	0.0203	0.0153	0.001	0.0171	1.63	/
Agreement(%)	Calculated	17.2	16.2	2	2.6	0	2.5	/	30
60	Estimate	0.0733	0.0544	0.0182	0.014	0.0009	0.0155	/	
60	Measured	0.0358	0.0278	0.0168	0.0126	0.0009	0.014	1.63	/
Agreement(%)	Calculated	13.6	12.8	1.3	2	0.3	1.8	/	30
80	Calculated	0.0583	0.0433	0.0163	0.0129	0.0008	0.0141	/	/
80	Measured	0.0334	0.0257	0.0155	0.0119	0.00081	0.0131	1.63	/
100	Measured	0.031	0.0236	0.0142	0.0112	0.00072	0.0122	1.63	/
120	Measured	0.0286	0.0215	0.0129	0.0105	0.00063	0.0113	1.63	/
140	Measured	0.0262	0.0194	0.0116	0.0098	0.00054	0.0104	1.63	/
160	Measured	0.0238	0.0173	0.0103	0.0091	0.00045	0.0095	1.63	/
180	Measured	0.0214	0.0152	0.009	0.0084	0.00036	0.0086	1.63	/
200	Measured	0.019	0.0131	0.0077	0.0077	0.00027	0.0077	1.63	/

Note:

- (1)All the situation (full load, half load and empty load) has been tested, only the worst situation (full load 5W) was recorded in the report.
- (2)All three axes the device has been tested, only the worst results reported.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_MPE

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----