

TEST REPORT

Reference No...... : WTX26X06166771W001
FCC ID : 2BWYV-X2T
Applicant : Zhuhai Meding Co-Create Technology Co.,Ltd.
Address : Room 217,2nd Floor,6#Plant,No.6366 Zhuhai Avenue,Hongqi Town,Zhuhai,
Guangdong,China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : PORTABLE CD PLAYER WITH CASSETTE RECORDER
Model No...... : CD-X2T
Standards : FCC Part 15.247
Date of Receipt sample : 2026-06-11
Date of Test..... : 2026-06-12 to 2026-06-23
Date of Issue : 2026-07-03
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Tris Li

Tris Li/Project Engineer

Approved by:

Jason Su

Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS.....	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE	13
3.2 EVALUATION INFORMATION	13
4. POWER SPECTRAL DENSITY	14
4.1 STANDARD APPLICABLE	14
4.2 TEST SETUP BLOCK DIAGRAM	14
4.3 TEST PROCEDURE	14
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	14
5. DTS BANDWIDTH	15
5.1 STANDARD APPLICABLE	15
5.2 TEST SETUP BLOCK DIAGRAM	15
5.3 TEST PROCEDURE	15
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
6. RF OUTPUT POWER.....	16
6.1 STANDARD APPLICABLE	16
6.2 TEST SETUP BLOCK DIAGRAM	16
6.3 TEST PROCEDURE	16
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	16
7. FIELD STRENGTH OF SPURIOUS EMISSIONS.....	17
7.1 STANDARD APPLICABLE	17
7.2 TEST PROCEDURE	17
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	19
8. OUT OF BAND EMISSIONS	37
8.1 STANDARD APPLICABLE	37
8.2 TEST PROCEDURE	37
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	38
9. CONDUCTED EMISSIONS	43
9.1 TEST PROCEDURE	43
9.2 BASIC TEST SETUP BLOCK DIAGRAM	43
9.3 TEST RECEIVER SETUP	43
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	43
APPENDIX SUMMARY	46
APPENDIX A.....	47
APPENDIX B.....	50
APPENDIX C.....	53
APPENDIX D.....	56
APPENDIX PHOTOGRAPHS.....	60

Report version

Version No.	Date of issue	Description
Rev.00	2026-07-03	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	PORTABLE CD PLAYER WITH CASSETTE RECORDER
Trade Name	/
Model No.:	CD-X2T
Adding Model(s):	CD-X2A
Rated Voltage:	AC: 100-240V~50/60Hz DC: 9V
Power Adapter:	/
<i>Note: The sample information is provided by the customer. The appearance color of others models listed in the report is different from main-test model CD-X2T, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.3 (LE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1Mbps: -0.39dBm (Conducted) 2Mbps: -0.11dBm (Conducted)
Data Rate:	1Mbps, 2Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	-0.58dBi
<i>Note: 1: The Antenna Gain is provided by the customer and can affect the validity of results. 2: The data provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2020: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1012mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.4	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AUX Cable	1	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.57\text{dB}$
Occupied Bandwidth	Conducted	$\pm 0.015\text{MHz}$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emission 1#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Conducted Emission 2#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Transmitter Spurious Emissions chamber A	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.70\text{dB}$
		@1GHz to 6GHz: $\pm 5.88\text{dB}$
		@6GHz to 18GHz: $\pm 5.96\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$
Transmitter Spurious Emissions chamber B	Radiated	@30MHz to 1GHz: $\pm 5.36\text{dB}$
Transmitter Spurious Emissions chamber C	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.28\text{dB}$
		@1GHz to 6GHz: $\pm 5.56\text{dB}$
		@6GHz to 18GHz: $\pm 5.72\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$

1.7 Test Equipment List and Details

Internal No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1002	Communication Tester	Rohde & Schwarz	CMW500	1201.0002 k50-14865 0-FB	2026-03-25	2027-03-24
WTXE1005A 1005	MXA Signal Analyzer	Agilent	N9020A	US471401 02	2026-03-25	2027-03-24
WTXE1084A 1001	MXA Signal Analyzer	KEYSIGHT	N9020A	MY543205 48	2026-02-06	2027-02-05
WTXE1005A 1006	Spectrum Analyzer	Rohde & Schwarz	FSP40	1164.4391 K38Ser. 100368	2026-04-29	2027-04-28
WTXW1105A 1136	RF ATTENUATOR	FEIYANG	N-JK	/	2026-02-06	2027-02-05
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2026-02-23	2027-02-22
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2026-02-05	2027-02-04
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1007A 1002	Amplifier	HP	8447F	2805A034 75	2026-02-05	2027-02-04
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2026-03-11	2029-03-10
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2026-02-05	2027-02-04
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1065A 1001	Amplifier	C&D	PAP-1.0G18	14918	2026-02-05	2027-02-04
WTXE1010A	Horn Antenna	ETS	3117	00086197	2026-02-05	2027-02-04

1005						
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2026-02-05	2027-02-04
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2026-02-05	2027-02-04
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2026-02-23	2027-02-22
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1007A 1003	Amplifier	HP	8447F	2944A038 69	2026-02-05	2027-02-04
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☒ Chamber C: Above 1GHz						

WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2025-06-13	2027-06-12
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2026-02-05	2027-02-04
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2025-11-25	2026-11-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2026-02-05	2027-02-04
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2026-02-05	2027-02-04
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2026-02-23	2027-02-22
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2026-02-05	2027-02-04
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2026-02-05	2027-02-04
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software/EZ-EMC (Radiated Emission A)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission B)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission C)	Farad	RA-03A1-2	1.1.4.2
EMI Test Software/EZ-EMC (Conducted Emission Room 1#)	Farad	3A1*CE-RE	1.1.4.3
EMI Test Software/EZ-EMC (Conducted Emission Room 2#)	Farad	3A1*CE-RE	1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has a PCB antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

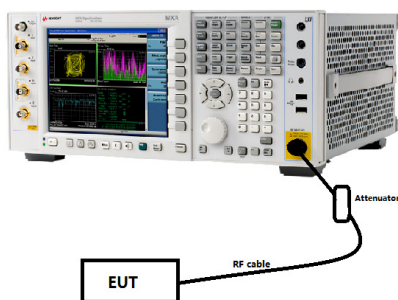

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2020 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

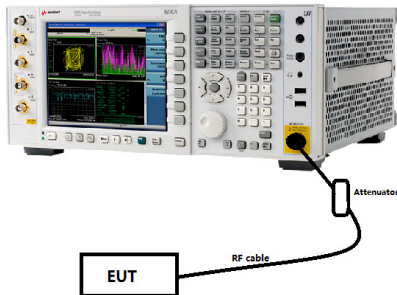

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2020 Subclause 11.8.1, the test method of DTS Bandwidth as below:

Option 1:

The steps for the first option are as follows:

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB downamplitude” value, then it shall be as close as possible to this value.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in ANSI C63.10-2020 Subclause 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

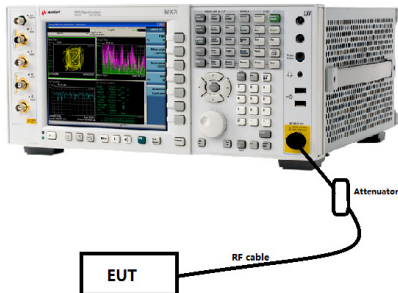

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2020 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30MHz to 1GHz.

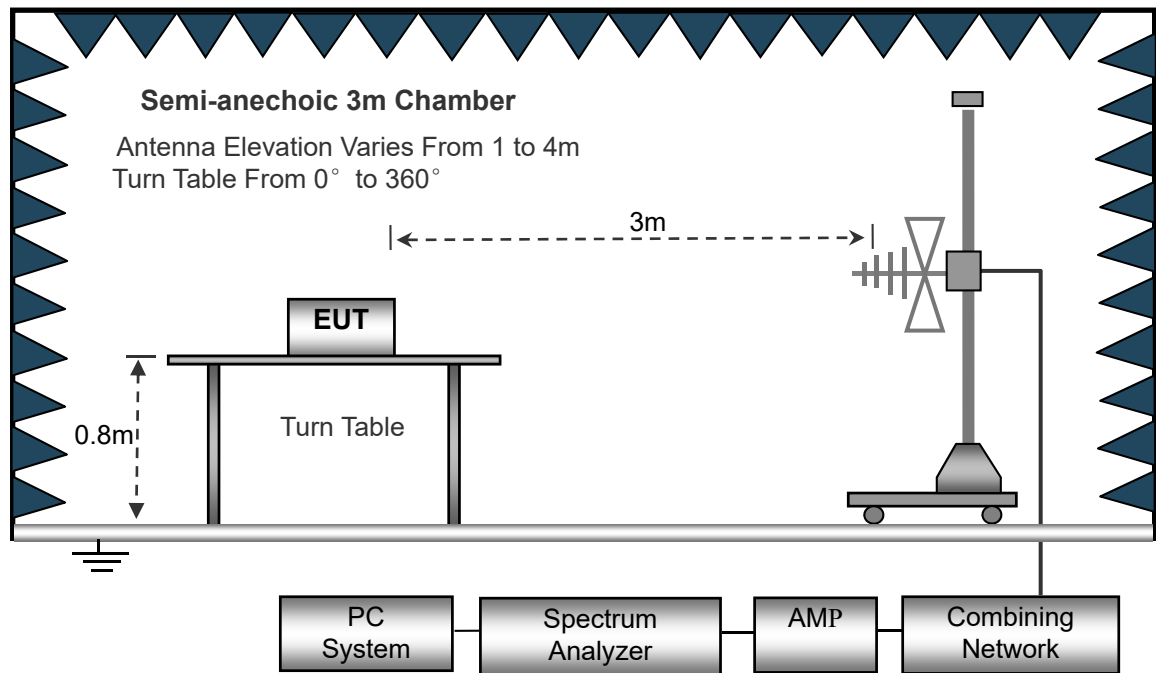

The test setup for emission measurement above 1GHz.



Frequency :9kHz-30MHz
RBW=10kHz,
VBW =30kHz
Sweep time= Auto
Trace = max hold

Frequency :30MHz-1GHz
RBW=120kHz,
VBW=300kHz
Sweep time= Auto
Trace = max hold

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold

Detector function = peak

Detector function = peak, QP

Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emissions Below 30MHz
- LE 1Mbps


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

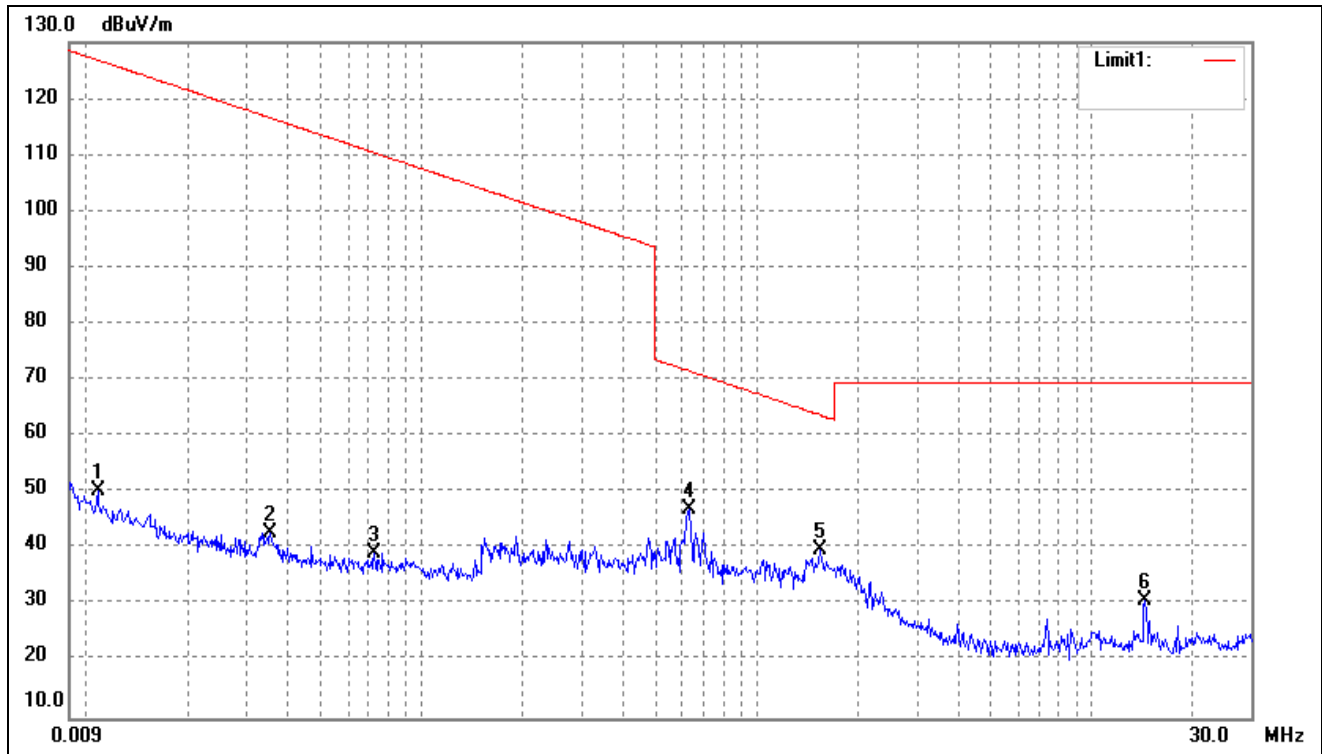

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0109	57.53	-7.23	50.30	126.84	-76.54	-	-	peak
2	0.0353	50.33	-7.46	42.87	116.64	-73.77	-	-	peak
3	0.0720	47.14	-7.78	39.36	110.45	-71.09	-	-	peak
4	0.6271	55.03	-8.03	47.00	71.66	-24.66	-	-	peak
5	1.5355	47.47	-7.68	39.79	63.91	-24.12	-	-	peak
6	14.4404	38.78	-7.82	30.96	69.50	-38.54	-	-	peak


- Spurious Emissions Below 1GHz
- LE 1Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

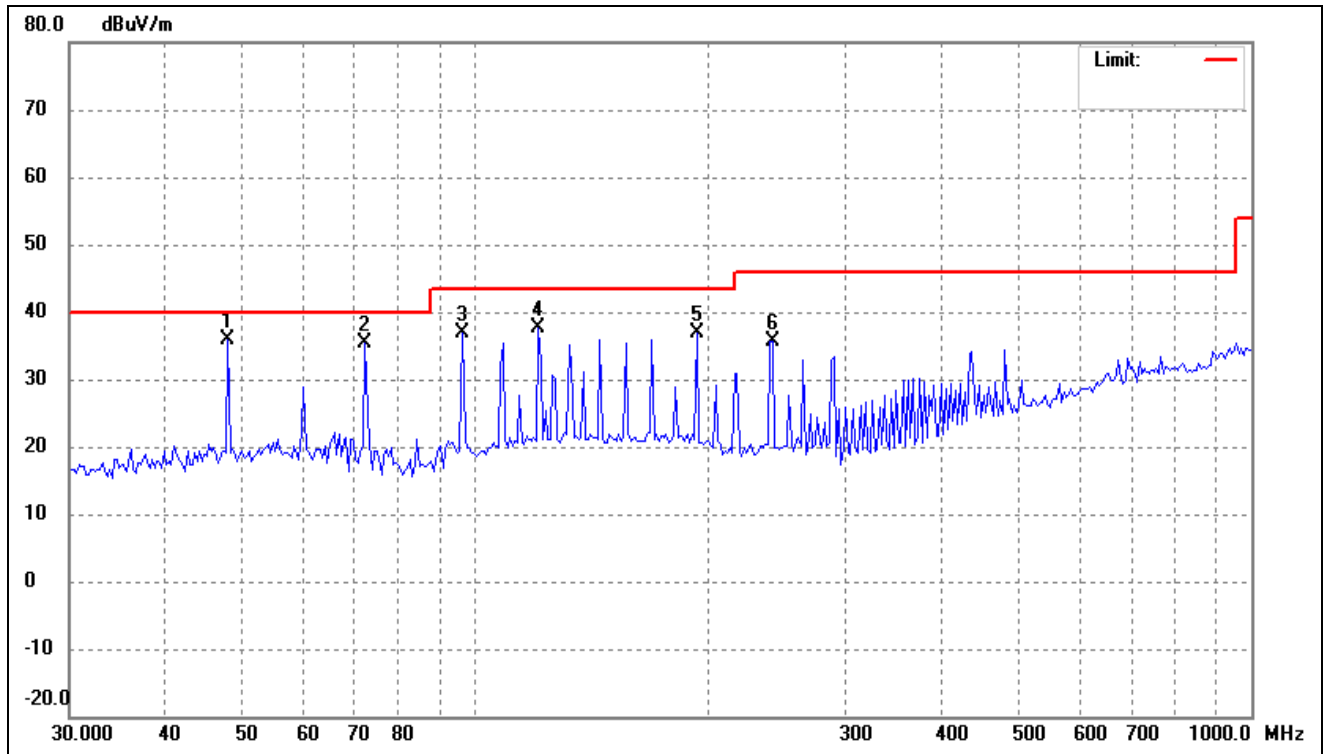

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.0392	44.14	-8.31	35.83	40.00	-4.17	-	-	peak
2	72.2111	46.31	-10.82	35.49	40.00	-4.51	-	-	peak
3	96.3230	50.25	-13.39	36.86	43.50	-6.64	-	-	peak
4	120.6118	47.86	-10.25	37.61	43.50	-5.89	-	-	peak
5	193.1366	48.30	-11.49	36.81	43.50	-6.69	-	-	peak
6	241.8377	46.04	-10.29	35.75	46.00	-10.25	-	-	peak


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

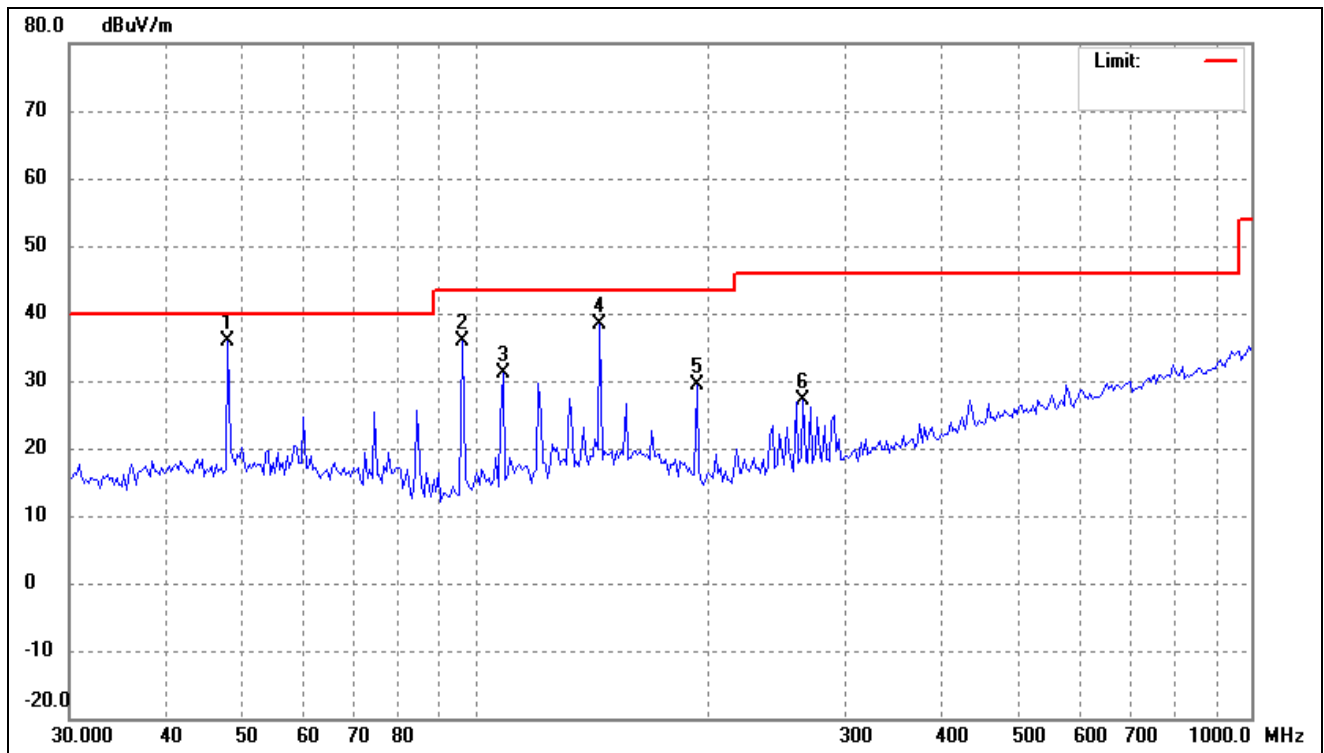

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.0392	44.19	-8.31	35.88	40.00	-4.12	-	-	peak
2	96.3230	49.25	-13.39	35.86	43.50	-7.64	-	-	peak
3	108.5455	42.54	-11.50	31.04	43.50	-12.46	-	-	peak
4	144.7899	47.23	-8.76	38.47	43.50	-5.03	-	-	peak
5	193.1366	40.80	-11.49	29.31	43.50	-14.19	-	-	peak
6	264.9709	36.52	-9.51	27.01	46.00	-18.99	-	-	peak


➤ LE 2Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

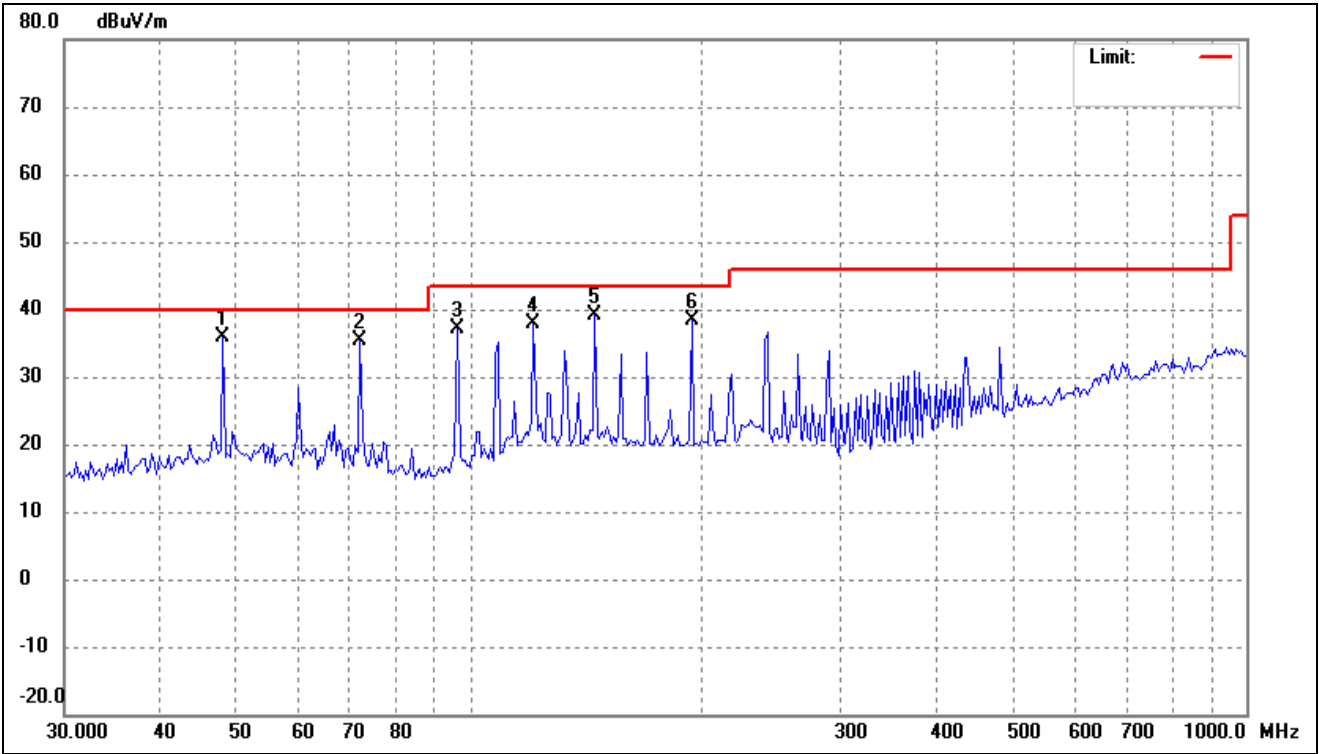

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.0392	44.20	-8.31	35.89	40.00	-4.11	-	-	peak
2	72.2111	46.18	-10.82	35.36	40.00	-4.64	-	-	peak
3	96.3230	50.45	-13.39	37.06	43.50	-6.44	-	-	peak
4	120.6118	48.23	-10.25	37.98	43.50	-5.52	-	-	peak
5	144.7899	47.88	-8.76	39.12	43.50	-4.38	-	-	peak
6	193.1366	49.91	-11.49	38.42	43.50	-5.08	-	-	peak


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

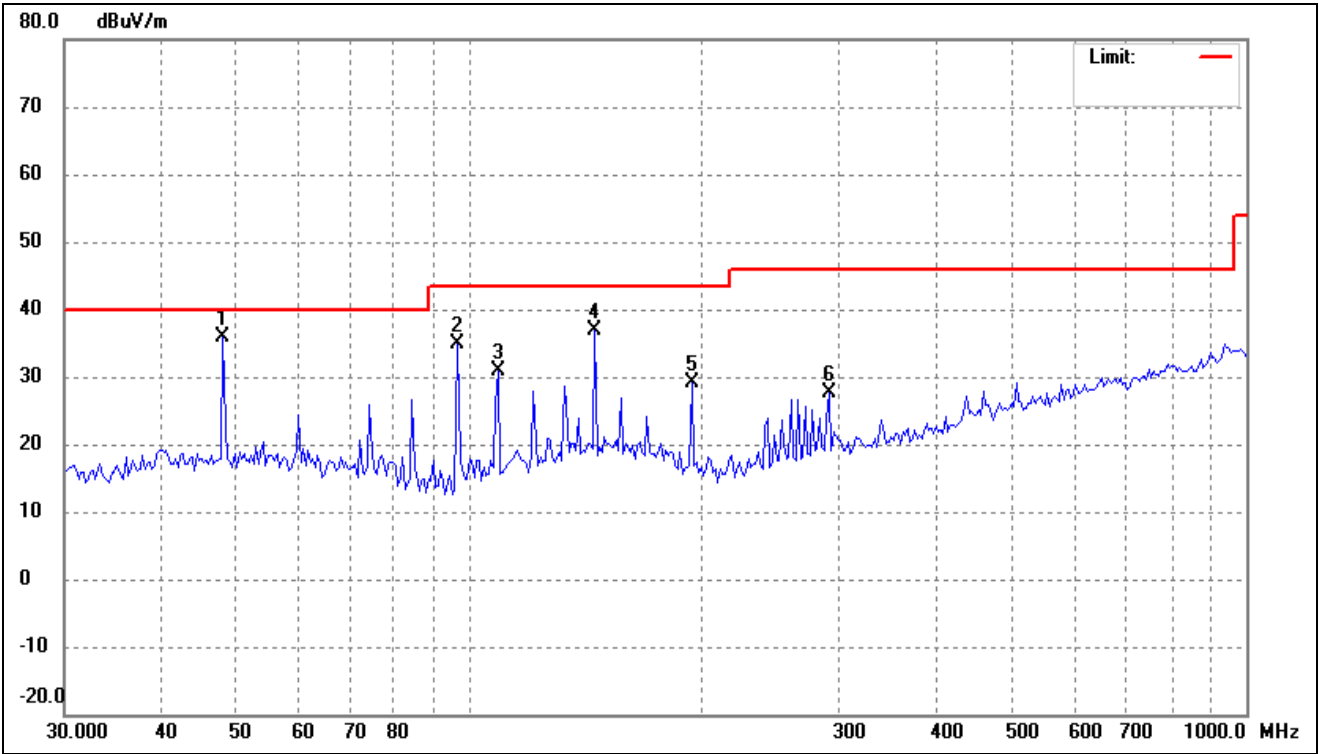

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.0392	44.22	-8.31	35.91	40.00	-4.09	-	-	peak
2	96.3230	48.21	-13.39	34.82	43.50	-8.68	-	-	peak
3	108.5455	42.36	-11.50	30.86	43.50	-12.64	-	-	peak
4	144.7899	45.70	-8.76	36.94	43.50	-6.56	-	-	peak
5	193.1366	40.60	-11.49	29.11	43.50	-14.39	-	-	peak
6	290.3170	36.25	-8.51	27.74	46.00	-18.26	-	-	peak


- Spurious Emissions Above 1GHz
- LE 1Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

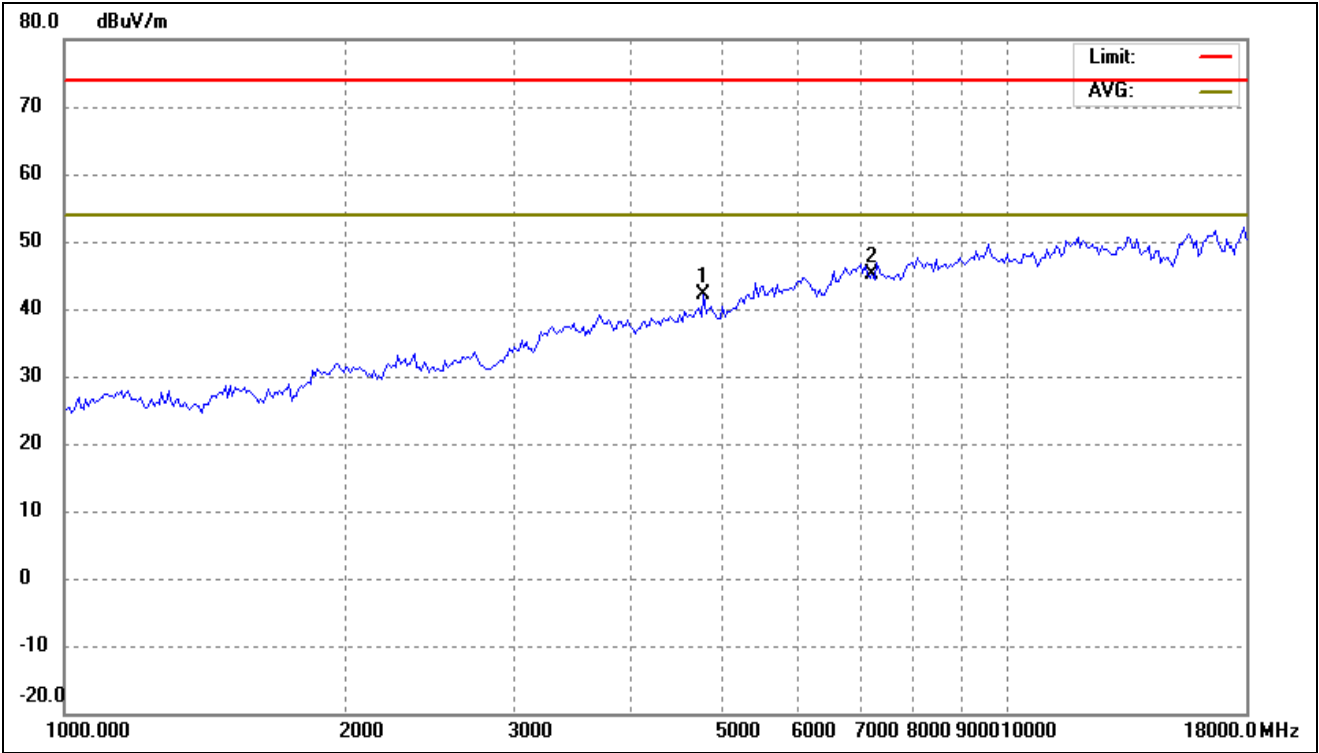


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4777.554	54.44	-12.34	42.10	74.00	-31.90	-	-	peak
2	7206.000	51.05	-5.81	45.24	74.00	-28.76	-	-	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

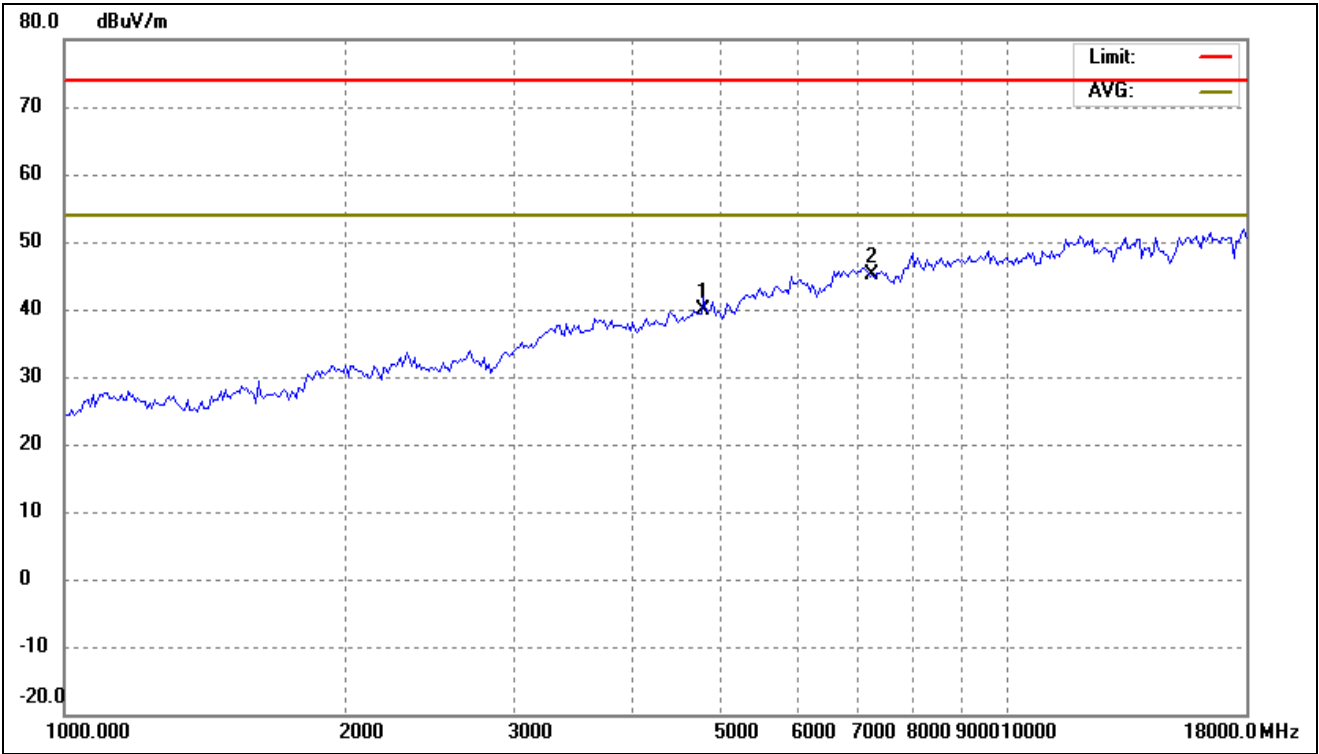


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	4804.000	51.89	-12.12	39.77	74.00	-34.23	-	-	peak
2	7206.000	50.91	-5.81	45.10	74.00	-28.90	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

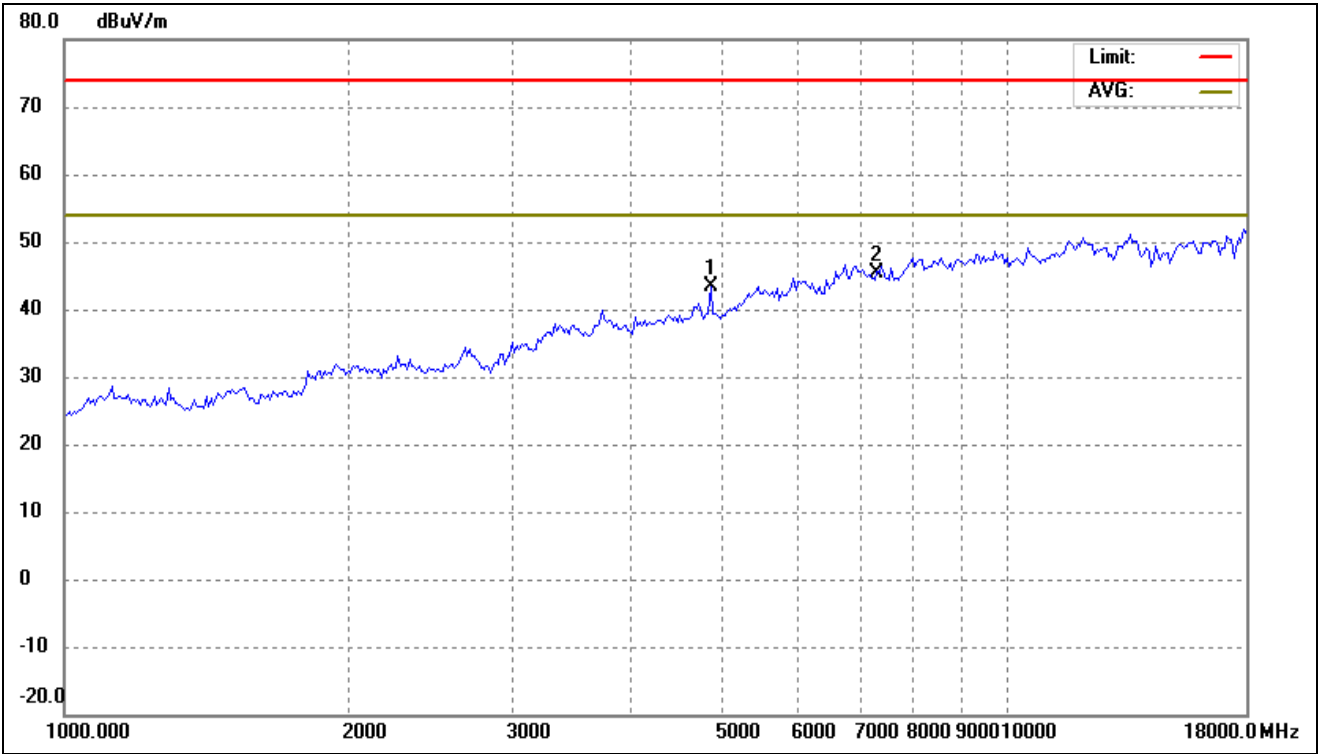


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4861.299	55.04	-11.72	43.32	74.00	-30.68	-	-	peak
2	7320.000	50.39	-5.05	45.34	74.00	-28.66	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

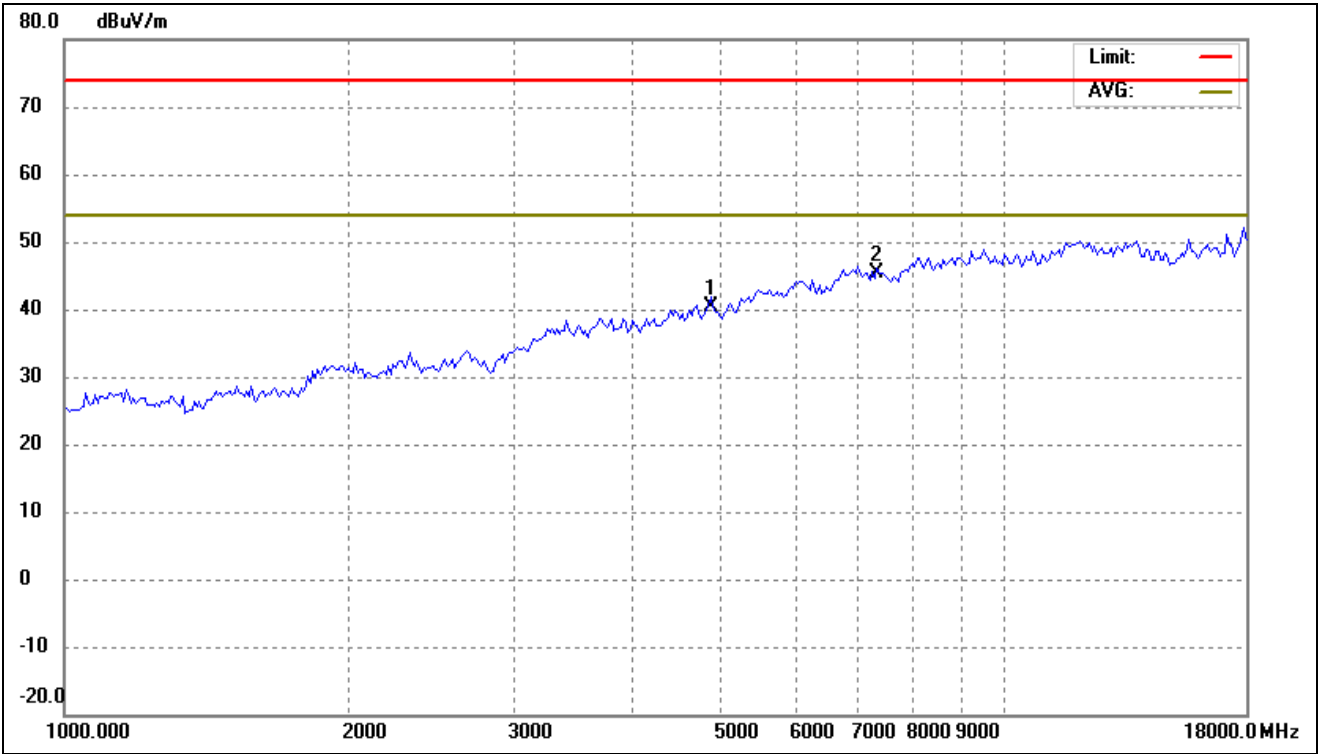


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	4880.000	52.25	-11.83	40.42	74.00	-33.58	-	-	peak
2	7320.000	50.39	-5.05	45.34	74.00	-28.66	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

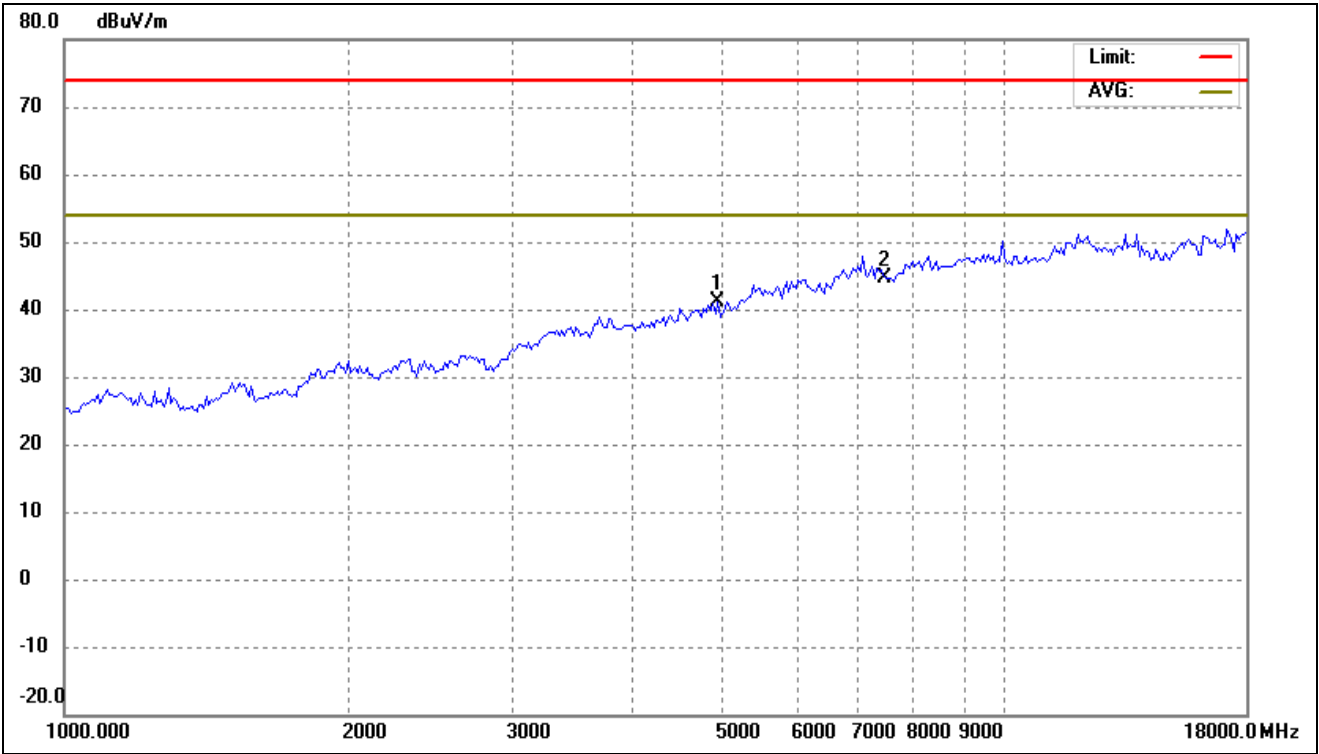

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4946.511	53.93	-12.69	41.24	74.00	-32.76	-	-	peak
2	7440.000	50.69	-5.97	44.72	74.00	-29.28	-	-	peak


Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

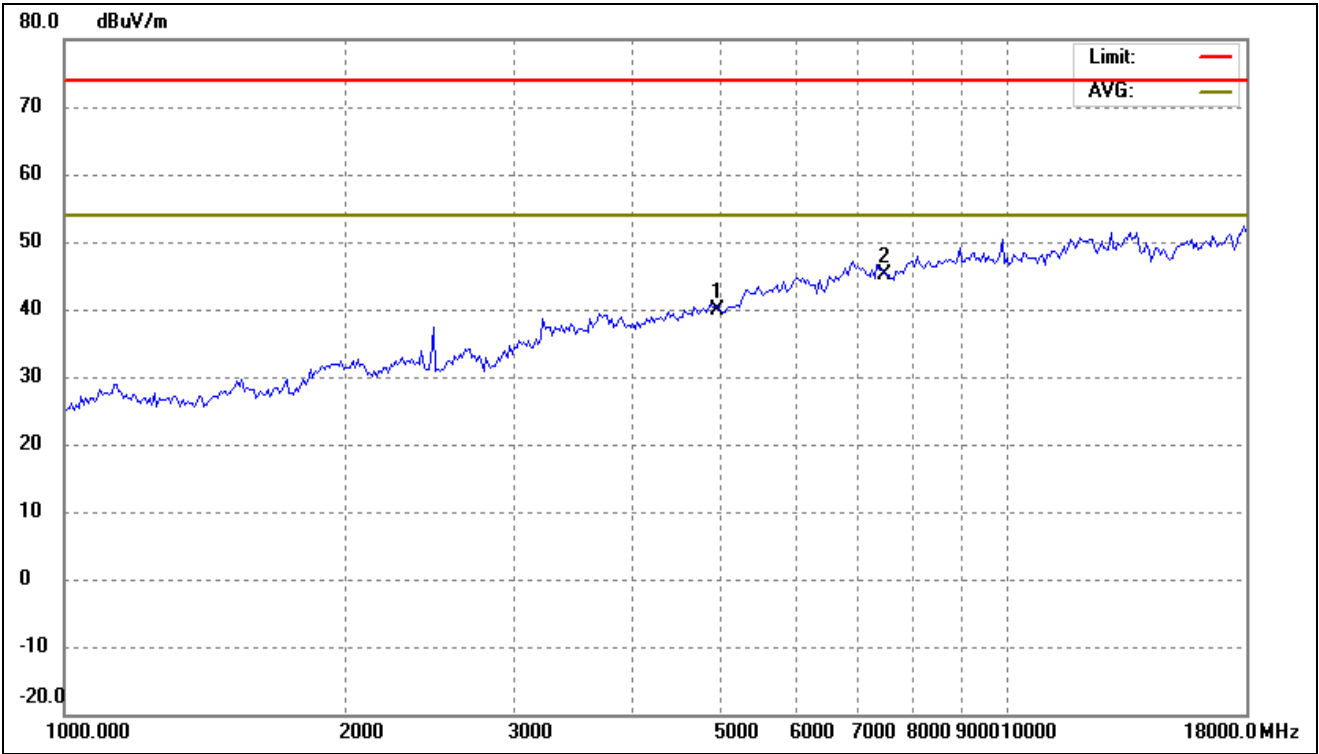

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	59.8588	31.43	-16.51	14.92	40.00	-25.08	-	-	peak
2	108.2667	32.24	-16.61	15.63	43.50	-27.87	-	-	peak


➤ LE 2Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

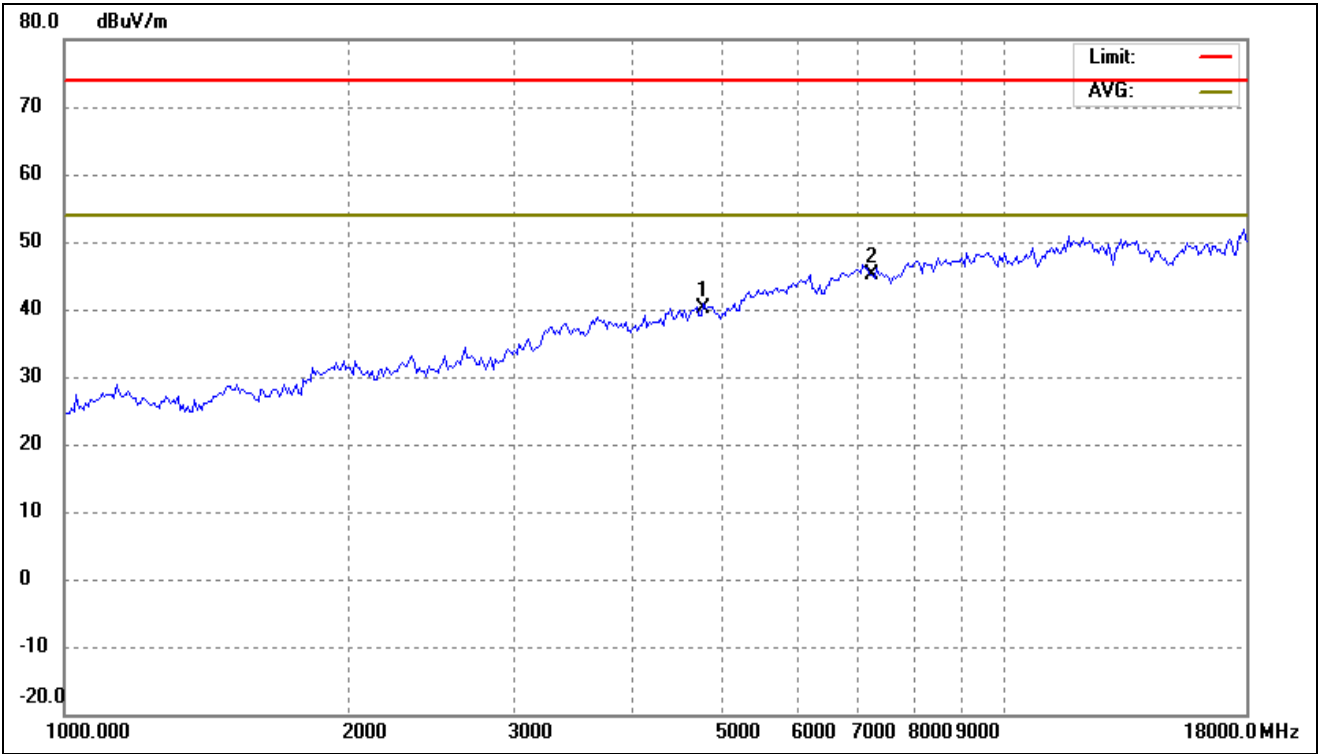


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4804.000	52.21	-12.12	40.09	74.00	-33.91	-	-	peak
2	7206.000	51.01	-5.81	45.20	74.00	-28.80	-	-	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

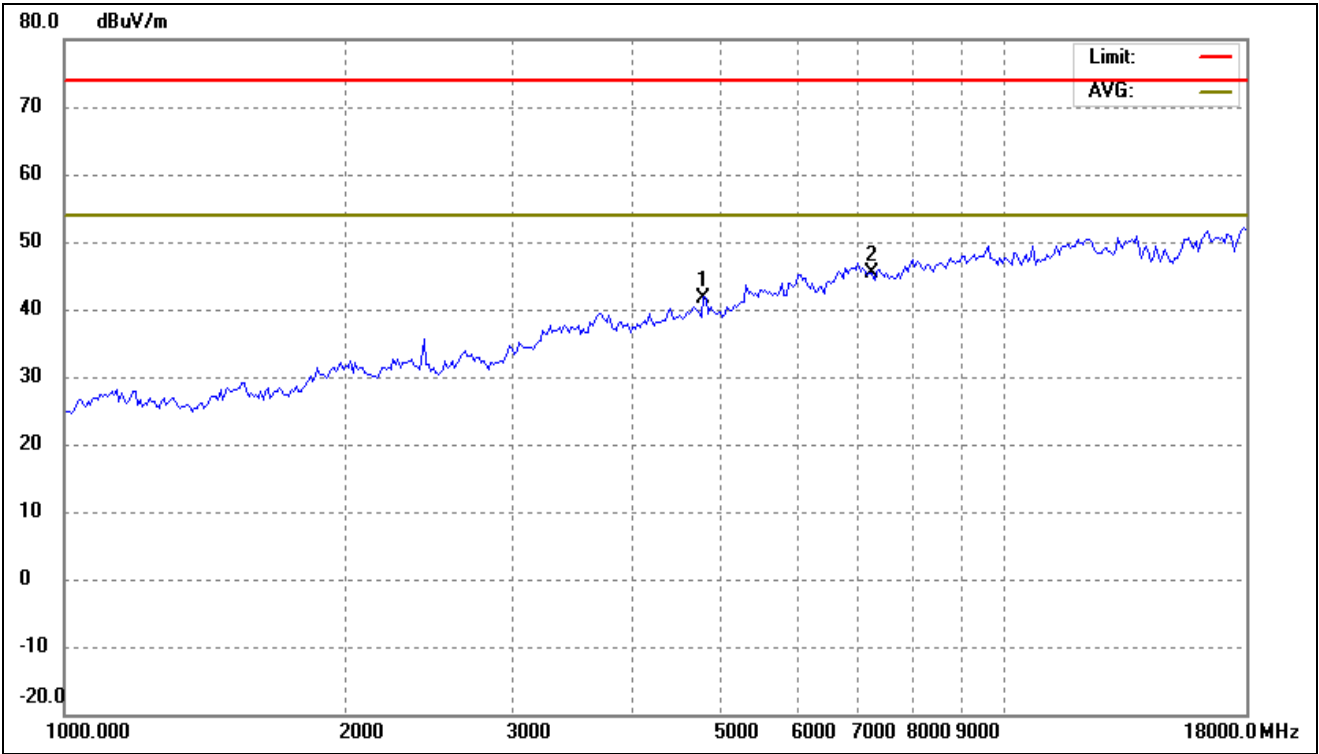


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4804.000	53.68	-12.12	41.56	74.00	-32.44	-	-	peak
2	7206.000	51.23	-5.81	45.42	74.00	-28.58	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

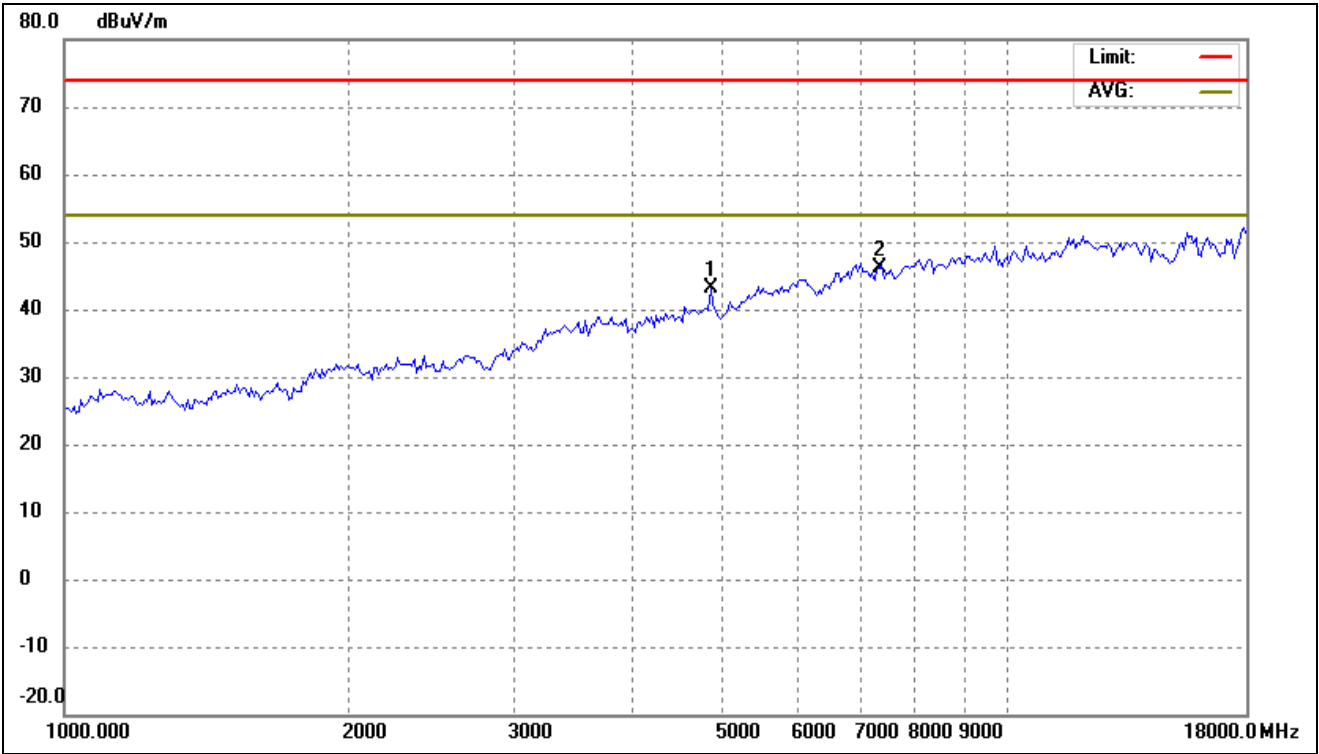


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4861.299	54.79	-11.72	43.07	74.00	-30.93	-	-	peak
2	7320.000	51.18	-5.05	46.13	74.00	-27.87	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

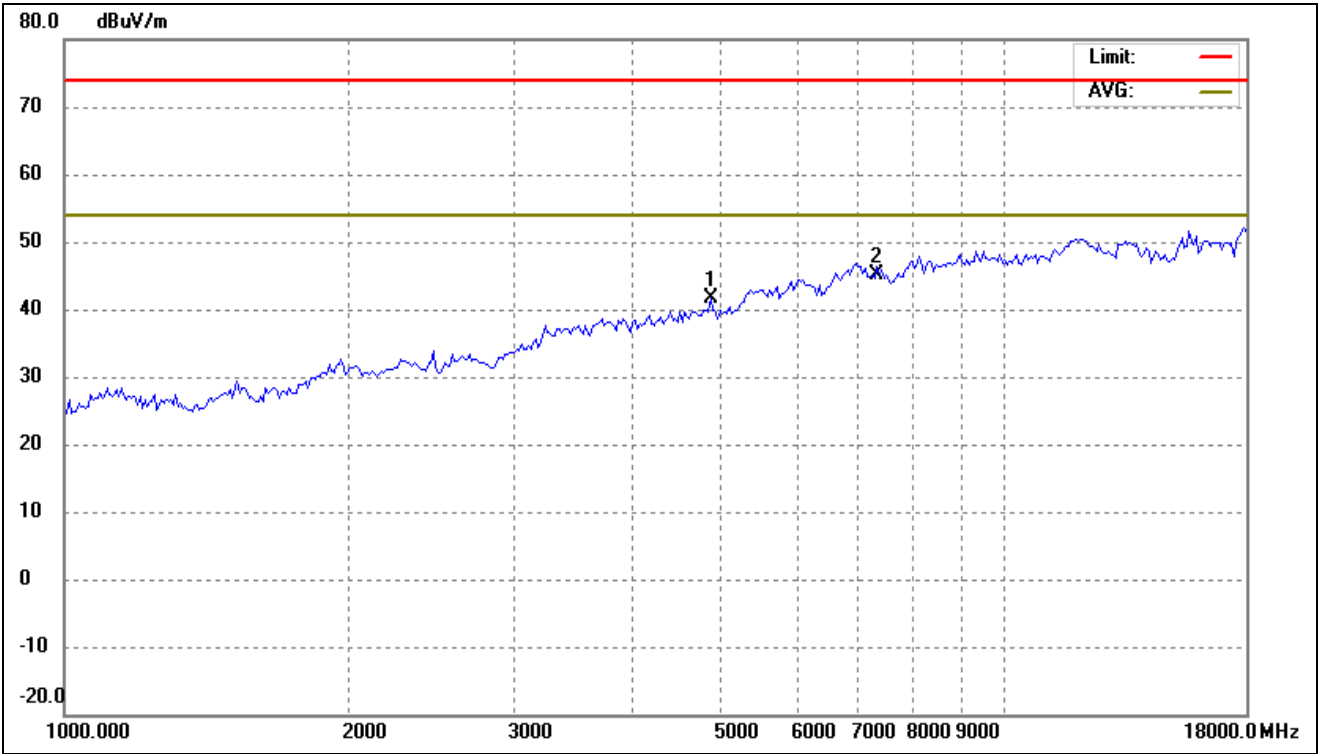


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4861.299	53.41	-11.72	41.69	74.00	-32.31	-	-	peak
2	7320.000	50.22	-5.05	45.17	74.00	-28.83	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

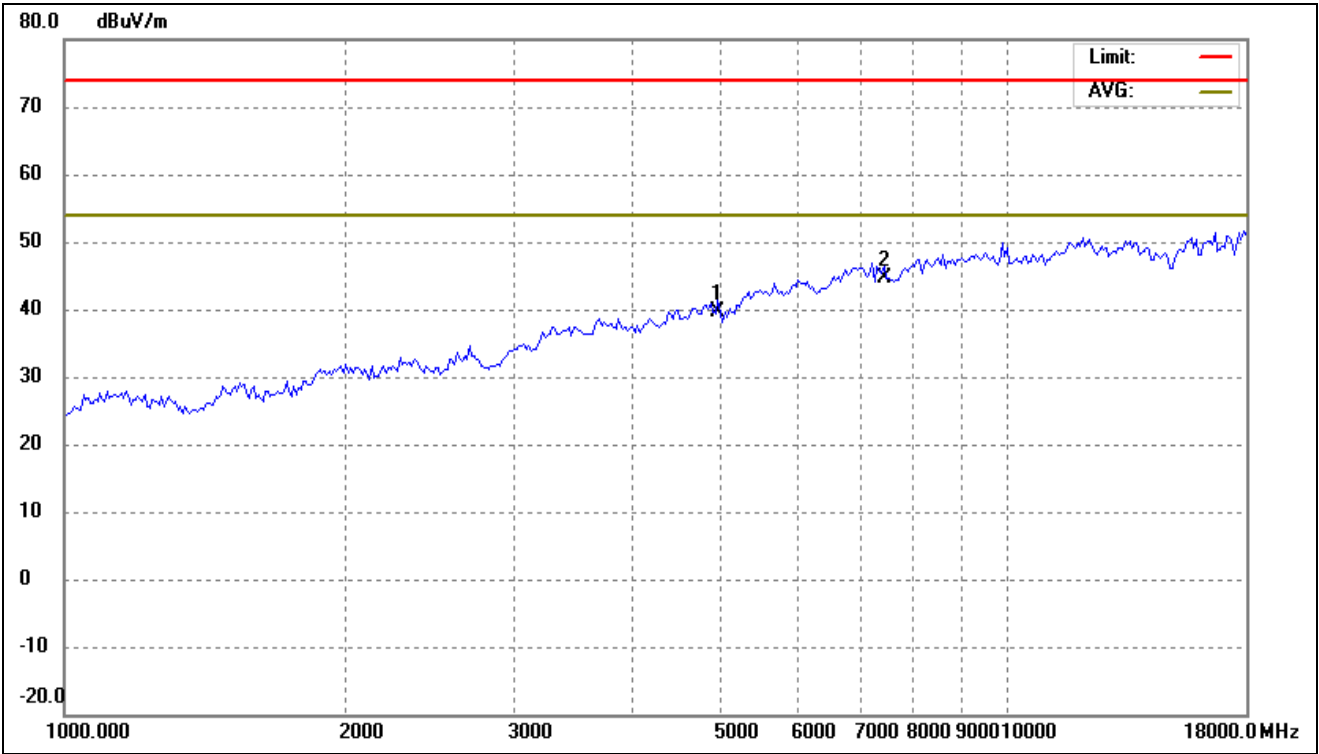

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4960.000	52.34	-12.72	39.62	74.00	-34.38	-	-	peak
2	7440.000	50.56	-5.97	44.59	74.00	-29.41	-	-	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

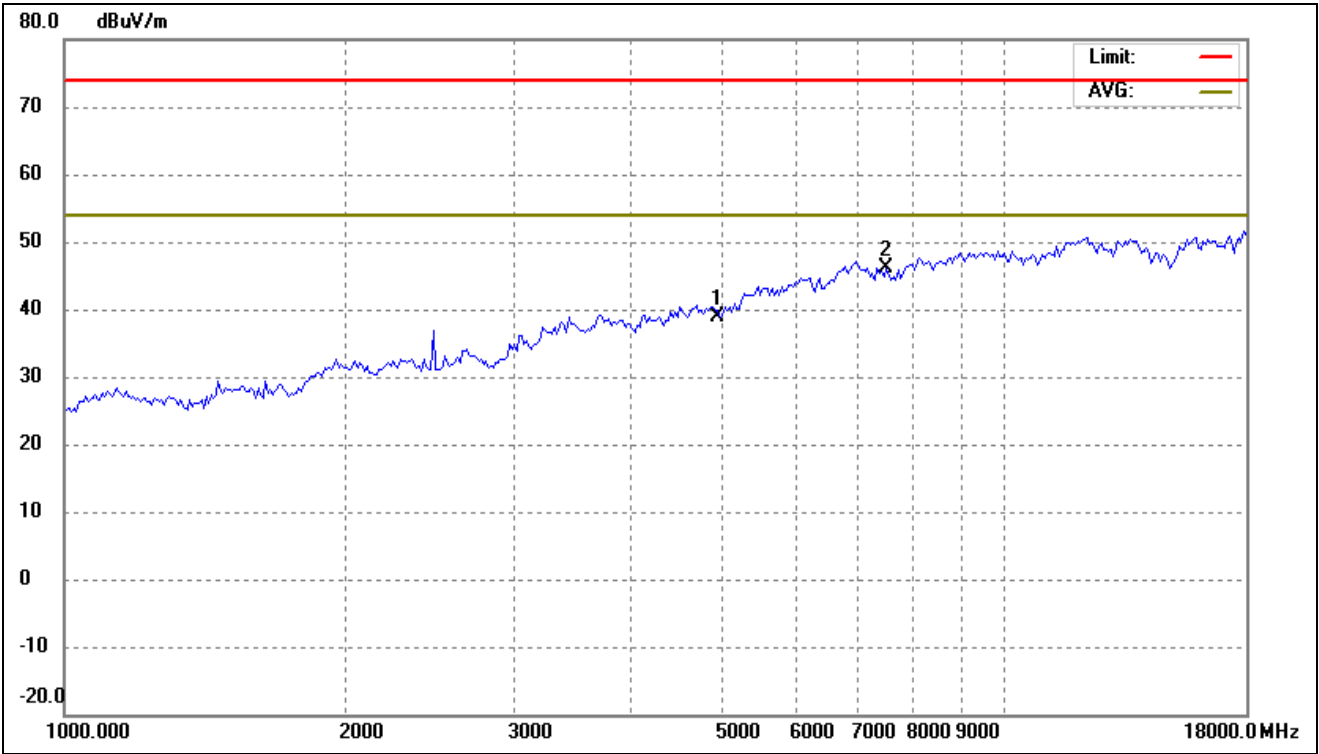

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4960.000	51.53	-12.72	38.81	74.00	-35.19	-	-	peak
2	7440.000	52.08	-5.97	46.11	74.00	-27.89	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2020 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2020 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

➤ Radiated test


LE 1Mbps

Test Channel	Low	Polarity:	Horizontal(worst case)
--------------	-----	-----------	------------------------

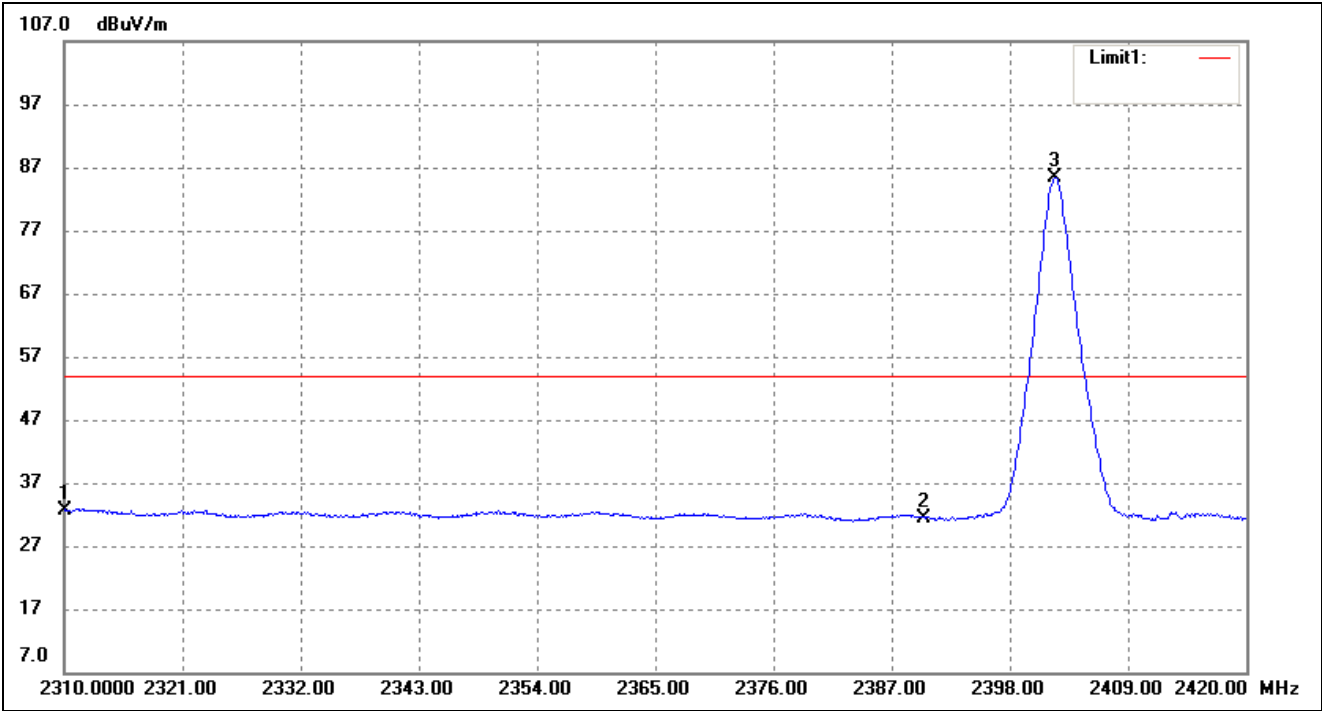

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	57.91	-18.74	39.17	74.00	-34.83	Average Detector
	2310.000	44.07	-18.74	25.33	54.00	-28.67	Peak Detector
2	2390.000	62.38	-18.68	43.70	74.00	-30.30	Average Detector
	2390.000	44.30	-18.68	25.62	54.00	-28.38	Peak Detector
3	2401.784	120.41	-18.71	101.70	/	/	Average Detector
	2402.184	94.07	-18.70	75.37	/	/	Peak Detector


Test Channel	High	Polarity:	Horizontal(worst case)
--------------	------	-----------	------------------------

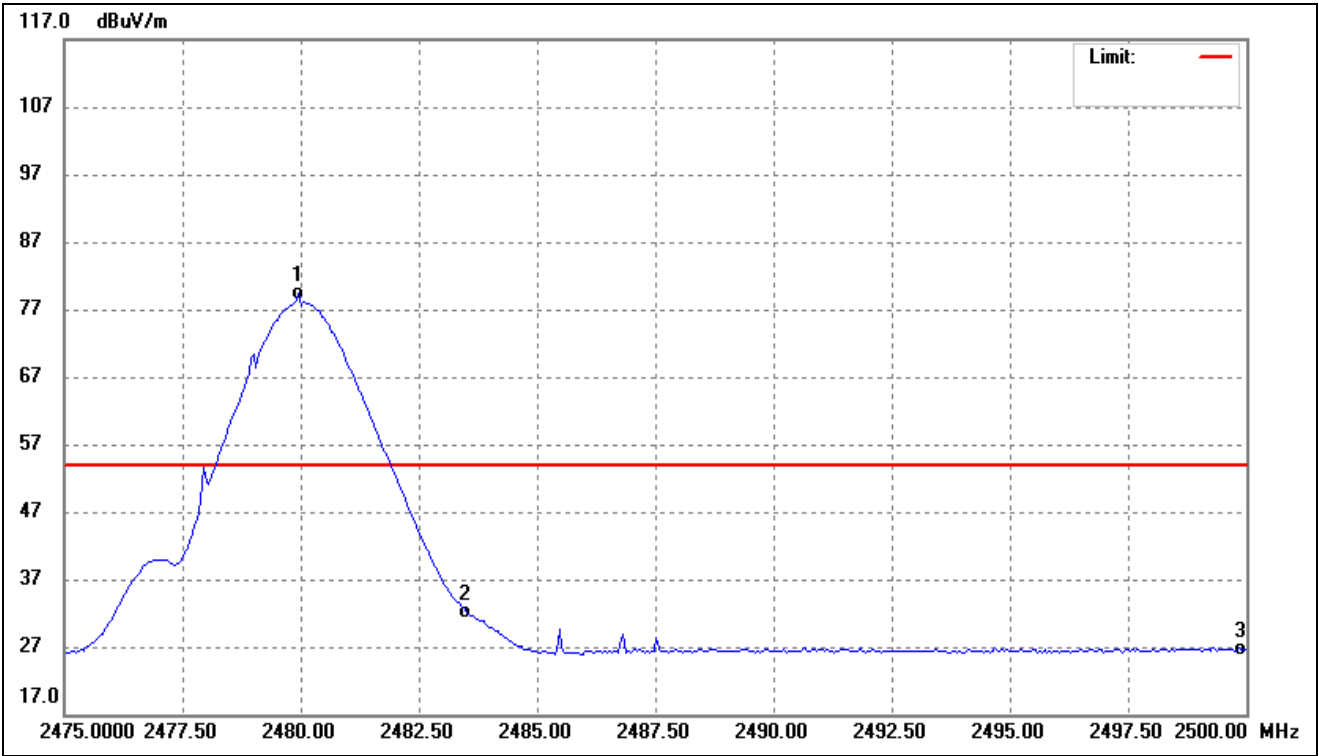

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.960	97.87	-18.52	79.35	/	/	Average Detector
	2479.960	117.92	-18.52	99.40	/	/	Peak Detector
2	2483.500	50.77	-18.54	32.23	54.00	-21.77	Average Detector
	2483.500	73.84	-18.54	55.30	74.00	-18.70	Peak Detector
3	2500.000	45.21	-18.64	26.57	54.00	-27.43	Average Detector
	2500.000	59.11	-18.64	40.47	74.00	-33.53	Peak Detector


LE 2Mbps

Test Channel	Low	Polarity:	Horizontal(worst case)
--------------	-----	-----------	------------------------

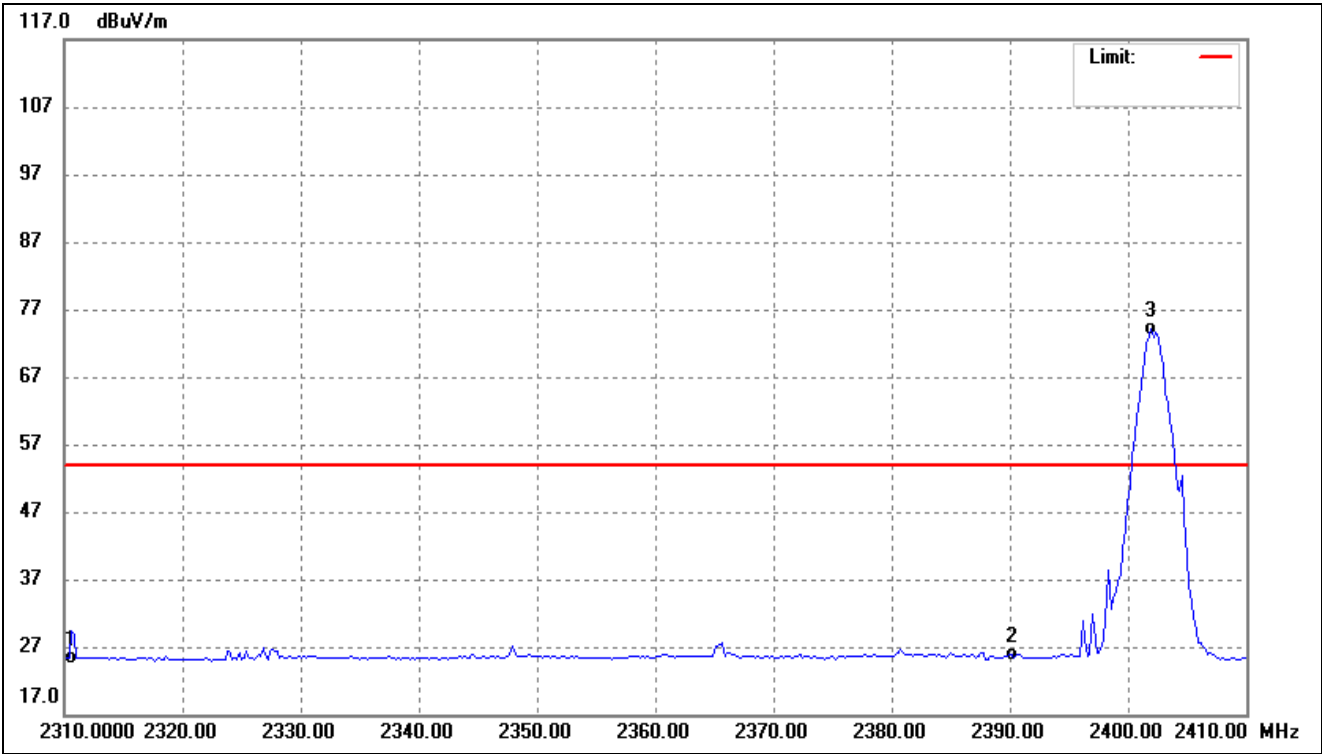

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.16	-18.74	25.42	54.00	-28.58	Average Detector
	2310.000	57.18	-18.74	38.44	74.00	-35.56	Peak Detector
2	2390.000	44.55	-18.68	25.87	54.00	-28.13	Average Detector
	2390.000	62.50	-18.68	43.82	74.00	-30.18	Peak Detector
3	2401.984	92.86	-18.70	74.16	/	/	Average Detector
	2402.184	120.12	-18.70	101.42	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal(worst case)
--------------	------	-----------	------------------------

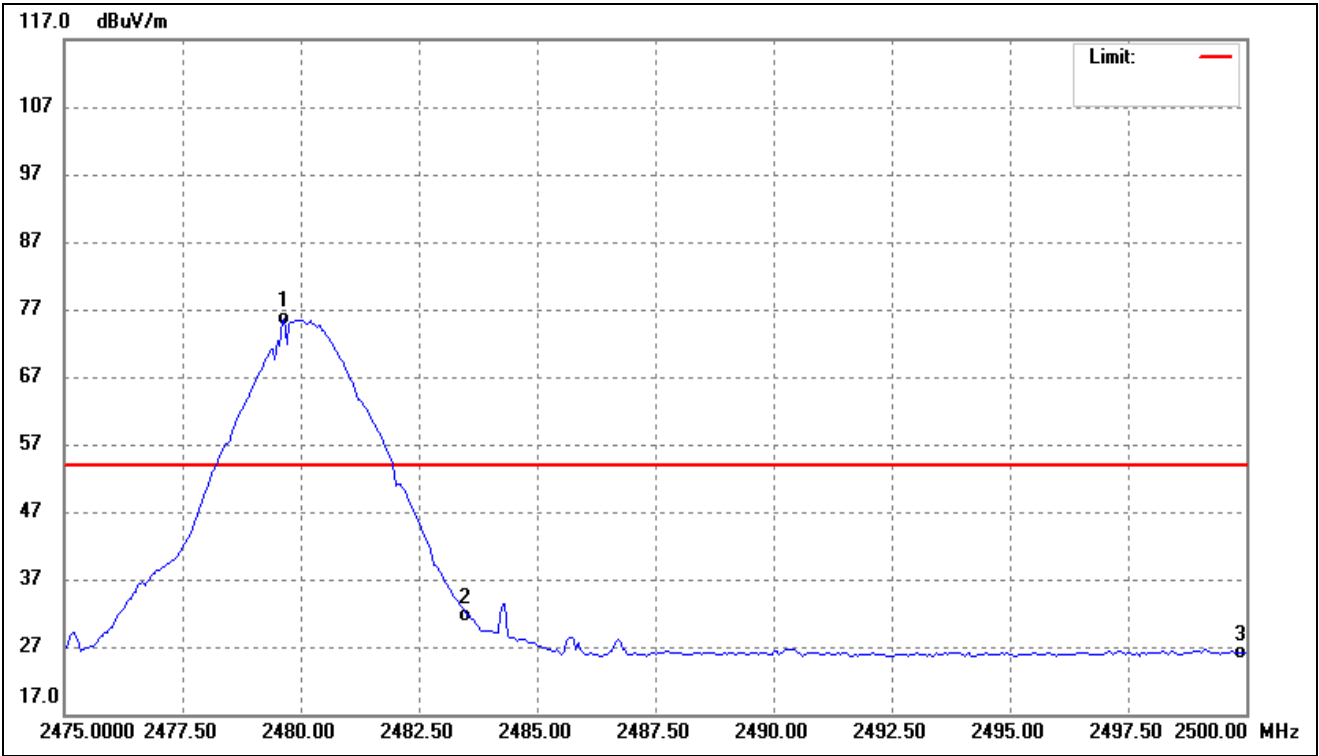

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.659	94.24	-18.52	75.72	/	/	Average Detector
	2480.160	119.90	-18.52	101.38	/	/	Peak Detector
2	2483.500	50.27	-18.54	31.73	54.00	-22.27	Average Detector
	2483.500	71.72	-18.54	53.18	74.00	-20.82	Peak Detector
3	2500.000	44.87	-18.64	26.23	54.00	-27.77	Average Detector
	2500.000	59.54	-18.64	40.90	74.00	-33.10	Peak Detector

➤ Conducted test
Please refer to Appendix D


9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

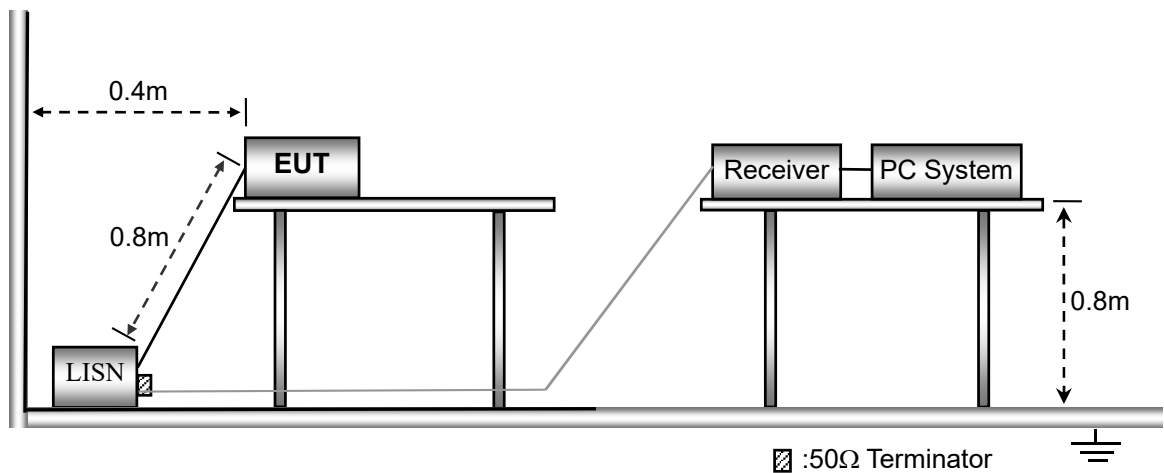


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

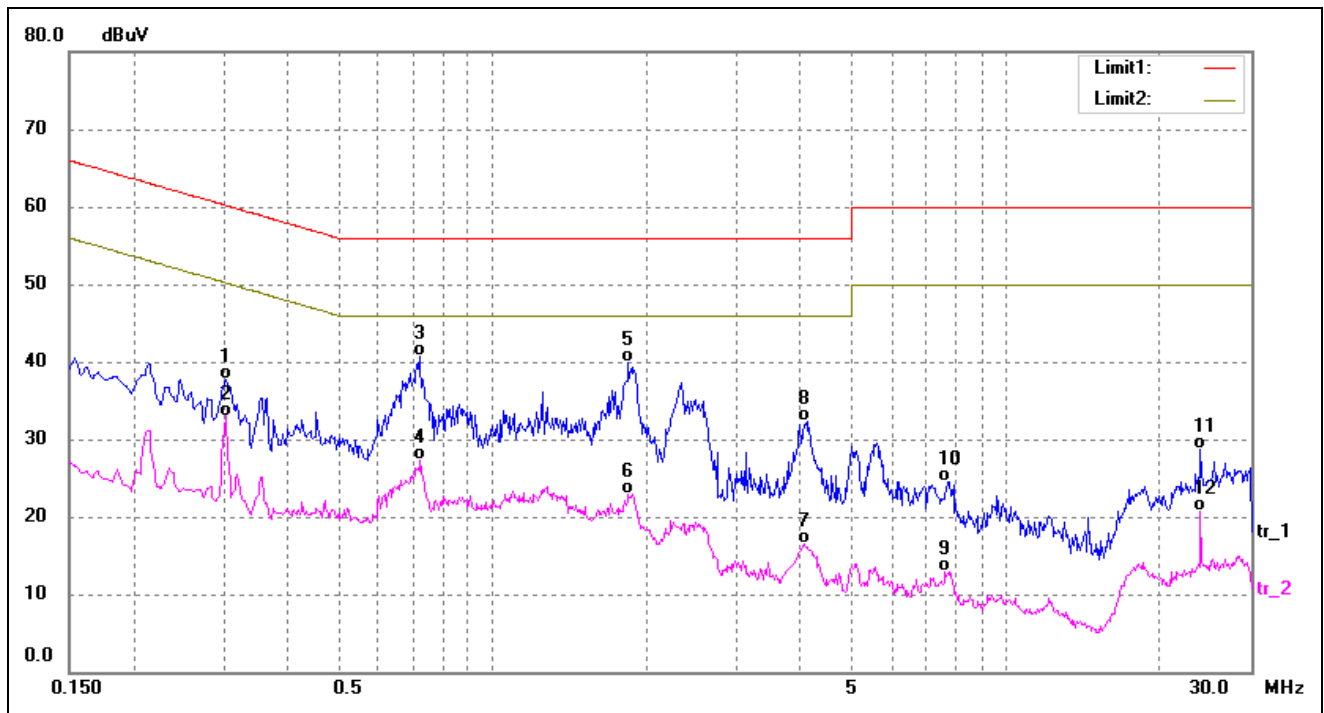

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3019	28.09	9.63	37.72	60.19	-22.47	QP
2	0.3019	23.37	9.63	33.00	50.19	-17.19	AVG
3*	0.7219	30.94	9.74	40.68	56.00	-15.32	QP
4	0.7259	17.47	9.74	27.21	46.00	-18.79	AVG
5	1.8460	30.44	9.42	39.86	56.00	-16.14	QP
6	1.8460	13.50	9.42	22.92	46.00	-23.08	AVG
7	4.0700	7.04	9.47	16.51	46.00	-29.49	AVG
8	4.0979	22.79	9.47	32.26	56.00	-23.74	QP
9	7.6459	3.14	9.79	12.93	50.00	-37.07	AVG
10	7.6939	14.77	9.79	24.56	60.00	-35.44	QP
11	24.0019	19.10	9.54	28.64	60.00	-31.36	QP
12	24.0019	11.12	9.54	20.66	50.00	-29.34	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

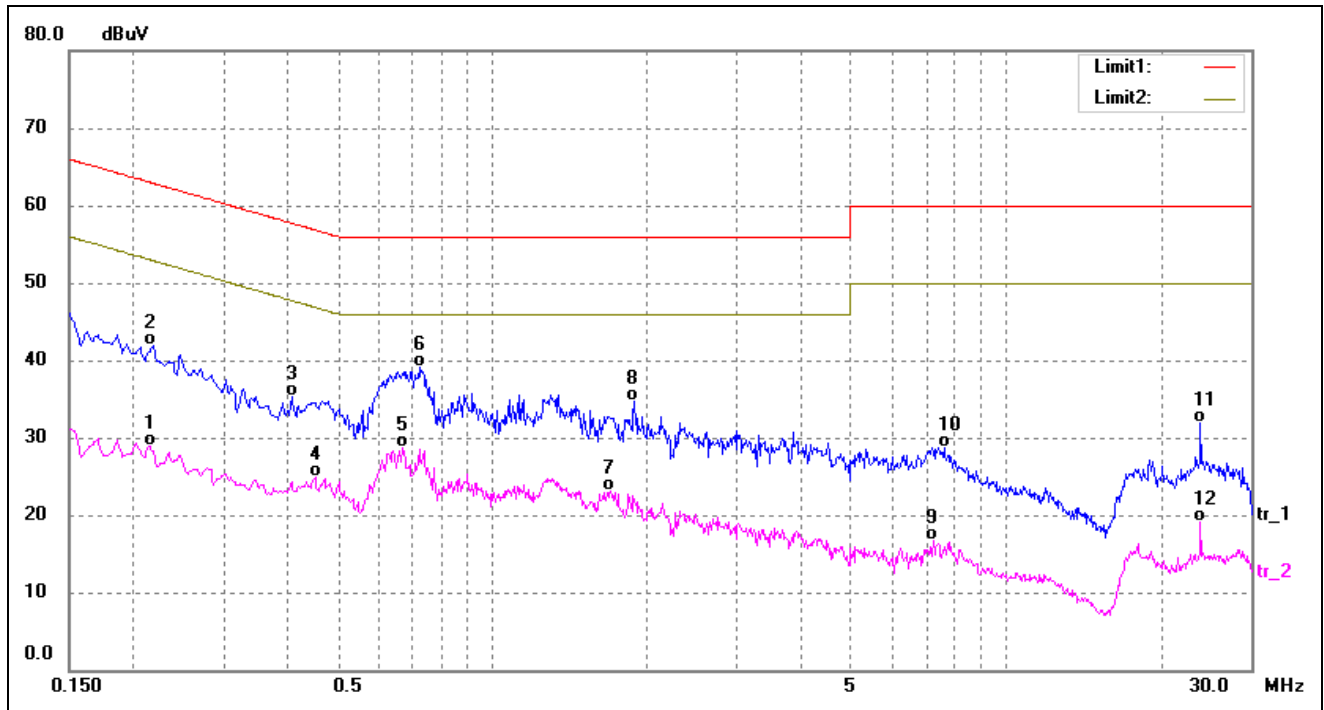

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2140	19.27	9.63	28.90	53.04	-24.14	AVG
2	0.2180	32.25	9.63	41.88	62.89	-21.01	QP
3	0.4060	25.58	9.64	35.22	57.73	-22.51	QP
4	0.4500	15.27	9.64	24.91	46.87	-21.96	AVG
5	0.6700	18.95	9.72	28.67	46.00	-17.33	AVG
6*	0.7220	29.36	9.74	39.10	56.00	-16.90	QP
7	1.7060	13.57	9.48	23.05	46.00	-22.95	AVG
8	1.8940	25.27	9.40	34.67	56.00	-21.33	QP
9	7.2140	6.98	9.79	16.77	50.00	-33.23	AVG
10	7.5660	19.01	9.79	28.80	60.00	-31.20	QP
11	24.0020	22.42	9.54	31.96	60.00	-28.04	QP
12	24.0020	9.55	9.54	19.09	50.00	-30.91	AVG




APPENDIX SUMMARY

Project No.	WTX26X06166771W001	Test Engineer	Timi Huang
Start date	2026/6/17	Finish date	2026/6/17
Temperature	22.6℃	Humidity	52%
RF specifications	Bluetooth-LE		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A




Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
LE-GFSK-1Mbps	Low	-17.89	8
	Middle	-17.30	8
	High	-16.74	8
LE-GFSK-2Mbps	Low	-21.77	8
	Middle	-21.22	8
	High	-20.06	8

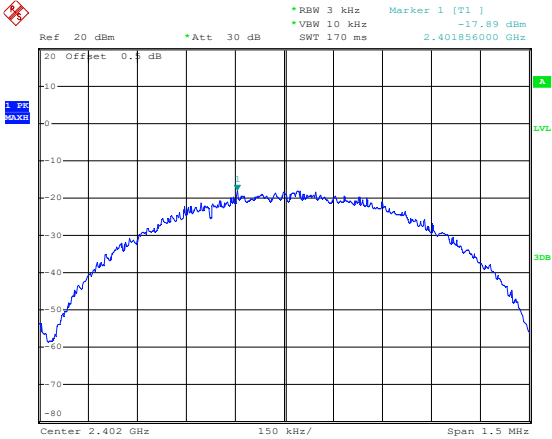
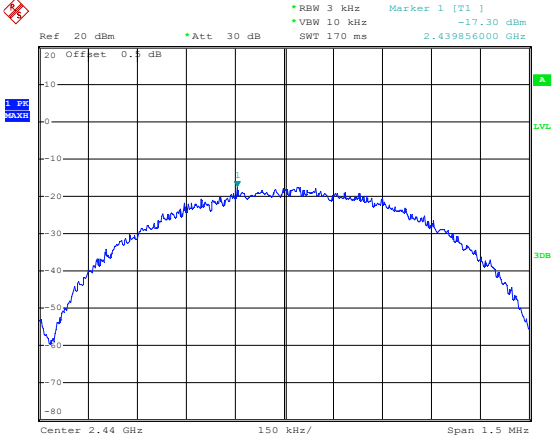
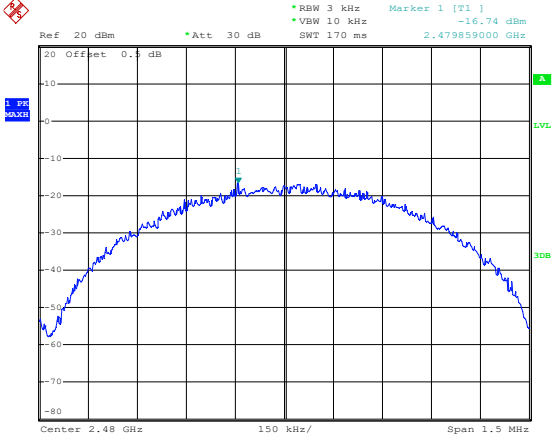
Low-1Mbps	 Ref: 20 dBm *Att: 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -17.89 dBm 2.401856000 GHz SWT 170 ms Center 2.402 GHz 150 kHz/ Span 1.5 MHz Date: 17.JUN.2026 14:32:00
Middle-1Mbps	 Ref: 20 dBm *Att: 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -17.30 dBm 2.439856000 GHz SWT 170 ms Center 2.44 GHz 150 kHz/ Span 1.5 MHz Date: 17.JUN.2026 14:39:11
High-1Mbps	 Ref: 20 dBm *Att: 30 dB RBW 3 kHz VBW 10 kHz Marker 1 [T1] -16.74 dBm 2.479859000 GHz SWT 170 ms Center 2.48 GHz 150 kHz/ Span 1.5 MHz Date: 17.JUN.2026 14:39:57

Low-2Mbps	Date: 17.JUN.2026 14:51:05
Middle-2Mbps	Date: 17.JUN.2026 14:46:33
High-2Mbps	Date: 17.JUN.2026 14:45:47

APPENDIX B




Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
LE-GFSK-1Mbps	Low	666	≥500
	Middle	666	≥500
	High	672	≥500
LE-GFSK-2Mbps	Low	1180	≥500
	Middle	1180	≥500
	High	1180	≥500

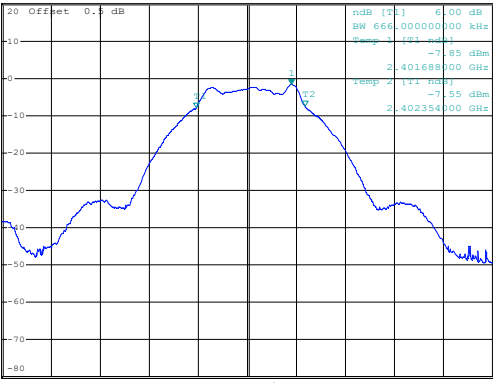
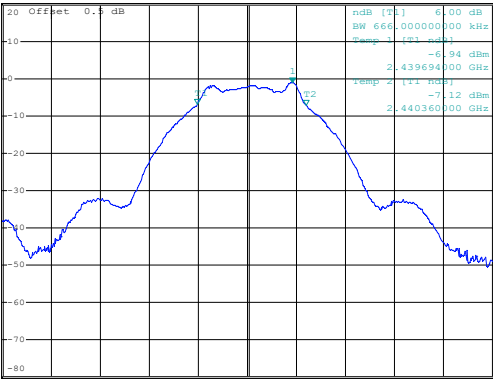
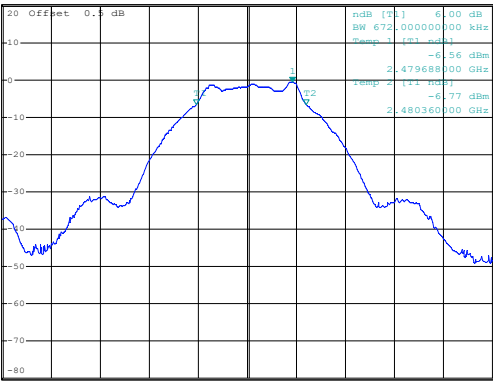
Low-1Mbps	 Ref: 20 dBm *Att: 30 dB *RBW 100 kHz Marker 1 [T1] -1.72 dBm *VBW 300 kHz 2.402270000 GHz SWT 2.5 ms ndB [T1] 6.00 dB BW 666.000000000 kHz Temp 1 [T1] -7.85 dBm 2.401688000 GHz Temp 2 [T1] -7.55 dBm 2.402354000 GHz Center 2.402 GHz 300 kHz/ Span 3 MHz Date: 17.JUN.2026 14:32:58
Middle-1Mbps	 Ref: 20 dBm *Att: 30 dB *RBW 100 kHz Marker 1 [T1] -1.13 dBm *VBW 300 kHz 2.440276000 GHz SWT 2.5 ms ndB [T1] 6.00 dB BW 666.000000000 kHz Temp 1 [T1] -6.94 dBm 2.439694000 GHz Temp 2 [T1] -7.12 dBm 2.440360000 GHz Center 2.44 GHz 300 kHz/ Span 3 MHz Date: 17.JUN.2026 14:38:50
High-1Mbps	 Ref: 20 dBm *Att: 30 dB *RBW 100 kHz Marker 1 [T1] -0.51 dBm *VBW 300 kHz 2.480276000 GHz SWT 2.5 ms ndB [T1] 6.00 dB BW 672.000000000 kHz Temp 1 [T1] -6.56 dBm 2.479688000 GHz Temp 2 [T1] -6.77 dBm 2.480360000 GHz Center 2.48 GHz 300 kHz/ Span 3 MHz Date: 17.JUN.2026 14:40:22

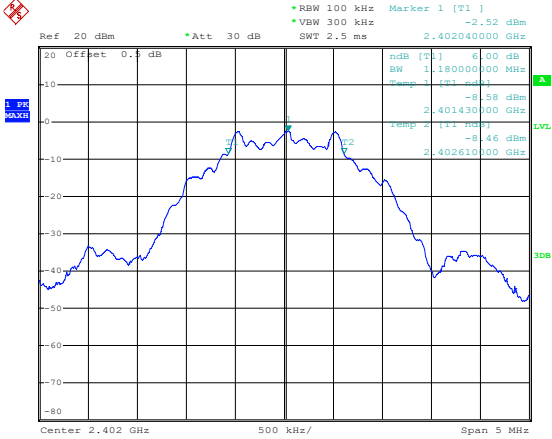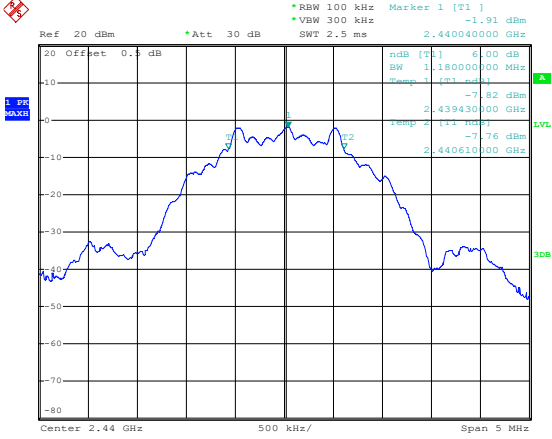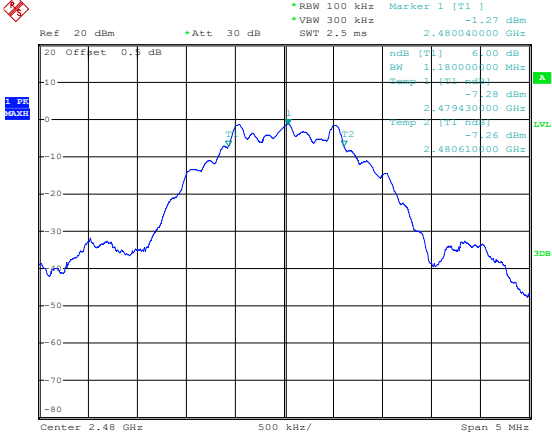Low-2Mbps	 Ref 20 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -2.52 dBm SW 2.5 ms 2.402040000 GHz ndB [T1] 6.00 dB BW 1.180000000 MHz Sweep 1 [T1 500 kHz] -8.58 dBm 2.401430000 GHz Temp 2 [T2 100 kHz] -8.46 dBm 2.402610000 GHz Center 2.402 GHz 500 kHz/ Span 5 MHz Date: 17.JUN.2026 14:50:45
Middle-2Mbps	 Ref 20 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -1.91 dBm SW 2.5 ms 2.440040000 GHz ndB [T1] 6.00 dB BW 1.180000000 MHz Sweep 1 [T1 500 kHz] -7.82 dBm 2.439430000 GHz Temp 2 [T2 100 kHz] -7.76 dBm 2.440610000 GHz Center 2.44 GHz 500 kHz/ Span 5 MHz Date: 17.JUN.2026 14:47:10
High-2Mbps	 Ref 20 dBm *Att 30 dB *RBW 100 kHz *VBW 300 kHz Marker 1 [T1] -1.27 dBm SW 2.5 ms 2.480040000 GHz ndB [T1] 6.00 dB BW 1.180000000 MHz Sweep 1 [T1 500 kHz] -7.28 dBm 2.479430000 GHz Temp 2 [T2 100 kHz] -7.26 dBm 2.480610000 GHz Center 2.48 GHz 500 kHz/ Span 5 MHz Date: 17.JUN.2026 14:44:37

APPENDIX C

RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
LE-GFSK-1Mbps	Low	-1.56	30.00
	Middle	-0.99	30.00
	High	-0.39	30.00
LE-GFSK-2Mbps	Low	-1.43	30.00
	Middle	-0.75	30.00
	High	-0.11	30.00

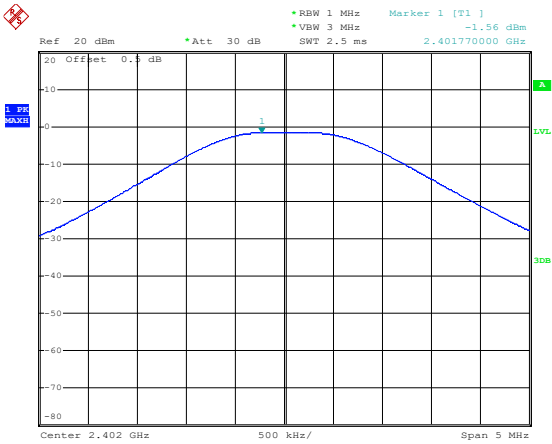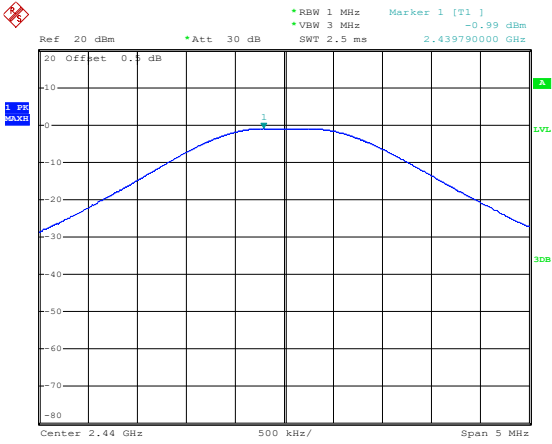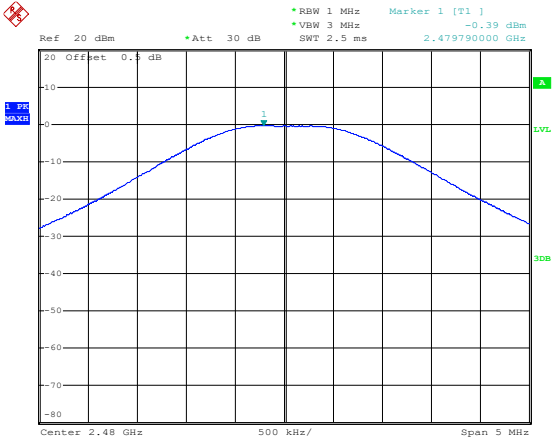
Low-1Mbps	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -1.56 dBm *VBW 3 MHz SWT 2.5 ms 2.401770000 GHz Center 2.402 GHz 500 kHz/ Span 5 MHz Date: 17.JUN.2026 14:30:25
Middle-1Mbps	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -0.99 dBm *VBW 3 MHz SWT 2.5 ms 2.439790000 GHz Center 2.44 GHz 500 kHz/ Span 5 MHz Date: 17.JUN.2026 14:39:21
High-1Mbps	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -0.39 dBm *VBW 3 MHz SWT 2.5 ms 2.479790000 GHz Center 2.48 GHz 500 kHz/ Span 5 MHz Date: 17.JUN.2026 14:39:39

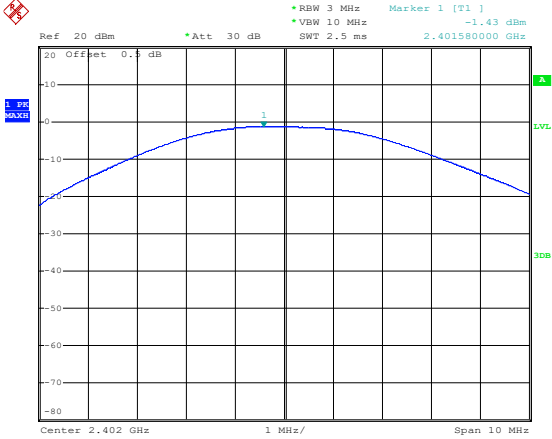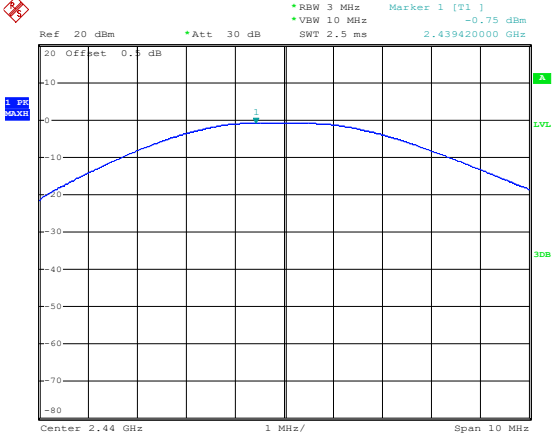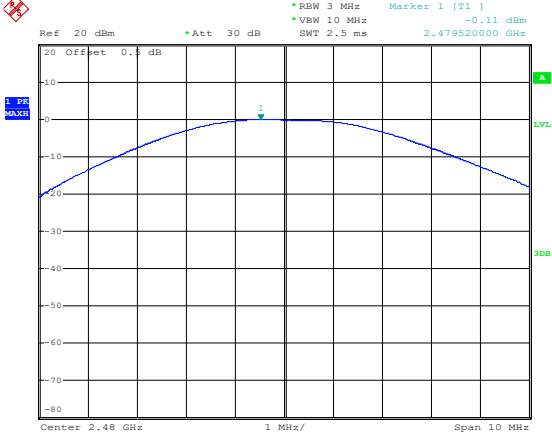Low-2Mbps	 Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] -1.43 dBm *VBW 10 MHz SWT 2.5 ms 2.401580000 GHz Center 2.402 GHz 1 MHz/ Span 10 MHz Date: 17.JUN.2026 14:51:16
Middle-2Mbps	 Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] -0.75 dBm *VBW 10 MHz SWT 2.5 ms 2.439420000 GHz Center 2.44 GHz 1 MHz/ Span 10 MHz Date: 17.JUN.2026 14:46:17
High-2Mbps	 Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] -0.11 dBm *VBW 10 MHz SWT 2.5 ms 2.479520000 GHz Center 2.48 GHz 1 MHz/ Span 10 MHz Date: 17.JUN.2026 14:46:00


APPENDIX D

Conducted Out of Band Emissions

Low-1Mbps

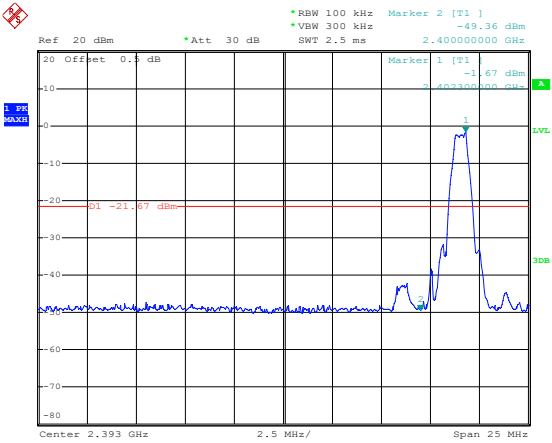


Date: 17.JUN.2026 14:35:47



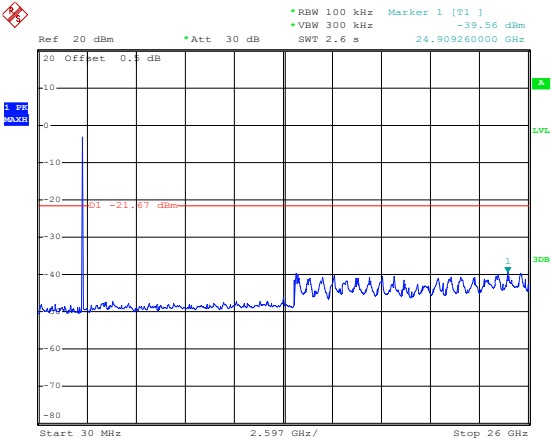


Date: 17.JUN.2026 14:36:53



Middle-1Mbps

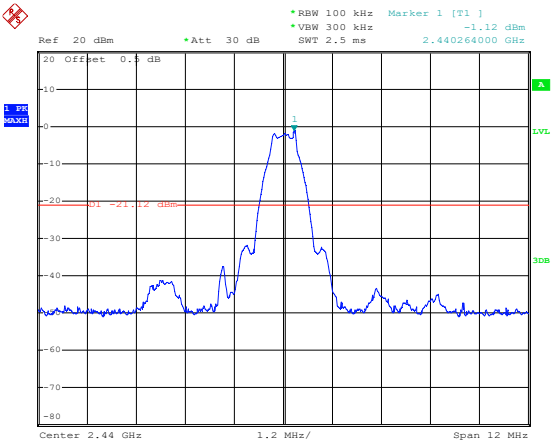


Date: 17.JUN.2026 14:37:58

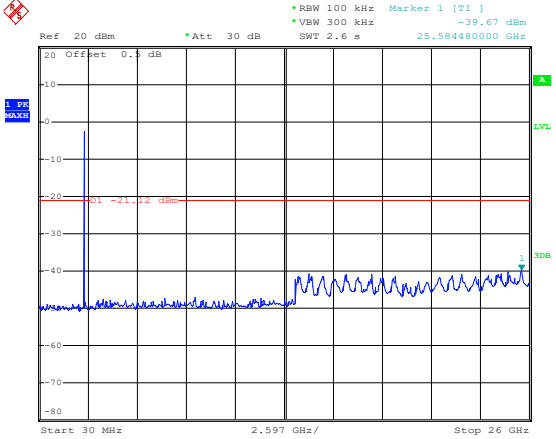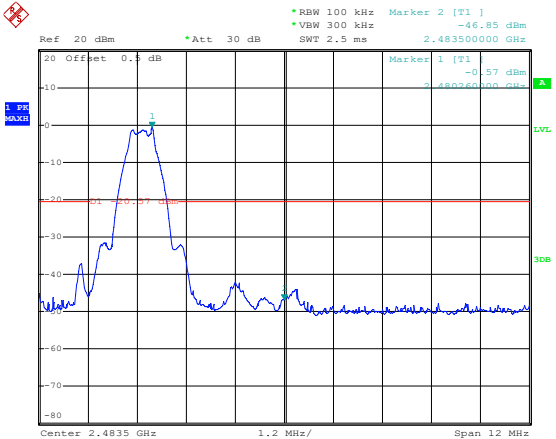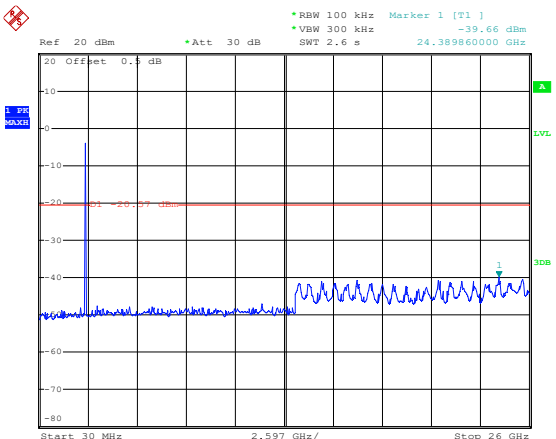
	 Date: 17.JUN.2026 14:38:28
High-1Mbps	 Date: 17.JUN.2026 14:41:02
	 Date: 17.JUN.2026 14:41:23

Low-2Mbps

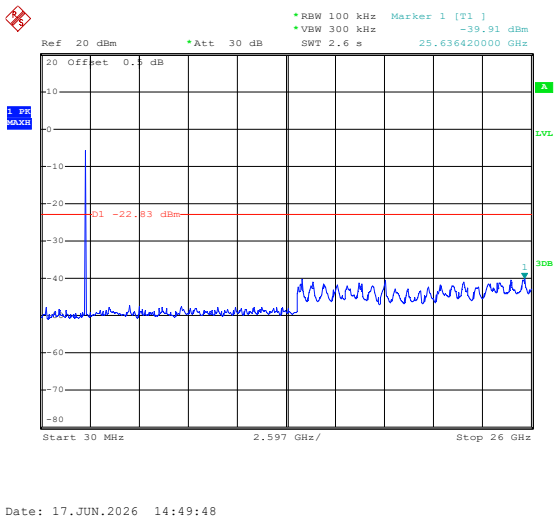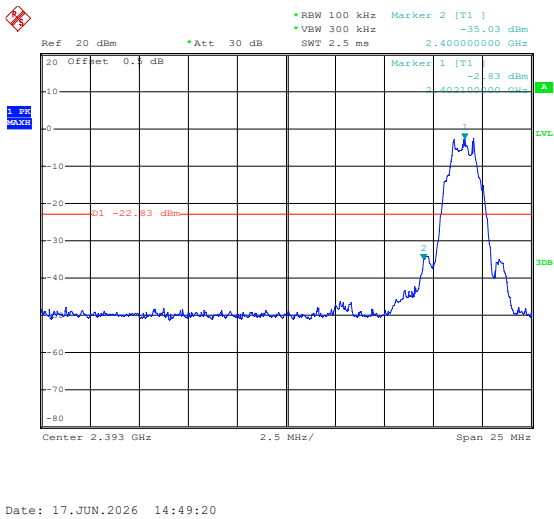


Middle-2Mbps

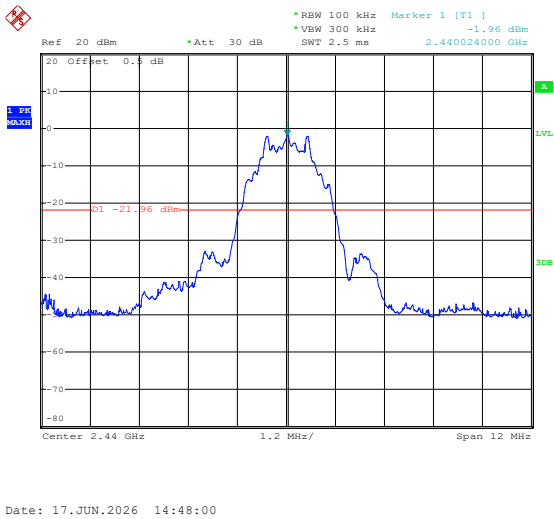

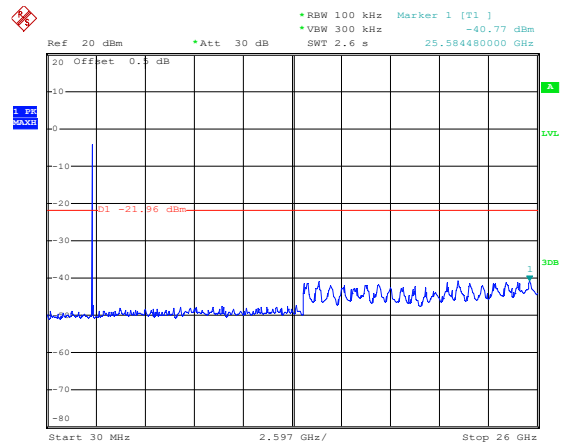


Date: 17.JUN.2026 14:48:19

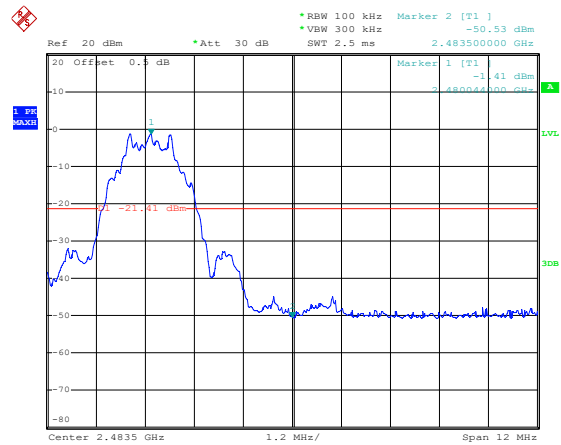

Date: 17.JUN.2026 14:42:26

High-2Mbps

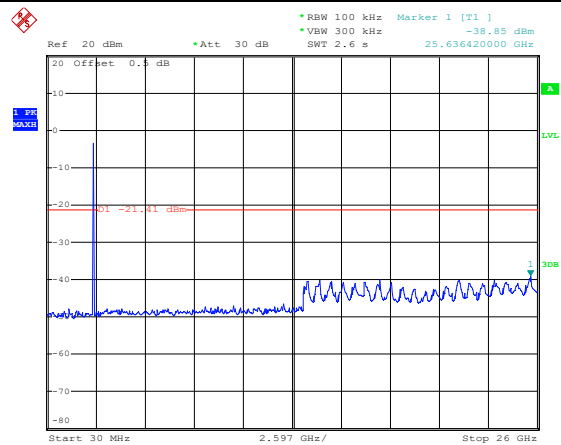

Date: 17.JUN.2026 14:43:36

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****