



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band IV for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 7 for Head& Body
LTE Band 12 for Head& Body
LTE Band 25 for Head& Body
LTE Band 26 for Head& Body
LTE Band 41 for Head& Body
LTE Band 66 for Head& Body
4. WIFI
WIFI 2.4GHz for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.3GHz for Head& Body
WIFI 5.5GHz for Head& Body
WIFI 5.8GHz for Head& Body

Date:2026/8/31

Test Laboratory: LCS-SAR Lab

GSM 850 128CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz;Duty Cycle: 1: 1

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 41.053$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.343 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.356 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.394 W/kg

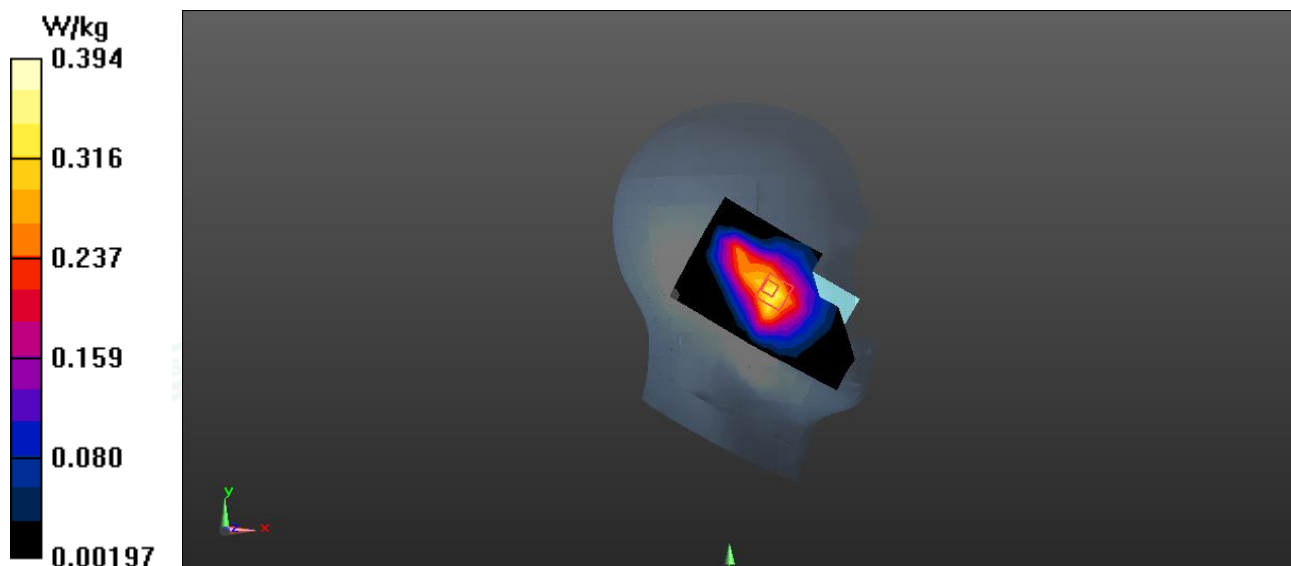

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 190CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.296$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.278 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.069 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

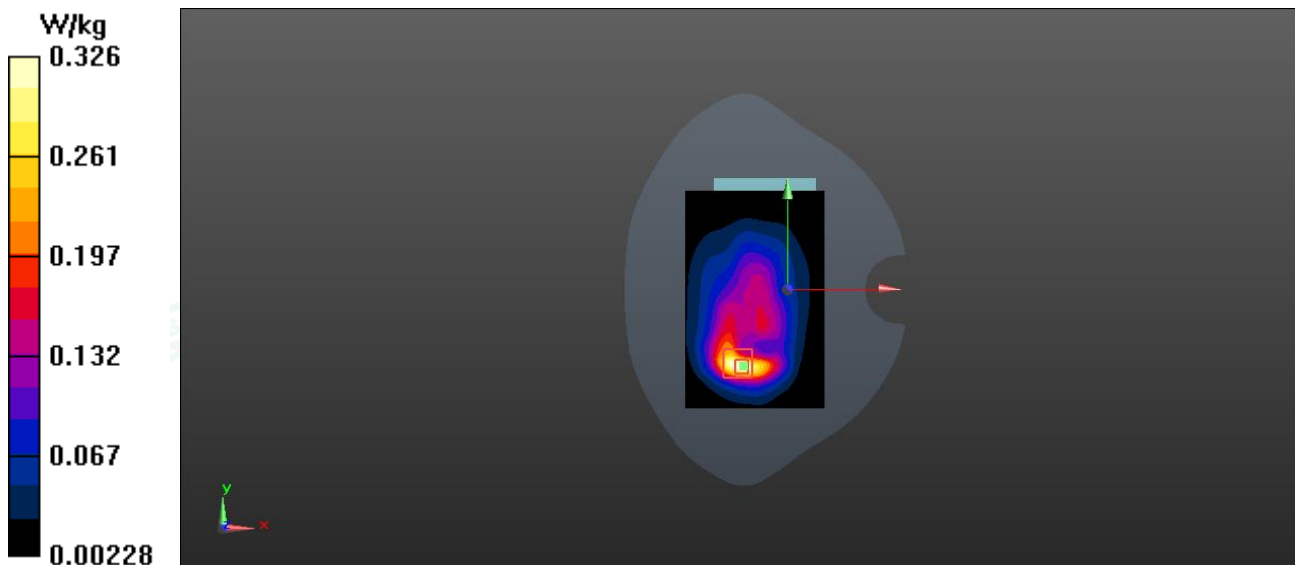

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab
GSM 1900 512CH Left Cheek

DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1


Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 185
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.697 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.439 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.874 W/kg
SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.284 W/kg
Maximum value of SAR (measured) = 0.648 W/kg

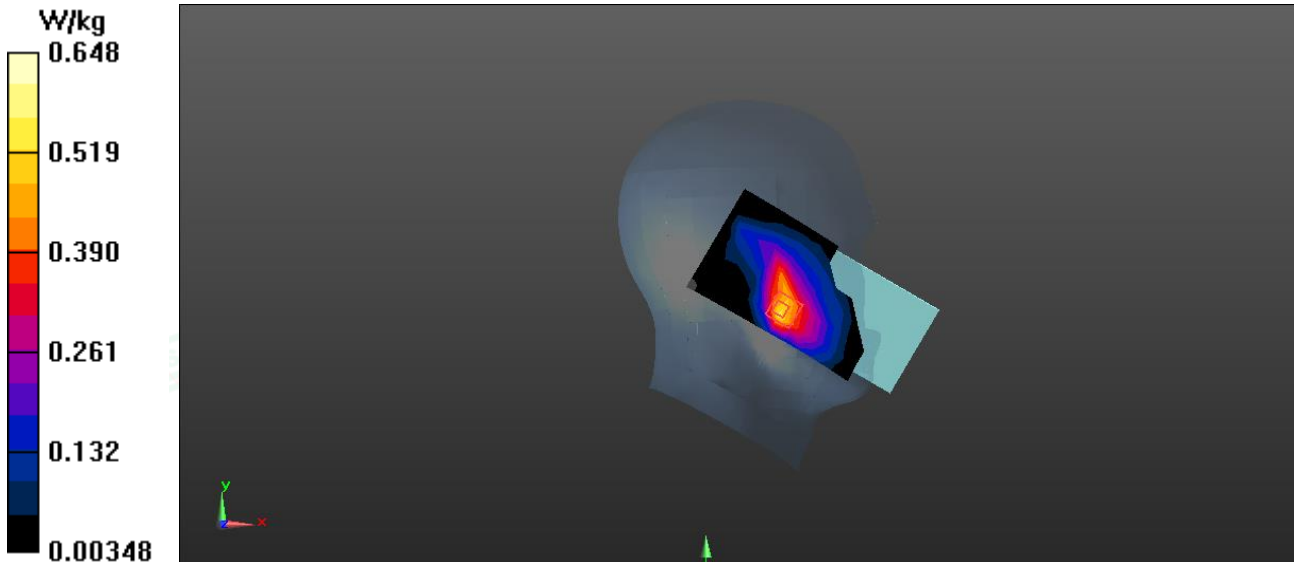

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 661CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.352 \text{ S/m}$; $\epsilon_r = 39.794$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.26 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.784 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.71 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

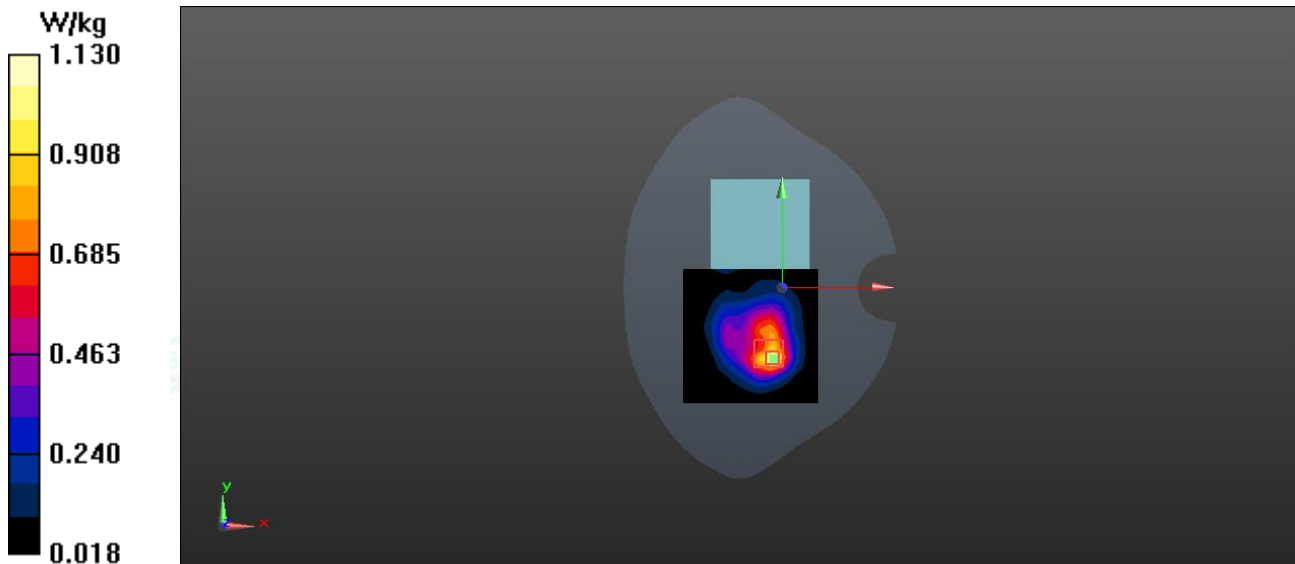

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.794$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.593 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.452 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.758 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.548 W/kg

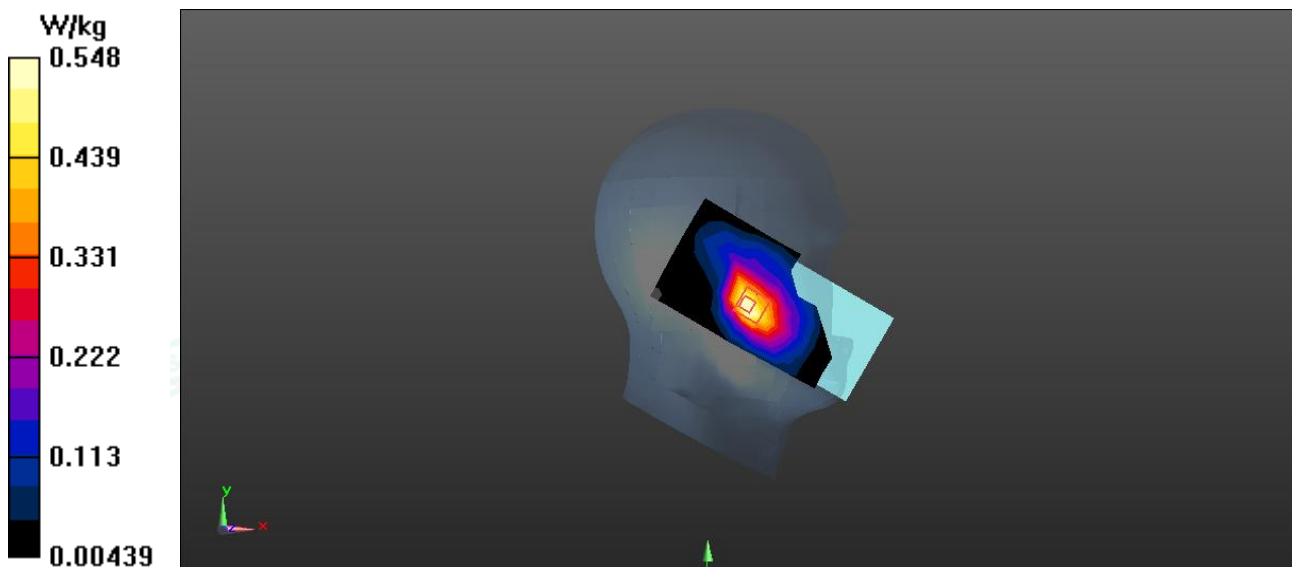

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.794$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.746 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

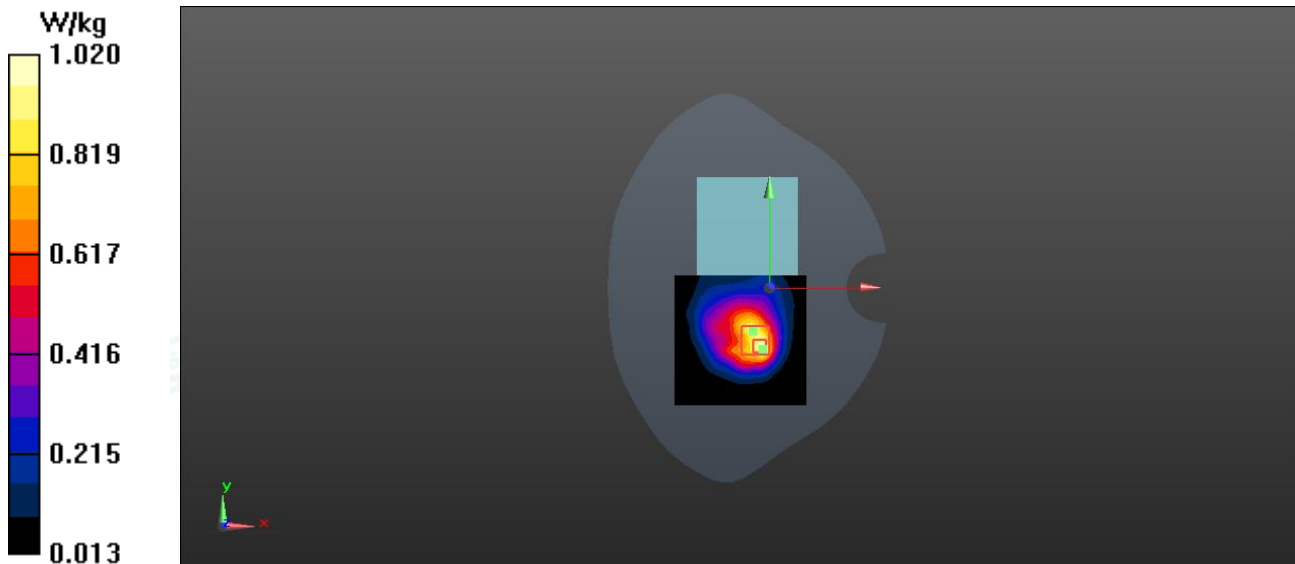

Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1413CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.536$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.594 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.635 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

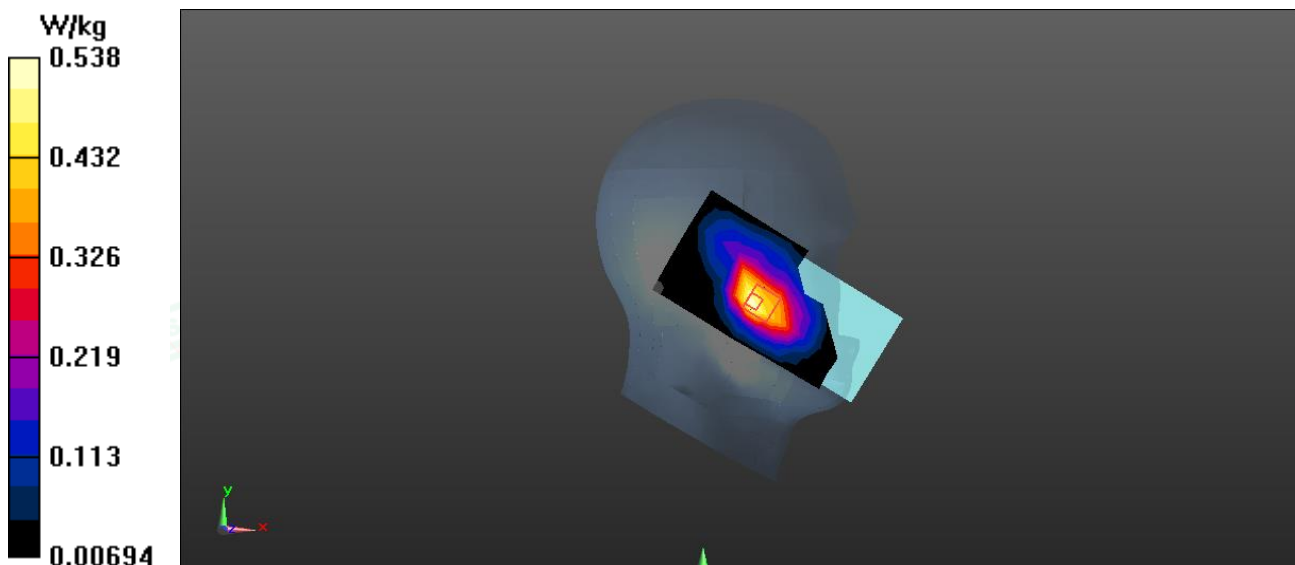



Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1413CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 1732.6 \text{ MHz}$; $\sigma = 1.379 \text{ S/m}$; $\epsilon_r = 40.536$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.967 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.43 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.914 W/kg

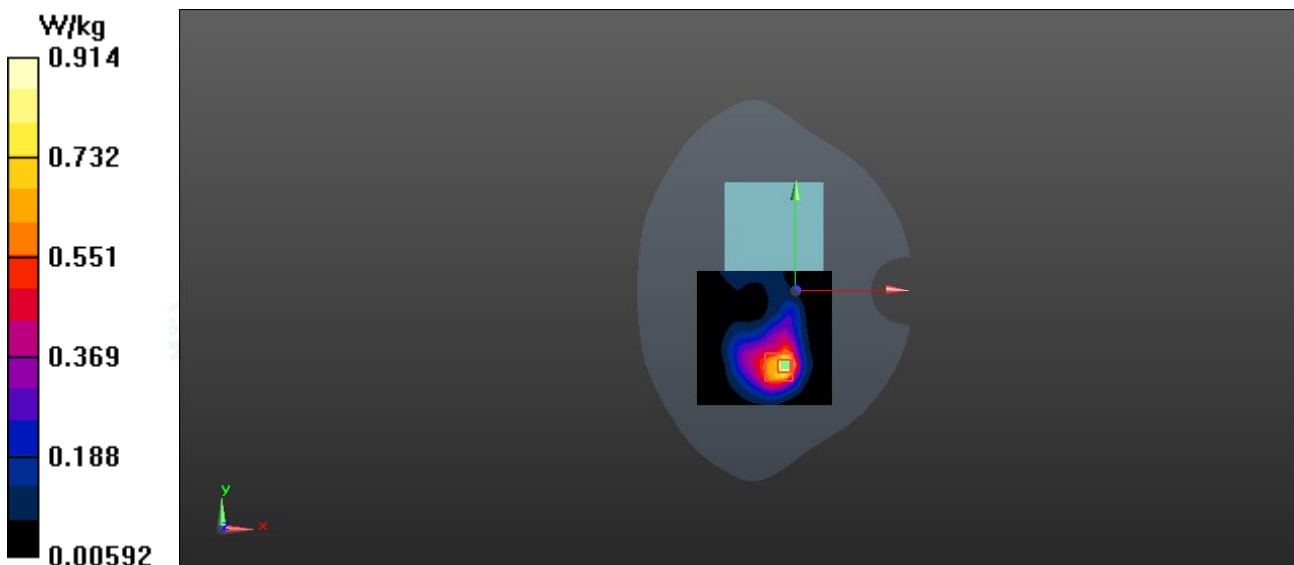



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab
WCDMA V RMC 4182CH Left Cheek

DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.296$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.356 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.487 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

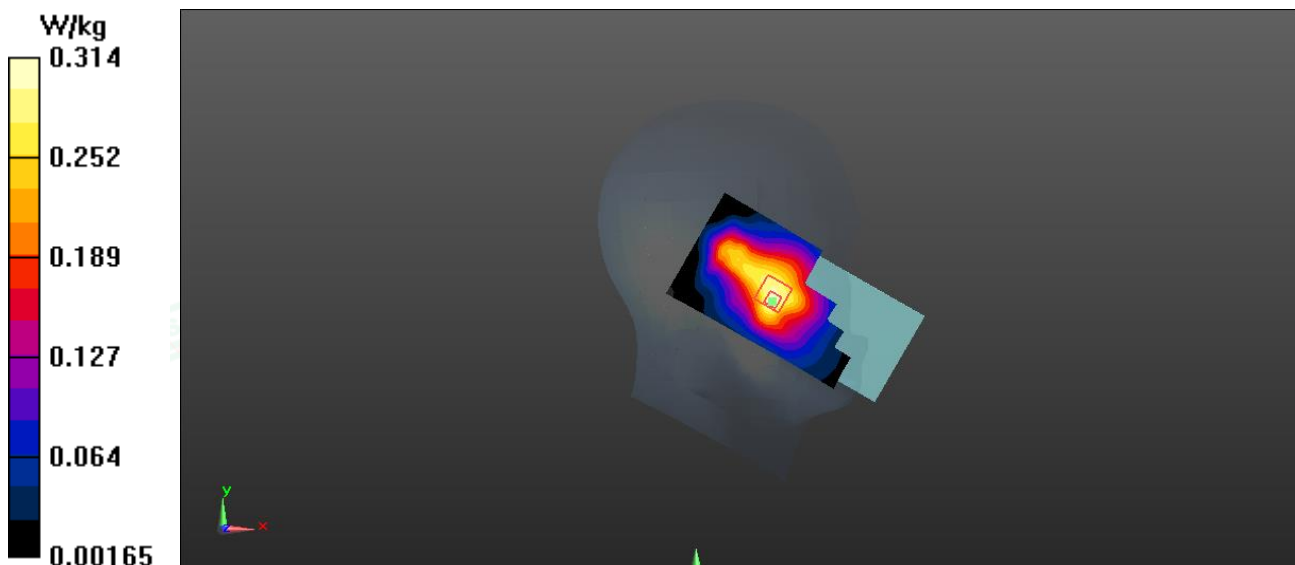

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4182CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 41.296$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.394 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.094 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

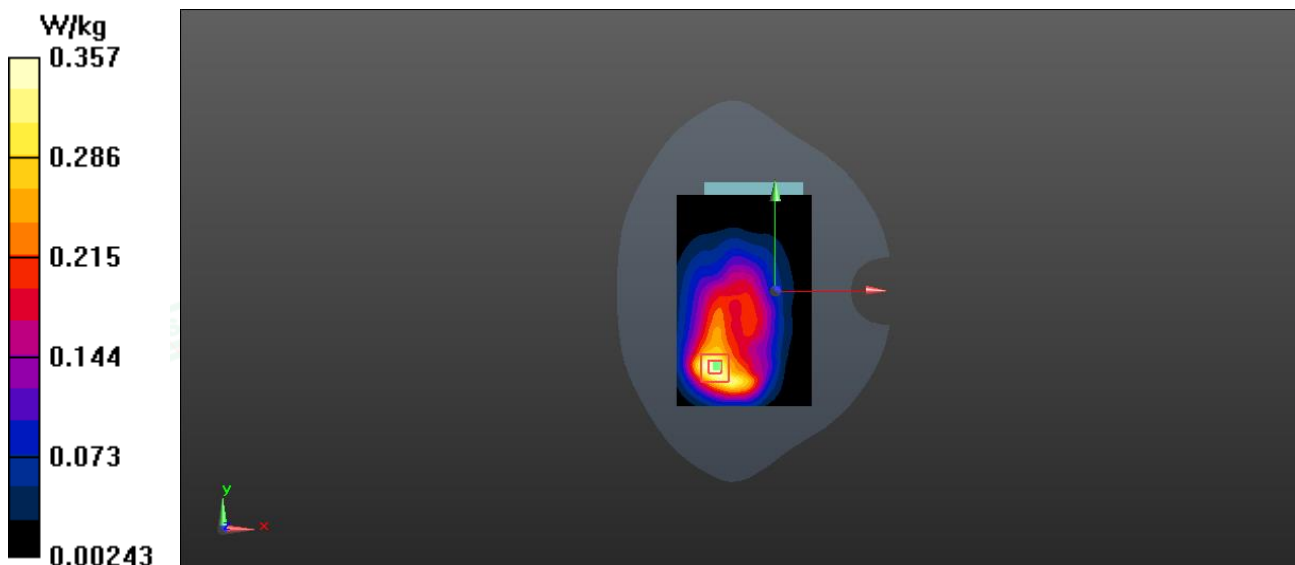

Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB49 Left Cheek

DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.869$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.422 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.374 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

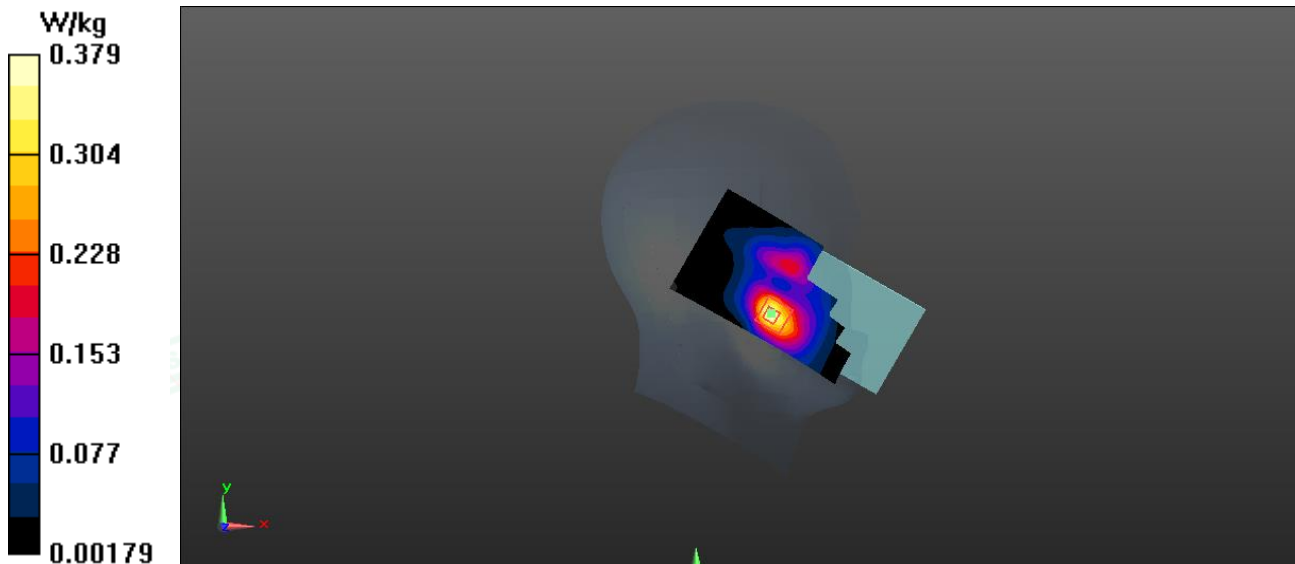



Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB49 Rear side 10mm

DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.935$ S/m; $\epsilon_r = 38.869$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.584 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =6.548 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

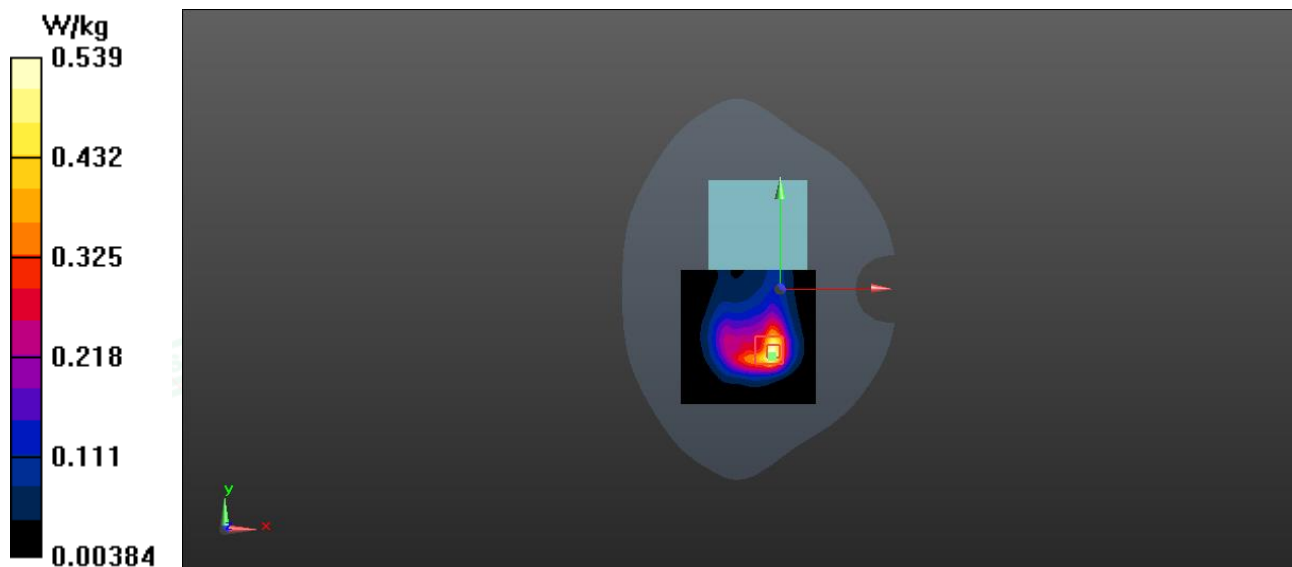

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23060CH 1RB24 Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.879 \text{ S/m}$; $\epsilon_r = 41.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)0

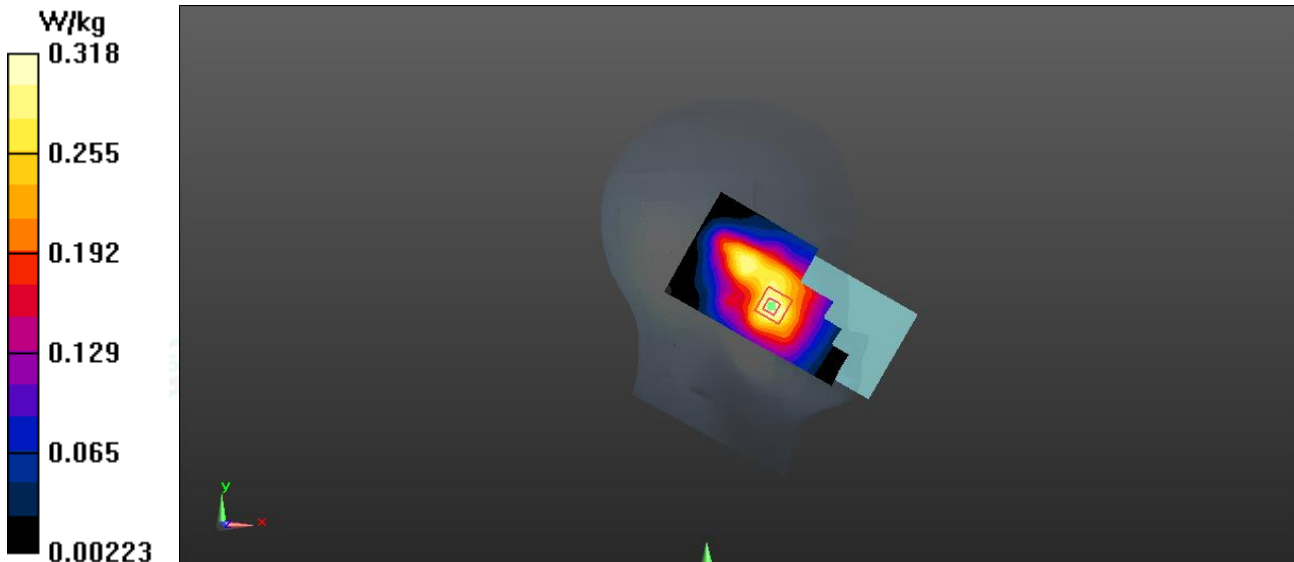Configuration/Head /Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.367 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.254 V/m ; Power Drift = -0.04 dB Peak S AR (extrapolated) = 0.405 W/kg **SAR(1 g) = 0.179 W/kg ; SAR(10 g) = 0.101 W/kg** Maximum value of SAR (measured) = 0.318 W/kg 

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23060CH 1RB24 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 704 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.879 \text{ S/m}$; $\epsilon_r = 41.375$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.475 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.746 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.402 W/kg

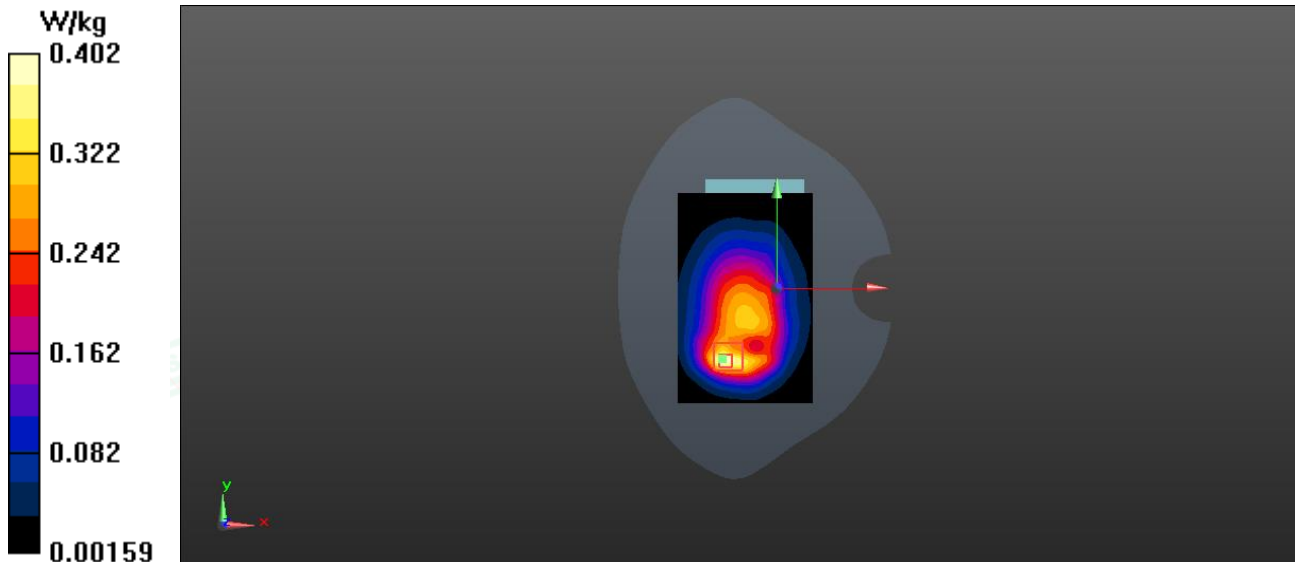



Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26140CH 1RB49 Left Cheek

DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 39.695$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.613 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.863 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.209 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

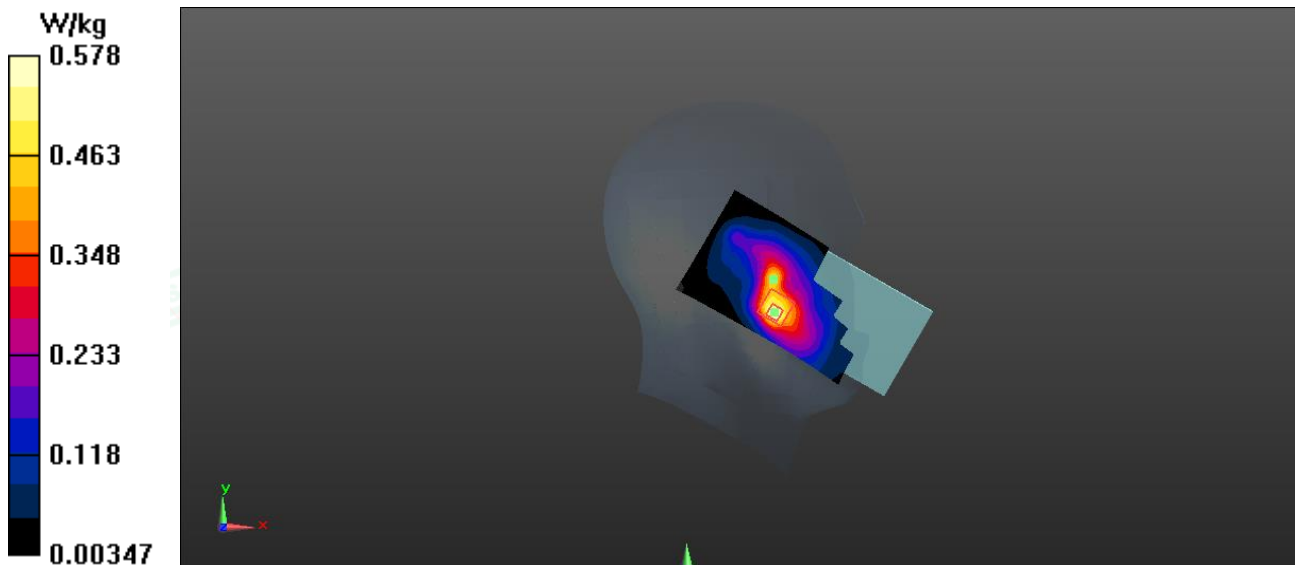

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26140CH 1RB49 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.347 \text{ S/m}$; $\epsilon_r = 39.695$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

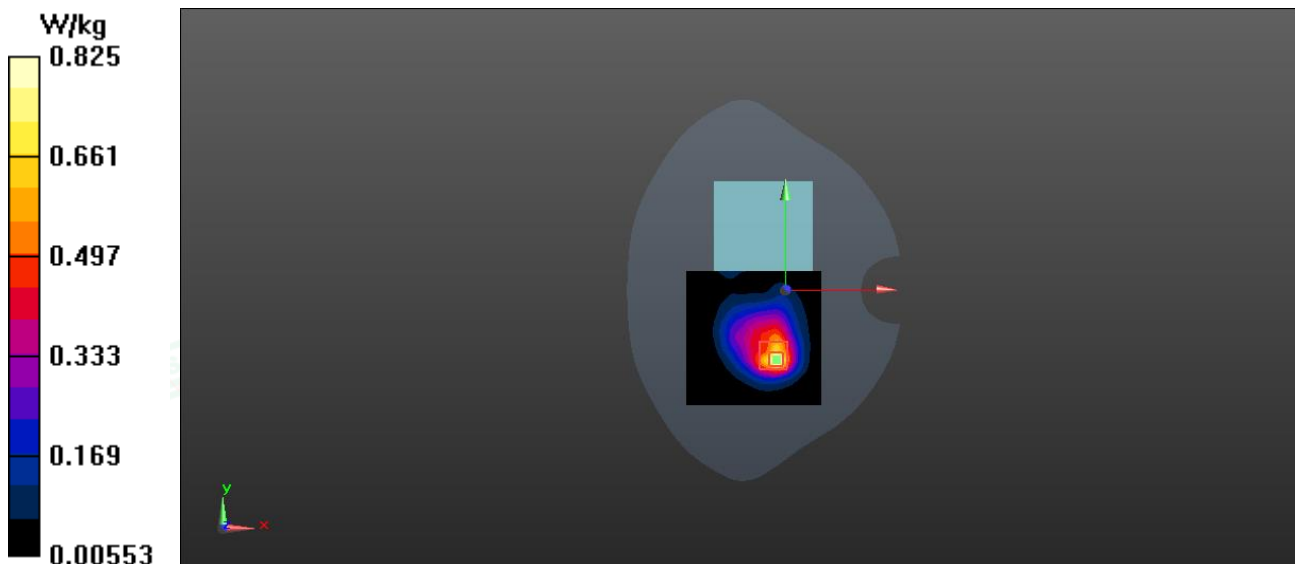Configuration/ Body /Area Scan (8x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.876 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.24 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 1.18 W/kg **SAR(1 g) = 0.547 W/kg ; SAR(10 g) = 0.348 W/kg** Maximum value of SAR (measured) = 0.825 W/kg 

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

LTE B26 10M QPSK 26740CH 1RB24 Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 819 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 40.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

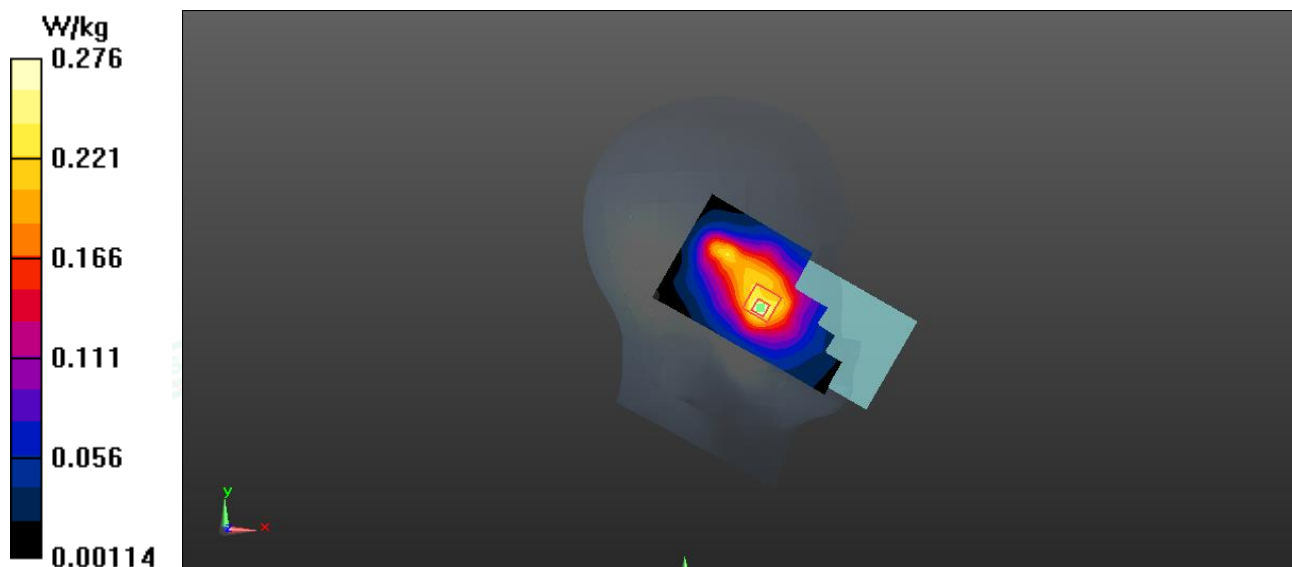Configuration/Head /Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.317 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.153 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.422 W/kg **SAR(1 g) = 0.187 W/kg ; SAR(10 g) = 0.112 W/kg** Maximum value of SAR (measured) = 0.276 W/kg 



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

LTE B26 10M QPSK 26740CH 1RB24 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 819 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 819 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 40.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

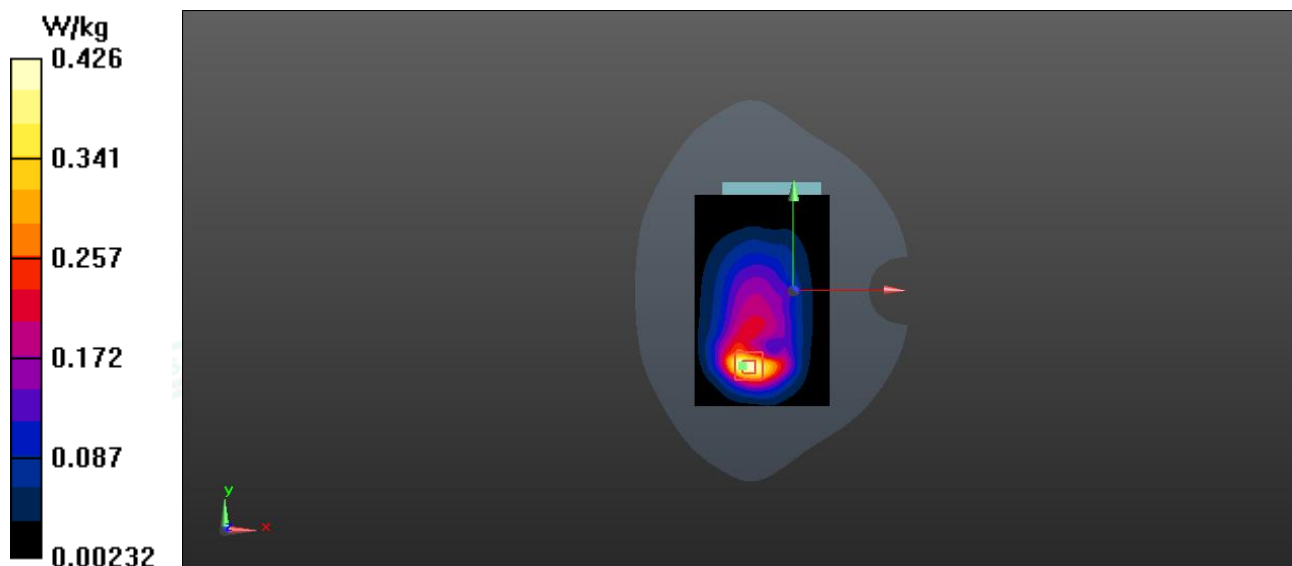Configuration/ Body /Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.489 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.214 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.576 W/kg **SAR(1 g) = 0.269 W/kg ; SAR(10 g) = 0.153 W/kg** Maximum value of SAR (measured) = 0.426 W/kg 



Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 40640CH 1RB99 Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2595 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 39.163$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.495 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.754 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

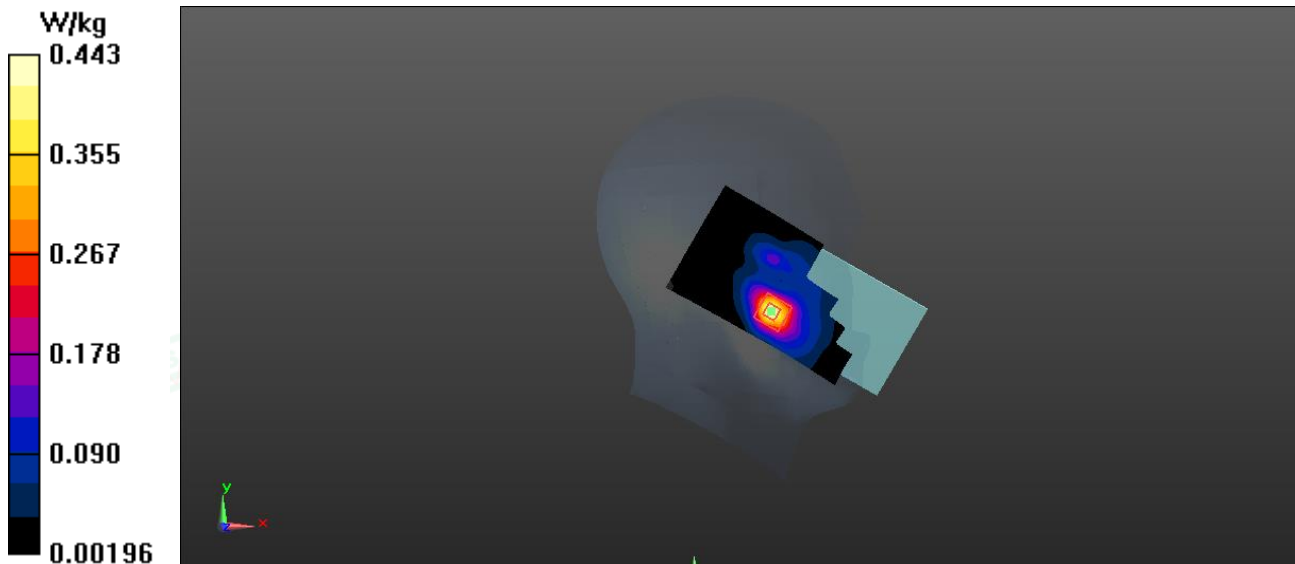



Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 40640CH 1RB99 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2595 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 39.163$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.579 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =6.153 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.528 W/kg

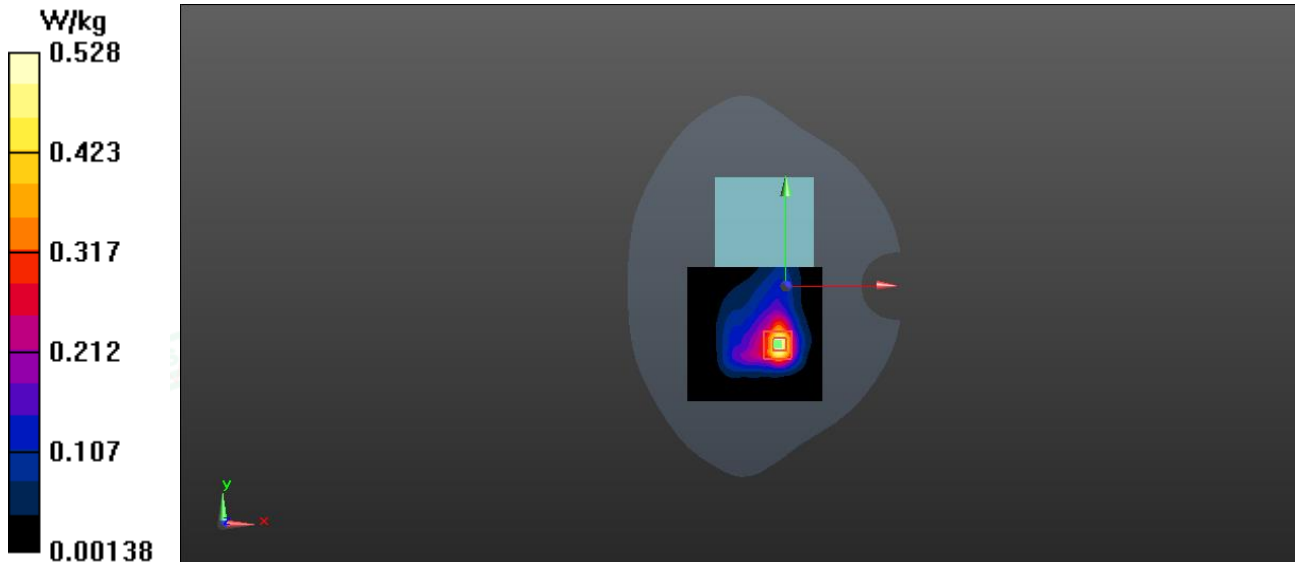



Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132572CH 1RB99 Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.763$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.502 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.463 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.535 W/kg

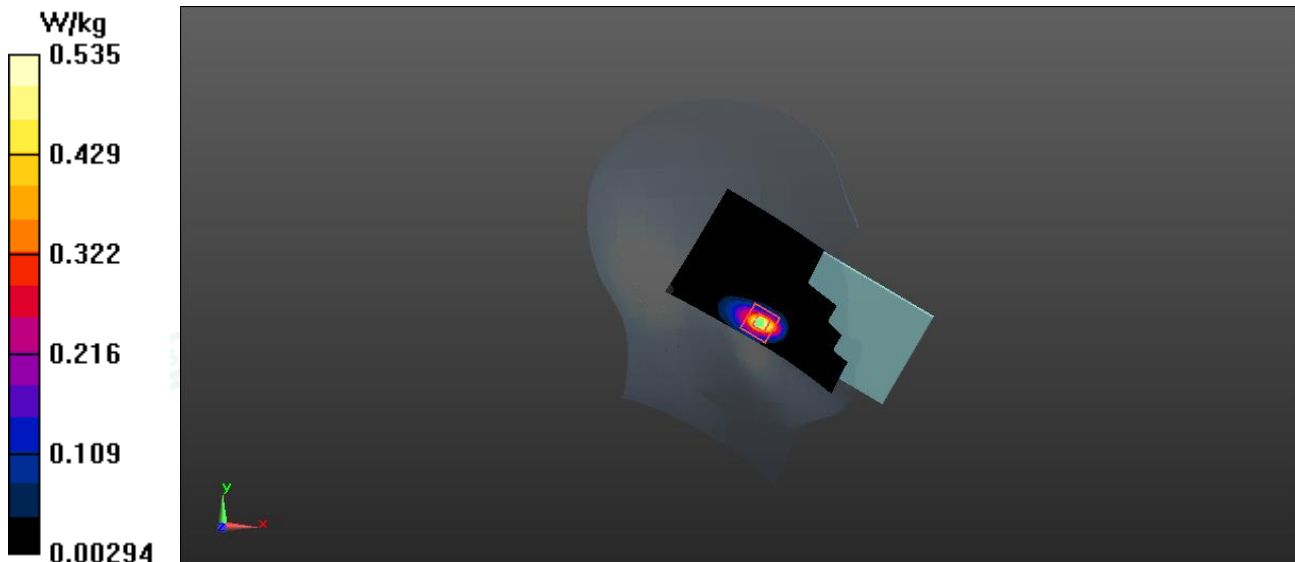



Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132572CH 1RB99 Rear Side 10mm

DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 40.763$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.996 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.33 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.937 W/kg

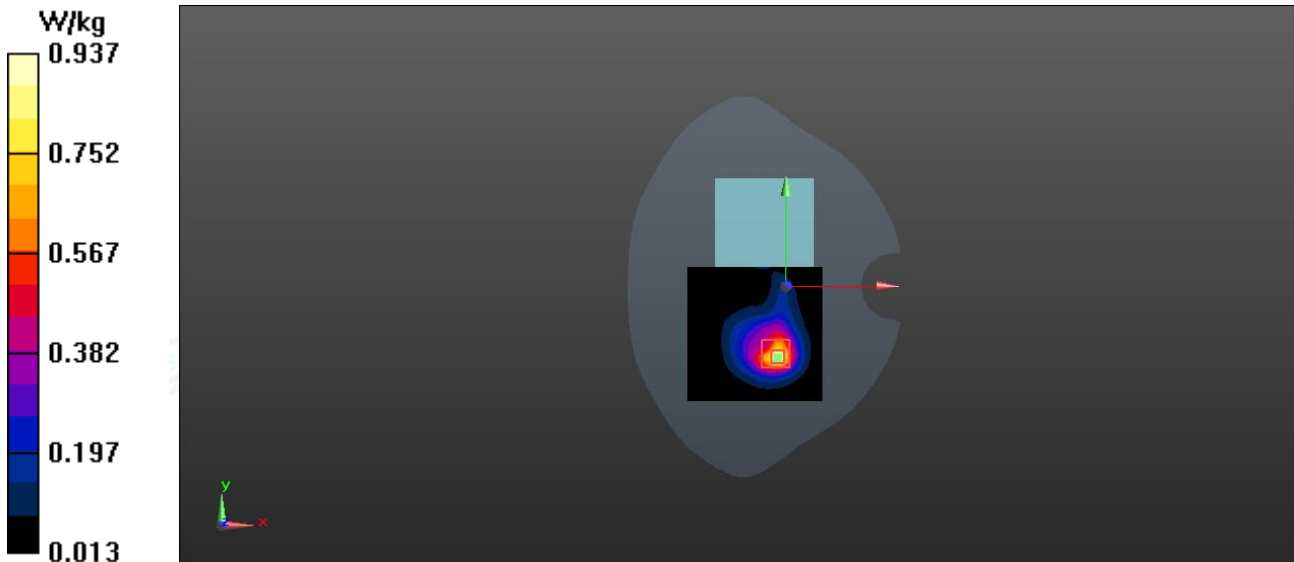



Date:2026/9/9

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11n40 3CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2422 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2422 \text{ MHz}$; $\sigma = 1.804 \text{ S/m}$; $\epsilon_r = 39.264$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x8x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.593 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.539 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.547 W/kg

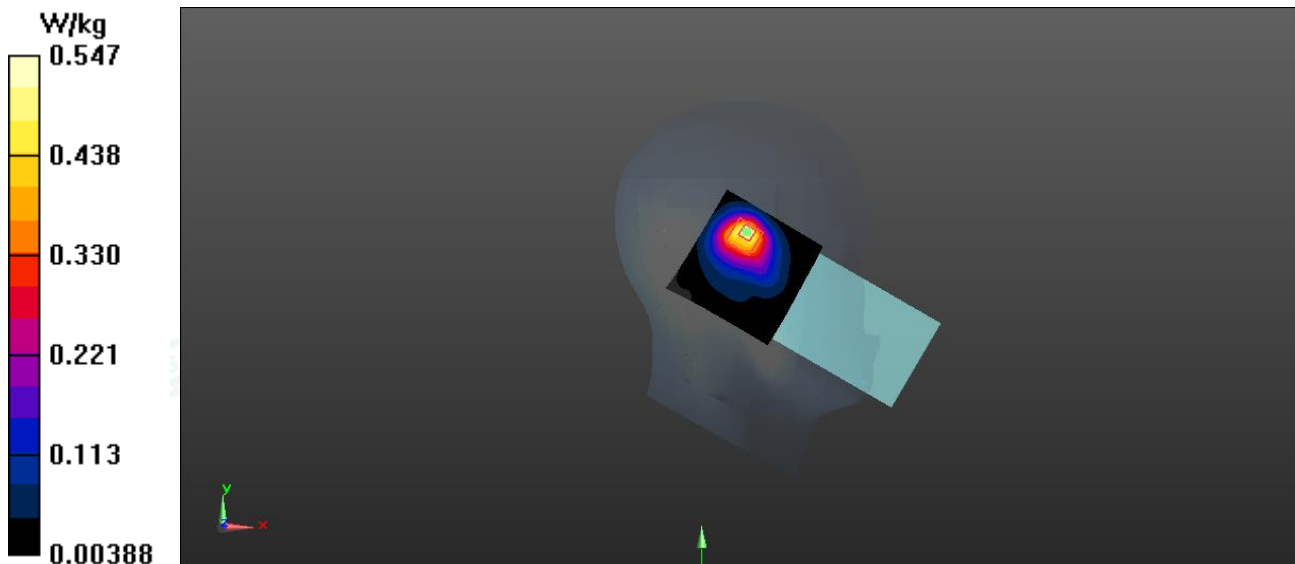



Date: 2026/9/9

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11n40 3CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**


Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422 \text{ MHz}$; $\sigma = 1.804 \text{ S/m}$; $\epsilon_r = 39.264$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

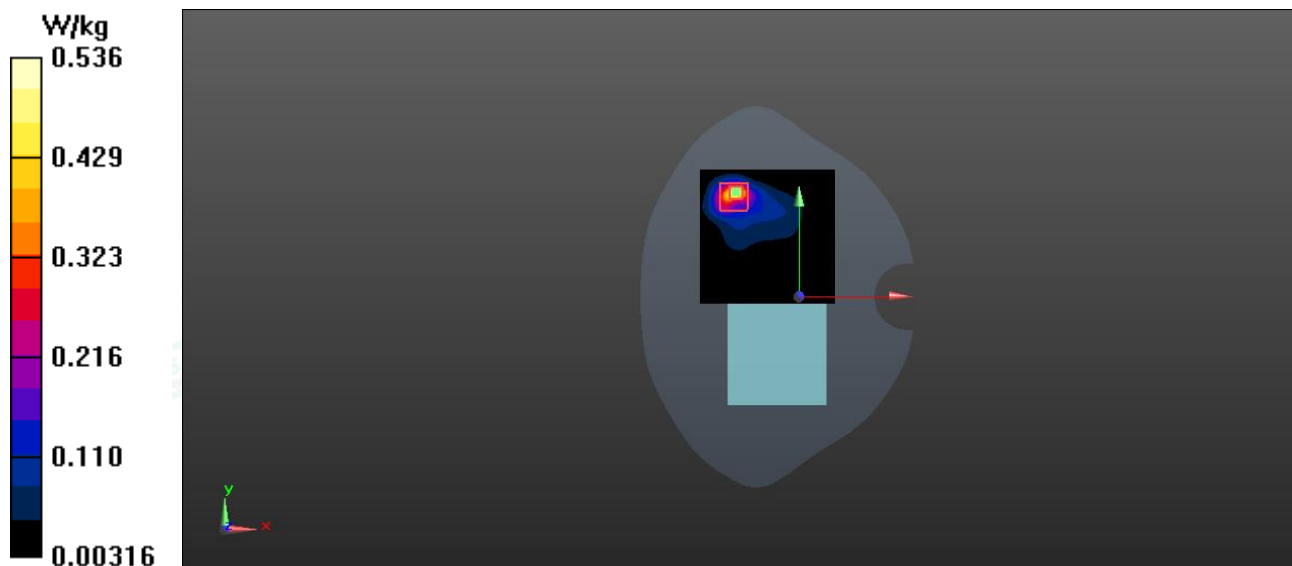Configuration/ Body /Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.497 W/kg **Configuration/ Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.746 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.658 W/kg **SAR(1 g) = 0.296 W/kg ; SAR(10 g) = 0.174 W/kg** Maximum value of SAR (measured) = 0.536 W/kg 



Date: 2026/9/14


Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11ac20 48CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.648 \text{ S/m}$; $\epsilon_r = 35.294$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

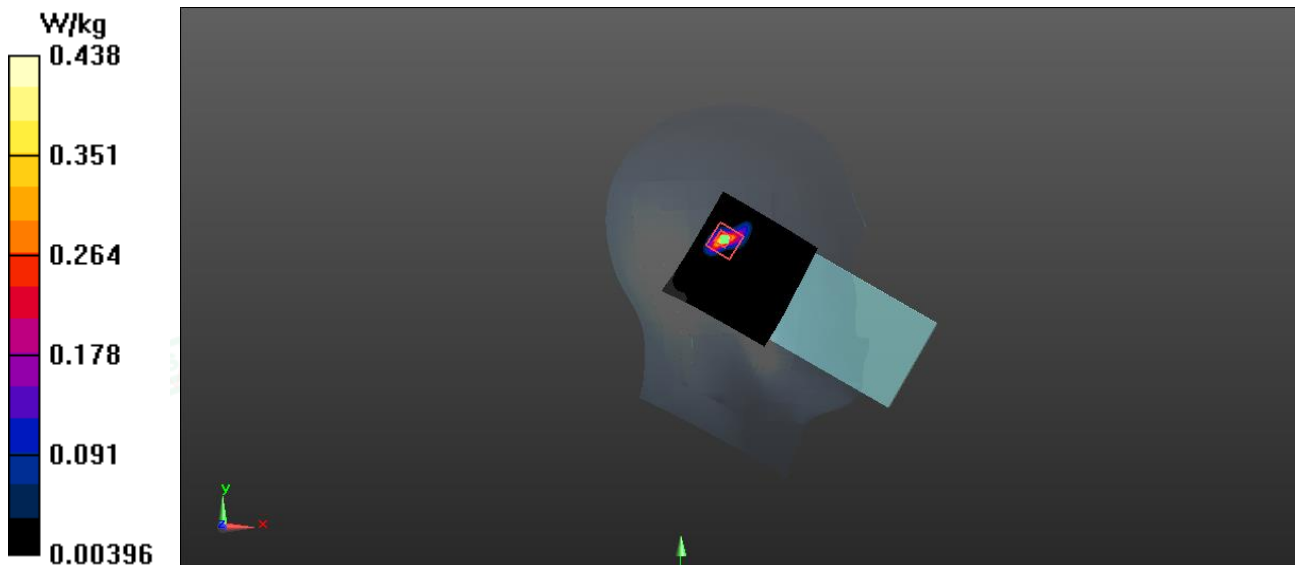Configuration/Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.476 W/kg **Configuration/Head /Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.548 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.596 W/kg **SAR(1 g) = 0.259 W/kg ; SAR(10 g) = 0.185 W/kg** Maximum value of SAR (measured) = 0.438 W/kg 



Date: 2026/9/14


Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11ac20 48CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.648 \text{ S/m}$; $\epsilon_r = 35.294$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

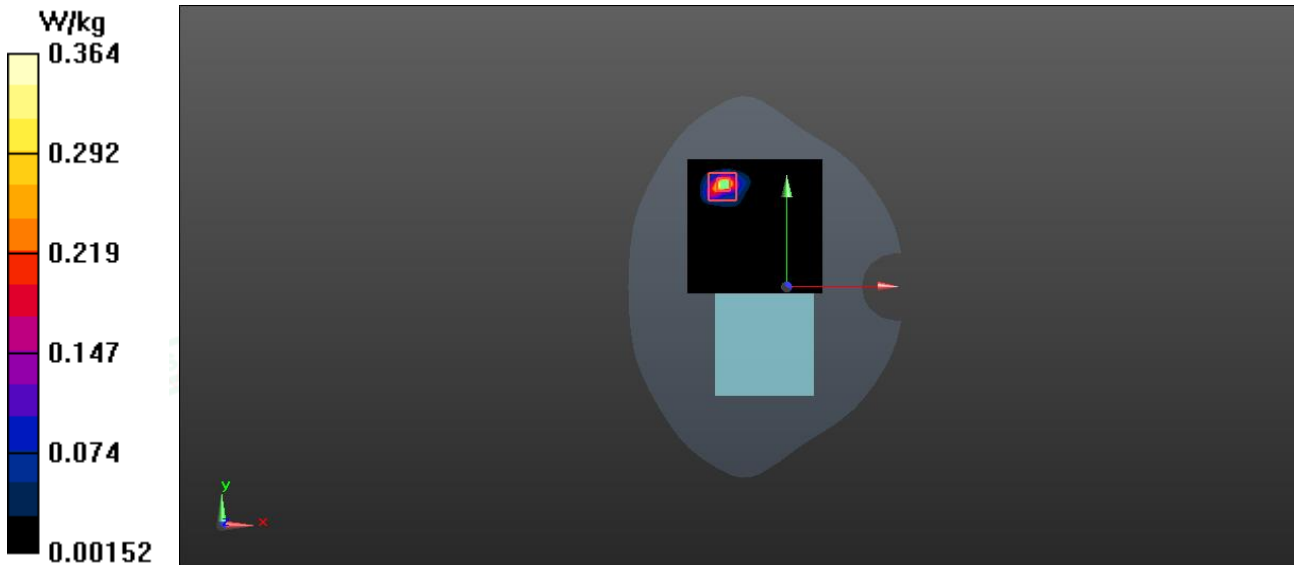Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.395 W/kg **Configuration/ Body /Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.461 V/m ; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.513 W/kg **SAR(1 g) = 0.224 W/kg ; SAR(10 g) = 0.127 W/kg** Maximum value of SAR (measured) = 0.364 W/kg 



Date: 2026/9/14

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11ac20 64CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5320 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.715 \text{ S/m}$; $\epsilon_r = 35.416$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.326 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.745 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.384 W/kg

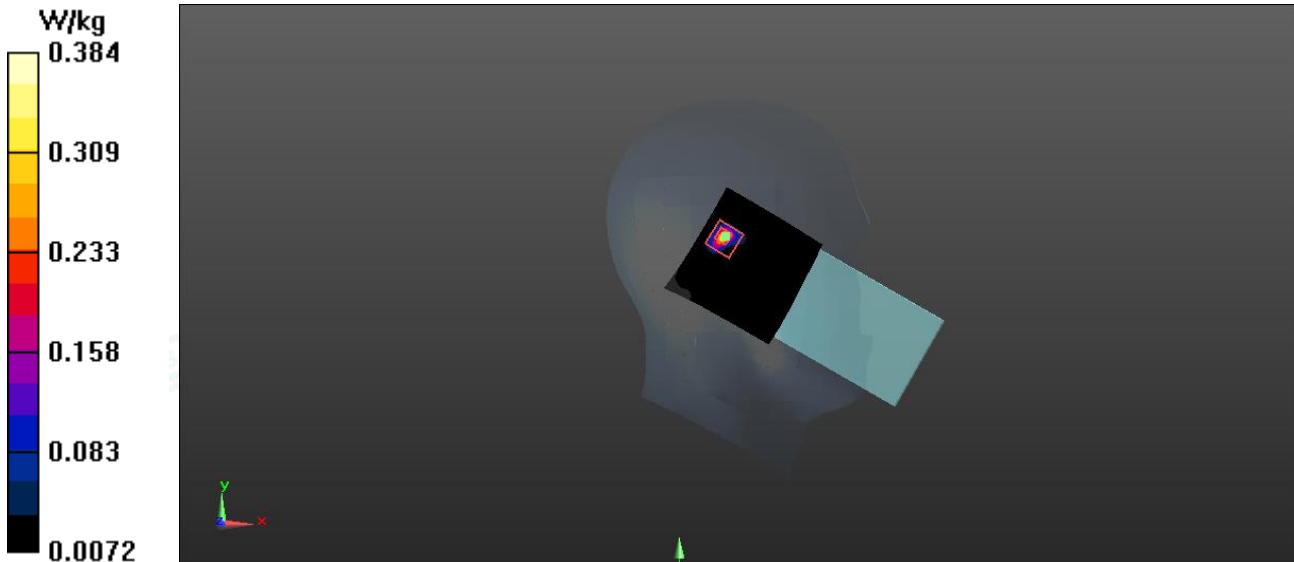



Date: 2026/9/14

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11ac20 64CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5320 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.715 \text{ S/m}$; $\epsilon_r = 35.416$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.393 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.448 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

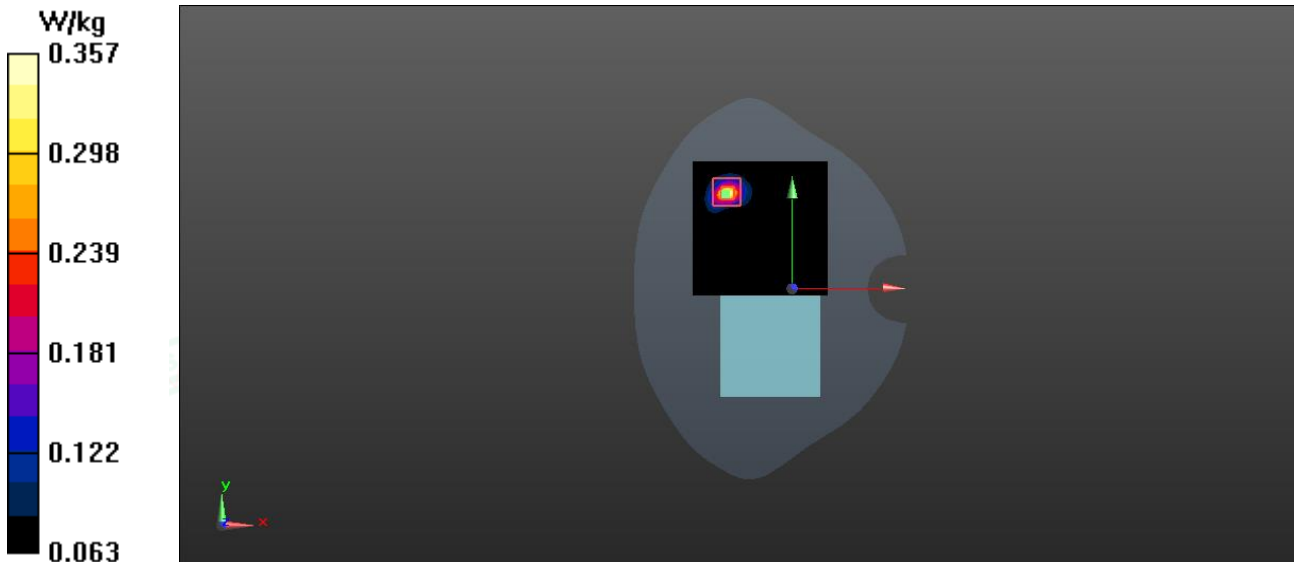



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11n20 100CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 35.463$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.374 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.467 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.329 W/kg

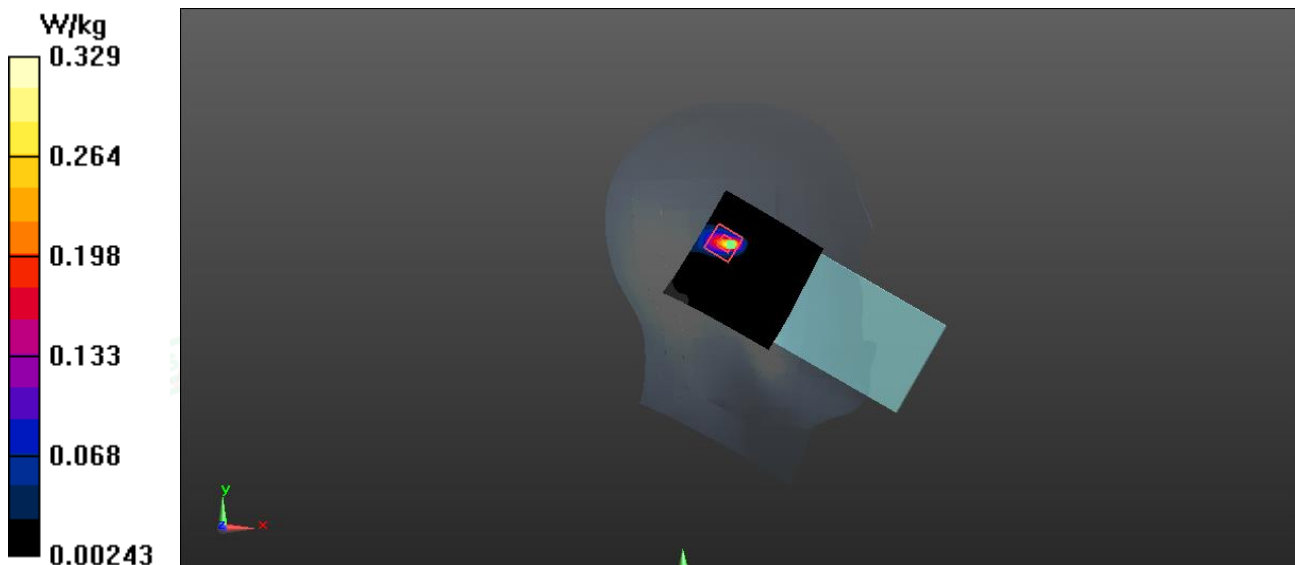



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11n20 100CH Rear side 0mm Ant 1**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5500 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 35.463$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.75, 4.75, 4.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.368 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.748 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.305 W/kg

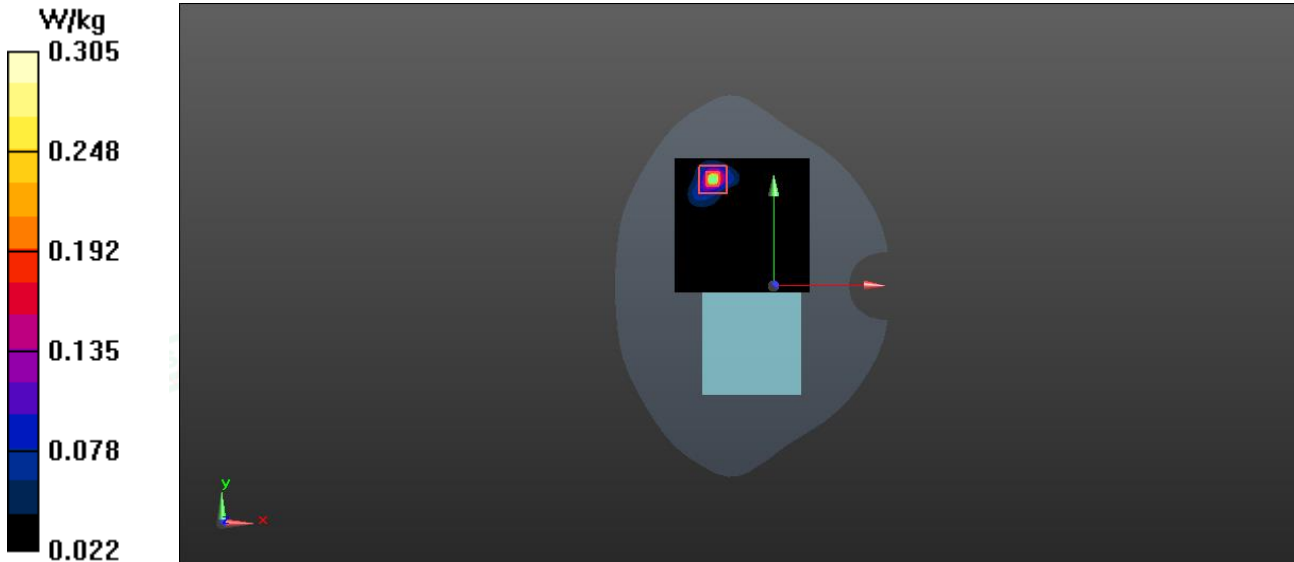



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11ac40 159CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5795 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 5.276 \text{ S/m}$; $\epsilon_r = 35.094$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.367 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.345 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

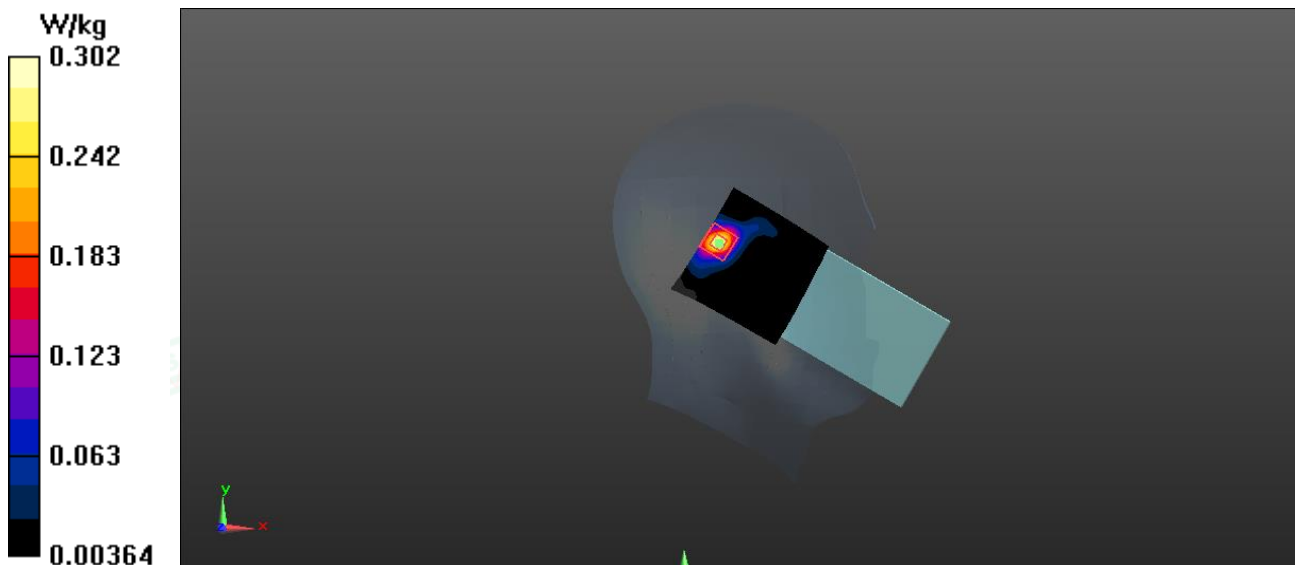



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11ac40 159CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S25 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 5.276 \text{ S/m}$; $\epsilon_r = 35.094$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.268 W/kg **Configuration/Body/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.558 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.408 W/kg **SAR(1 g) = 0.185 W/kg ; SAR(10 g) = 0.098 W/kg** Maximum value of SAR (measured) = 0.297 W/kg 