



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band IV for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 7 for Head& Body
LTE Band 12 for Head& Body
LTE Band 25 for Head& Body
LTE Band 26 for Head& Body
LTE Band 41 for Head& Body
LTE Band 66 for Head& Body
4. WIFI
WIFI 2.4GHz for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.3GHz for Head& Body
WIFI 5.5GHz for Head& Body
WIFI 5.8GHz for Head& Body

Date:2026/8/31

Test Laboratory: LCS-SAR Lab
GSM 850 190CH Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1


Communication System: UID 0, GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1: 1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.296$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.329 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.869 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.558 W/kg
SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.175 W/kg
Maximum value of SAR (measured) = 0.386 W/kg

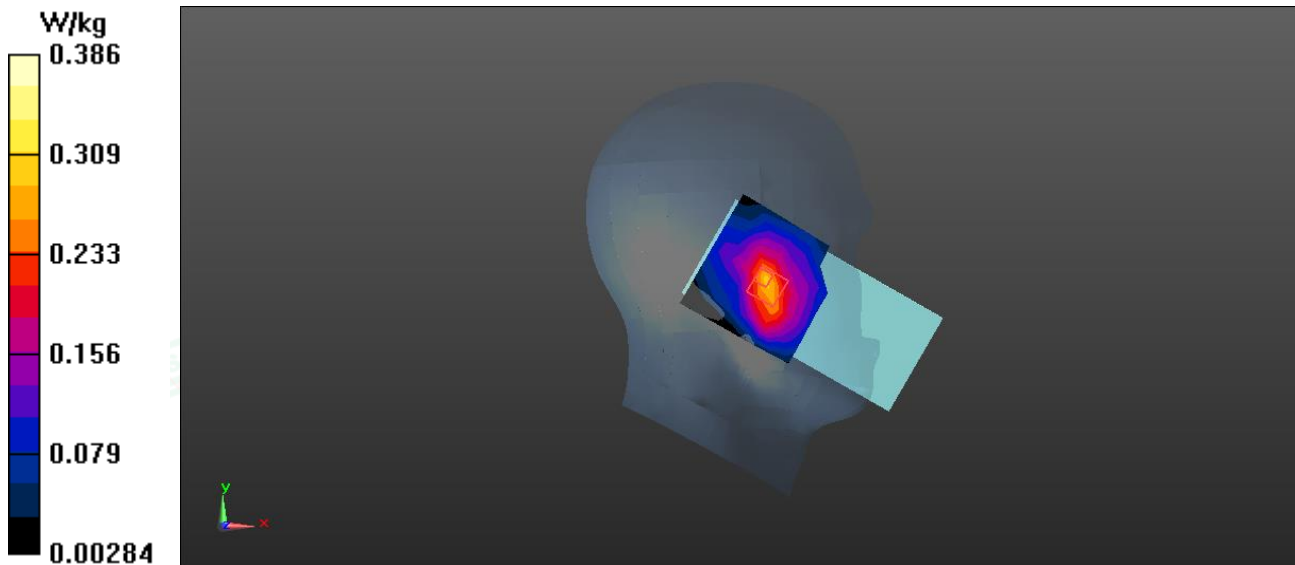



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 128CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.296$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.311 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.429 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.347 W/kg

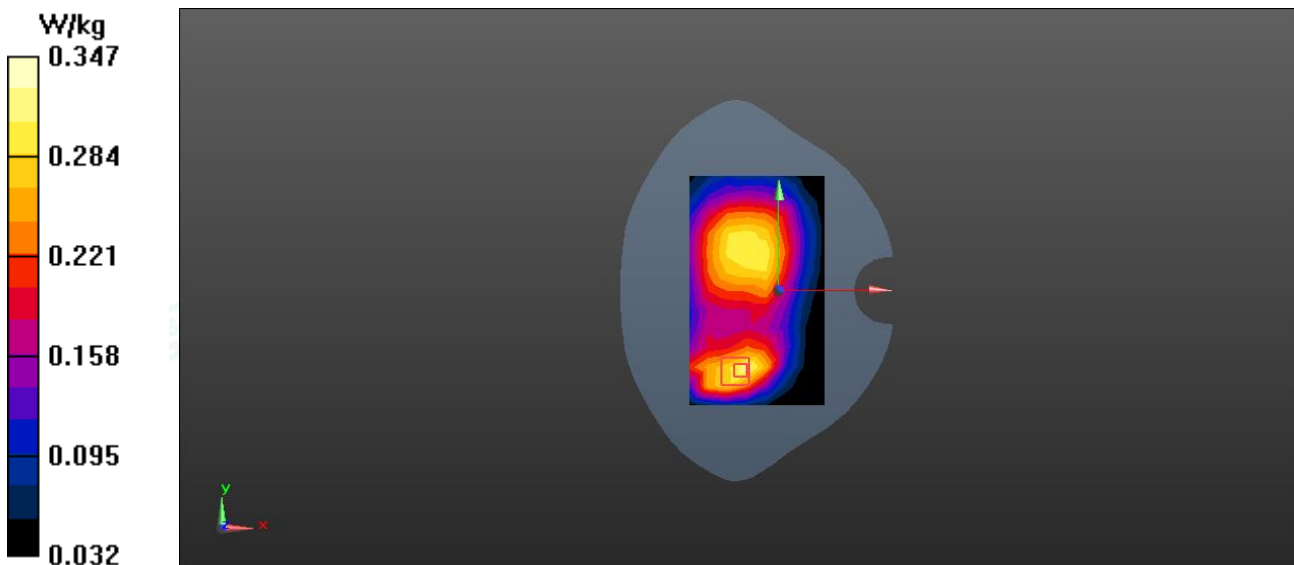

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab
GSM 1900 512CH Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1


Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1: 1
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 185
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.625 W/kg

Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.761 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.794 W/kg
SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.234 W/kg
Maximum value of SAR (measured) = 0.584 W/kg

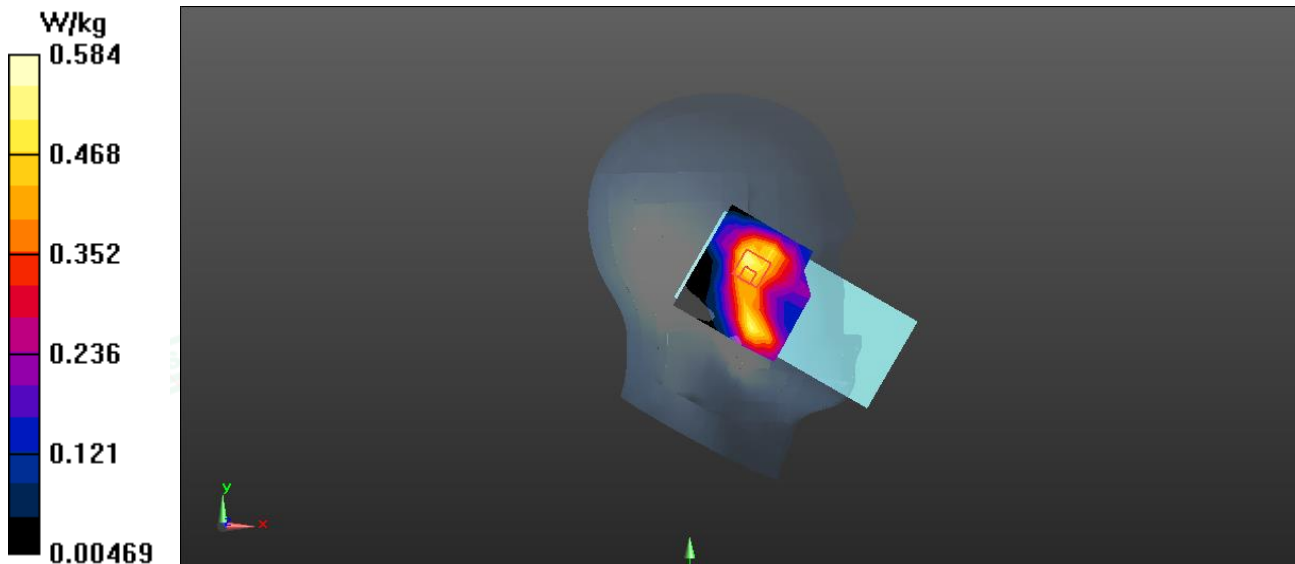

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 512CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1: 2.77
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 39.647$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.18 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.284 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

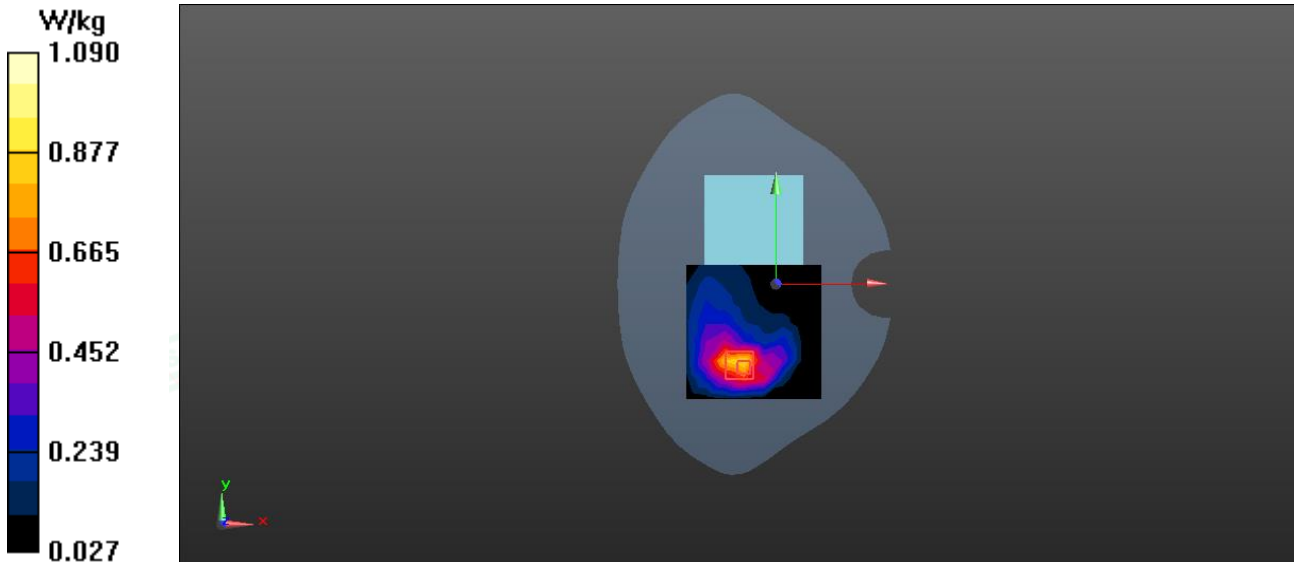

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab
WCDMA II RMC 9262CH Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.654$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.607 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.469 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.583 W/kg

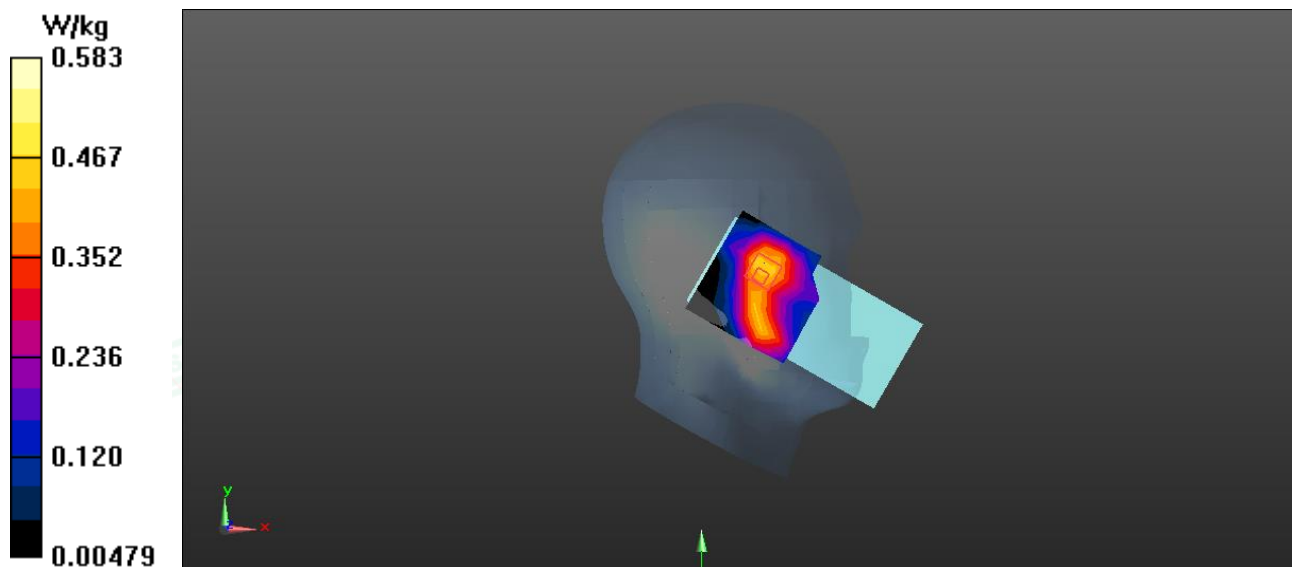

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9262CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.654$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.43 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

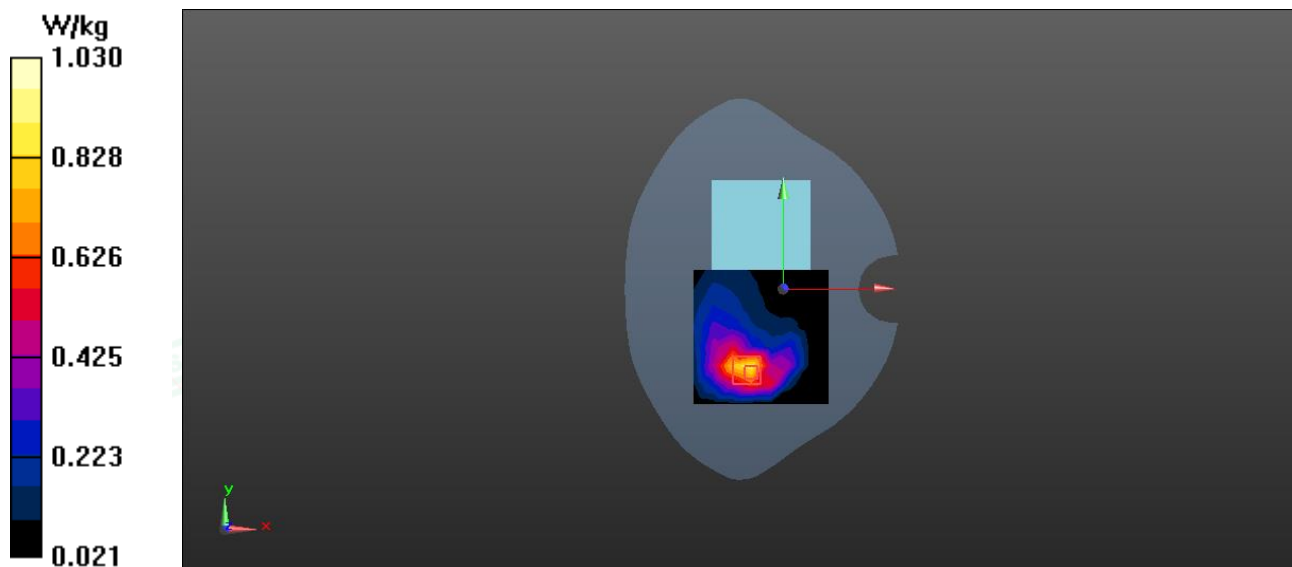

Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1513CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.579$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.603 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.168 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.574 W/kg

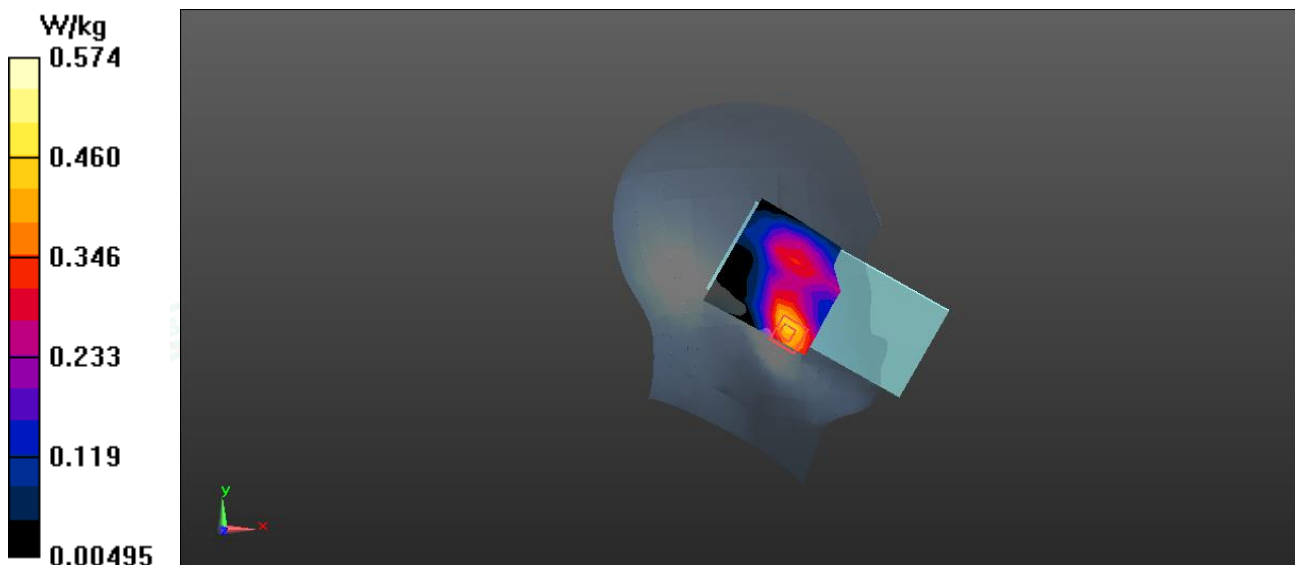

Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1513CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 1752.6 \text{ MHz}$; $\sigma = 1.388 \text{ S/m}$; $\epsilon_r = 40.579$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.976 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.84 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

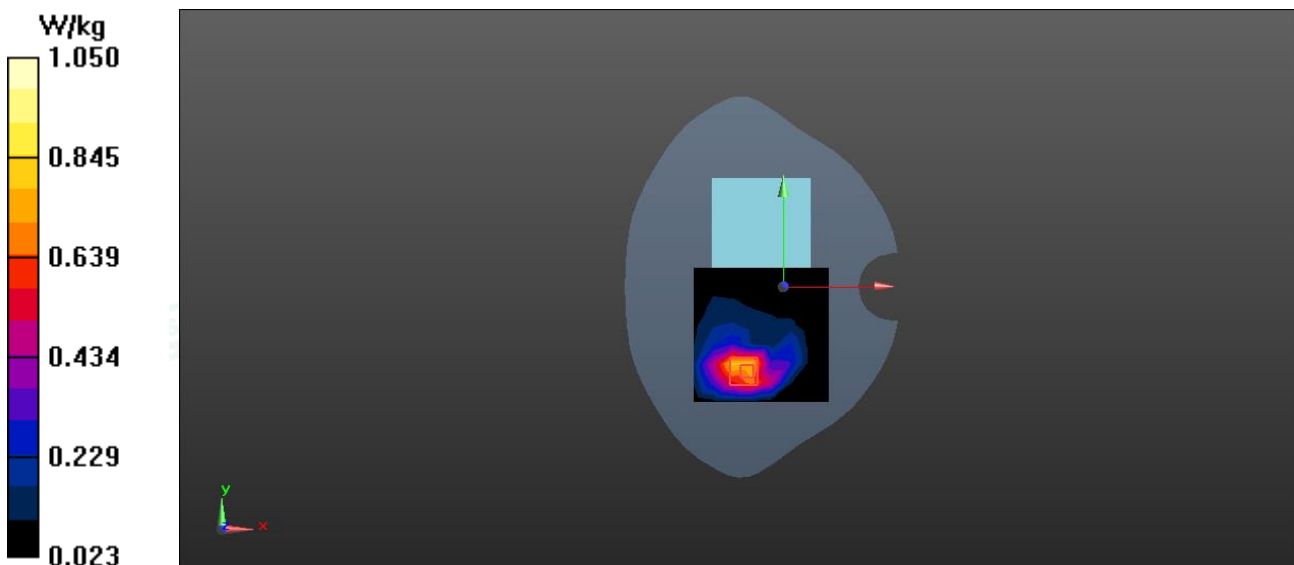

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab
WCDMA V RMC 4132CH Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 41.062$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.384 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.869 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

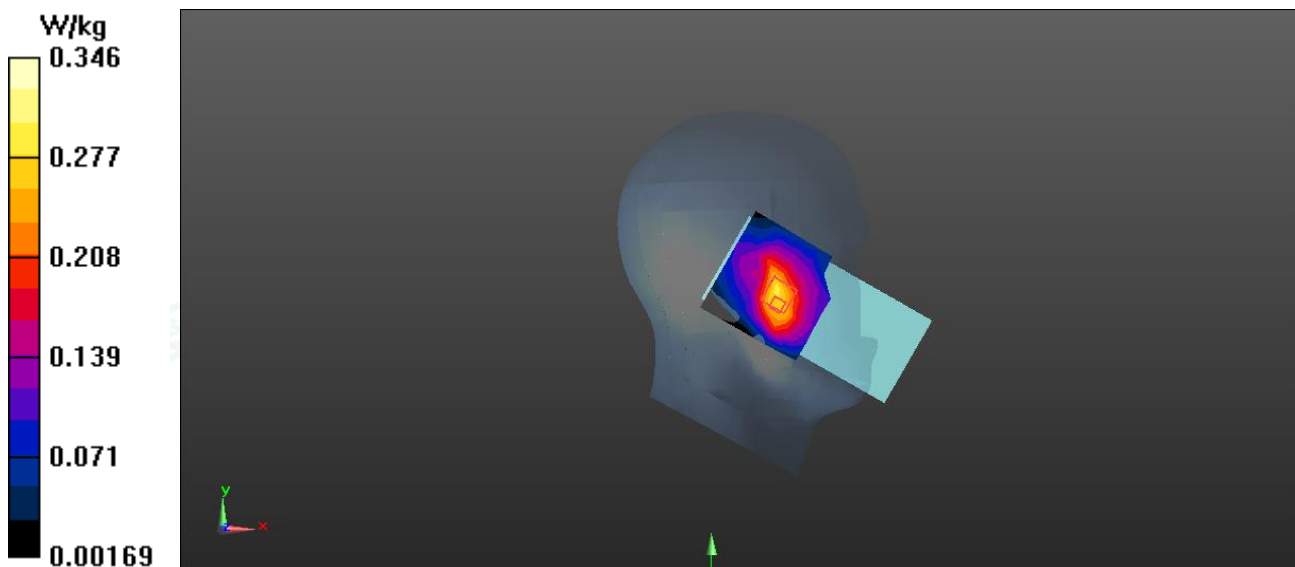

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4132CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 41.062$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.446 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.869 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.419 W/kg

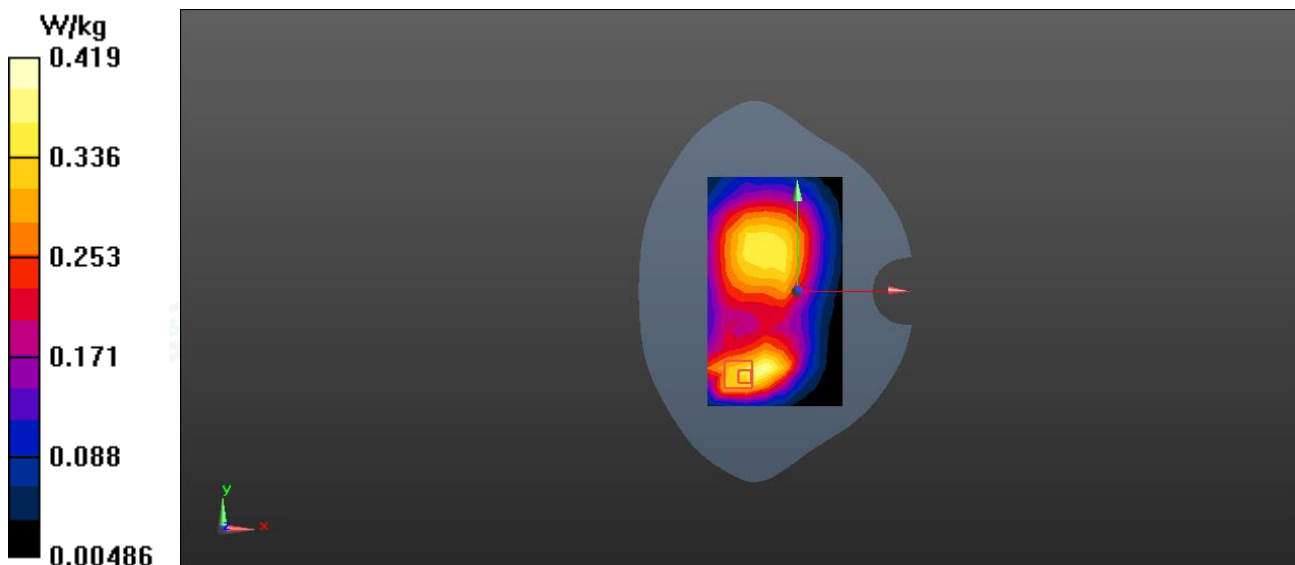

Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21100CH 1RB49 Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.947$ S/m; $\epsilon_r = 38.914$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.398 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.739 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

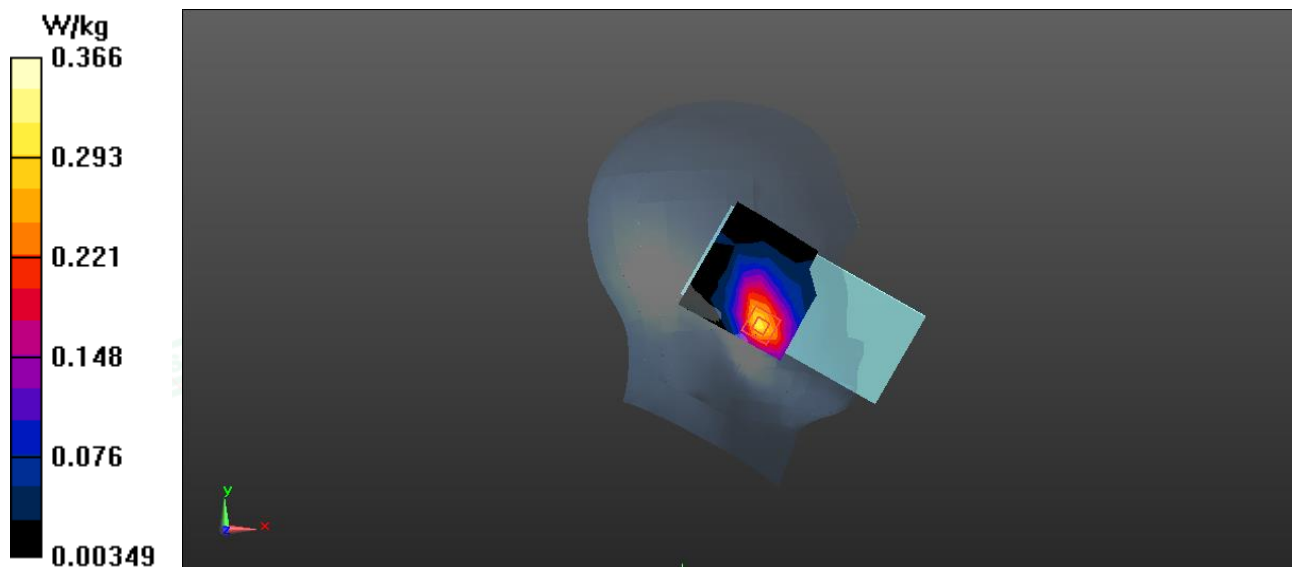

Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21100CH 1RB49 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.947 \text{ S/m}$; $\epsilon_r = 38.914$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

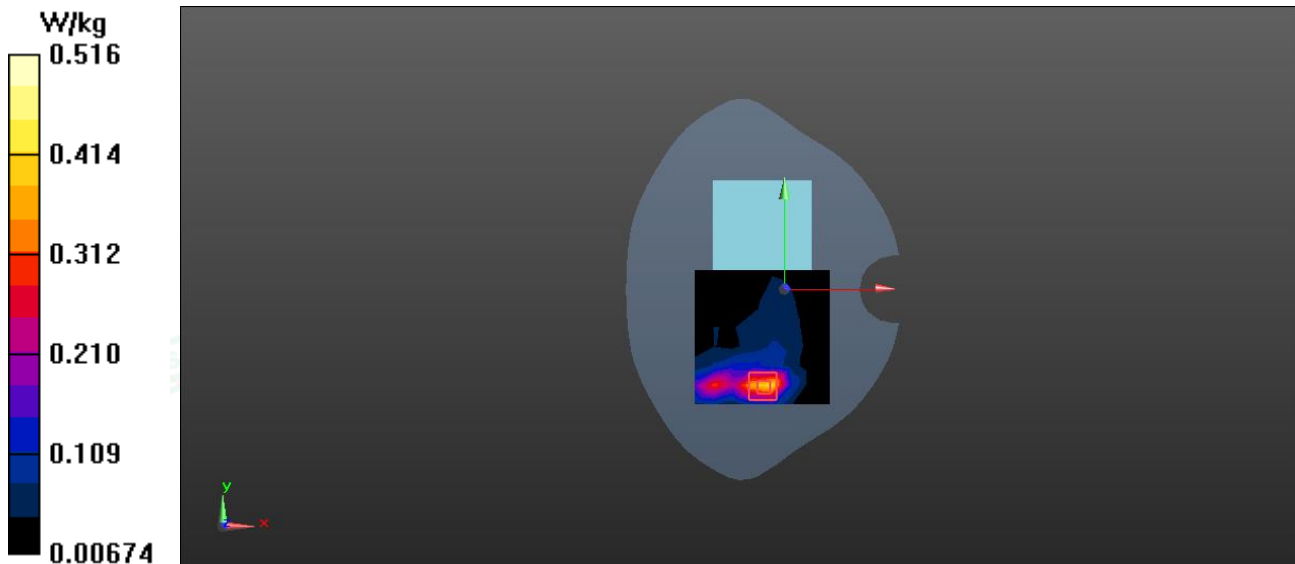Configuration/ Body /Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.572 W/kg **Configuration/ Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.193 V/m ; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.689 W/kg **SAR(1 g) = 0.326 W/kg ; SAR(10 g) = 0.179 W/kg** Maximum value of SAR (measured) = 0.516 W/kg 

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB0 Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 41.386$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)0

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.466 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.574 V/m; Power Drift = -0.15 dB

Peak S AR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.435 W/kg

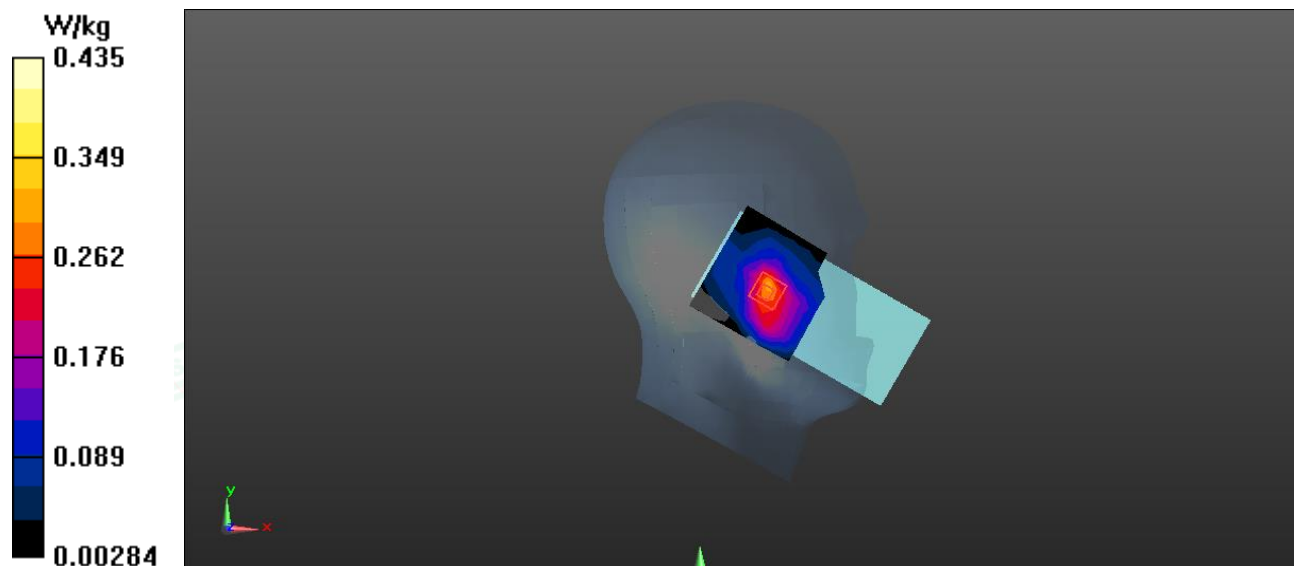

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB0 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 41.386$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.506 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.149 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.457 W/kg

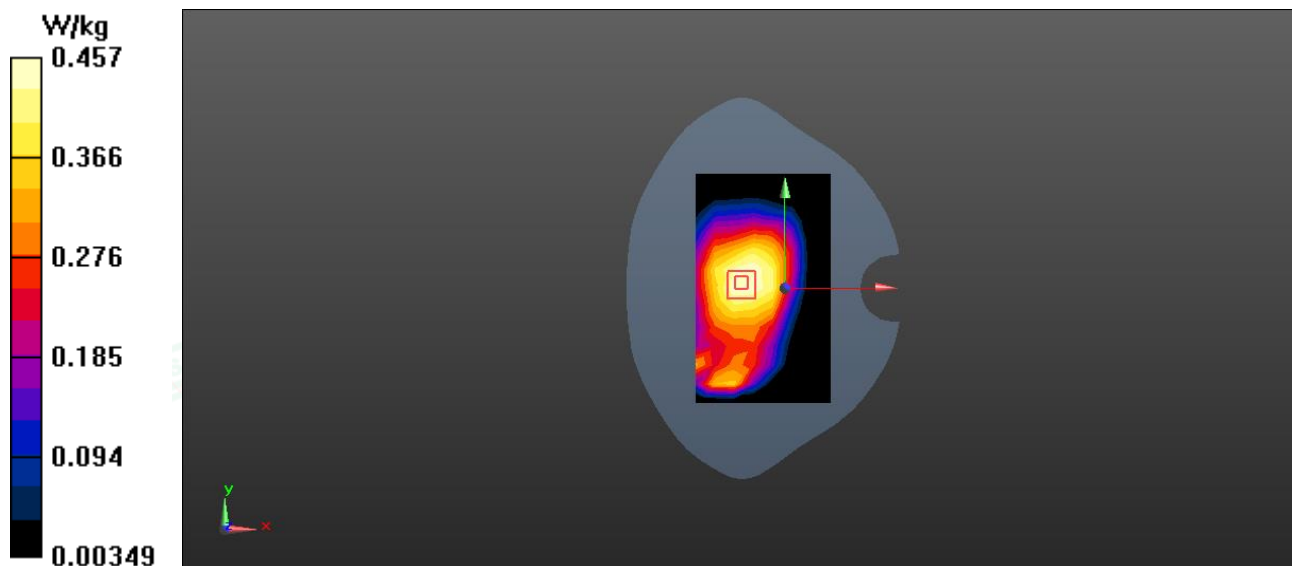

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26365CH 1RB49 Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.805$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.624 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.358 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

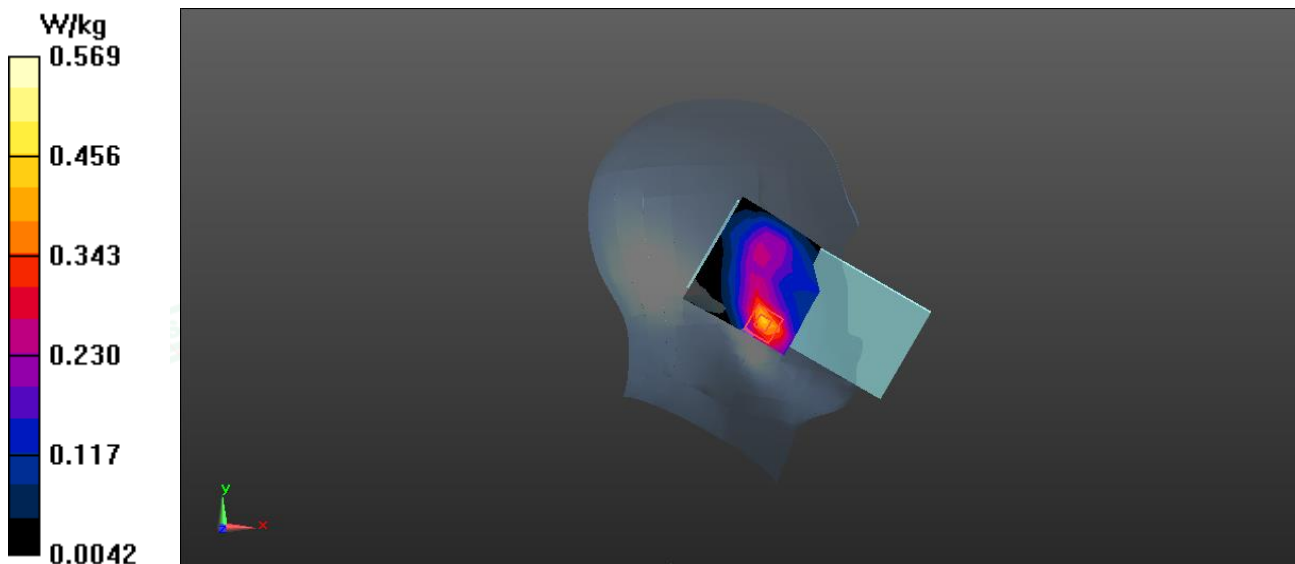

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26365CH 1RB49 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 39.805$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.943 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.34 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.352 W/kg

Maximum value of SAR (measured) = 0.896 W/kg

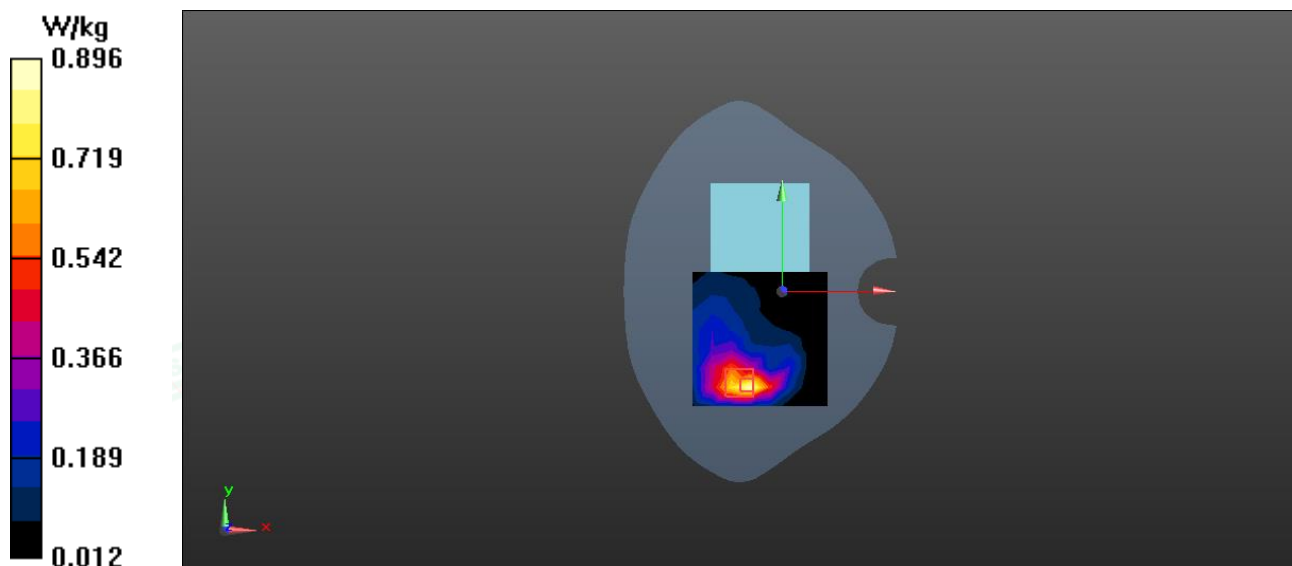

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

LTE B26 10M QPSK 26740CH 1RB24 Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 819 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 40.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

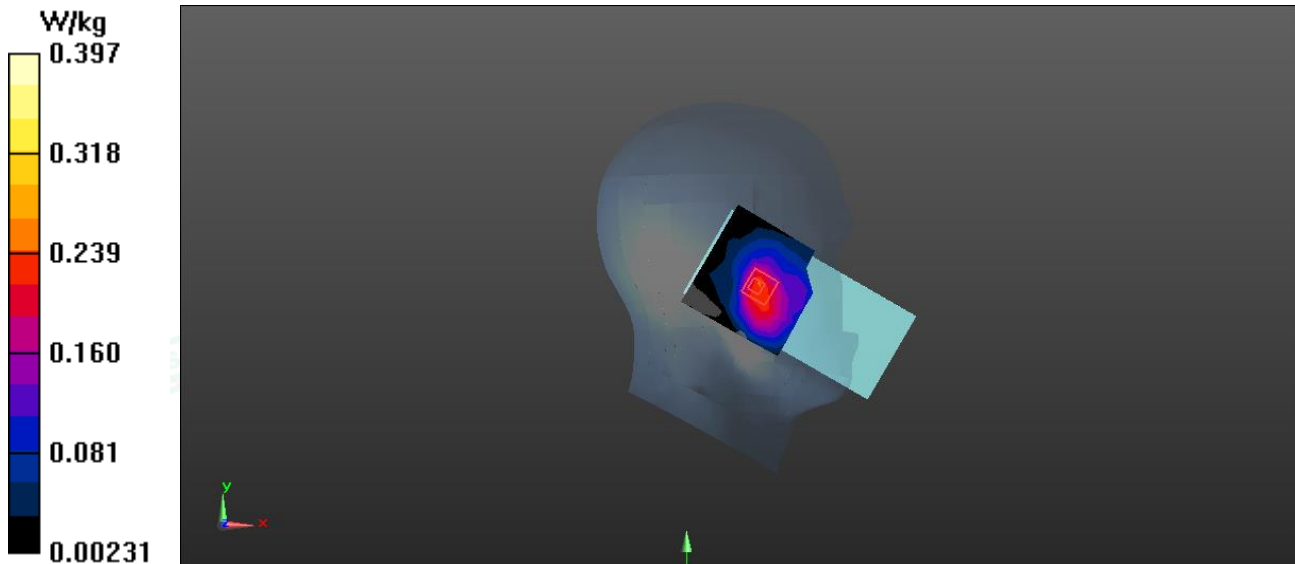Configuration/Head /Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.342 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.539 V/m ; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.549 W/kg **SAR(1 g) = 0.243 W/kg ; SAR(10 g) = 0.181 W/kg** Maximum value of SAR (measured) = 0.397 W/kg 



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

LTE B26 10M QPSK 26740CH 1RB24 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 819 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 819 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 40.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

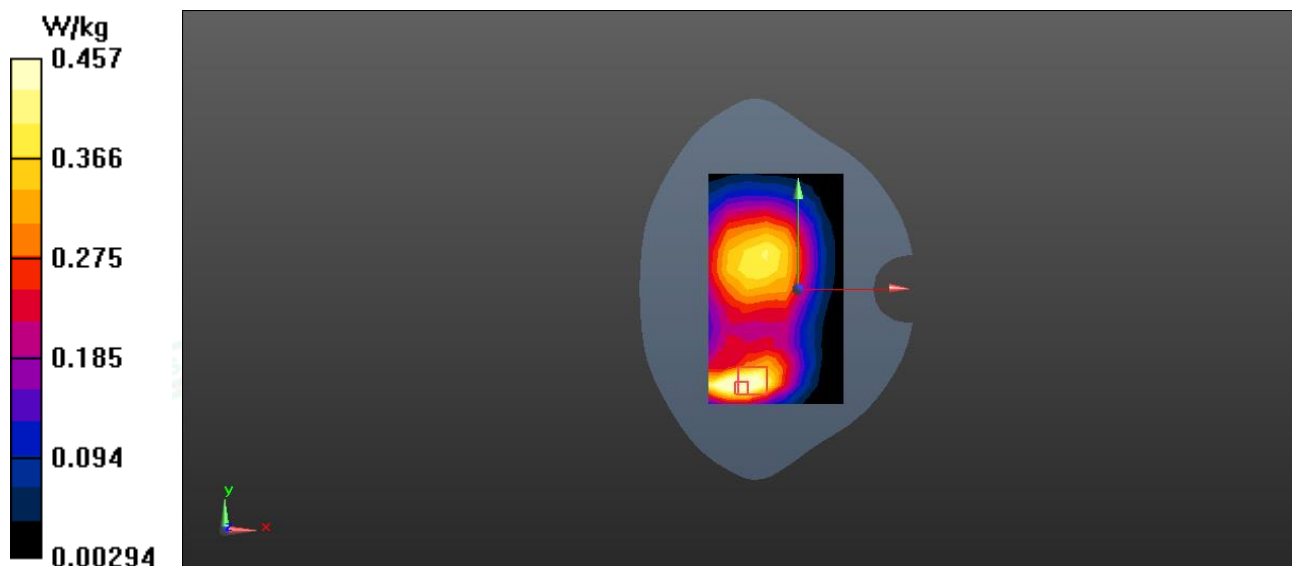Configuration/ Body /Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.513 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.913 V/m ; Power Drift = -0.19 dB Peak SAR (extrapolated) = 0.624 W/kg **SAR(1 g) = 0.293 W/kg ; SAR(10 g) = 0.192 W/kg** Maximum value of SAR (measured) = 0.457 W/kg 



Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 40640CH 1RB99 Left Cheek

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1

Communication System: UID 0, LTE-TDD (0); Frequency: 2595 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 39.163$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.579 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.394 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.531 W/kg

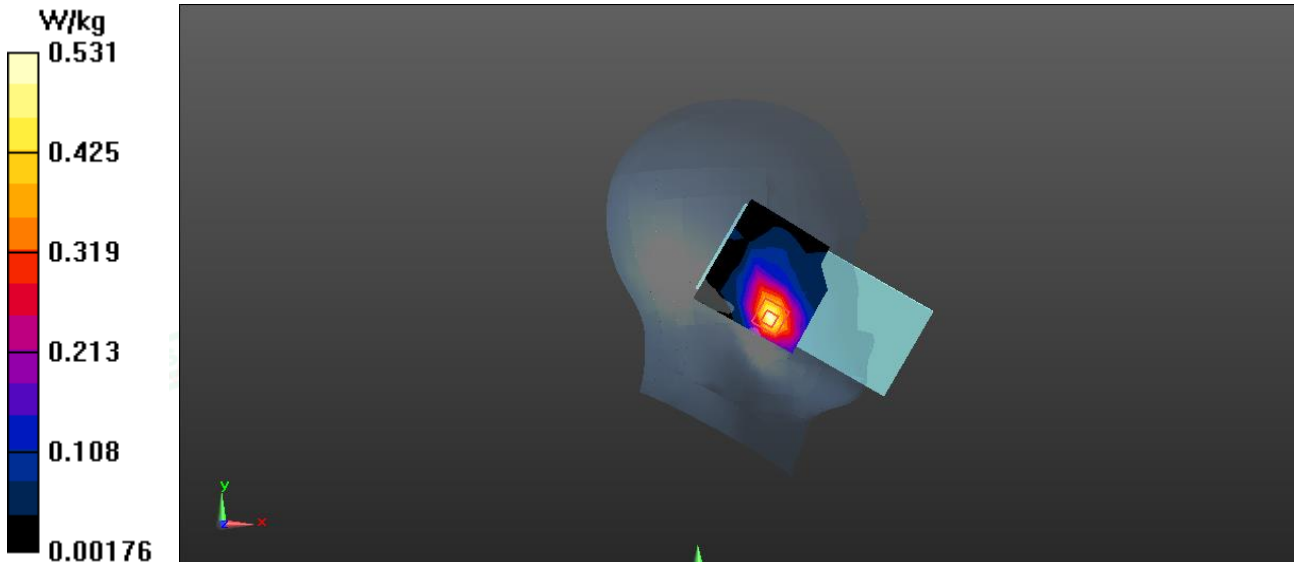



Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 40640CH 1RB99 Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2595 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2595$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 39.163$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.725 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.483 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.763 W/kg

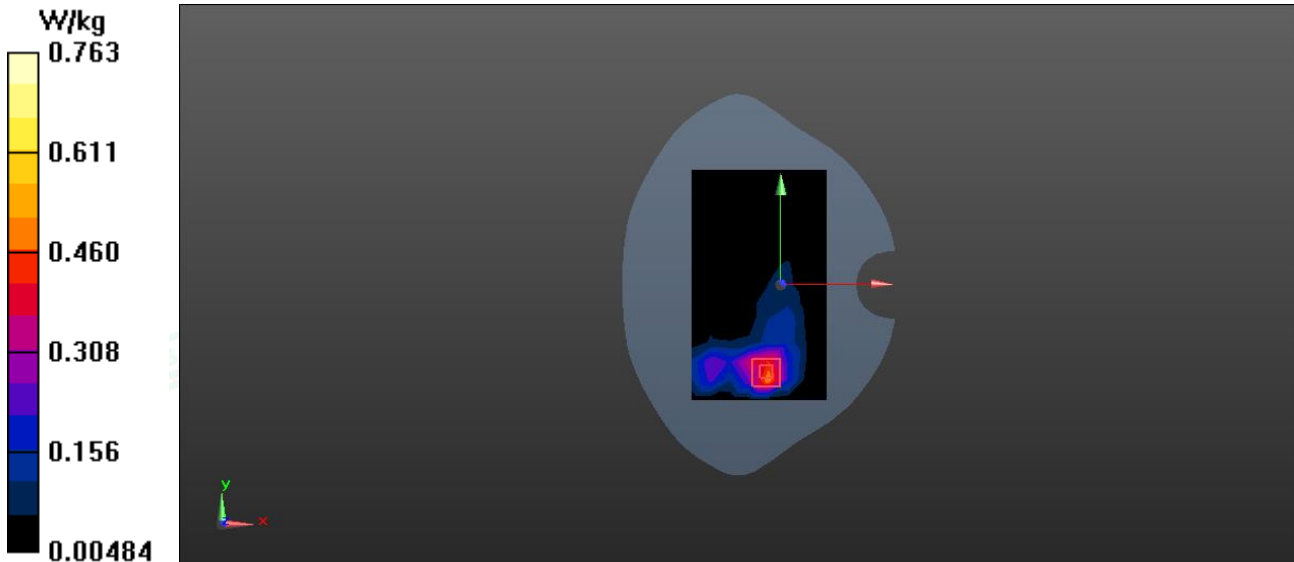



Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB99 Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.569$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.764 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.423 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.712 W/kg

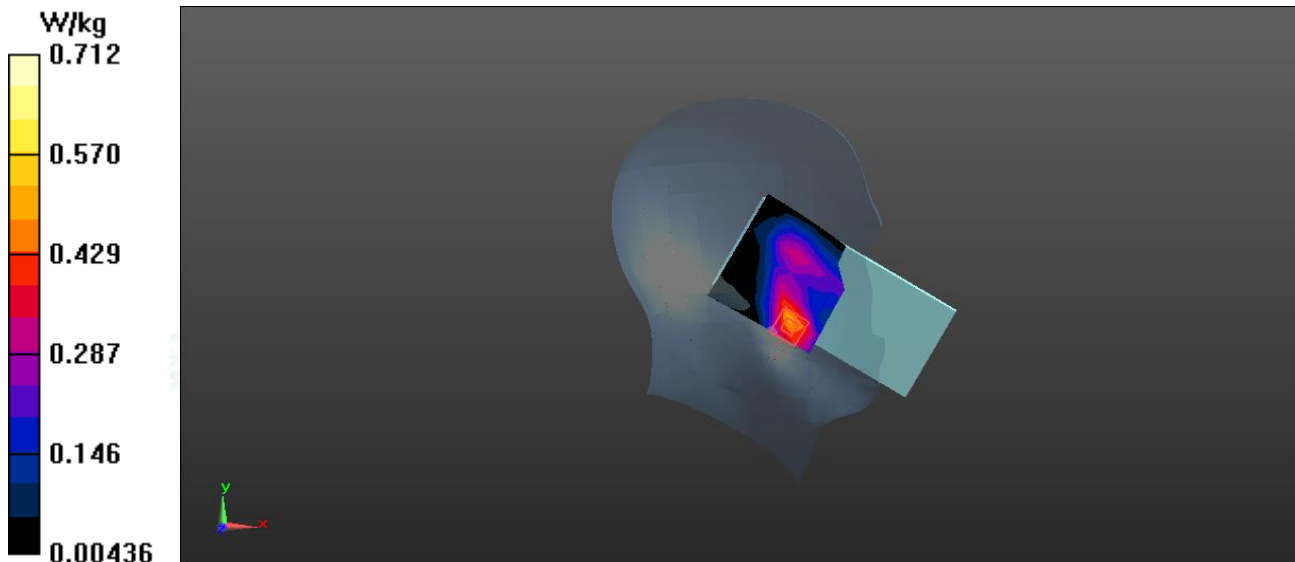



Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB99 Rear Side 10mm

DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.387 \text{ S/m}$; $\epsilon_r = 40.569$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.926 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.74 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.953 W/kg

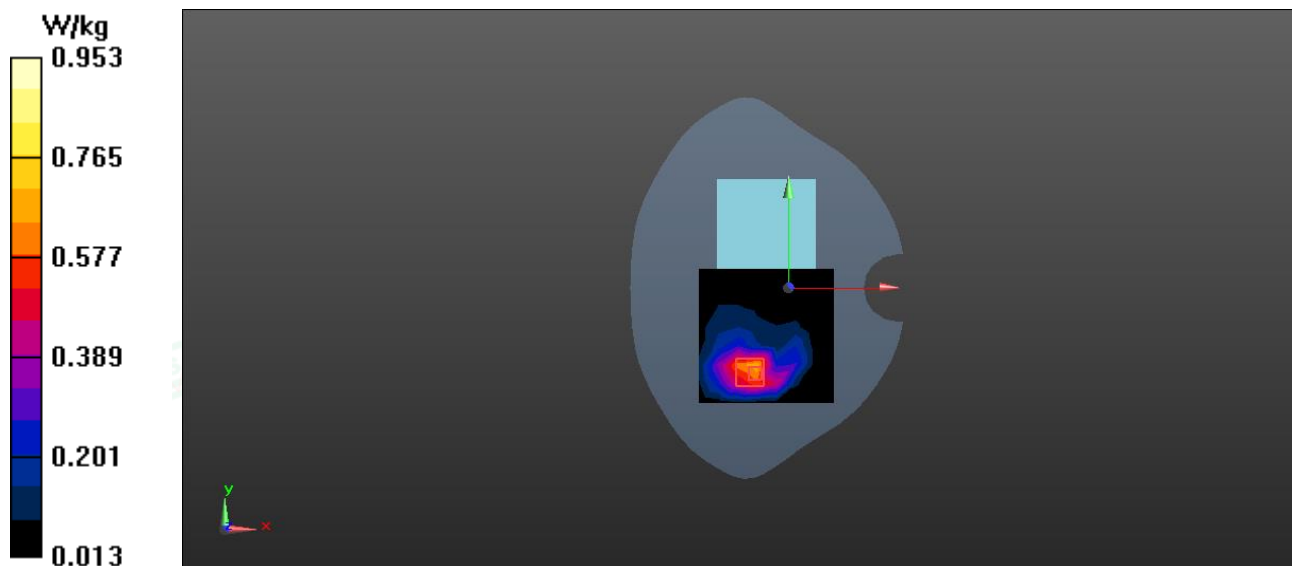



Date:2026/9/9

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.797 \text{ S/m}$; $\epsilon_r = 39.197$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.713 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.248 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.765 W/kg

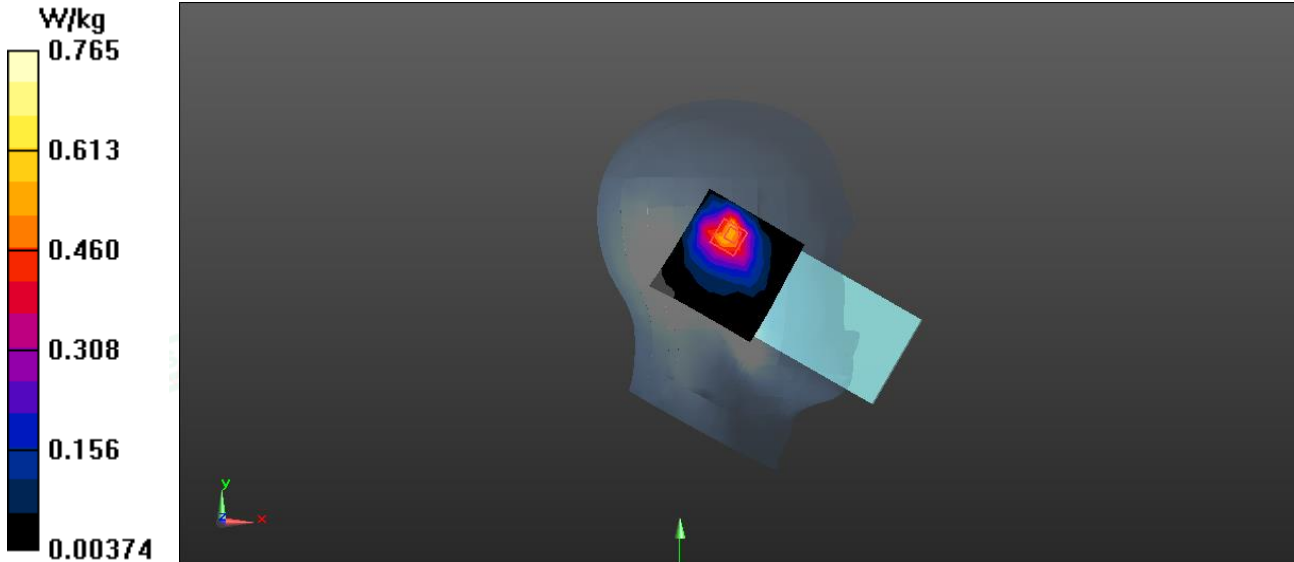



Date: 2026/9/9

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.797 \text{ S/m}$; $\epsilon_r = 39.197$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.863 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.394 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

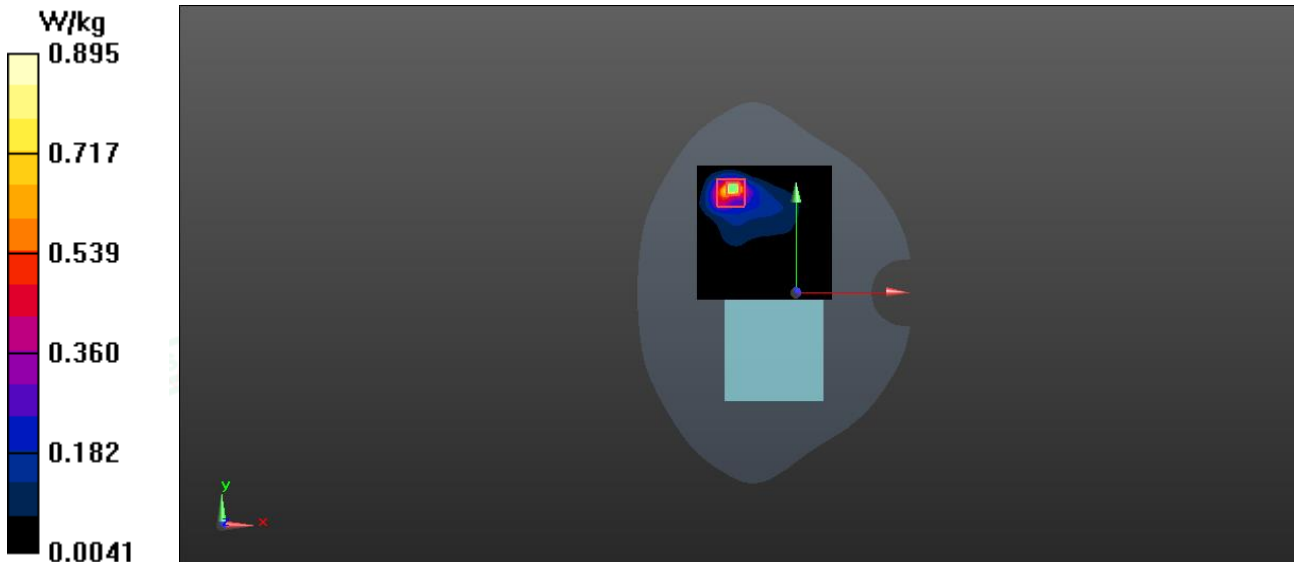



Date: 2026/9/14

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11ac80 42CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5210 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.615 \text{ S/m}$; $\epsilon_r = 35.053$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.523 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.748 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.567 W/kg

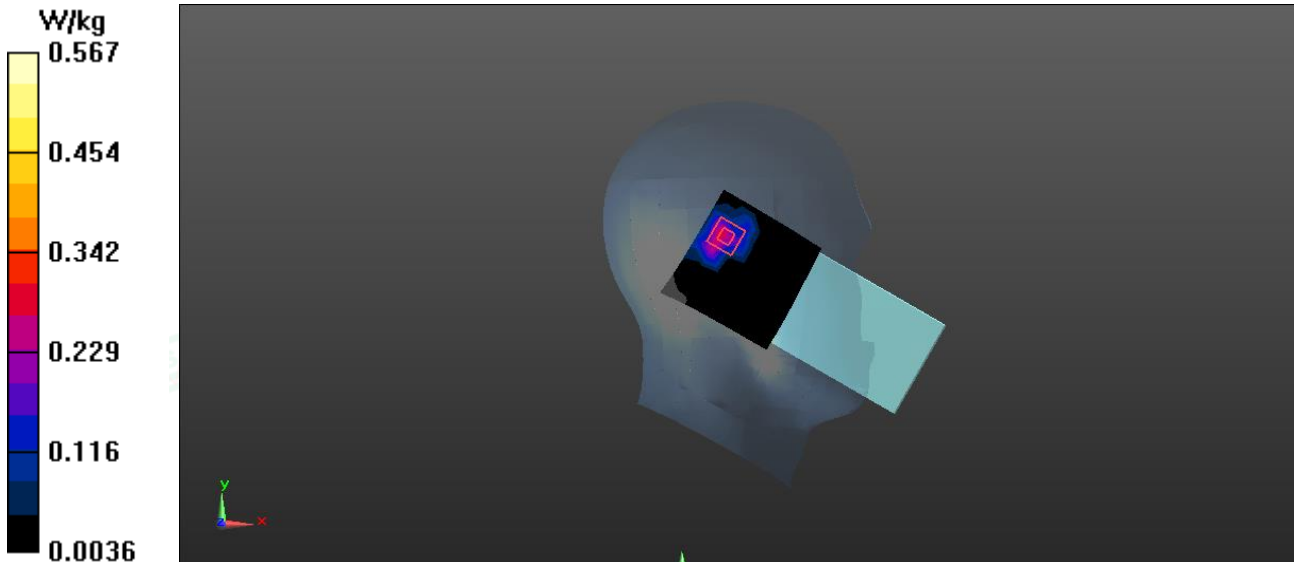



Date: 2026/9/14


Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11ac80 42CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5210 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.615 \text{ S/m}$; $\epsilon_r = 35.053$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

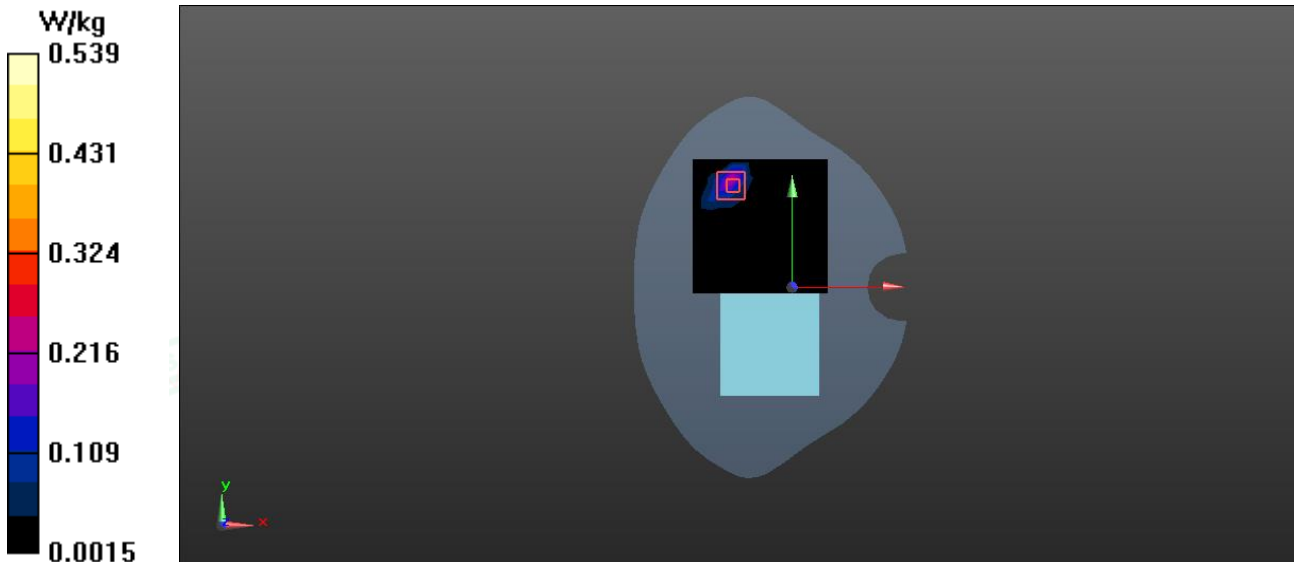Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.624 W/kg **Configuration/ Body /Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 5.384 V/m ; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.704 W/kg **SAR(1 g) = 0.355 W/kg ; SAR(10 g) = 0.201 W/kg** Maximum value of SAR (measured) = 0.539 W/kg 



Date: 2026/9/14

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11n40 54CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5270 \text{ MHz}$; $\sigma = 4.676 \text{ S/m}$; $\epsilon_r = 35.334$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.568 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.492 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

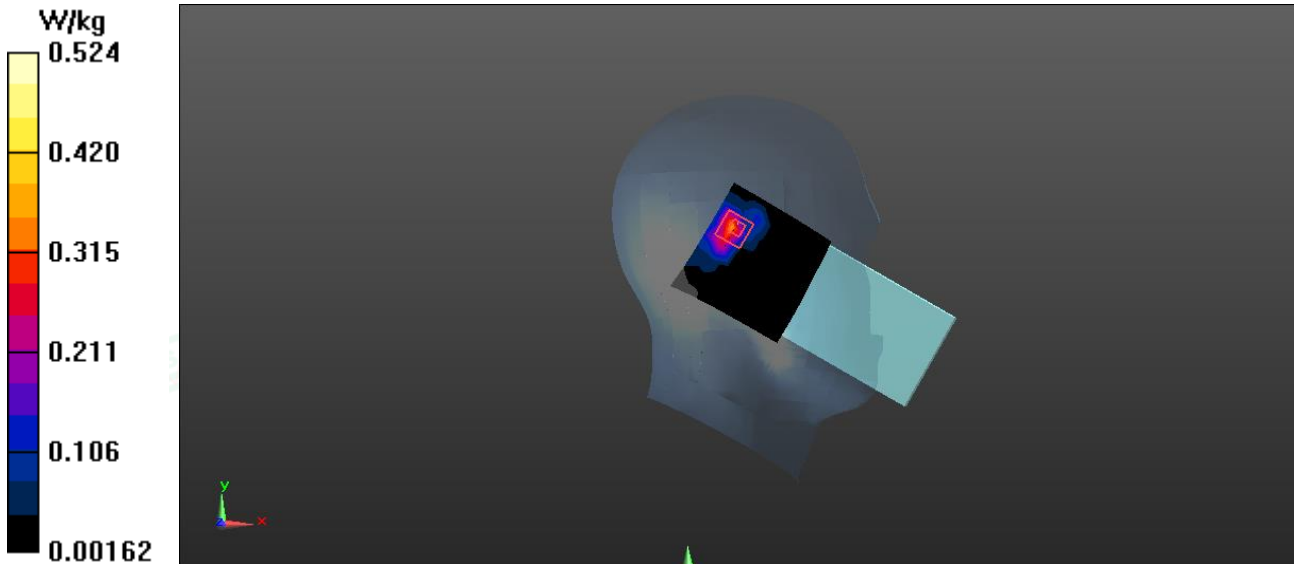



Date: 2026/9/14

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11n40 54CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.676$ S/m; $\epsilon_r = 35.334$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.652 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.396 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

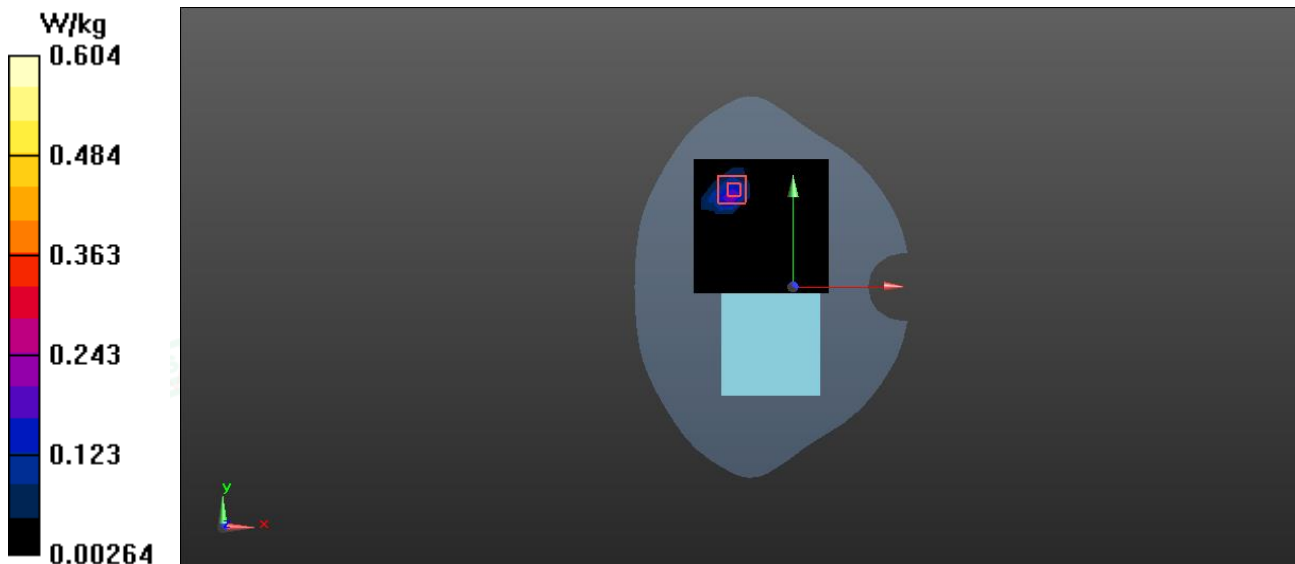



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11n20 140CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.204 \text{ S/m}$; $\epsilon_r = 35.416$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.553 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.154 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

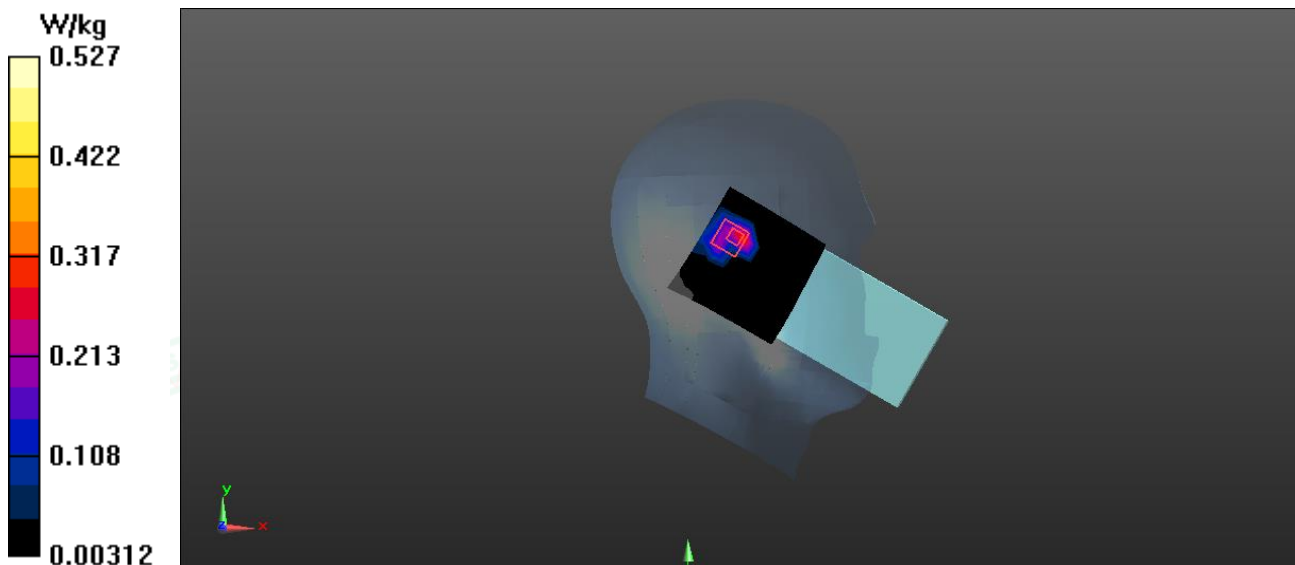



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.5G 802.11n20 140CH Rear side 0mm Ant 1**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.204 \text{ S/m}$; $\epsilon_r = 35.416$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.75, 4.75, 4.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.569 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.894 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

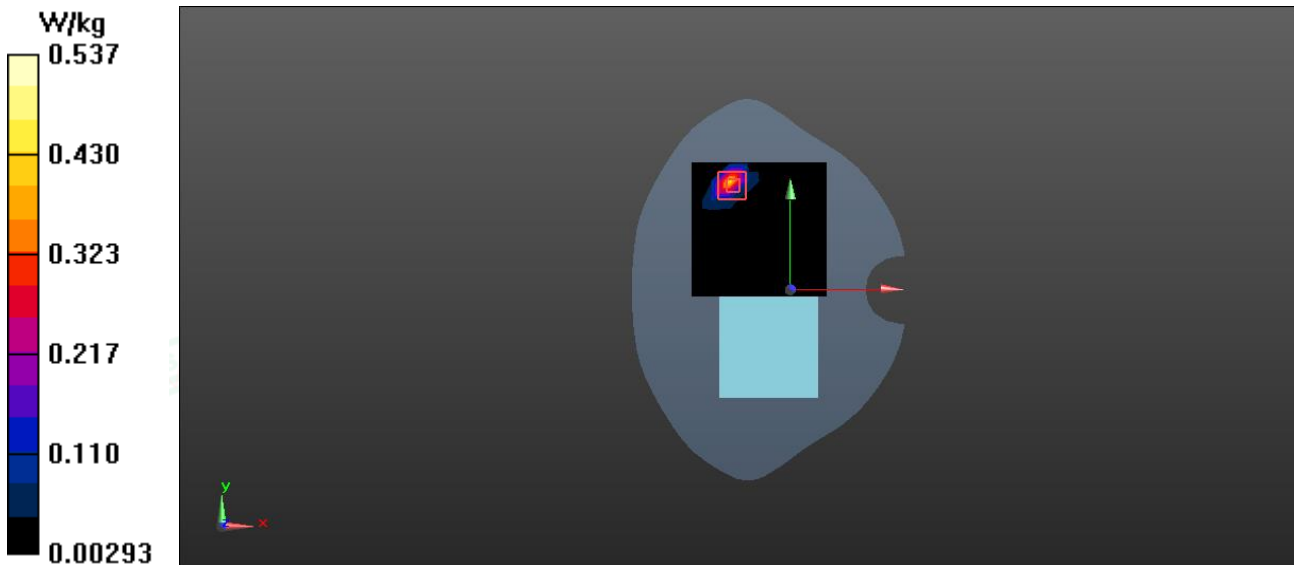



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11ac80 155CH Left Cheek**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5775 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.068$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.526 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.174 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.394 W/kg

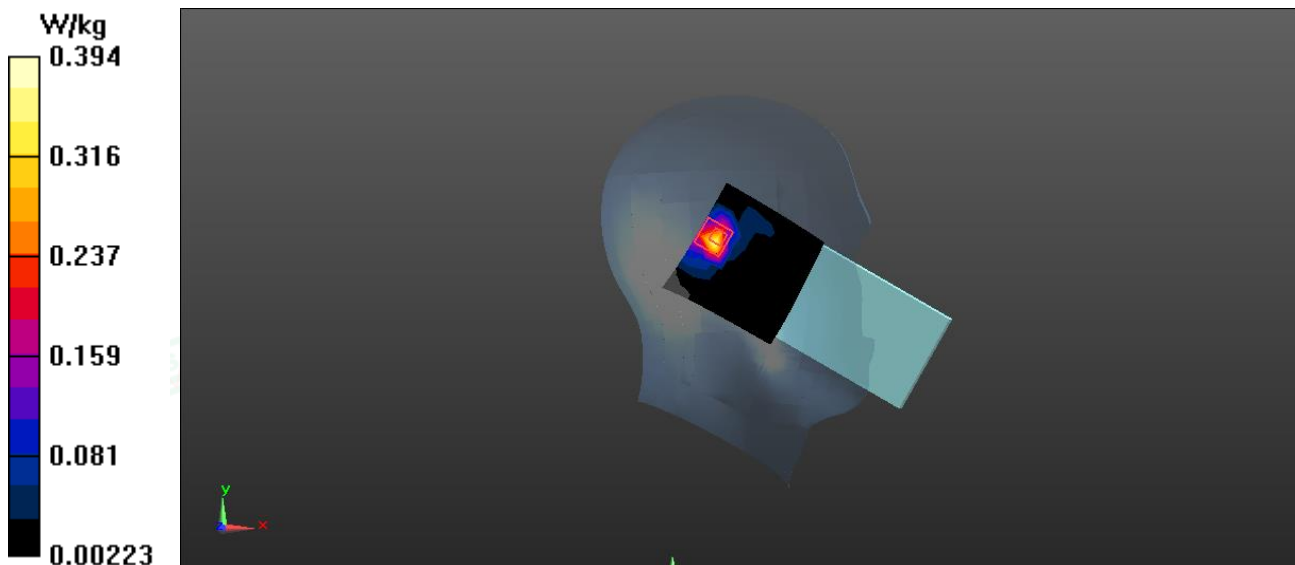



Date: 2026/9/16

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11ac80 155CH Rear side 10mm**DUT: Smart Phone ; Type: ULTRA S26 ; Serial: C260817009-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5775 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.251 \text{ S/m}$; $\epsilon_r = 35.068$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.415 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.394 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

