

Test Report

Product: Wireless Touchscreen Car Stereo

Trade Mark: N/A

Model Number: ZZKJ-T113-i

FCC ID: 2BX4K-ZZKJ-T113I

Prepared for

Shenzhen Zhongze Technology Co., Ltd
Room 101, Building 6, Phase I, Huangtian Yangbei Industrial Park,
Huangtian Community, Hangcheng Subdistrict, Bao'an District, Shenzhen,
518000, China

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China
Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110
Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	6
1.1	DESCRIPTION OF EUT	6
1.2	TEST MODE.....	7
1.3	OPERATION CHANNEL LIST.....	7
1.4	TEST SETUP	9
1.5	POWER SETTING CONFIGURATION PARAMETERS	9
1.6	ANCILLARY EQUIPMENT	9
2	SUMMARY OF TEST RESULT	10
3	TEST FACILITIES AND ACCREDITATIONS	11
3.1	TEST LABORATORY	11
3.2	ENVIRONMENTAL CONDITIONS	11
3.3	MEASUREMENT UNCERTAINTY	11
3.4	TEST SOFTWARE	12
4	LIST OF TEST EQUIPMENT	13
5	TEST ITEM AND RESULTS.....	15
5.1	ANTENNA REQUIREMENT	15
5.1.1	<i>Standard Requirement</i>	15
5.1.2	<i>Test Result</i>	15
5.2	CONDUCTED EMISSION	16
5.2.1	<i>Limits</i>	16
5.2.2	<i>Test Procedures</i>	16
5.2.3	<i>Test Setup</i>	17
5.2.4	<i>Test Result</i>	17
	<i>The EUT is an automotive product, So this test item not applicable.</i>	17
5.3	RADIATED EMISSION	18
5.3.1	<i>Limits</i>	18
5.3.2	<i>Test Procedures</i>	18
5.3.3	<i>Test Setup</i>	18
5.3.4	<i>Test Result</i>	19
5.3.5	<i>Radiated Band Edge</i>	27
5.4	PEAK OUTPUT POWER	30
5.4.1	<i>Limit</i>	30
5.4.2	<i>Test Procedure</i>	30
5.4.3	<i>Test Setup</i>	30
5.4.4	<i>Test Results</i>	30
	<i>2.4 WIFI</i>	31
5.5	POWER SPECTRAL DENSITY.....	33
5.5.1	<i>Limit</i>	33
5.5.2	<i>Test Procedure</i>	33
5.5.3	<i>Test Setup</i>	33
5.5.4	<i>Test Results</i>	33
5.6	6DB BANDWIDTH	39
5.6.1	<i>Limit</i>	39
5.6.2	<i>Test Procedure</i>	39
5.6.3	<i>Test Setup</i>	39
5.6.4	<i>Test Results</i>	39
5.7	DUTY CYCLE	45
5.7.1	<i>Limit</i>	45
5.7.2	<i>Test Procedure</i>	45

5.7.3	Test Setup	45
5.7.4	Test Results	46
5.8	CONDUCTED BAND EDGE	49
5.8.1	Limit	49
5.8.2	Test Procedure	49
5.8.3	Test Setup	49
5.8.4	Test Results	49
5.9	SPURIOUS RF CONDUCTED EMISSIONS	55
5.9.1	Limit	55
5.9.2	Measuring Instruments	55
5.9.3	Test Procedure	55
5.9.4	Test Setup	55
5.9.5	Test Results	55
6	PHOTOGRAPHS OF THE TEST SETUP	61

TEST RESULT CERTIFICATION

Applicant's Name..... : Shenzhen Zhongze Technology Co., Ltd
Room 101, Building 6, Phase I, Huangtian Yangbei
Address : Industrial Park, Huangtian Community, Hangcheng
Subdistrict, Bao'an District, Shenzhen,518000, China
Manufacturer's Name : Shenzhen Zhongze Technology Co., Ltd
Room 101, Building 6, Phase I, Huangtian Yangbei
Address : Industrial Park, Huangtian Community, Hangcheng
Subdistrict, Bao'an District, Shenzhen,518000, China

Product description


Product name : Wireless Touchscreen Car Stereo
Model Number : ZZKJ-T113-i
Standards : FCC Part 15C 15.247
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 +
Test procedure..... : Errata to C63.10a-2024
KDB 558074 D01 15.247 Meas Guidance v05r02

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test


Date (s) of performance of tests : Jan 25, 2026~ Jul.15, 2026
Test Result..... : **Pass**

Testing Engineer :



(Z o e S u)

Technical Manager :



(M i n g L i u)

Authorized Signatory :



(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	Wireless Touchscreen Car Stereo
Model name:	ZZKJ-T113-i
Series Model:	ZZKJ_LINUX_EVO, ZZKJ_LINUX_NBT, ZZKJ_LINUX_CIC, ZZKJ_LINUX_CCC, ZZKJ_LINUX_6.0, ZZKJ_LINUX_5.5, ZZKJ_LINUX_5.0, ZZKJ_LINUX_4.5, ZZKJ_LINUX_4.0, ZZKJ_LINUX_MMI3G, ZZKJ_LINUX_MMI2G, ZZKJ_LINUX_MIB, ZZKJ_LINUX_MIB2, ZZKJ_QCM6115, ZZKJ_QCM6225, ZZKJ_QCM6225-AD, ZZKJ_LINUX_MRC, ZZKJ_LINUX_HN-R, ZZKJ_LINUX_HN+R, ZZKJ_LINUX_JEEP, ZZKJ_LINUX_GMC, ZZKJ_LINUX_FORD, ZZKJ_LINUX_TOYOTA, ZZKJ_LINUX_HONDA, ZZKJ_LINUX_HYUNDAI, ZZKJ_LINUX_LEXUS, ZZKJ_LINUX_VW, ZZKJ_LINUX_NISSAN, ZZKJ_LINUX_KIA, ZZKJ_LINUX_CADILLAC, ZZKJ_LINUX_LAND ROVER
Different of series model:	All the models are the same circuit and module, except the model No..
Operation frequency:	2.4G WIFI: IEEE 802.11b/g/n20: 2412-2462MHz IEEE 802.11n40: 2422-2452MHz BLE:2402 MHz to 2480 MHz
Modulation type:	2.4G WIFI: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g/n (HT20/H40): OFDM (BPSK, QPSK, 16QAM, 64QAM) BLE: GFSK
Bit Rate of transmitter:	2.4G WIFI: IEEE 802.11b: 1/2/5.5/11Mbps IEEE 802.11g: 6/9/12/18/24/36/48/54Mbps IEEE 802.11n(20MHz): MCS0-7, up to 150Mbps IEEE 802.11n(40MHz): MCS0-7, up to 300Mbps BLE: 1Mbps
Antenna type:	2.4G WIFI: Glue Stick Antenna BLE: PCB Antenna
Antenna gain:	2.4G WIFI: 2.02dBi BLE: 1.93dBi
Max. output power:	2.4G WIFI: 12.67dBm BLE: 1.184dBm
Battery:	N/A

Power supply:	DC 12V
Adapter information:	N/A

1.2 Test Mode

2.4G WIFI:

Channel List for 802.11b/g/n (20)

Channel	Channel	Frequency (MHz)
Low	01	2412
Middle	06	2437
High	11	2462

Channel List for 802.11n (40)

Channel	Channel	Frequency (MHz)
Low	03	2422
Middle	06	2437
High	09	2452

Channel List for BLE

Channel	Channel	Frequency (MHz)
Low	00	2402
Middle	19	2440
High	39	2480

1.3 Operation Channel list

2.4G WIFI:

Channel List for 802.11b/g/n (20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457

05	2432	11	2462
06	2437	\	\

Channel List for 802.11n (40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	07	2442
04	2427	08	2447
05	2432	09	2452
06	2437	\	\

BLE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	/
13	2428	27	2456	/	/

1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.5 Power setting configuration parameters

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Test software Version		AiRFTTestTool	
Mode	802.11b/g	802.11n20	802.11n40
Mode	GFSK		
Parameters	Default	Default	Default
RF cable			
Description	Connector	Length	Supplied by
Antenna Cable	SMA	10cm	Applicant

Note: Disclaimer: the loss of RF cable is too small and can be ignored.

1.6 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
/	/	/	/

Note: The notebook is used to assist the RF test. In order to prevent the notebook from causing unnecessary impact on the test, the notebook will be removed from the test environment after the EUT successfully transmits at a fixed frequency using the notebook.

2 Summary of Test Result

No.	Standard Section	Test Item	Result	Remark
1	15.203	Antenna Requirement	Pass	
2	15.247 (b)	Peak Output Power	Pass	
3	15.207	Conducted Emission	N/A	
4	15.247 (d) & 15.209	Radiated Spurious Emission	Pass	
5	15.247 (e)	Power Spectral Density	Pass	
6	15.247 (a)(2)	6dB Bandwidth	Pass	
7	558074 D01 15.247 Meas Guidance v05r02 Chapter 6	Duty Cycle	Pass	
8	15.205	Band Edge Emission	Pass	
9	15.247(d)	Spurious RF Conducted Emissions	Pass	

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Radiated emission (above 1GHz)	± 4.7 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	
Humidity	$\pm 5 \%$	

3.4 Test Software

Software name	Manufacturer	Model	Version
Conducted Emission test Software	Farad	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission test Software	Farad	EZ-EMC	FA-03A2
RF Test System	MWRF	MTS 8310	2.0.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2026-04-25	2028-04-24
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2026-04-25	2028-04-24
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 9170	01193	2026-04-25	2028-04-24
4	HB-E005	Preamplifier	Noyetec	LAN-0118	NYCM1420102	2026-04-27	2027-04-26
5	HB-E006	Preamplifier	Noyetec	LAN-1840	NYCM1420103	2026-04-30	2027-04-29
6	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2026-04-28	2027-04-27
7	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
8	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM1420204	/	/
9	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2026-04-30	2027-04-29
10	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-00245	2026-04-25	2028-04-24
11	HB-E076	Preamplifier	Hewlett Packard	8447D	1937A02278	2026-04-28	2027-04-27
Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2026-04-27	2027-04-26
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2026-04-27	2027-04-26
3	HB-E016	Absorb clamp	ZHINAN	ZN23201	*21066*	2026-04-29	2027-04-28
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2026-04-27	2027-04-26
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	100610	2026-04-27	2027-04-26
RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Anaio Signal Generator	Agilent	N5181A	MY47070421	2026-04-27	2027-04-26

2	HB-E042	WIDEBAND RADIO COMMUNICA TION TESTER	R&S	CMW500	132108	2026-04-27	2027-04-26
3	HB-E043	MXG Anaio Signal Generator	Agilent	N5182A	US46240335	2026-04-28	2027-04-27
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2026-04-28	2027-04-27
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	2026-04-28	2027-04-27
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1S	N/A	2026-04-30	2027-04-29

Note:

1. The calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).
2. The instrument RF Control Box, numbered HB-E045, contains power meter.

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The EUT antenna is PCB Antenna and Glue Stick Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted Emission

5.2.1 Limits

Limits – Class B		
Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note: 1. the tighter limit applies at the band edges. 2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.		

5.2.2 Test Procedures

a) EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


b) The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f) LISN is at least 80 cm from nearest part of EUT chassis.
- g) For the actual test configuration, please refer to the related Item – photographs of the test

setup.

5.2.3 Test Setup

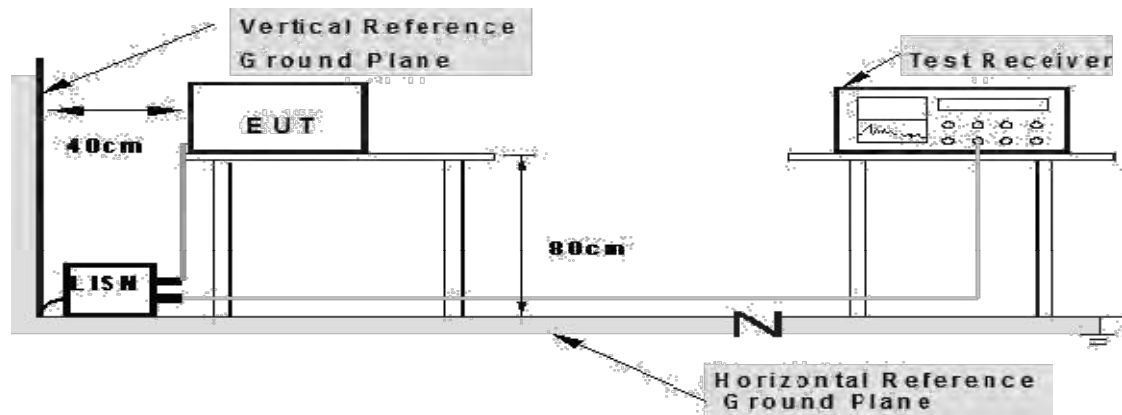

5.2.4 Test Result

The EUT is an automotive product, So this test item not applicable.

5.3 Radiated Emission

5.3.1 Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures


- The radiated emission tests were performed in the 3 meters.
- The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- For the actual test configuration, please refer to the related item – EUT test photos.

5.3.3 Test Setup


Radiated Emission Test-Up Frequency Below 30MHz

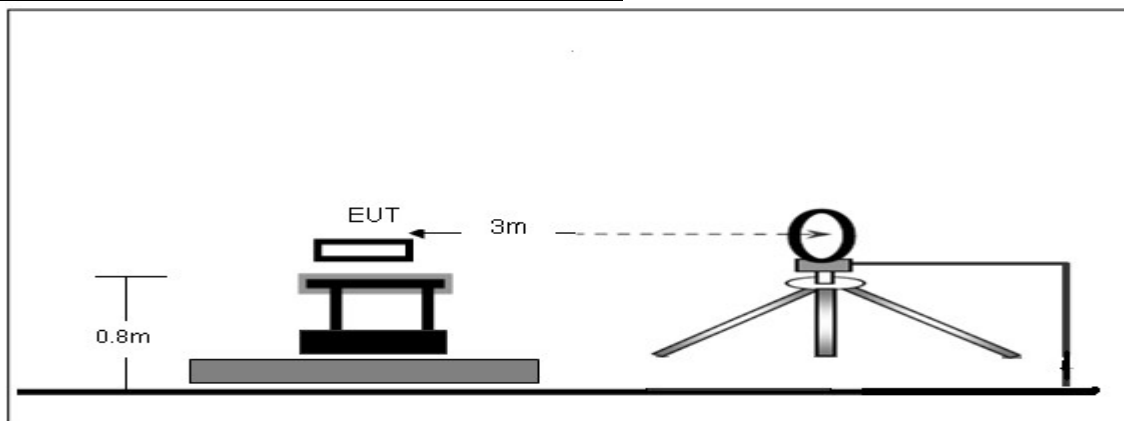

Radiated Emission Test-Up Frequency 30MHz~1GHz

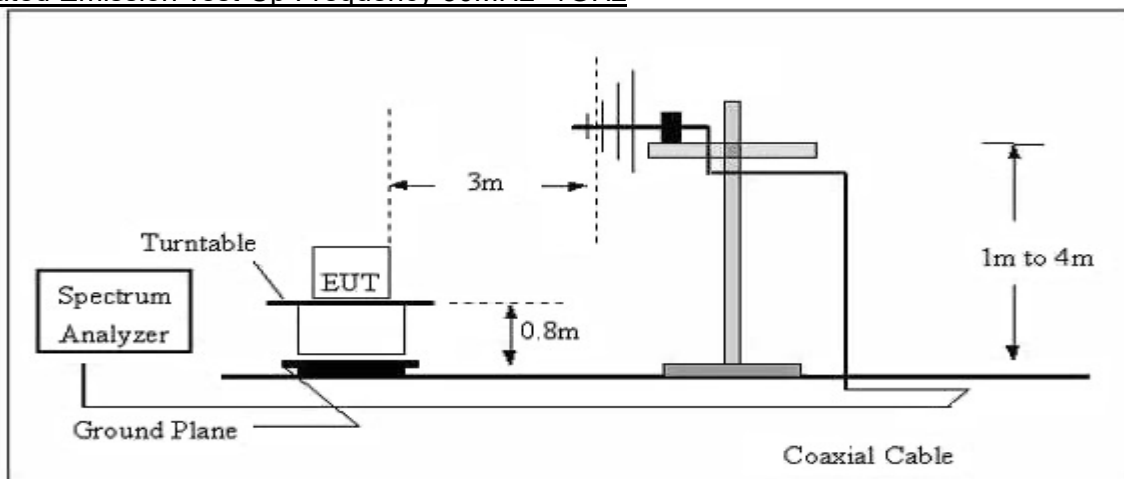

Radiated emission test-up frequency above 1GHz

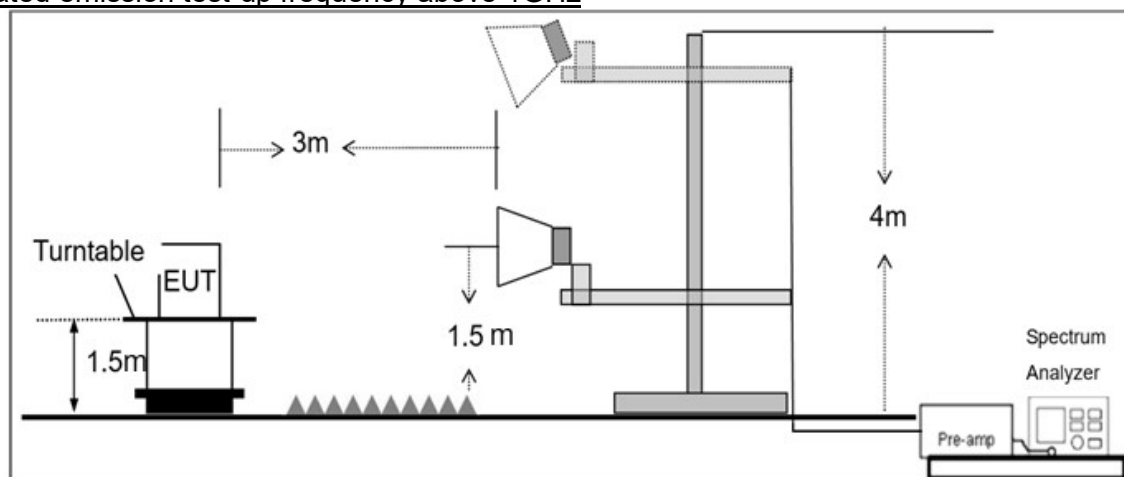

5.3.4 Test Result

Below 30MHz

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1010 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	TX	Polarization:	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	Pass
--	--	--	--	Pass


Note:

1. For 9kHz-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
3. Limit line = specific limits (dBuV) + distance extrapolation factor.

Frequency range (30MHz – 1GHz)


2.4GWIFI:

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Test Mode:	TX 802.11b :Rate 1Mbps (worst case)	Phase:	Vertical
Test Voltage:	DC 3.7V from battery		

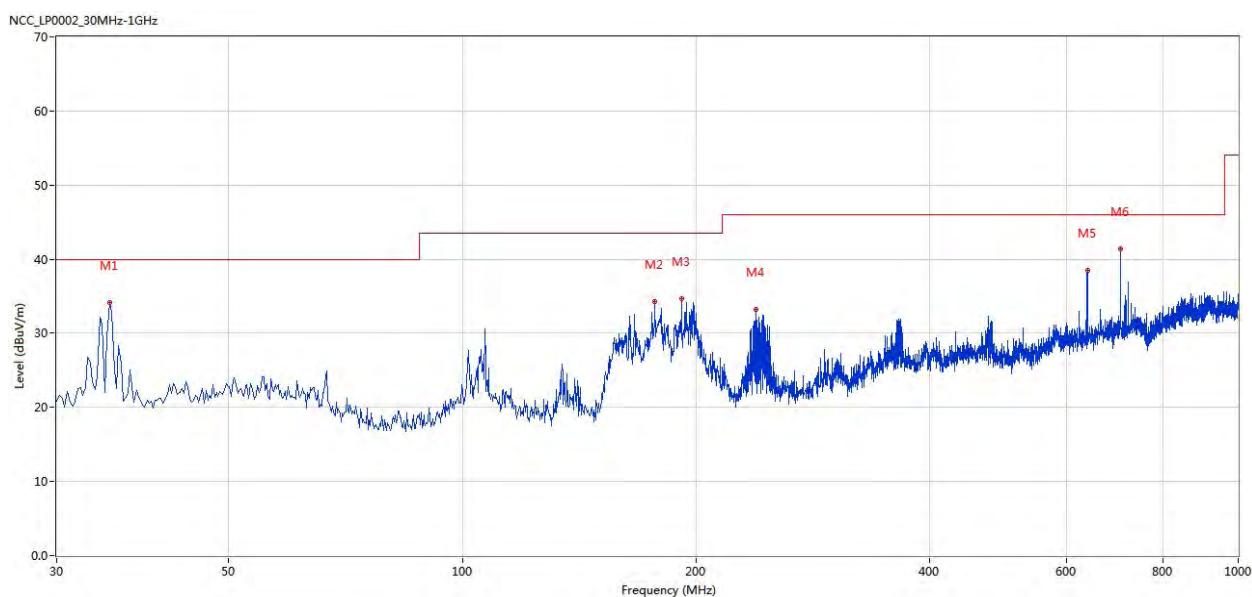

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Verdict
1	35.091	34.16	-9.86	40.0	5.84	Peak	Pass
2	177.161	34.23	-11.71	43.5	9.27	Peak	Pass
3	191.707	34.72	-11.08	43.5	8.78	Peak	Pass
4	238.983	33.27	-8.90	46.0	12.73	Peak	Pass
5	639.008	38.50	-1.64	46.0	7.50	Peak	Pass
6	705.436	41.35	-0.29	46.0	4.65	Peak	Pass

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Test Mode:	TX 802.11b :Rate 1Mbps (worst case)	Phase:	Horizontal
Test Voltage:	DC 3.7V from battery		

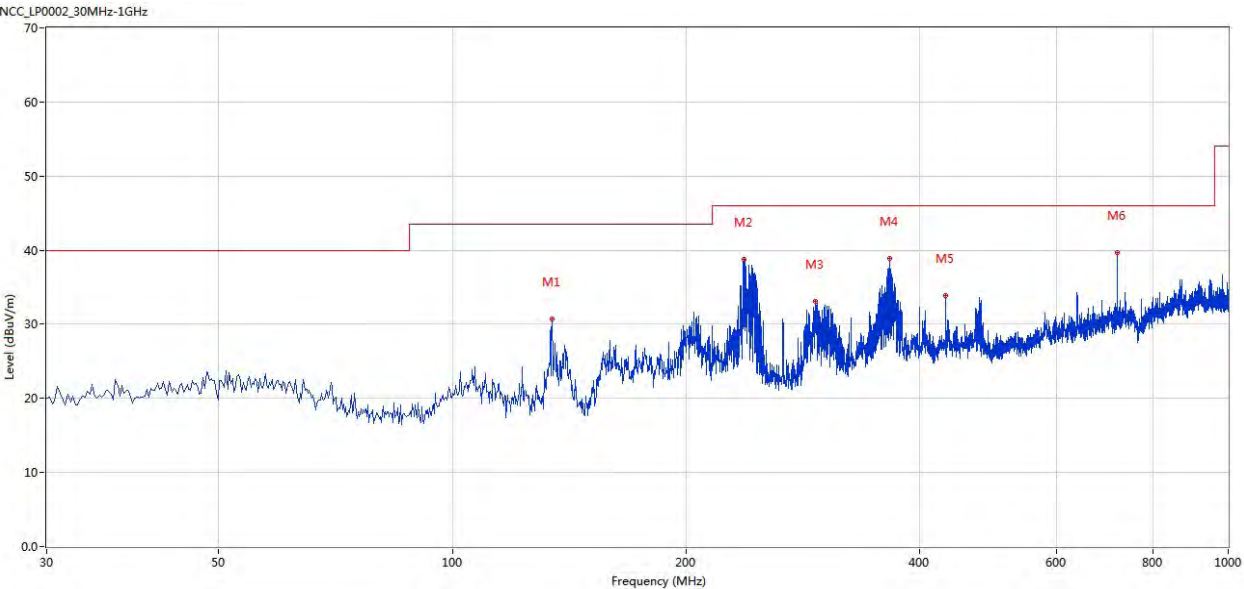

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Verdict
1	134.491	30.67	-12.63	43.5	12.83	Peak	Pass
2	237.771	38.72	-8.85	46.0	7.28	Peak	Pass
3	293.774	33.12	-7.50	46.0	12.88	Peak	Pass
4	366.263	38.85	-4.93	46.0	7.15	Peak	Pass
5	431.965	33.91	-4.30	46.0	12.09	Peak	Pass
6	719.983	39.71	-1.08	46.0	6.29	Peak	Pass

Frequency range (1GHz-25GHz)


Frequency (MHz)	Read Level (dBμV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824.116	65.14	4.36	32.92	45.53	56.89	74	-17.11	Pk	Vertical
4824.116	45.29	4.36	32.92	45.53	37.04	54	-16.96	AV	Vertical
7236.346	57.92	5.02	37.63	45.56	55.01	74	-18.99	Pk	Vertical
7236.346	38.58	5.02	37.63	45.56	35.67	54	-18.33	AV	Vertical
4824.134	65.88	4.36	32.92	45.53	57.63	74	-16.37	Pk	Horizontal
4824.134	44.99	4.36	32.92	45.53	36.74	54	-17.26	AV	Horizontal
7236.122	61.25	5.02	37.63	45.56	58.34	74	-15.66	Pk	Horizontal
7236.122	39.85	5.02	37.63	45.56	36.94	54	-17.06	AV	Horizontal
Middle Channel (2437 MHz)(802.11b)--Above 1G									
4874.104	65.86	4.41	33.01	45.76	57.52	74	-16.48	Pk	Vertical
4874.104	47.27	4.41	33.01	45.76	38.93	54	-15.07	AV	Vertical
7311.255	59.92	5.02	37.68	45.59	57.03	74	-16.97	Pk	Vertical
7311.255	38.30	5.02	37.68	45.59	35.41	54	-18.59	AV	Vertical
4874.186	65.96	4.41	33.01	45.76	57.62	74	-16.38	Pk	Horizontal
4874.186	46.11	4.41	33.01	45.76	37.77	54	-16.23	AV	Horizontal
7311.248	59.75	5.02	37.68	45.59	56.86	74	-17.14	Pk	Horizontal
7311.248	39.60	5.02	37.68	45.59	36.71	54	-17.29	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924.109	67.29	4.5	33.26	46.07	58.98	74	-15.02	Pk	Vertical
4924.109	46.50	4.5	33.26	46.07	38.19	54	-15.81	AV	Vertical
7386.066	58.81	5.02	37.78	45.77	55.84	74	-18.16	Pk	Vertical
7386.066	38.65	5.02	37.78	45.77	35.68	54	-18.32	AV	Vertical
4924.032	66.65	4.5	33.26	46.07	58.34	74	-15.66	Pk	Horizontal
4924.032	48.52	4.5	33.26	46.07	40.21	54	-13.79	AV	Horizontal
7386.156	58.50	5.02	37.78	45.77	55.53	74	-18.47	Pk	Horizontal
7386.156	40.66	5.02	37.78	45.77	37.69	54	-16.31	AV	Horizontal

Note:

1. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
2. All other emissions more than 20dB below the limit.
3. The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is 802.11b.


BLE:

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Test Mode:	TX GFSK (worst case)	Phase:	Vertical
Test Voltage:	DC 3.7V from battery		

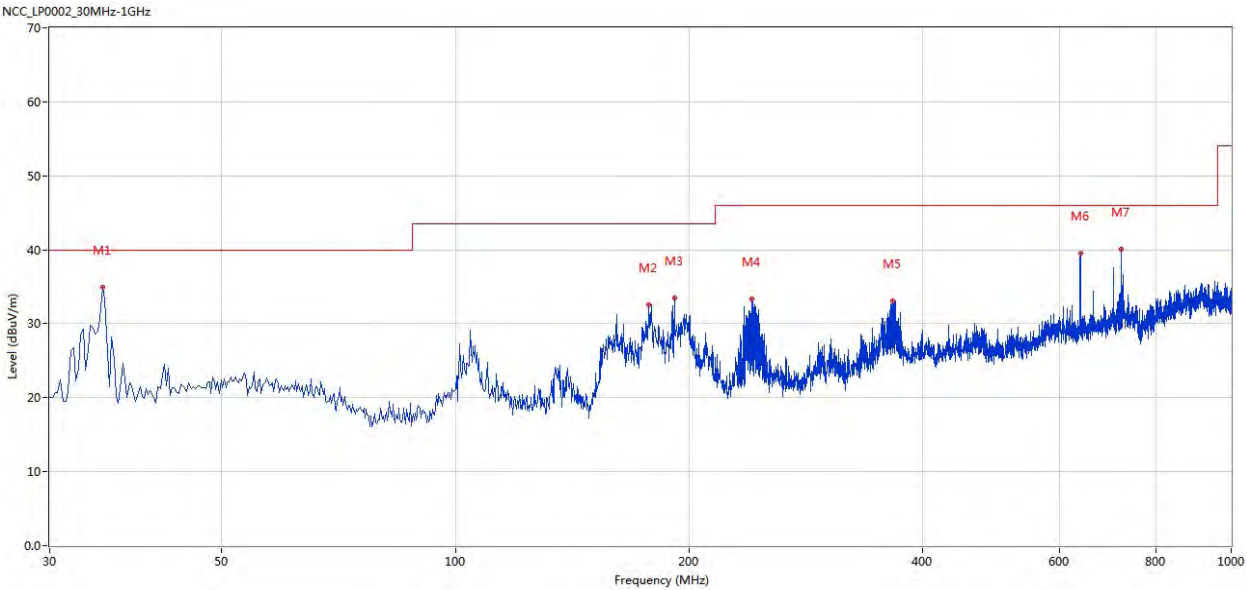

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Verdict
1	35.091	34.97	-9.86	40.0	5.03	Peak	Pass
2	177.646	32.52	-11.47	43.5	10.98	Peak	Pass
3	191.465	33.49	-11.11	43.5	10.01	Peak	Pass
4	240.922	33.32	-8.92	46.0	12.68	Peak	Pass
5	366.263	33.12	-4.93	46.0	12.88	Peak	Pass
6	639.008	39.52	-1.64	46.0	6.48	Peak	Pass
7	722.164	40.05	-0.95	46.0	5.95	Peak	Pass

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Test Mode:	TX GFSK (worst case)	Phase:	Horizontal
Test Voltage:	DC 3.7V from battery		

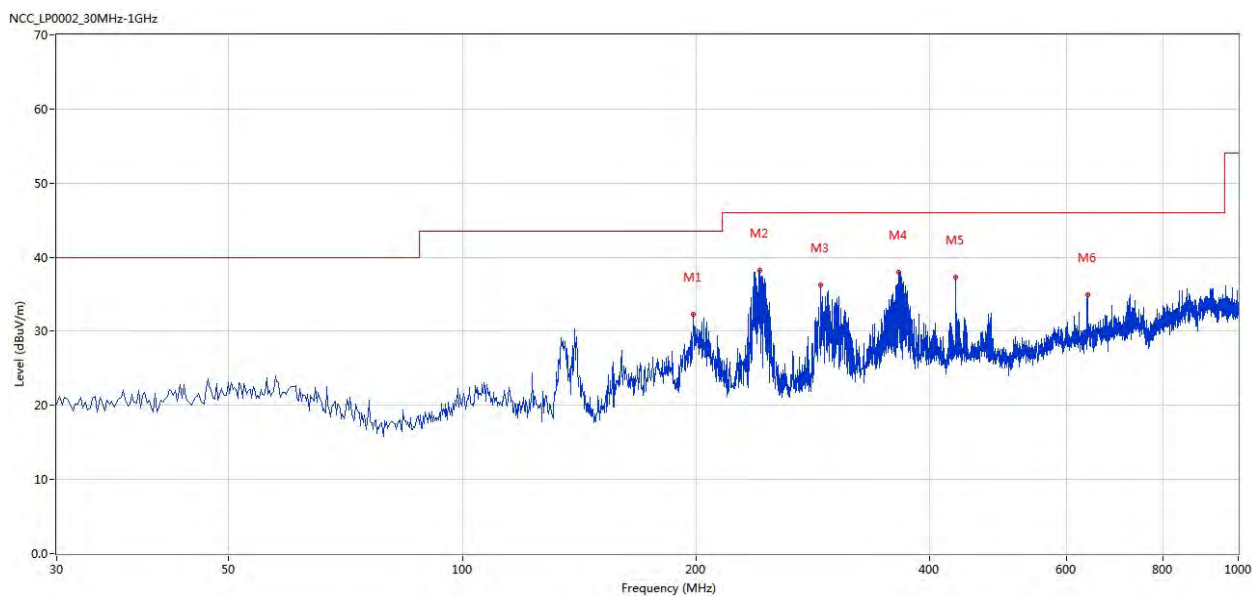

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Verdict
1	198.495	32.34	-10.08	43.5	11.16	Peak	Pass
2	241.892	38.29	-8.90	46.0	7.71	Peak	Pass
3	289.410	36.32	-7.87	46.0	9.68	Peak	Pass
4	365.051	38.01	-4.91	46.0	7.99	Peak	Pass
5	431.965	37.30	-4.30	46.0	8.70	Peak	Pass
6	639.008	34.92	-1.64	46.0	11.08	Peak	Pass

Frequency range (1GHz-25GHz)

All the modulation modes have been tested, and the worst result was report as below:

Frequency (MHz)	Reading Level (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.338	65.84	4.36	32.92	45.53	57.59	74	-16.41	Pk	Vertical
4804.338	44.15	4.36	32.92	45.53	35.90	54	-18.10	AV	Vertical
7206.107	61.49	5.02	37.63	45.56	58.58	74	-15.42	Pk	Horizontal
7206.107	40.08	5.02	37.63	45.56	37.17	54	-16.83	AV	Horizontal
4804.169	63.84	4.36	32.92	45.53	55.59	74	-18.41	Pk	Vertical
4804.169	43.56	4.36	32.92	45.53	35.31	54	-18.69	AV	Vertical
7206.214	62.28	5.02	37.63	45.56	59.37	74	-14.63	Pk	Horizontal
7206.214	41.77	5.02	37.63	45.56	38.86	54	-15.14	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.473	64.63	4.41	33.01	45.76	56.29	74	-17.71	Pk	Vertical
4880.473	44.18	4.41	33.01	45.76	35.84	54	-18.16	AV	Vertical
7320.265	61.58	5.02	37.68	45.59	58.69	74	-15.31	Pk	Horizontal
7320.265	41.10	5.02	37.68	45.59	38.21	54	-15.79	AV	Horizontal
4880.366	64.87	4.41	33.01	45.76	56.53	74	-17.47	Pk	Vertical
4880.366	43.18	4.41	33.01	45.76	34.84	54	-19.16	AV	Vertical
7320.234	61.70	5.02	37.68	45.59	58.81	74	-15.19	Pk	Horizontal
7320.234	42.34	5.02	37.68	45.59	39.45	54	-14.55	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.482	65.18	4.50	33.26	46.07	56.87	74	-17.13	Pk	Vertical
4960.482	42.97	4.50	33.26	46.07	34.66	54	-19.34	AV	Vertical
7440.131	64.38	5.02	37.78	45.77	61.41	74	-12.59	Pk	Horizontal
7440.131	45.13	5.02	37.78	45.77	42.16	54	-11.84	AV	Horizontal
4960.326	62.89	4.50	33.26	46.07	54.58	74	-19.42	Pk	Vertical
4960.326	45.22	4.50	33.26	46.07	36.91	54	-17.09	AV	Vertical
7440.199	64.89	5.02	37.78	45.77	61.92	74	-12.08	Pk	Horizontal
7440.199	44.01	5.02	37.78	45.77	41.04	54	-12.96	AV	Horizontal

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. All the modulation modes have been tested, and only the worst results are reflected in the report.

5.3.5 Radiated Band Edge

2.4G WIFI:

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b									
2310.00	47.08	3.40	27.80	32.41	45.87	74	-28.13	Pk	Horizontal
2310.00	33.95	3.40	27.80	32.41	32.74	54	-21.26	AV	Horizontal
2310.00	45.98	3.40	27.80	32.41	44.77	74	-29.23	Pk	Vertical
2310.00	34.65	3.40	27.80	32.41	33.44	54	-20.56	AV	Vertical
2390.00	45.89	3.45	27.70	32.49	44.55	74	-29.45	Pk	Vertical
2390.00	34.79	3.45	27.70	32.49	33.45	54	-20.55	AV	Vertical
2390.00	46.35	3.45	27.70	32.49	45.01	74	-28.99	Pk	Horizontal
2390.00	35.16	3.45	27.70	32.49	33.82	54	-20.18	AV	Horizontal
2483.50	47.04	3.48	28.53	32.55	46.50	74	-27.50	Pk	Vertical
2483.50	34.96	3.48	28.53	32.55	34.42	54	-19.58	AV	Vertical
2483.50	47.17	3.48	28.53	32.55	46.63	74	-27.37	Pk	Horizontal
2483.50	33.77	3.48	28.53	32.55	33.23	54	-20.77	AV	Horizontal
2500.00	46.04	3.49	29.20	32.66	46.07	74	-27.93	Pk	Vertical
2500.00	34.20	3.49	29.20	32.66	34.23	54	-19.77	AV	Vertical
2500.00	46.11	3.49	29.20	32.66	46.14	74	-27.86	Pk	Horizontal
2500.00	34.23	3.49	29.20	32.66	34.26	54	-19.74	AV	Horizontal
802.11g									
2310.00	45.78	3.40	27.80	32.41	44.57	74	-29.43	Pk	Horizontal
2310.00	33.46	3.40	27.80	32.41	32.25	54	-21.75	AV	Horizontal
2310.00	43.72	3.40	27.80	32.41	42.51	74	-31.49	Pk	Vertical
2310.00	35.31	3.40	27.80	32.41	34.10	54	-19.90	AV	Vertical
2390.00	45.67	3.45	27.70	32.49	44.33	74	-29.67	Pk	Vertical
2390.00	35.76	3.45	27.70	32.49	34.42	54	-19.58	AV	Vertical
2390.00	46.91	3.45	27.70	32.49	45.57	74	-28.43	Pk	Horizontal
2390.00	34.33	3.45	27.70	32.49	32.99	54	-21.01	AV	Horizontal
2483.50	48.72	3.48	28.53	32.55	48.18	74	-25.82	Pk	Vertical
2483.50	34.28	3.48	28.53	32.55	33.74	54	-20.26	AV	Vertical
2483.50	46.94	3.48	28.53	32.55	46.40	74	-27.60	Pk	Horizontal
2483.50	34.15	3.48	28.53	32.55	33.61	54	-20.39	AV	Horizontal
2500.00	45.68	3.49	29.20	32.66	45.71	74	-28.29	Pk	Vertical
2500.00	34.44	3.49	29.20	32.66	34.47	54	-19.53	AV	Vertical
2500.00	45.93	3.49	29.20	32.66	45.96	74	-28.04	Pk	Horizontal
2500.00	33.97	3.49	29.20	32.66	34.00	54	-20.00	AV	Horizontal

802.11n20									
2310.00	47.34	3.40	27.80	32.41	46.13	74	-27.87	Pk	Horizontal
2310.00	34.11	3.40	27.80	32.41	32.90	54	-21.10	AV	Horizontal
2310.00	44.21	3.40	27.80	32.41	43.00	74	-31.00	Pk	Vertical
2310.00	32.97	3.40	27.80	32.41	31.76	54	-22.24	AV	Vertical
2390.00	45.40	3.45	27.70	32.49	44.06	74	-29.94	Pk	Vertical
2390.00	34.73	3.45	27.70	32.49	33.39	54	-20.61	AV	Vertical
2390.00	45.79	3.45	27.70	32.49	44.45	74	-29.55	Pk	Horizontal
2390.00	34.43	3.45	27.70	32.49	33.09	54	-20.91	AV	Horizontal
2483.50	46.74	3.48	28.53	32.55	46.20	74	-27.80	Pk	Vertical
2483.50	33.95	3.48	28.53	32.55	33.41	54	-20.59	AV	Vertical
2483.50	46.21	3.48	28.53	32.55	45.67	74	-28.33	Pk	Horizontal
2483.50	33.54	3.48	28.53	32.55	33.00	54	-21.00	AV	Horizontal
2500.00	45.78	3.49	29.20	32.66	45.81	74	-28.19	Pk	Vertical
2500.00	33.45	3.49	29.20	32.66	33.48	54	-20.52	AV	Vertical
2500.00	45.56	3.49	29.20	32.66	45.59	74	-28.41	Pk	Horizontal
2500.00	33.38	3.49	29.20	32.66	33.41	54	-20.59	AV	Horizontal
802.11n40									
2310.00	46.14	3.40	27.80	32.41	44.93	74	-29.07	Pk	Horizontal
2310.00	33.68	3.40	27.80	32.41	32.47	54	-21.53	AV	Horizontal
2310.00	44.14	3.40	27.80	32.41	42.93	74	-31.07	Pk	Vertical
2310.00	33.38	3.40	27.80	32.41	32.17	54	-21.83	AV	Vertical
2390.00	45.07	3.45	27.70	32.49	43.73	74	-30.27	Pk	Vertical
2390.00	33.51	3.45	27.70	32.49	32.17	54	-21.83	AV	Vertical
2390.00	45.39	3.45	27.70	32.49	44.05	74	-29.95	Pk	Horizontal
2390.00	33.53	3.45	27.70	32.49	32.19	54	-21.81	AV	Horizontal
2483.50	46.89	3.48	28.53	32.55	46.35	74	-27.65	Pk	Vertical
2483.50	33.47	3.48	28.53	32.55	32.93	54	-21.07	AV	Vertical
2483.50	45.45	3.48	28.53	32.55	44.91	74	-29.09	Pk	Horizontal
2483.50	35.15	3.48	28.53	32.55	34.61	54	-19.39	AV	Horizontal
2500.00	45.70	3.49	29.20	32.66	45.73	74	-28.27	Pk	Vertical
2500.00	34.26	3.49	29.20	32.66	34.29	54	-19.71	AV	Vertical
2500.00	44.41	3.49	29.20	32.66	44.44	74	-29.56	Pk	Horizontal
2500.00	32.84	3.49	29.20	32.66	32.87	54	-21.13	AV	Horizontal

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor.
3. All the modulation modes have been tested, and only the worst results are reflected in the report.

BLE:

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
GFSK									
2310.00	46.88	3.40	27.80	32.41	45.67	74	-28.33	Pk	Horizontal
2310.00	33.74	3.40	27.80	32.41	32.53	54	-21.47	AV	Horizontal
2310.00	45.12	3.40	27.80	32.41	43.91	74	-30.09	Pk	Vertical
2310.00	34.45	3.40	27.80	32.41	33.24	54	-20.76	AV	Vertical
2390.00	44.27	3.45	27.70	32.49	42.93	74	-31.07	Pk	Vertical
2390.00	34.45	3.45	27.70	32.49	33.11	54	-20.89	AV	Vertical
2390.00	47.15	3.45	27.70	32.49	45.81	74	-28.19	Pk	Horizontal
2390.00	34.05	3.45	27.70	32.49	32.71	54	-21.29	AV	Horizontal
2483.50	47.09	3.48	28.53	32.55	46.55	74	-27.45	Pk	Vertical
2483.50	35.36	3.48	28.53	32.55	34.82	54	-19.18	AV	Vertical
2483.50	46.80	3.48	28.53	32.55	46.26	74	-27.74	Pk	Horizontal
2483.50	33.93	3.48	28.53	32.55	33.39	54	-20.61	AV	Horizontal
2500.00	45.37	3.49	29.20	32.66	45.40	74	-28.60	Pk	Vertical
2500.00	34.40	3.49	29.20	32.66	34.43	54	-19.57	AV	Vertical
2500.00	45.92	3.49	29.20	32.66	45.95	74	-28.05	Pk	Horizontal
2500.00	34.68	3.49	29.20	32.66	34.71	54	-19.29	AV	Horizontal
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									

5.4 Peak Output Power

5.4.1 Limit

FCC Part15 Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(b)(3)	Peak output power	1 watt or 30dBm	2400-2483.5

5.4.2 Test Procedure

2.4G WIFI : The maximum peak conducted output power may be measured using a broadband peak RF power meter.

The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

BLE:

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.

Measure the conducted output power and record the results in the test report.

5.4.3 Test Setup

2.4G WIFI



BLE:



5.4.4 Test Results

2.4 WIFI

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Test Mode:	CH01 / CH06 /CH11	Test Voltage:	DC 3.7V from battery

802.11b

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH01	2412	12.56	30
CH06	2437	12.67	30
CH11	2462	12.43	30

802.11g

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH01	2412	12.23	30
CH06	2437	11.46	30
CH11	2462	11.32	30

802.11n20

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH01	2412	10.65	30
CH06	2437	10.86	30
CH11	2462	10.57	30


802.11n40

Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power(dBm)	Limit (dBm)
CH03	2422	9.54	30
CH06	2437	9.76	30
CH09	2452	9.35	30

BLE

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Test Mode:	GFSK	Test Voltage:	DC 3.7V from battery

BLE 1M			
Test Channel	Frequency (MHz)	Maximum Peak Output Power(dBm)	Limit (dBm)
CH00	2402	0.805	30
CH19	2440	1.184	30
CH39	2480	1.179	30

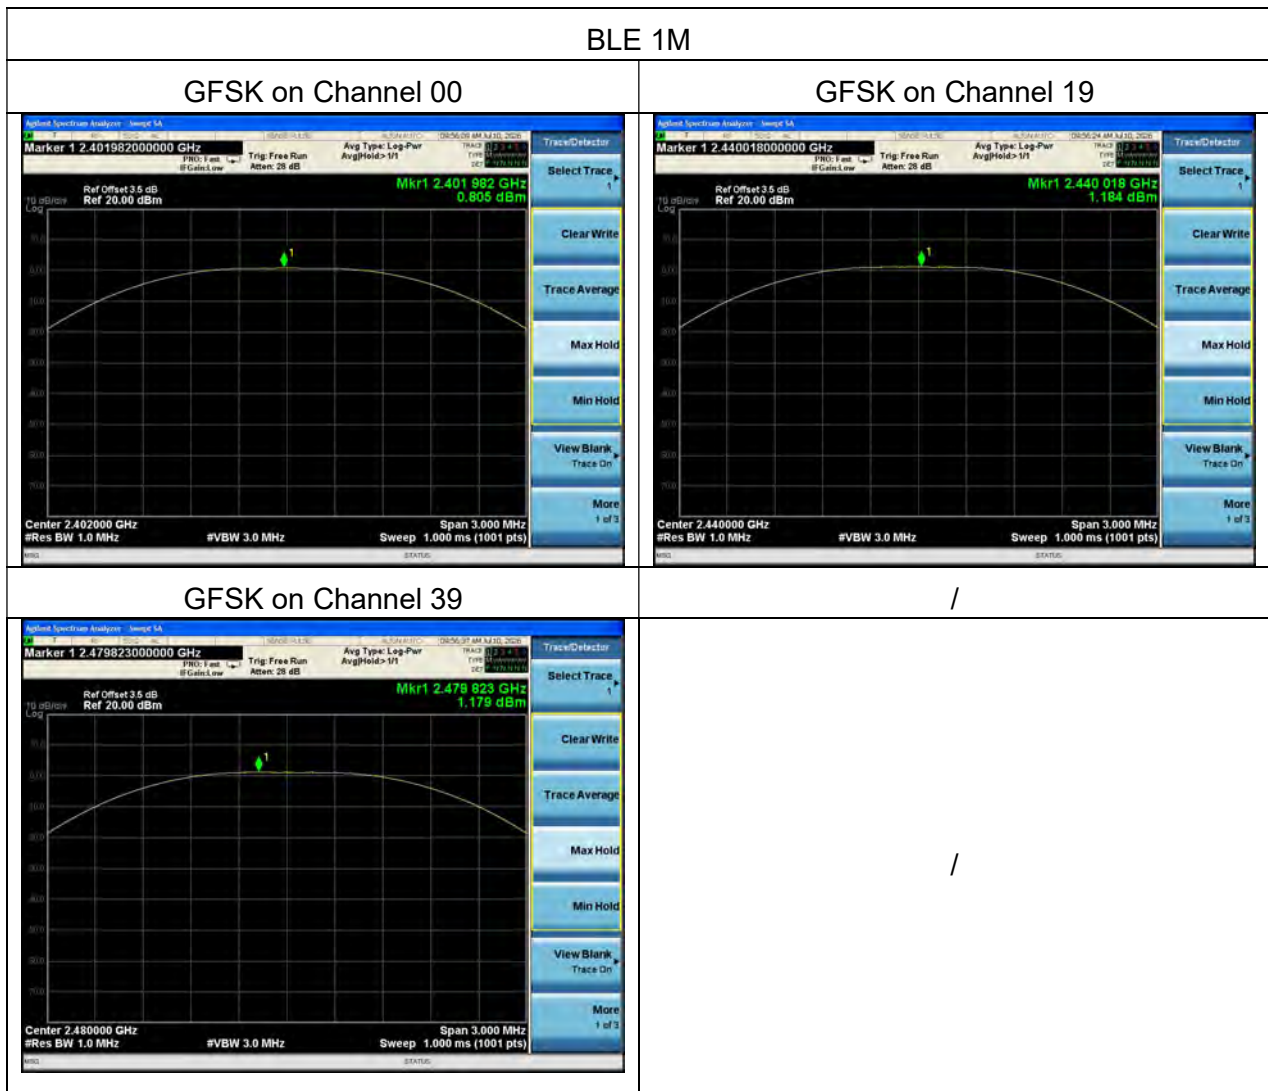

5.5 Power Spectral Density


5.5.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5

5.5.2 Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.5.3 Test Setup




5.5.4 Test Results


802.11b			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-10.143	8	Pass
2437 MHz	-10.055	8	Pass
2462 MHz	-10.649	8	Pass




802.11g			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-13.677	8	Pass
2437 MHz	-13.967	8	Pass
2462 MHz	-14.305	8	Pass

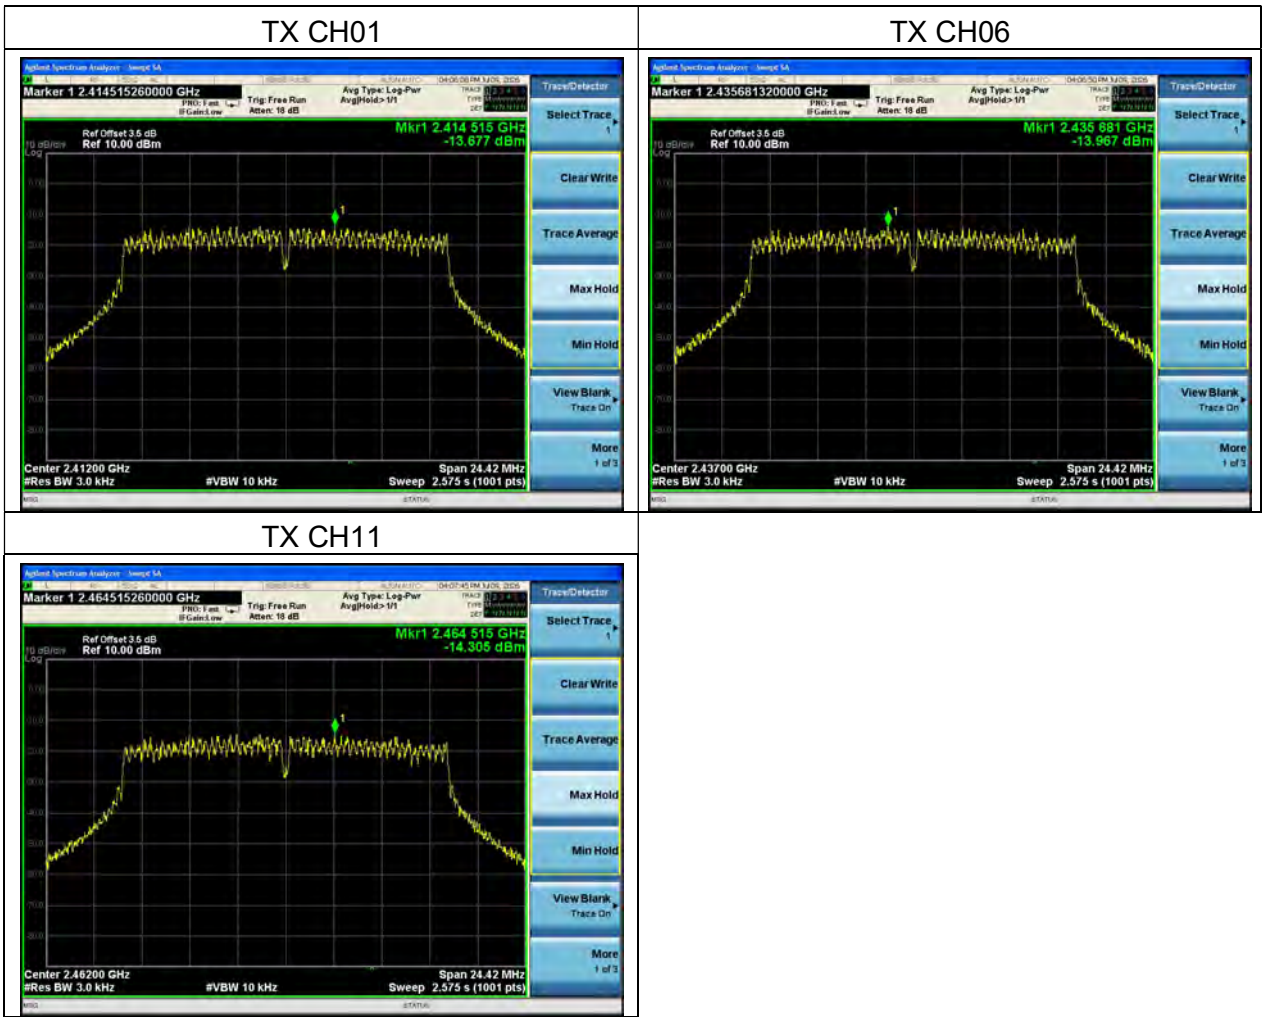


802.11n20			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-13.671	8	Pass
2437 MHz	-13.888	8	Pass
2462 MHz	-14.397	8	Pass

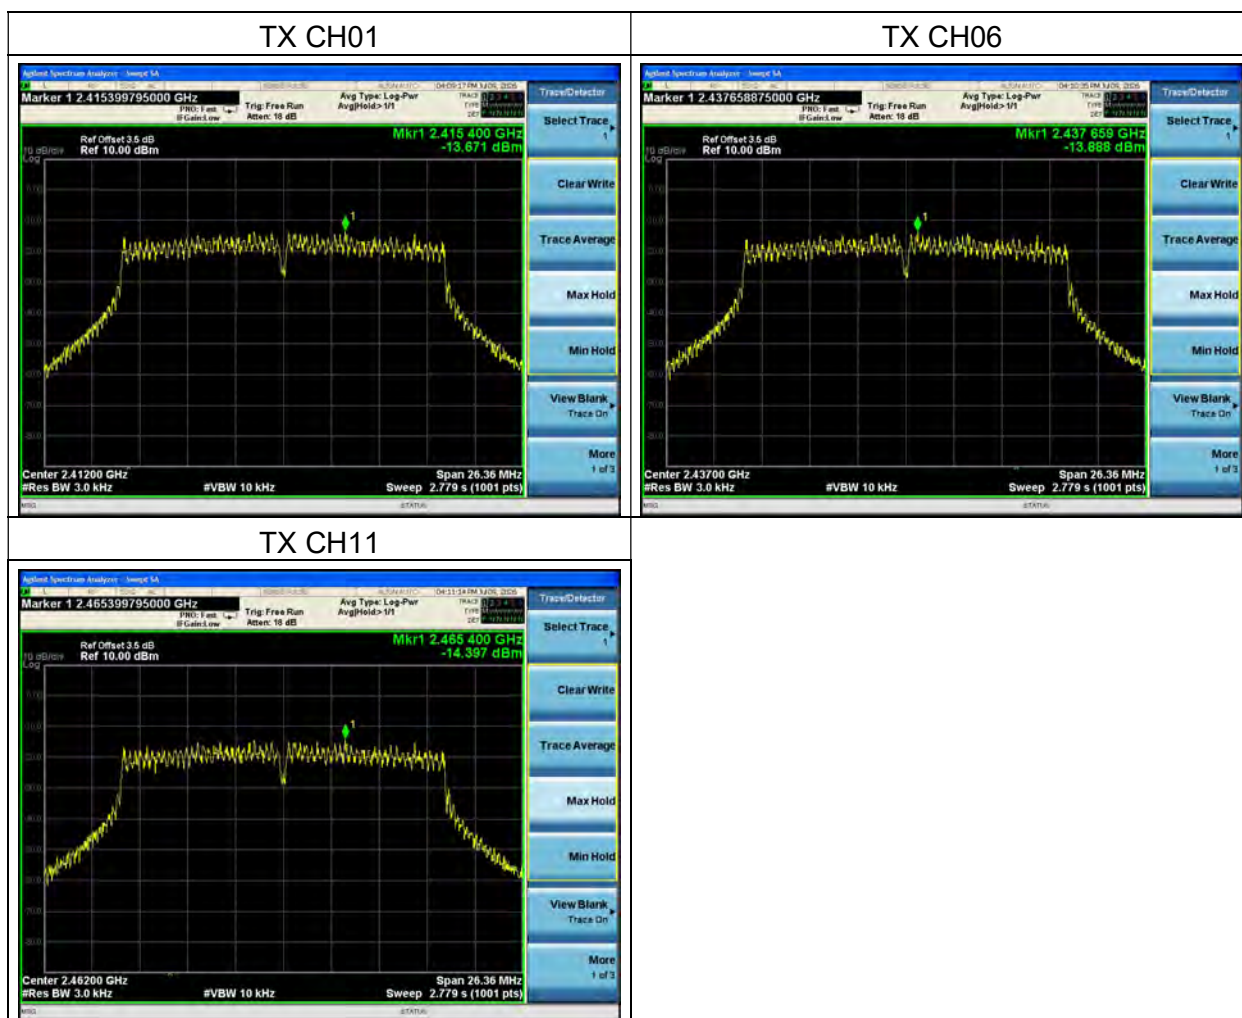

802.11n40			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-15.244	8	Pass
2437 MHz	-16.947	8	Pass
2452 MHz	-17.304	8	Pass

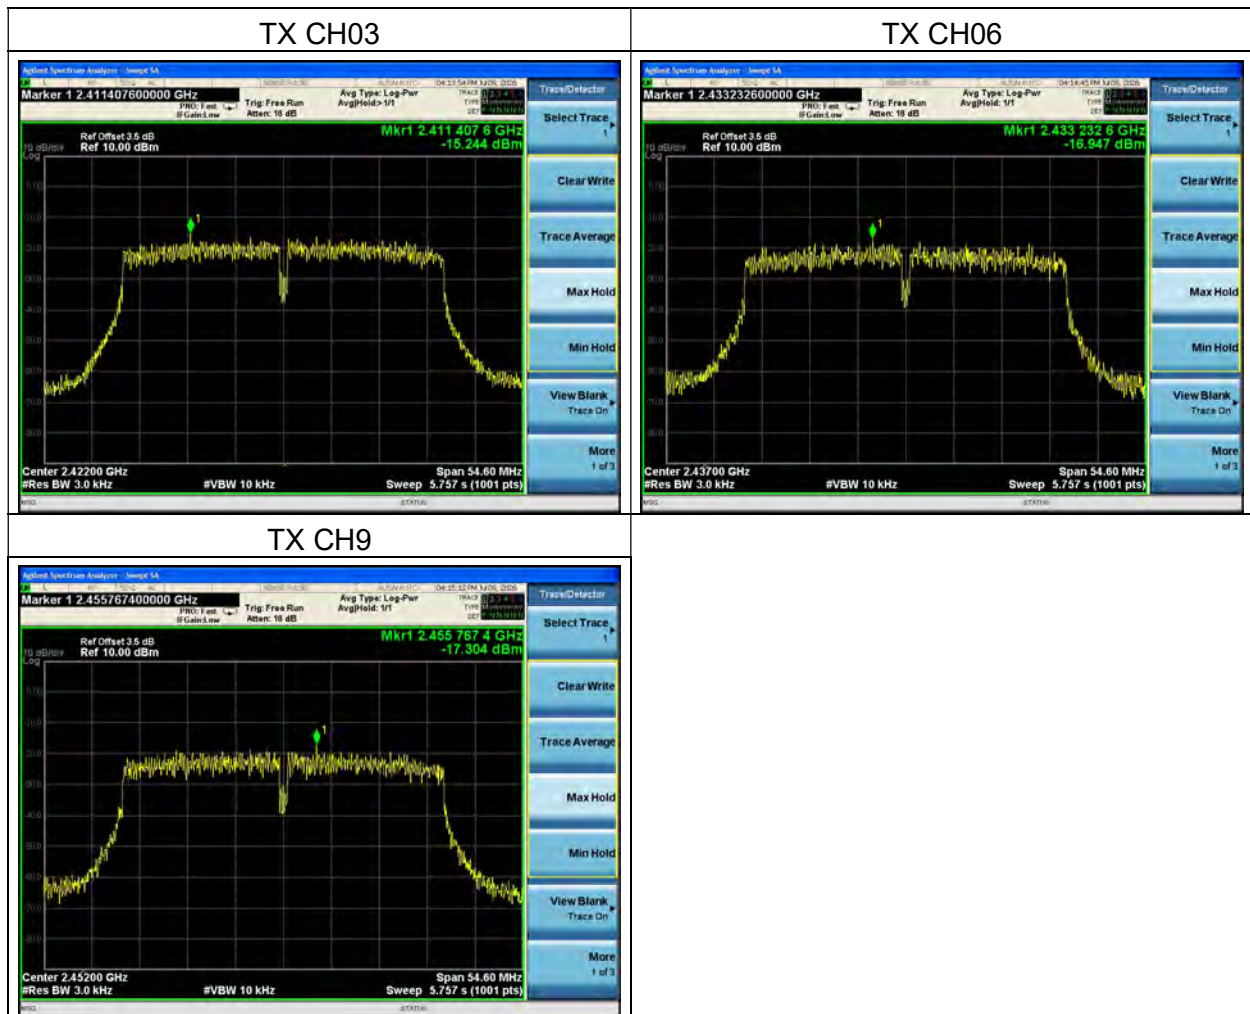

BLE 1M			
Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-9.454	8	Pass
2440 MHz	-9.996	8	Pass
2480 MHz	-9.669	8	Pass

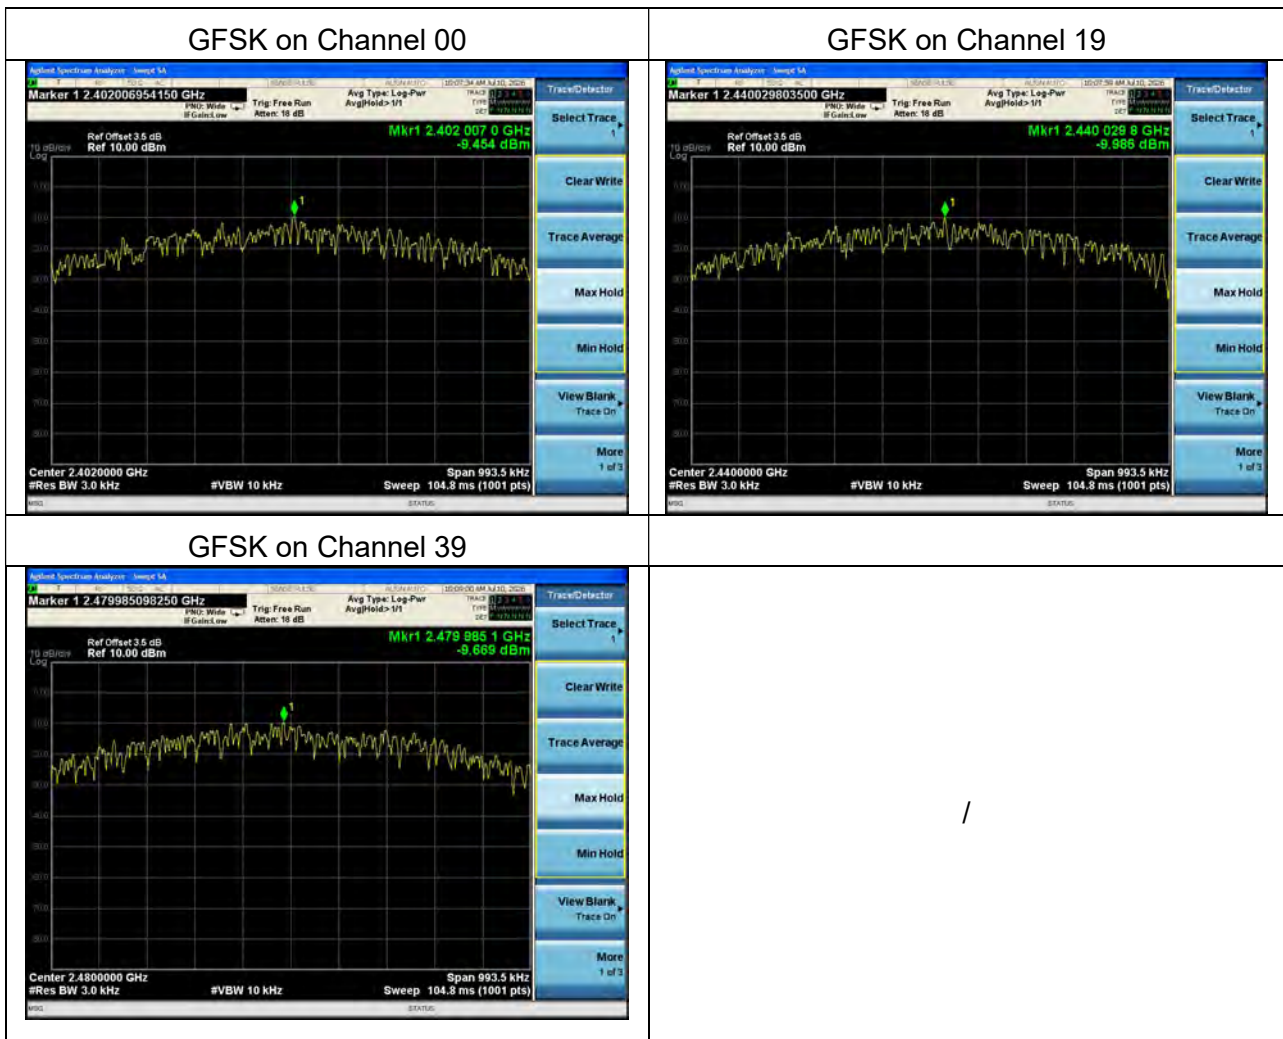

5.6 6dB Bandwidth


5.6.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5

5.6.2 Test Procedure

1. Set RBW= shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = No faster than coupled (auto) time.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6.3 Test Setup




5.6.4 Test Results

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
CH01	2412	10.30	500	Pass
CH06	2437	10.30	500	Pass
CH11	2462	10.30	500	Pass

Test plots

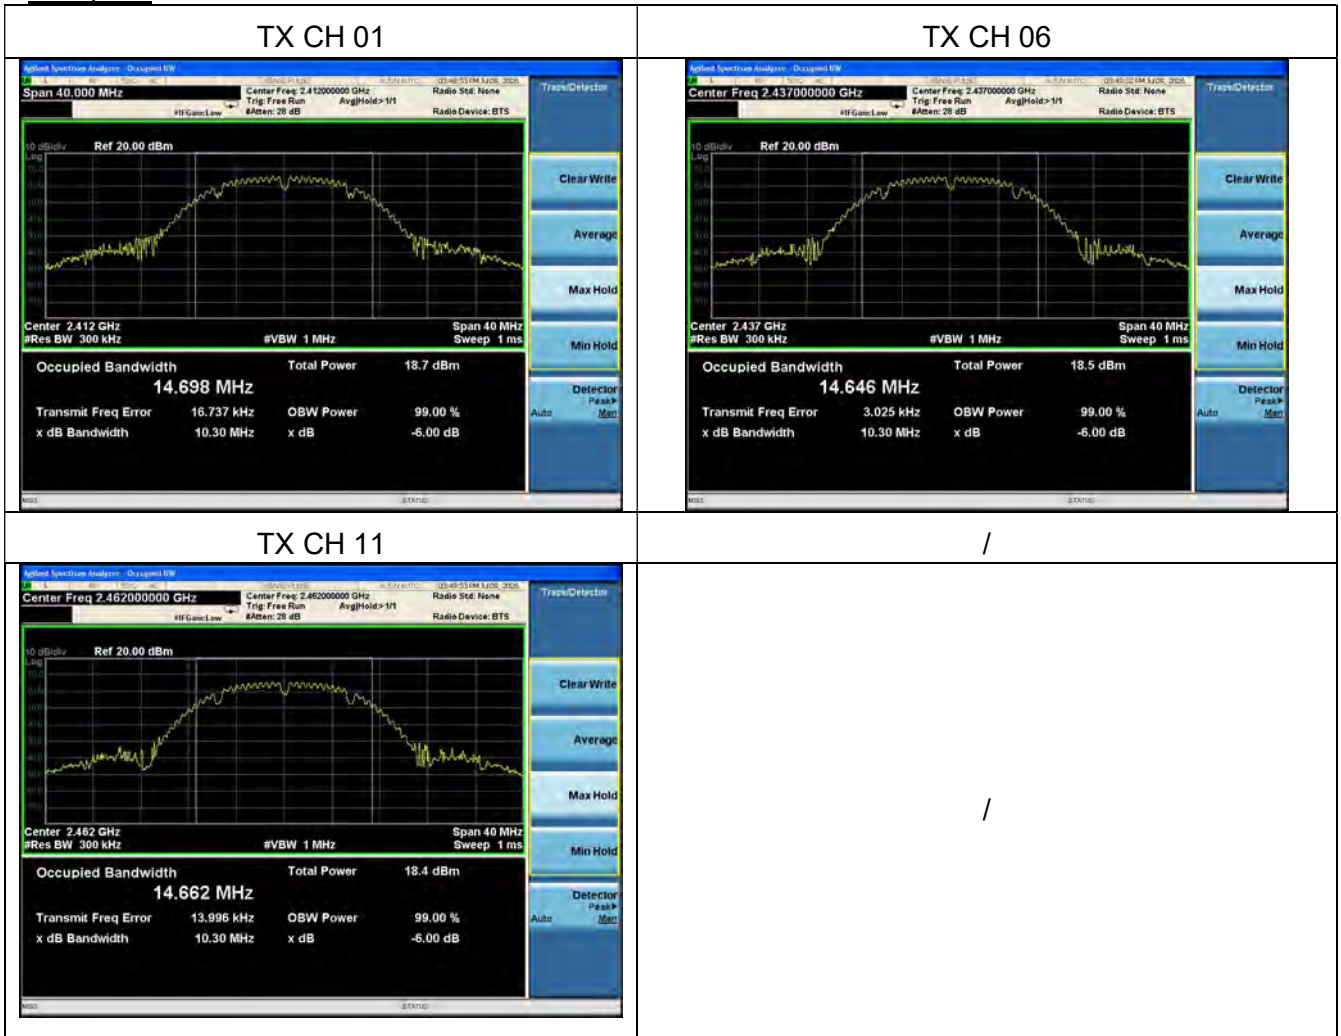

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
CH01	2412	16.28	500	Pass
CH06	2437	16.23	500	Pass
CH11	2462	16.25	500	Pass

Test plots

TX CH 01 	TX CH 06 
TX CH 11 	/

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	TX n20 Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
CH01	2412	17.56	500	Pass
CH06	2437	17.57	500	Pass
CH11	2462	17.51	500	Pass


Test plots

TX CH 01  Center Freq 2.412000000 GHz Center Freq 2.412000000 GHz Trig: Free Run AvgHold: 1/1 Radio Std: None Radio Device: BTS Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.721 MHz Total Power 18.4 dBm Transmit Freq Error 15.656 kHz OBW Power 99.00 % x dB Bandwidth 17.56 MHz x dB -6.00 dB	TX CH 06  Center Freq 2.437000000 GHz Center Freq 2.437000000 GHz Trig: Free Run AvgHold: 1/1 Radio Std: None Radio Device: BTS Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.734 MHz Total Power 18.4 dBm Transmit Freq Error 3.280 kHz OBW Power 99.00 % x dB Bandwidth 17.57 MHz x dB -6.00 dB
TX CH 11  Center Freq 2.462000000 GHz Center Freq 2.462000000 GHz Trig: Free Run AvgHold: 1/1 Radio Std: None Radio Device: BTS Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.684 MHz Total Power 18.5 dBm Transmit Freq Error 17.160 kHz OBW Power 99.00 % x dB Bandwidth 17.51 MHz x dB -6.00 dB	/

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	TX n40 Mode /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
CH03	2422	36.36	500	Pass
CH06	2437	36.34	500	Pass
CH09	2452	36.40	500	Pass

Test plots

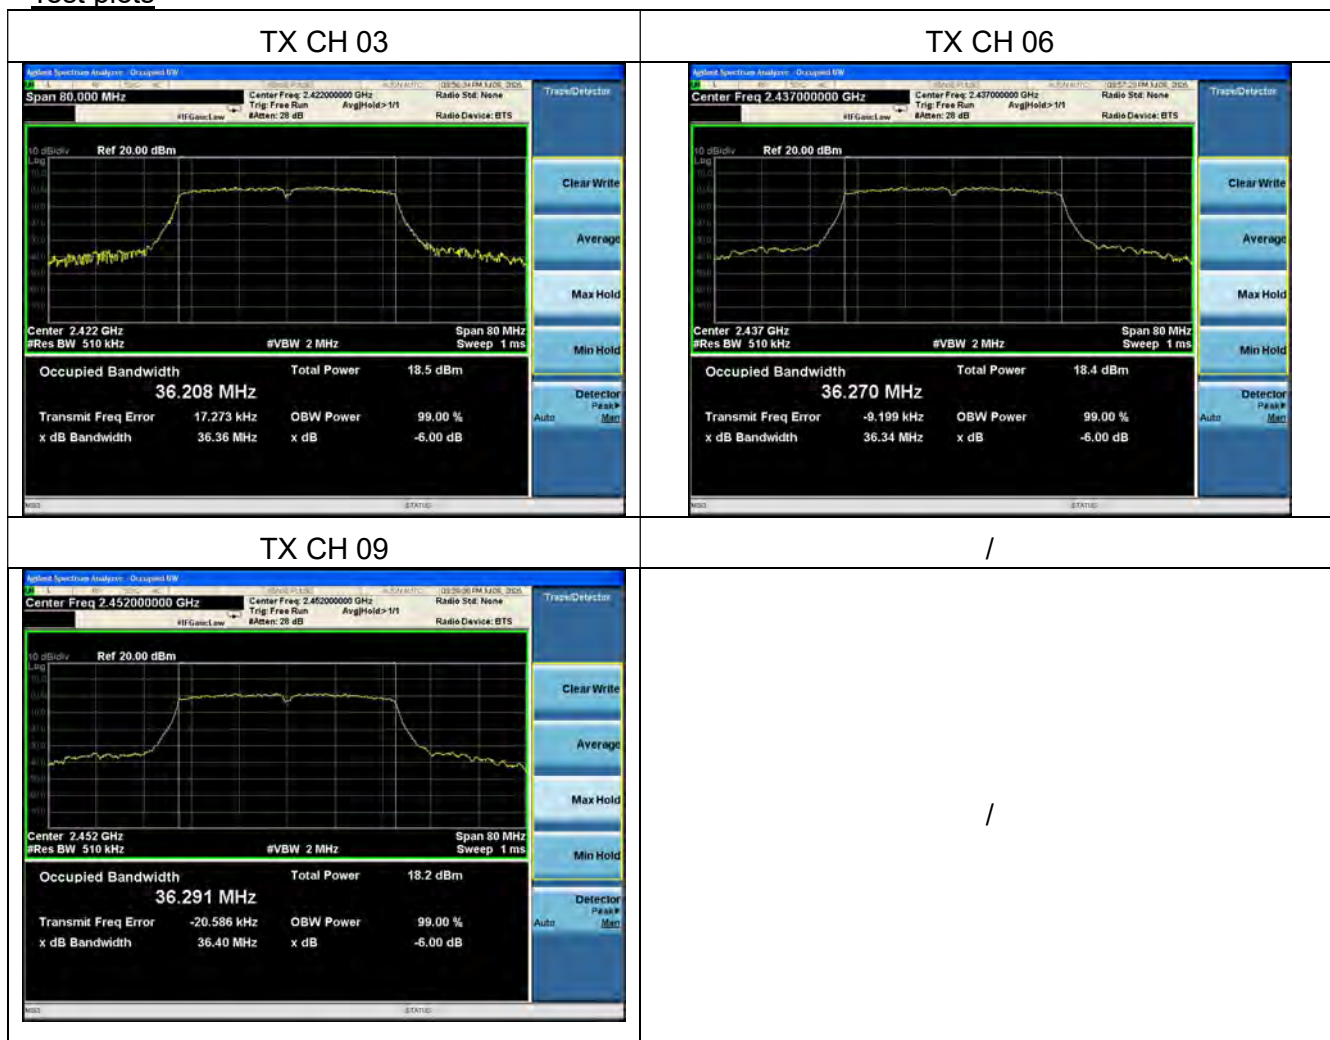

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	GFSK		

BLE 1M				
Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2402	662.3	500	Pass
Middle	2440	660.0	500	Pass
High	2480	656.6	500	Pass

Test plots

GFSK on Channel 00	GFSK on Channel 19
 Center Freq 2.402000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.0442 MHz Total Power 11.0 dBm Transmit Freq Error 11.062 kHz x dB Bandwidth 662.3 kHz OBW Power 99.00 % x dB -6.00 dB	 Center Freq 2.440000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.0422 MHz Total Power 11.4 dBm Transmit Freq Error 10.542 kHz x dB Bandwidth 660.0 kHz OBW Power 99.00 % x dB -6.00 dB
GFSK on Channel 39	
 Center Freq 2.480000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms Occupied Bandwidth 1.0416 MHz Total Power 11.6 dBm Transmit Freq Error 9.883 kHz x dB Bandwidth 656.6 kHz OBW Power 99.00 % x dB -6.00 dB	/

5.7 Duty Cycle

5.7.1 Limit

No limit requirement.

5.7.2 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0(b) in KDB 558074 D01 DTS Meas Guidance v05r02.

The largest available value of RBW is 10 MHz and VBW is 10 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 10MHz (the largest available value)

VBW = 10MHz ($\geq$ RBW)

Number of points in Sweep > 100


Detector function = peak

Trace = Clear write

Measure Total and Ton

Calculate Duty Cycle = $Ton / Total$

5.7.3 Test Setup




5.7.4 Test Results

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	TX b/g/n(20) Mode / CH01 TX n(40) Mode / CH03		


Mode	Data rate	Channel	T _{on} (msec)	T _{total} (msec)	Duty Cycle	Duty Cycle Factor (dB)	1/B Minimum VBW (kHz)
802.11b	1Mbps	01	8.22	8.7	94.48%	0.246	0.12
802.11g	6Mbps	01	1.332	1.866	71.38%	1.464	0.75
802.11n HT20	MCS0	01	1.242	1.776	69.93%	1.553	0.81
802.11n HT40	MCS0	03	0.584	1.136	51.41%	2.890	1.71

Test plots


802.11b

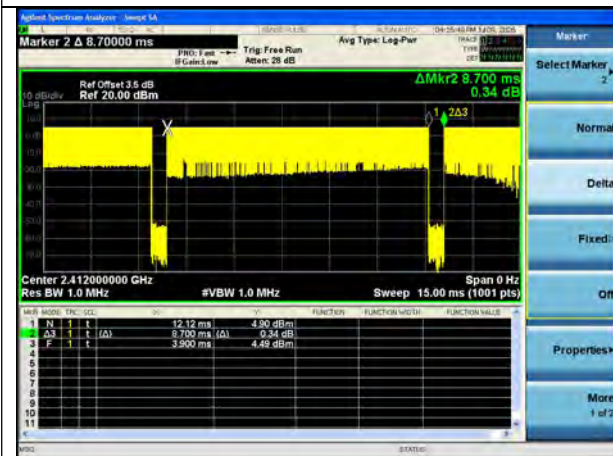


802.11g

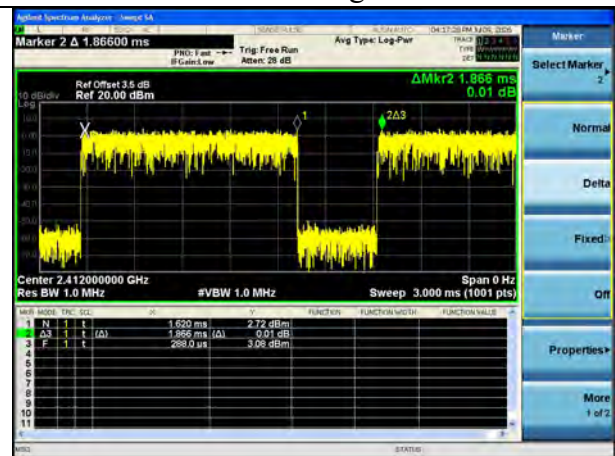

802.11n20(MHz)

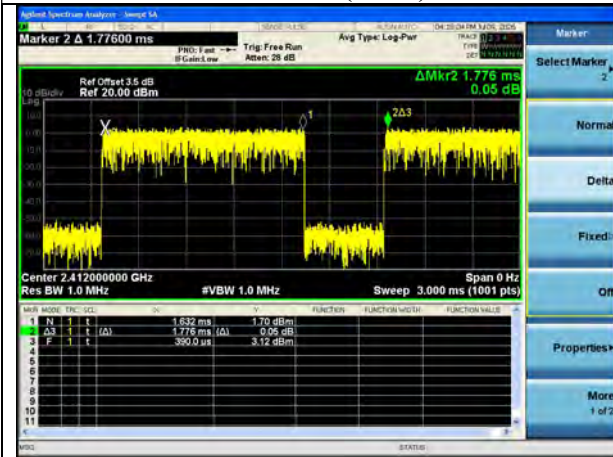


802.11n40(MHz)

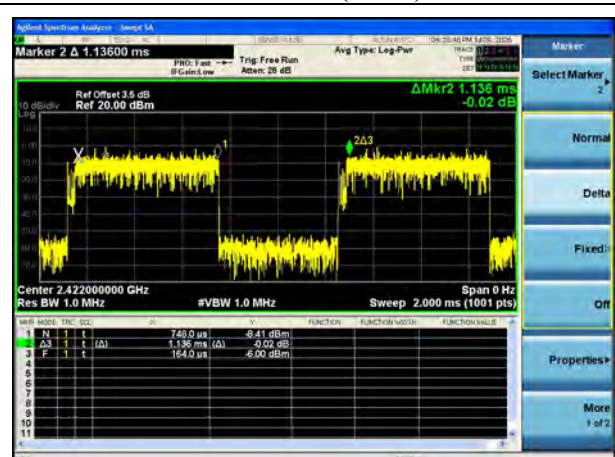

EUT:	Wireless Touchscreen Car Stereo	Model Name:	ZZKJ-T113-i
Pressure:	1012 hPa	Test Voltage:	DC 3.7V from battery
Test Mode:	GFSK		

Mode	Data rate	Channel	T _{on} (msec)	T _{total} (msec)	Duty Cycle	Duty Cycle Factor (dB)	1/B Minimum VBW (kHz)
BLE	1Mbps	00	0.207	0.626	33.07%	4.806	4.83

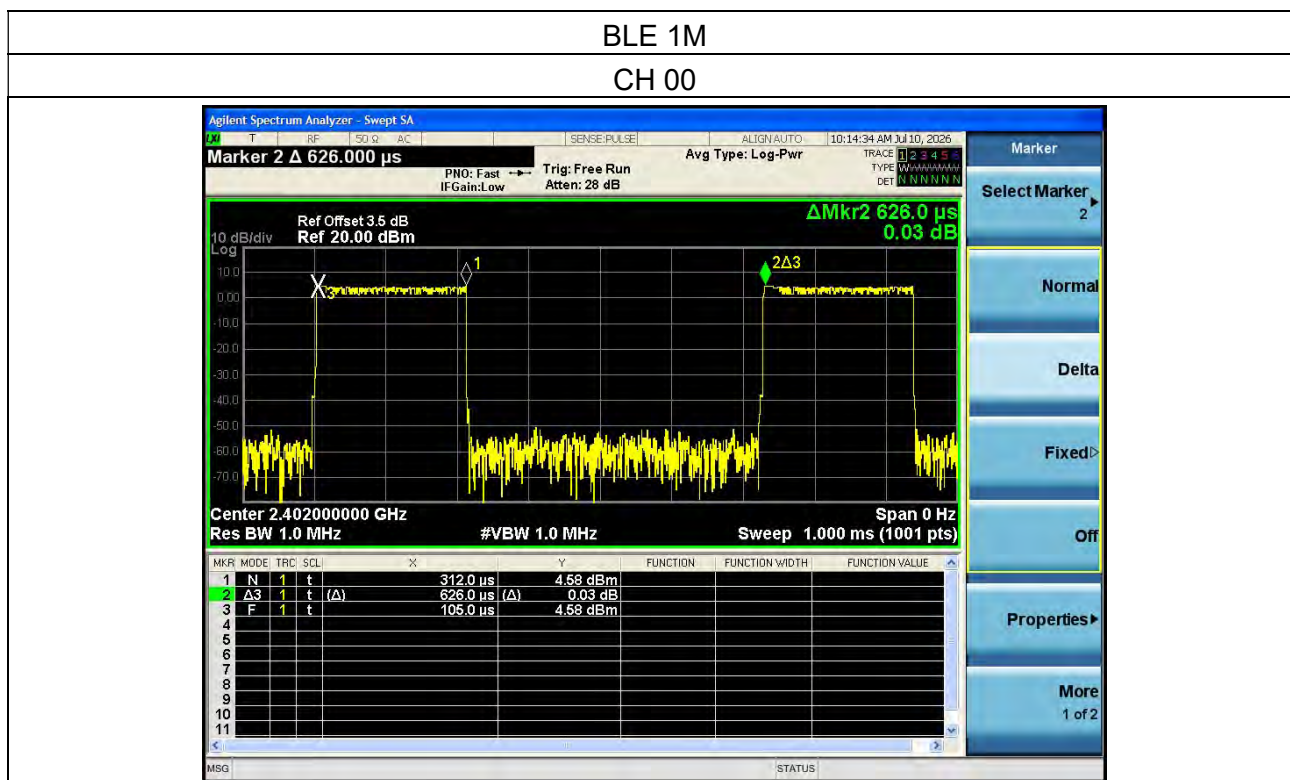

5.8 Conducted Band Edge


5.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

5.8.3 Test Setup



5.8.4 Test Results

802.11b: Band Edge, Left Side



802.11b: Band Edge, Right Side




802.11g: Band Edge, Left Side



802.11g: Band Edge, Right Side



802.11n20: Band Edge, Left Side

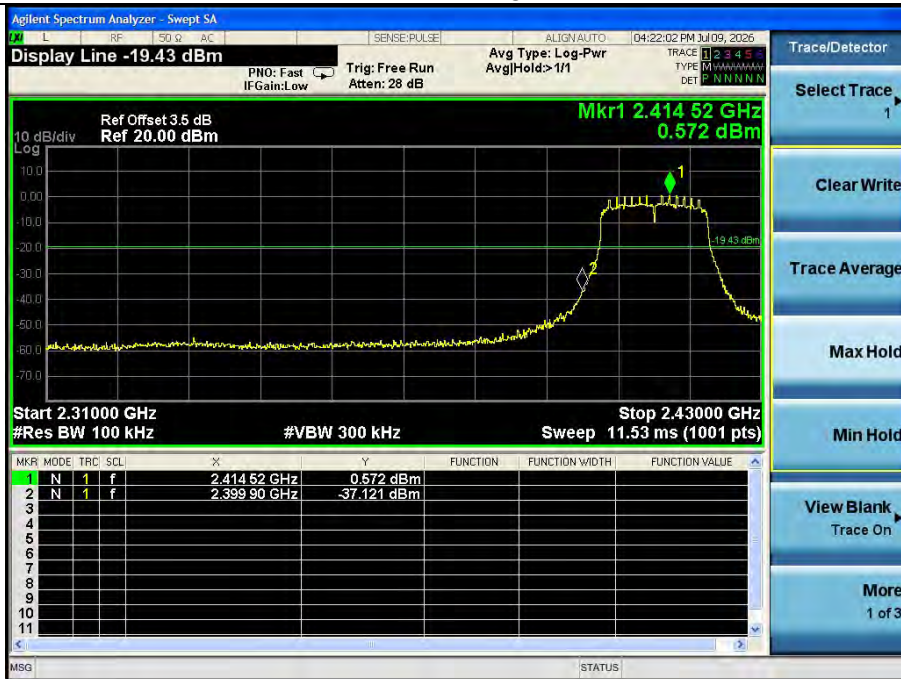

802.11n20: Band Edge, Right Side




802.11n40: Band Edge, Left Side




802.11n40: Band Edge, Right Side



BLE 1M: Band Edge, Left Side

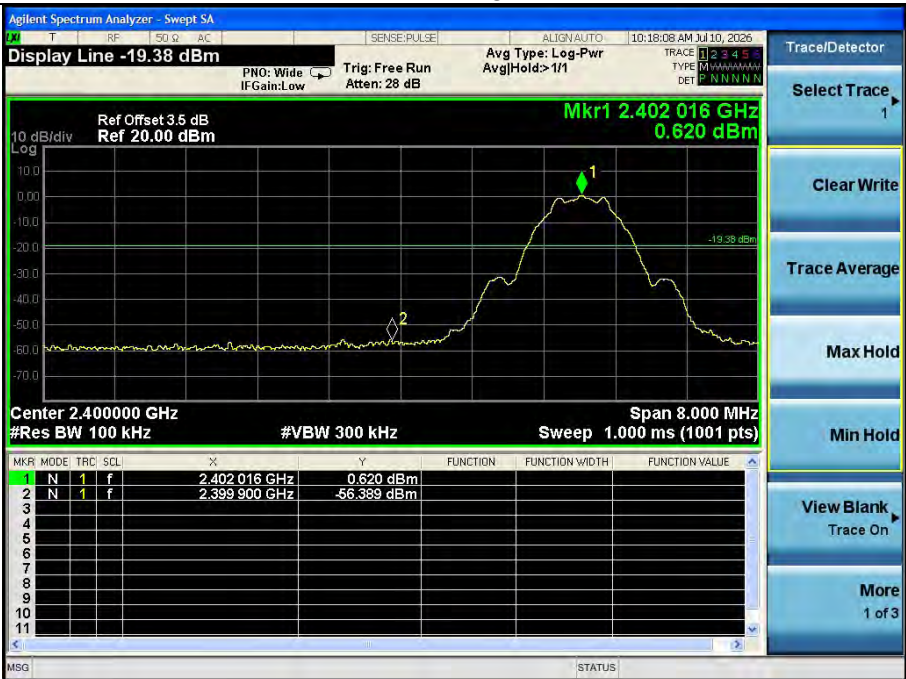

BLE 1M: Band Edge, Right Side

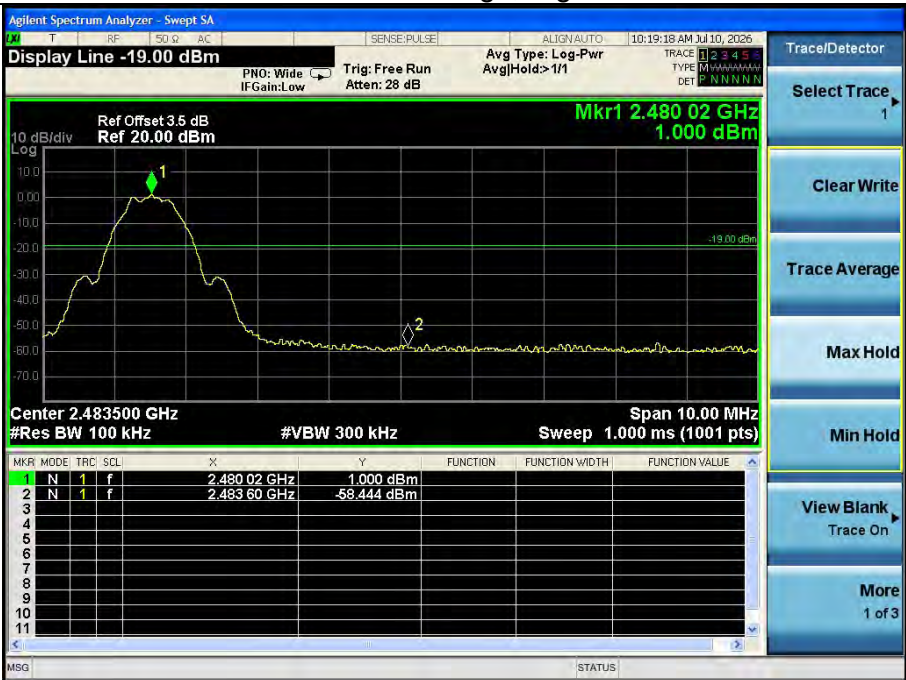

5.9 Spurious RF Conducted Emissions

5.9.1 Limit

Below -20dB of the highest emission level in operating band.


5.9.2 Measuring Instruments

The Measuring equipment is listed in the section 4 of this test report.

5.9.3 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2020 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW=300kHz to measure the peak field strength, and measure frequency range from 9kHz to 26.5GHz.

5.9.4 Test Setup



5.9.5 Test Results


Note:

1: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency; The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

802.11b on Channel 01




802.11b on Channel 01

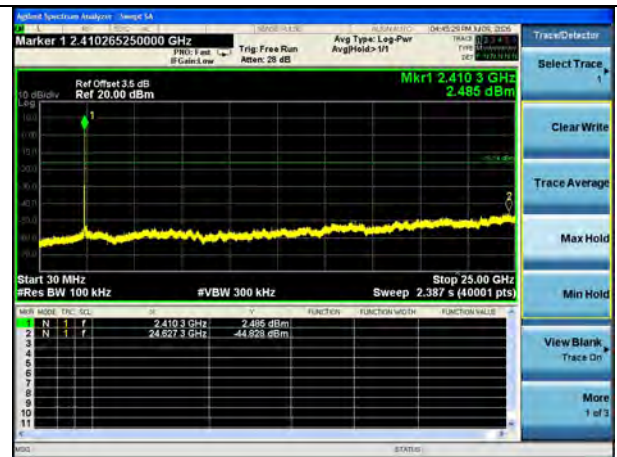

802.11b on Channel 06




802.11b on Channel 06

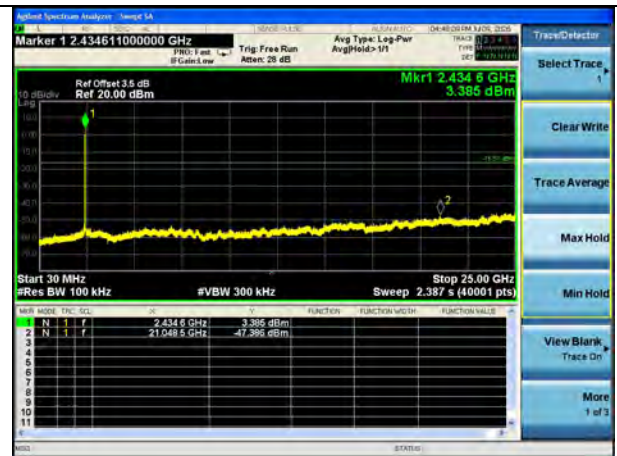

802.11b on Channel 11




802.11b on Channel 11

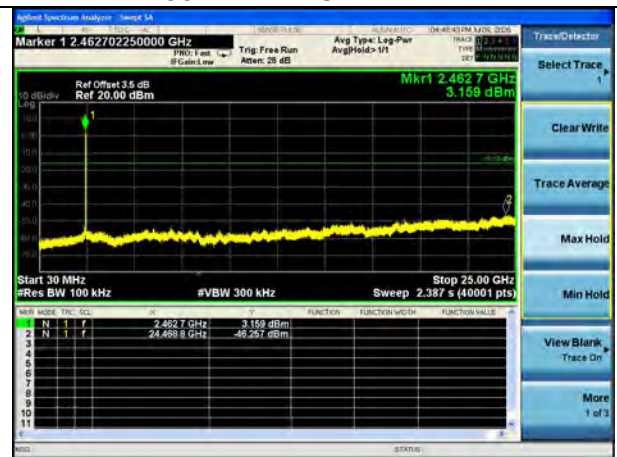

802.11g on Channel 01




802.11g on Channel 01

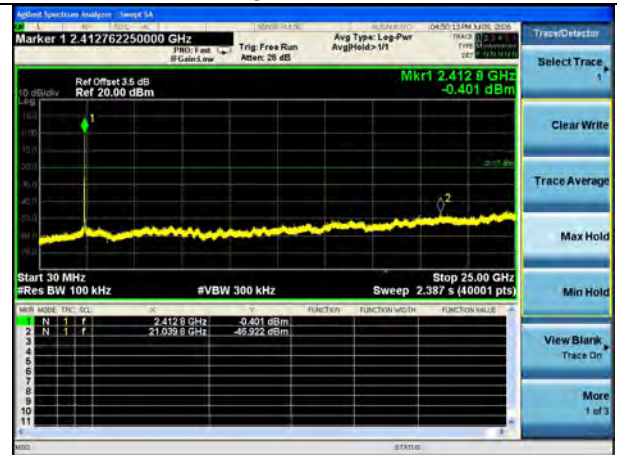

802.11g on Channel 06




802.11g on Channel 06

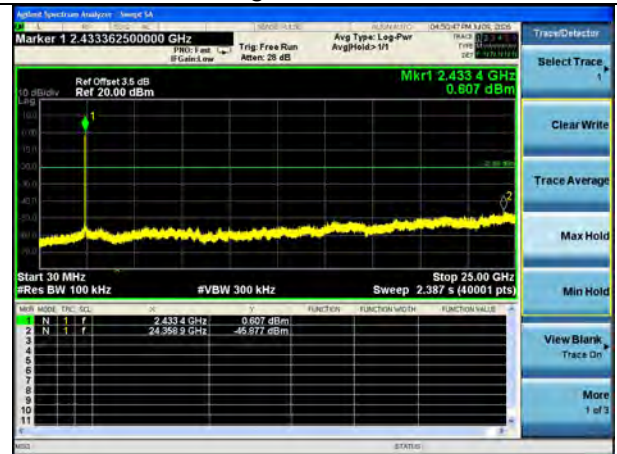

802.11g on Channel 11




802.11g on Channel 11

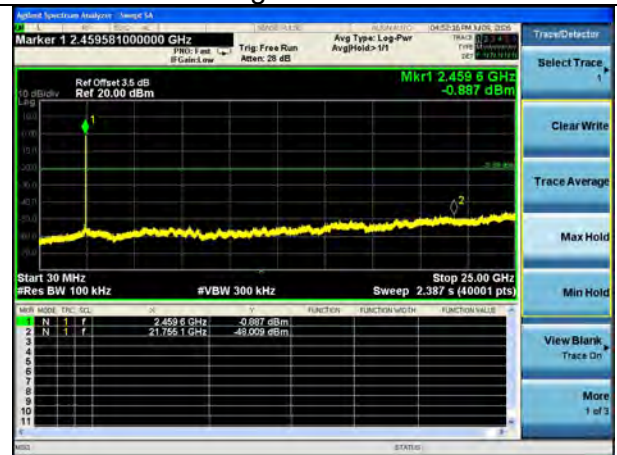

802.11 n20 on Channel 01




802.11 n20 on Channel 01

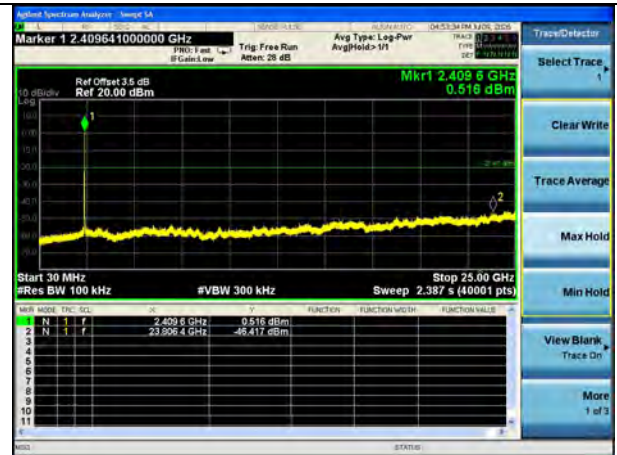

802.11 n20 on Channel 06




802.11 n20 on Channel 06

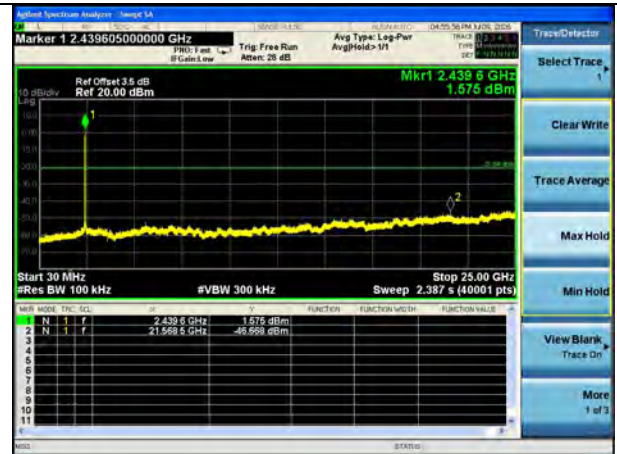

802.11n20 on Channel 11




802.11 n20 on Channel 11

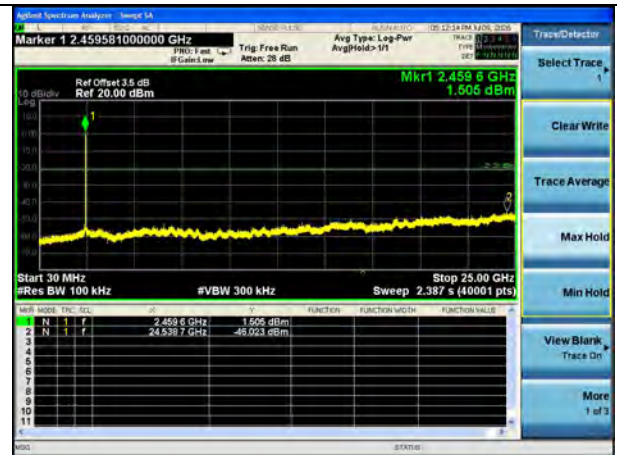

802.11 n40 on Channel 03




802.11 n40 on Channel 03

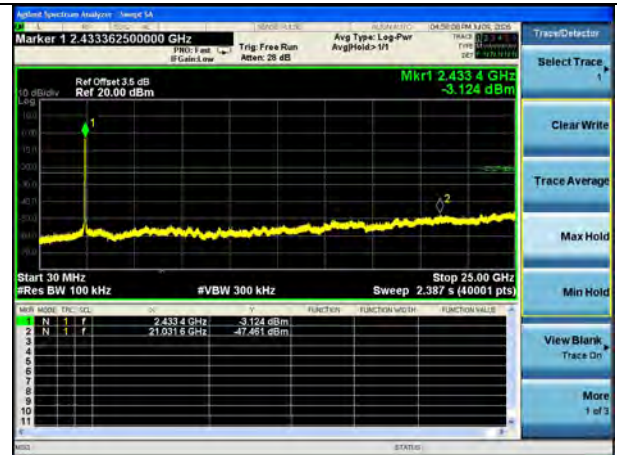

802.11 n40 on Channel 06




802.11 n40 on Channel 06

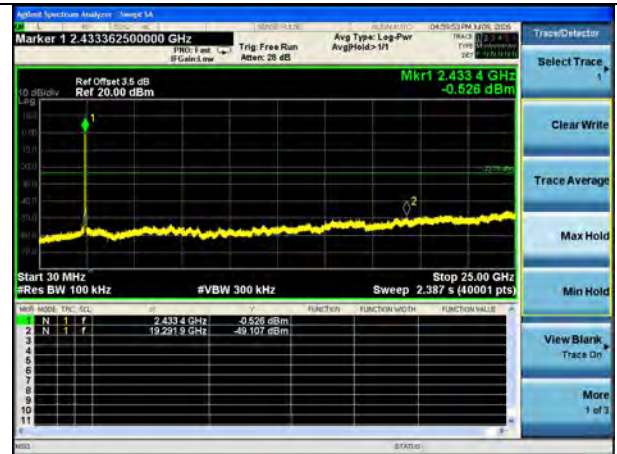

802.11n40 on Channel 09



802.11n40 on Channel 09

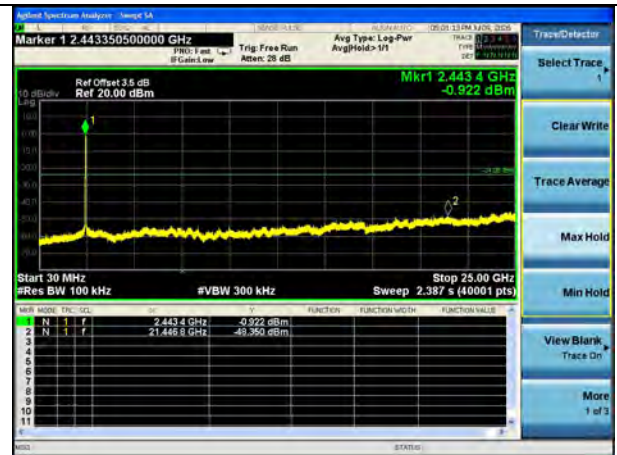


BLE 1M

GFSK on Channel 00




GFSK on Channel 00

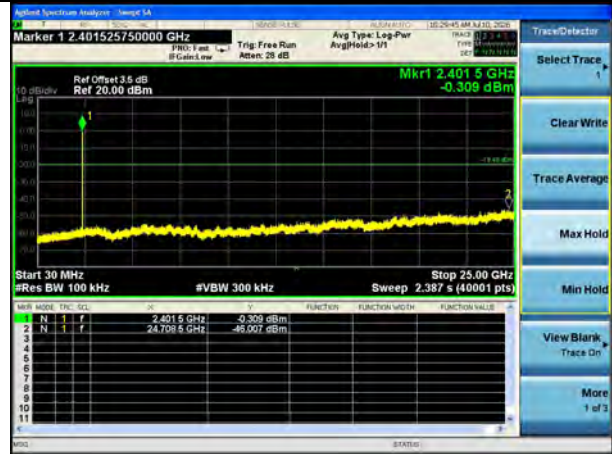

GFSK on Channel 19




GFSK on Channel 19

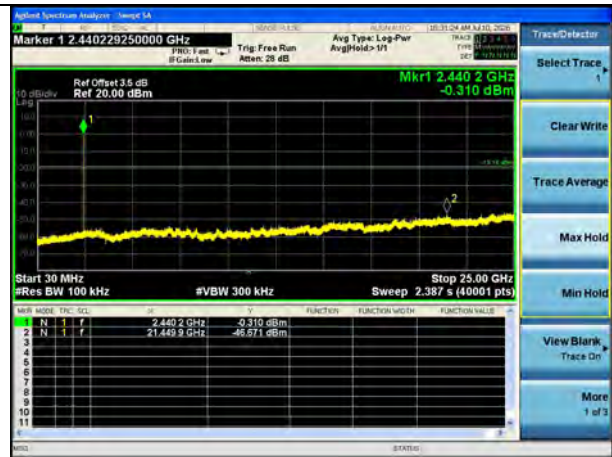

GFSK on Channel 39




GFSK on Channel 39

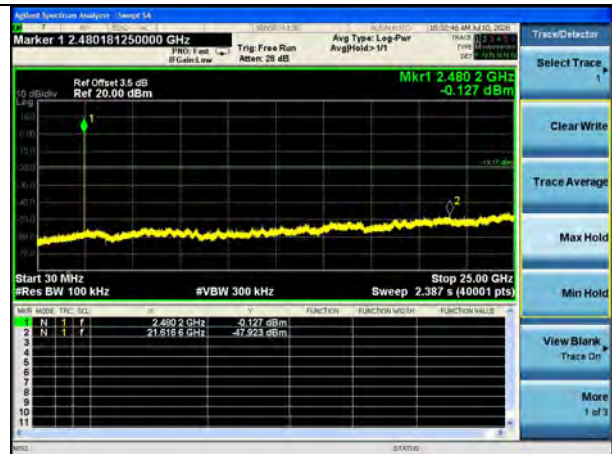

6 Photographs of the Test Setup

Radiated Emission Below 1GHz

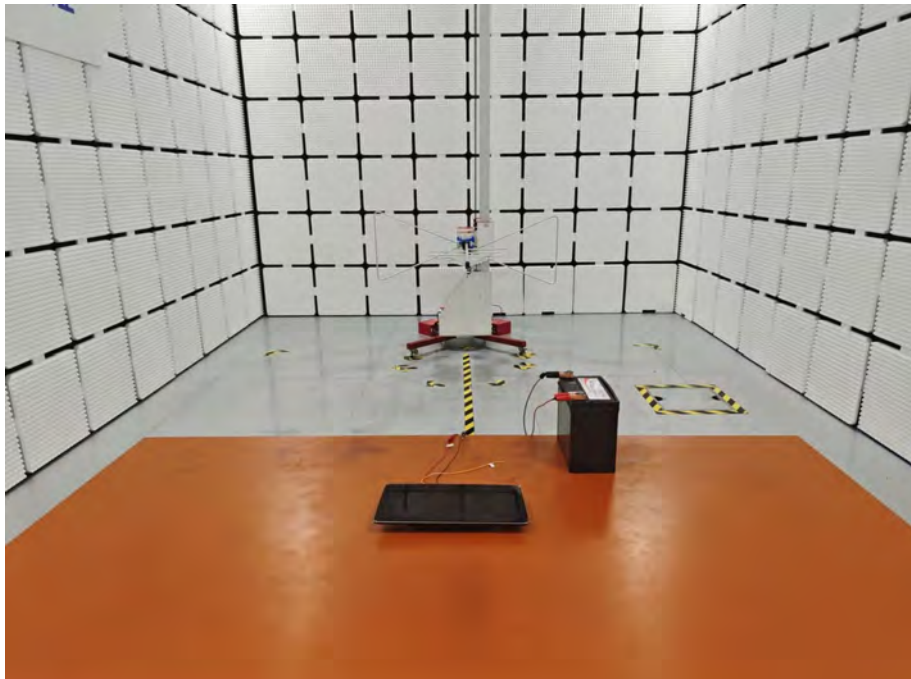

Radiated Emission Above 1GHz



***** END OF REPORT *****