



RF TEST REPORT

Product Name: Airplane

Model Number: X11, X81, X82, X83, X85, X86, X87, X88, X90, X91

FCC ID: 2BX5P-X11

Issued For : Shantou Zhizhixia Technology Co., Ltd.
3rd Floor, No. 10, Lane 2, Ganggang Gongqian Road,
Fengxiang Street, Chenghai District, Shantou City,
Guangdong Province, China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial
Park, No.177, Renmin West Road, Jinsha, Kengzi Street,
Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT26I208RF01

Sample Received Date: Sep. 28, 2026

Date of Test: Sep. 28, 2026 ~ Oct. 09, 2026

Date of Issue: Oct. 09, 2026

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Shantou Zhizhixia Technology Co., Ltd.
Address: 3rd Floor, No. 10, Lane 2, Ganggang Gongqian Road, Fengxiang Street, Chenghai District, Shantou City, Guangdong Province, China
Manufacturer: Shantou Zhizhixia Technology Co., Ltd.
Address: 3rd Floor, No. 10, Lane 2, Ganggang Gongqian Road, Fengxiang Street, Chenghai District, Shantou City, Guangdong Province, China
Product Name: Airplane
Trademark: N/A
Model Number: X11, X81, X82, X83, X85, X86, X87, X88, X90, X91
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.249, Subpart C ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS

Prepared by:

chris chen

Chris Chen
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.5 EQUIPMENTS LIST	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 TEST RESULTS	13
4. RADIATED EMISSION MEASUREMENT	14
4.1 RADIATED EMISSION LIMITS	14
4.2 TEST PROCEDURE	15
4.3 TEST SETUP	16
4.4 FIELD STRENGTH CALCULATION	17
4.5 TEST RESULTS	18
4.6 TEST RESULTS (BAND EDGE REQUIREMENTS)	23
4.7 TEST RESULTS (FIELD STRENGTH OF FUNDAMENTAL)	23
5. BANDWIDTH TEST	24
5.1 TEST PROCEDURE	24
5.2 TEST SETUP	24
5.3 EUT OPERATION CONDITIONS	24
5.4 TEST RESULTS	24
6. ANTENNA REQUIREMENT	26
6.1 STANDARD REQUIREMENT	26
6.2 EUT ANTENNA	26
APPENDIX I - MEASUREMENT PHOTOS	27



Revision History

Rev.	Issue Date	Revisions
00	Oct. 09, 2026	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.249(a)	Field Strength of Fundamental & Harmonics	PASS	--
15.249(d)	Radiated Spurious Emission (band-edge & out-of-band)	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
15.215	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	All Emissions, Radiated (18GHz-40GHz)	$\pm 4.31\text{dB}$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Airplane	
Test Model Number:	X11	
Series Number:	X81, X82, X83, X85, X86, X87, X88, X90, X91	
Model Difference:	Only the model name is different.	
Product Description:	Operation Frequency:	2410~2470 MHz
	Modulation Type:	GFSK
	Number Of Channel:	61CH
	Antenna Type:	Monopole Antenna
	Antenna Gain (dBi):	0.17
Battery:	Rated Voltage: 1.5V*3 AAA	
Hardware Version:	V1.0	
Software Version:	V1.0	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report.



3.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2410	21	2431	42	2452
1	2411	22	2432	43	2453
2	2412	23	2433	44	2454
3	2413	24	2434	45	2455
4	2414	25	2435	46	2456
5	2415	26	2436	47	2457
6	2416	27	2437	48	2458
7	2417	28	2438	49	2459
8	2418	29	2439	50	2460
9	2419	30	2440	51	2461
10	2420	31	2441	52	2462
11	2421	32	2442	53	2463
12	2422	33	2443	54	2464
13	2423	34	2444	55	2465
14	2424	35	2445	56	2466
15	2425	36	2446	57	2467
16	2426	37	2447	58	2468
17	2427	38	2448	59	2469
18	2428	39	2449	60	2470
19	2429	40	2450	-	-
20	2430	41	2451	-	-



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2410MHz)	GFSK
Mode 2	TX CH30(2440MHz)	GFSK
Mode 3	TX CH60(2470MHz)	GFSK

Note:

(1) All above mode has been measurement, only worst data was reported.

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 2.4G	
CMD Command	Mode Or Modulation type	Power setting
	2.4G	Default



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2026-03-02	2027-03-01
Active loop Antenna	ETS	6502	00049544	2025-03-11	2028-03-10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2026-03-03	2027-03-02
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024-05-17	2027-05-16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025-03-10	2028-03-09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023-10-23	2026-10-22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2026-03-02	2027-03-01
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2026-03-02	2027-03-01
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2025-10-20	2026-10-19
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600-NM NM-8M	N.A	2026-03-03	2027-03-02
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B-N MSM-1M9	N.A	2026-03-03	2027-03-02
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241-05 000KMSKMS	N.A	2026-03-03	2027-03-02
Antenna Tower	SAEMC	BK-4AT-BS-D	SK20210930 08	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2026-03-05	2027-03-04
Testing Software	EMC-I_V1.5.0.16_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2026-03-03	2027-03-02
Signal Analyzer	Keysight	N9020A	MY50530994	2026-03-02	2027-03-01
Power Sensor	R&S	NRP8S	104963	2026-03-02	2027-03-01
RF Automatic Test system	MW	MW100-RFC B	MW220324L G-33	2026-03-03	2027-03-02
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2026-03-03	2027-03-02
Attenuator	eastsheep	90db	N.A	2026-03-02	2027-03-01
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2026-03-05	2027-03-04
DC source	Keysight	E3634A	MY58036468	2026-03-05	2027-03-04
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

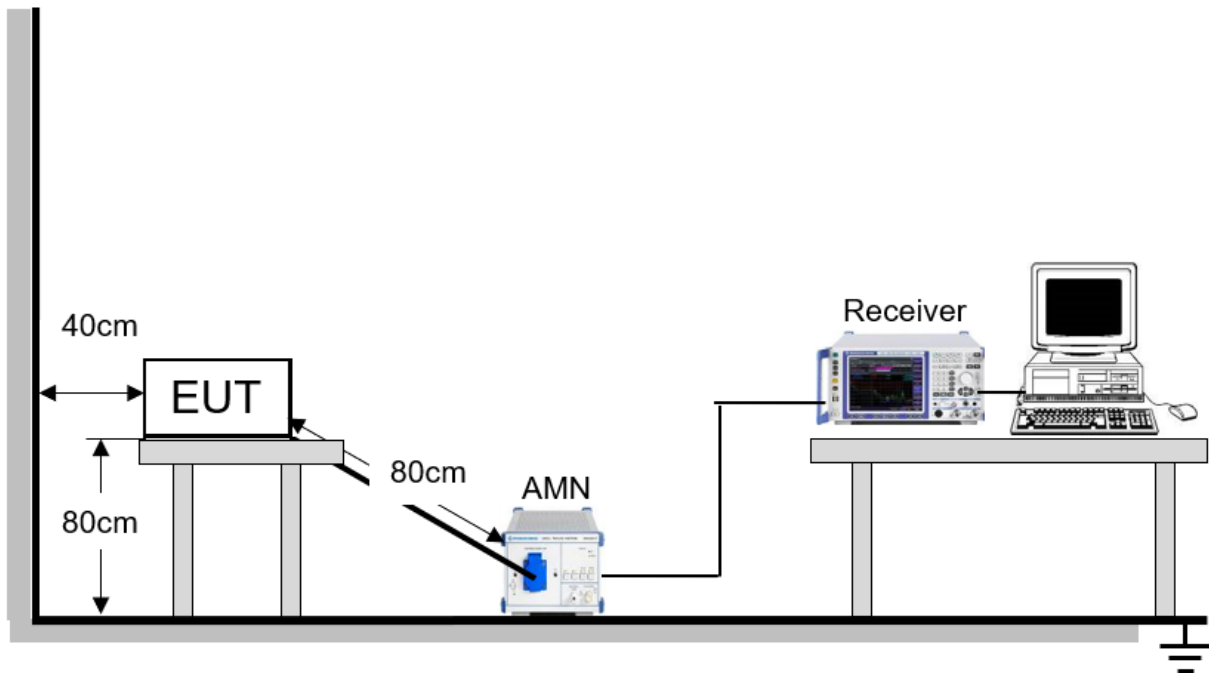

3.4 TEST RESULTS

N/A



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249, Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

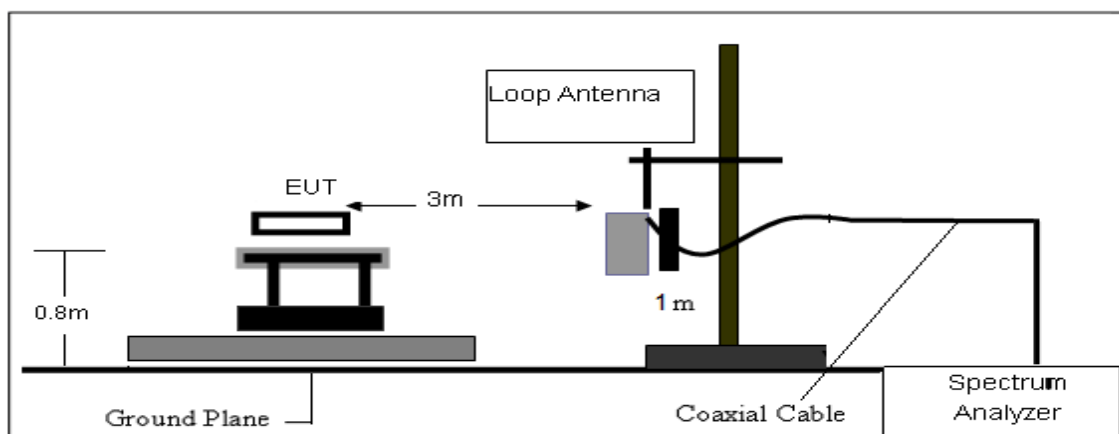

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

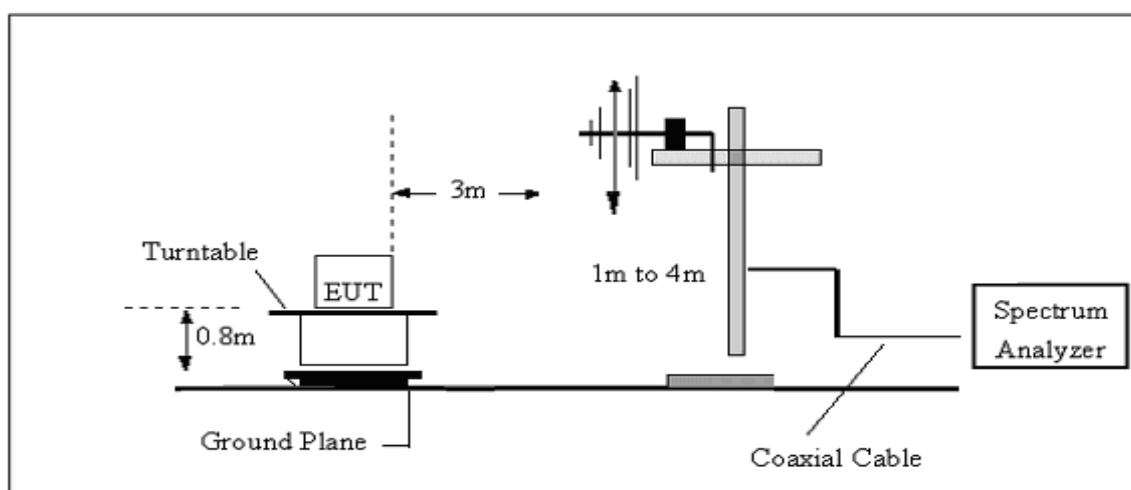

(C) Radiated Emission Test-Up Frequency Above 1GHz

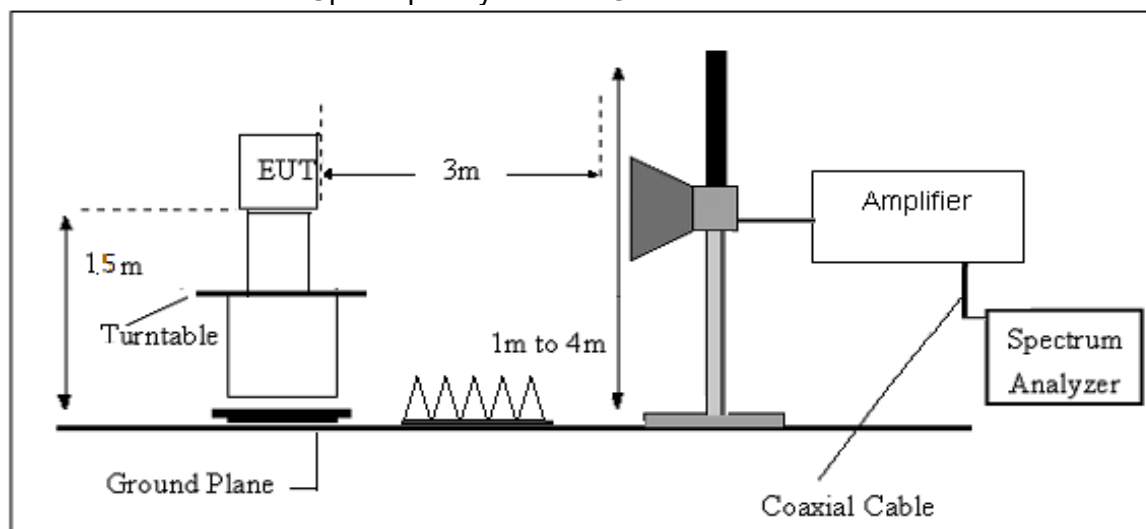



4.4 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example


Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




4.5 TEST RESULTS

Project: LGT26I208	Test Engineer: zhangchengxiang
EUT: Airplane	Temperature: 26.2°C
M/N: X11	Humidity: 56%RH
Test Voltage: Battery	Test Date: 2026-09-30
Test Mode: TX 2.4G	
Note:	

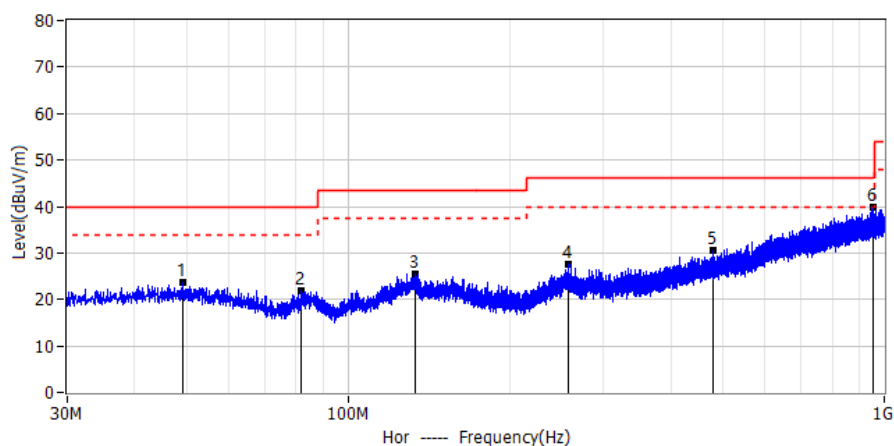

No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	49.400	2.76	20.88	23.64	40.00	-16.36	QP	Hor
2*	81.733	5.09	16.67	21.76	40.00	-18.24	QP	Hor
3*	133.666	4.45	20.99	25.44	43.50	-18.06	QP	Hor
4*	257.676	6.95	20.75	27.70	46.00	-18.30	QP	Hor
5*	478.637	3.29	27.22	30.51	46.00	-15.49	QP	Hor
6*	953.092	4.76	35.04	39.80	46.00	-6.20	QP	Hor

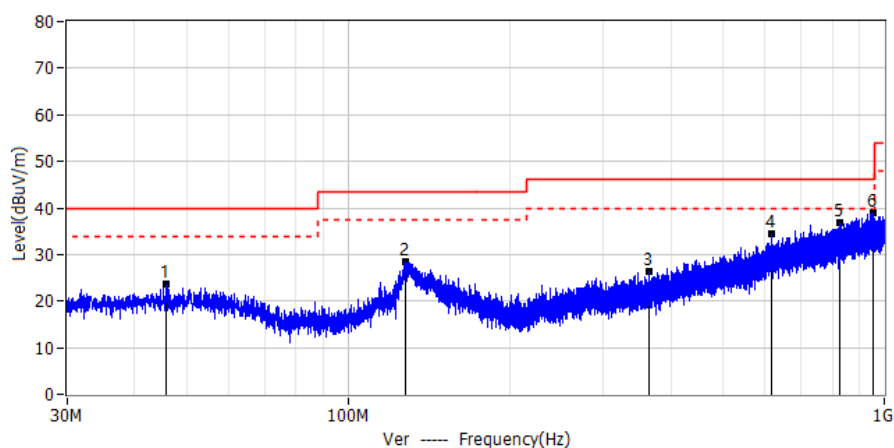

No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	45.719	2.91	20.70	23.61	40.00	-16.39	QP	Ver
2*	128.343	7.96	20.49	28.45	43.50	-15.05	QP	Ver
3*	363.779	2.43	23.96	26.39	46.00	-19.61	QP	Ver
4*	616.228	4.65	29.86	34.51	46.00	-11.49	QP	Ver
5*	827.589	3.63	33.19	36.82	46.00	-9.18	QP	Ver
6*	952.246	4.00	35.01	39.01	46.00	-6.99	QP	Ver



Above 1G Radiation Spurious

Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (2410 MHz)							
3264.89	55.59	-8.45	47.14	74.00	-26.86	PK	Vertical
3264.89	45.76	-8.45	37.31	54.00	-16.69	AV	Vertical
3264.67	56.00	-8.45	47.55	74.00	-26.45	PK	Horizontal
3264.67	46.57	-8.45	38.12	54.00	-15.88	AV	Horizontal
4820.06	54.20	-6.09	48.11	74.00	-25.89	PK	Vertical
4820.06	44.36	-6.09	38.27	54.00	-15.73	AV	Vertical
4820.14	54.12	-6.09	48.03	74.00	-25.97	PK	Horizontal
4820.14	44.77	-6.09	38.68	54.00	-15.32	AV	Horizontal
5359.67	57.23	-6.68	50.55	74.00	-23.45	PK	Vertical
5359.67	47.52	-6.68	40.84	54.00	-13.16	AV	Vertical
5359.58	57.72	-6.68	51.04	74.00	-22.96	PK	Horizontal
5359.58	47.63	-6.68	40.95	54.00	-13.05	AV	Horizontal
7230.05	60.37	-8.13	52.24	74.00	-21.76	PK	Vertical
7230.05	49.96	-8.13	41.83	54.00	-12.17	AV	Vertical
7230.12	59.54	-8.13	51.41	74.00	-22.59	PK	Horizontal
7230.12	50.20	-8.13	42.07	54.00	-11.93	AV	Horizontal
Middle Channel (2440 MHz)							
3264.90	55.43	-8.45	46.98	74.00	-27.02	PK	Vertical
3264.90	46.66	-8.45	38.21	54.00	-15.79	AV	Vertical
3264.81	55.95	-8.45	47.50	74.00	-26.50	PK	Horizontal
3264.81	45.46	-8.45	37.01	54.00	-16.99	AV	Horizontal
4880.02	54.95	-6.09	48.86	74.00	-25.14	PK	Vertical
4880.02	44.46	-6.09	38.37	54.00	-15.63	AV	Vertical
4880.08	54.76	-6.09	48.67	74.00	-25.33	PK	Horizontal
4880.08	45.31	-6.09	39.22	54.00	-14.78	AV	Horizontal
5359.87	58.00	-6.68	51.32	74.00	-22.68	PK	Vertical
5359.87	47.58	-6.68	40.90	54.00	-13.10	AV	Vertical
5359.81	57.19	-6.68	50.51	74.00	-23.49	PK	Horizontal
5359.81	47.62	-6.68	40.94	54.00	-13.06	AV	Horizontal
7320.10	60.41	-8.13	52.28	74.00	-21.72	PK	Vertical
7320.10	50.39	-8.13	42.26	54.00	-11.74	AV	Vertical
7320.17	61.01	-8.13	52.88	74.00	-21.12	PK	Horizontal
7320.17	49.78	-8.13	41.65	54.00	-12.35	AV	Horizontal
High Channel (2470 MHz)							
3264.73	55.64	-8.45	47.19	74.00	-26.81	PK	Vertical





3264.73	45.85	-8.45	37.40	54.00	-16.60	AV	Vertical
3264.60	55.64	-8.45	47.19	74.00	-26.81	PK	Horizontal
3264.60	47.00	-8.45	38.55	54.00	-15.45	AV	Horizontal
4940.08	55.36	-6.09	49.27	74.00	-24.73	PK	Vertical
4940.08	44.24	-6.09	38.15	54.00	-15.85	AV	Vertical
4940.11	54.97	-6.09	48.88	74.00	-25.12	PK	Horizontal
4940.11	44.28	-6.09	38.19	54.00	-15.81	AV	Horizontal
5359.81	56.79	-6.68	50.11	74.00	-23.89	PK	Vertical
5359.81	47.96	-6.68	41.28	54.00	-12.72	AV	Vertical
5359.77	56.97	-6.68	50.29	74.00	-23.71	PK	Horizontal
5359.77	47.15	-6.68	40.47	54.00	-13.53	AV	Horizontal
7410.14	59.84	-8.13	51.71	74.00	-22.29	PK	Vertical
7410.14	50.57	-8.13	42.44	54.00	-11.56	AV	Vertical
7410.19	60.53	-8.13	52.40	74.00	-21.60	PK	Horizontal
7410.19	50.20	-8.13	42.07	54.00	-11.93	AV	Horizontal


Note:1.In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.

Average measurement was not performed if peak level lower than average limit. No any other emissions level which are attenuated less than 20dB below the limit. The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.



Duty cycle

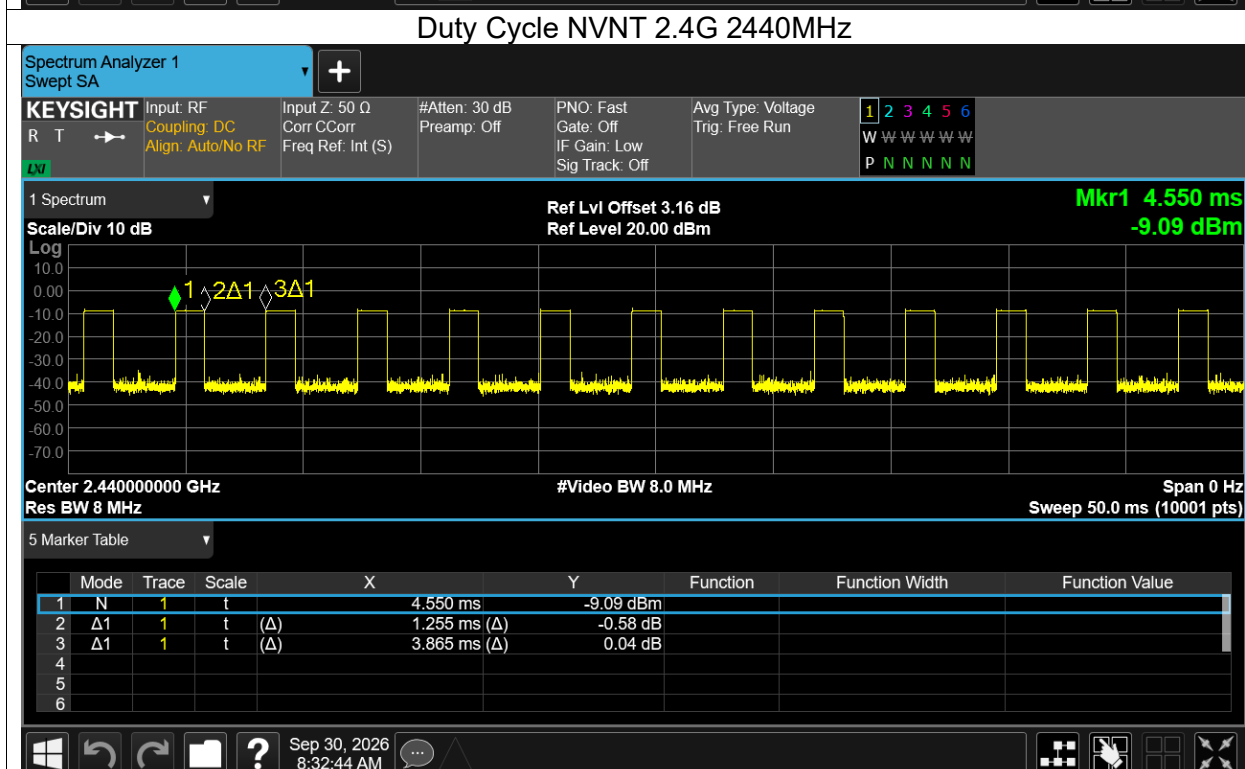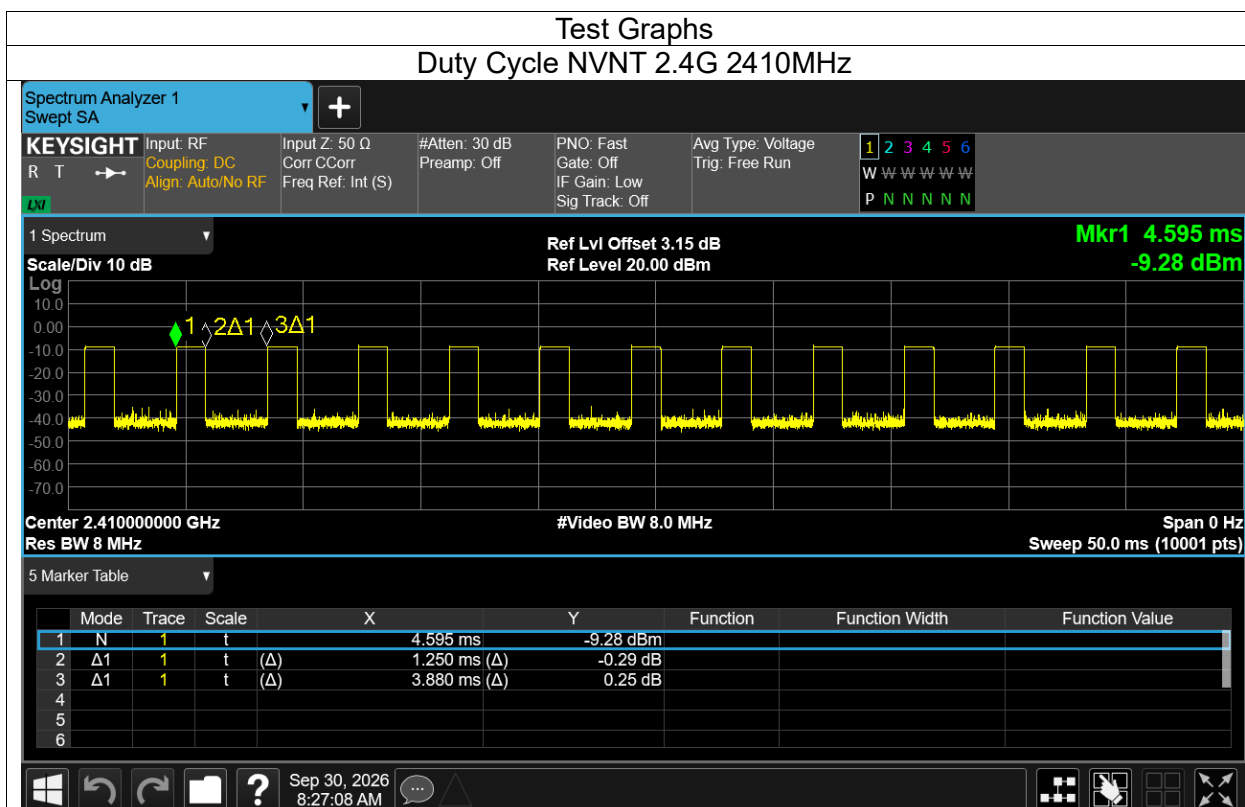

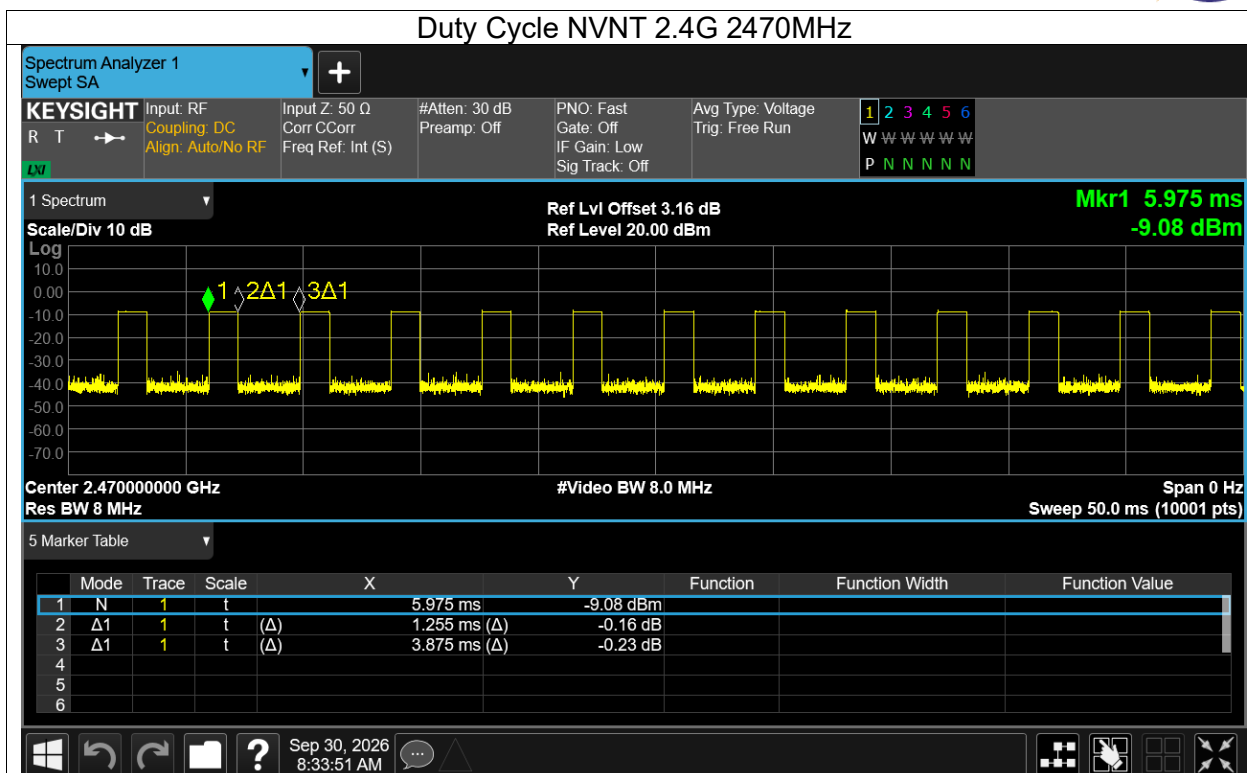

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	2.4G	2410	Ant1	32.22	-9.84	0.8
NVNT	2.4G	2440	Ant1	32.47	-9.77	0.8
NVNT	2.4G	2470	Ant1	32.39	-9.79	0.8

Note: Duty Factor=20*LOG(Ton/Tp)



4.6 TEST RESULTS (BAND EDGE REQUIREMENTS)

Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
2400.00	17.34	34.18	51.52	74.00	-22.48	PK	Vertical
2400.00	6.17	34.18	40.35	54.00	-13.65	AV	Vertical
2400.00	16.04	34.18	50.22	74.00	-23.78	PK	Horizontal
2400.00	5.30	34.18	39.48	54.00	-14.52	AV	Horizontal
2483.50	15.30	34.44	49.74	74.00	-24.26	PK	Vertical
2483.50	2.81	34.44	37.25	54.00	-16.75	AV	Vertical
2483.50	14.36	34.44	48.80	74.00	-25.20	PK	Horizontal
2483.50	1.68	34.44	36.12	54.00	-17.88	AV	Horizontal

4.7 TEST RESULTS (FIELD STRENGTH OF FUNDAMENTAL)

Frequency (MHz)	Meter Reading (dBμV/m)	Detector	Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polar
2410.00	59.62	PK	34.19	93.81	114.00	-20.19	H
2410.00	56.96	PK	34.19	91.15	114.00	-22.85	V
2440.00	59.07	PK	34.31	93.38	114.00	-20.62	H
2440.00	57.08	PK	34.31	91.39	114.00	-22.61	V
2470.00	59.52	PK	34.42	93.94	114.00	-20.06	H
2470.00	57.07	PK	34.42	91.49	114.00	-22.51	V

$$AV = \text{Peak} + 20\log_{10}(\text{duty cycle factor}) = PK + (-9.77)$$

Frequency (MHz)	PK Reading (dBμV/m)	Duty cycle factor (dB)	AV Reading (dBμV/m)	Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polar
2410.00	59.62	-9.77	49.85	34.19	84.04	94.00	-9.96	H
2410.00	56.96	-9.77	47.19	34.19	81.38	94.00	-12.62	V
2440.00	59.07	-9.77	49.30	34.31	83.61	94.00	-10.39	H
2440.00	57.08	-9.77	47.31	34.31	81.62	94.00	-12.38	V
2470.00	59.52	-9.77	49.75	34.42	84.17	94.00	-9.83	H
2470.00	57.07	-9.77	47.30	34.42	81.72	94.00	-12.28	V




5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting : RBW= 30KHz, VBW $\geq$ RBW, Sweep time = Auto.

5.2 TEST SETUP

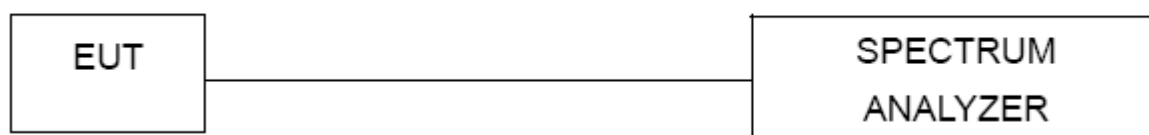

5.3 EUT OPERATION CONDITIONS

TX mode.

5.4 TEST RESULTS


Mode	Frequency (MHz)	Antenna	20dB BANDWIDTH (MHz)
2.4G	2410	Ant1	0.5436
2.4G	2440	Ant1	0.5506
2.4G	2470	Ant1	0.5439

Lowest Channel






Middle Channel

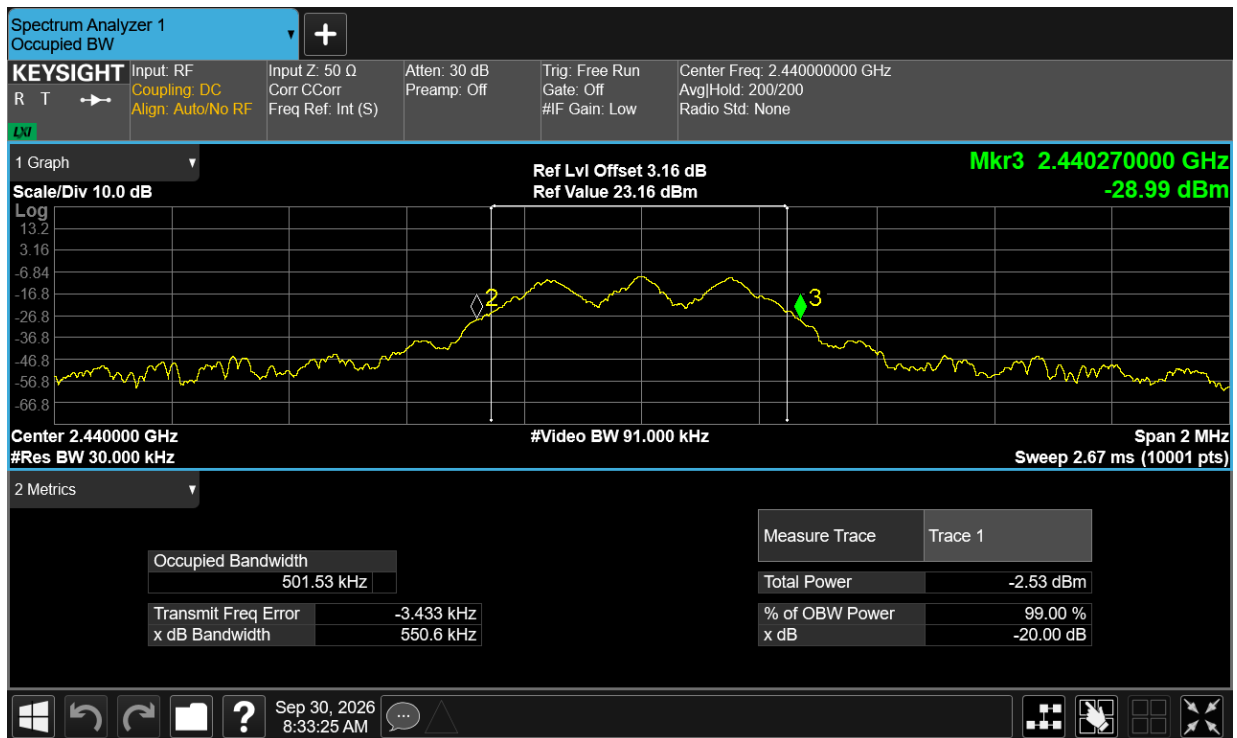

High Channel

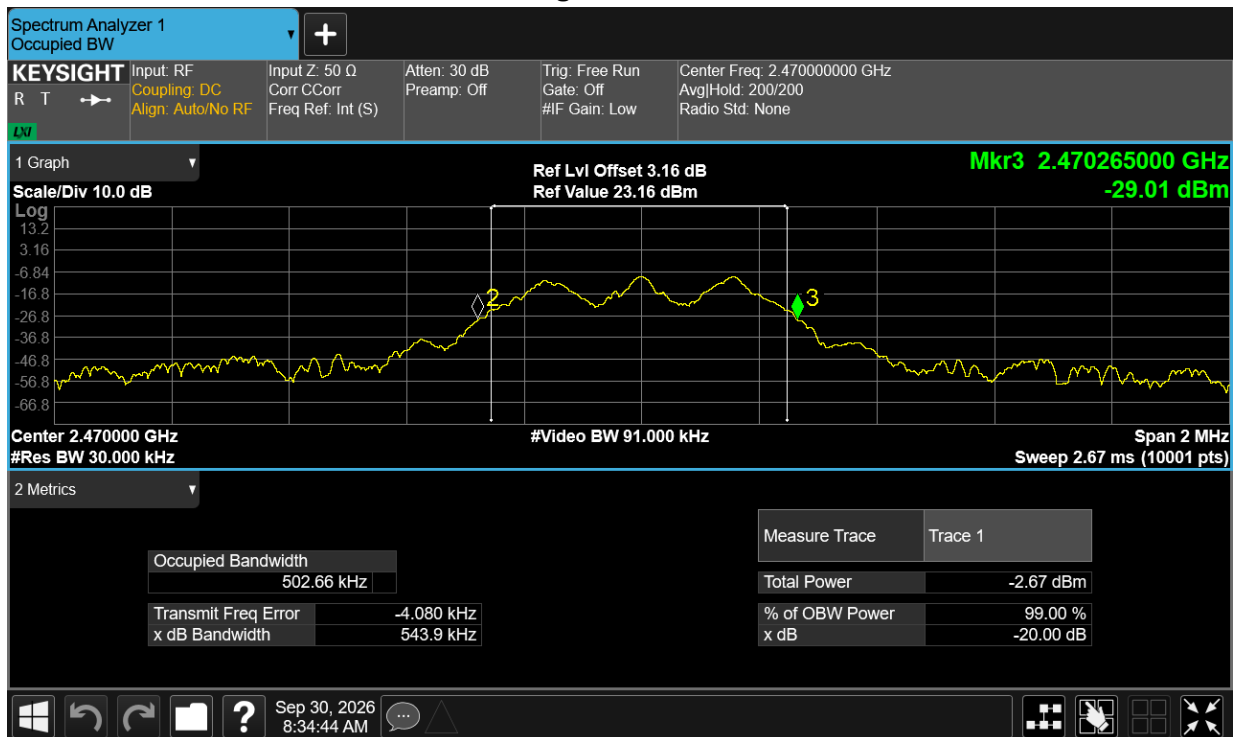



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The EUT antenna is Monopole Antenna. It comply with the standard requirement.



APPENDIX I - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID.

※※※※※END OF THE REPORT※※※※※