




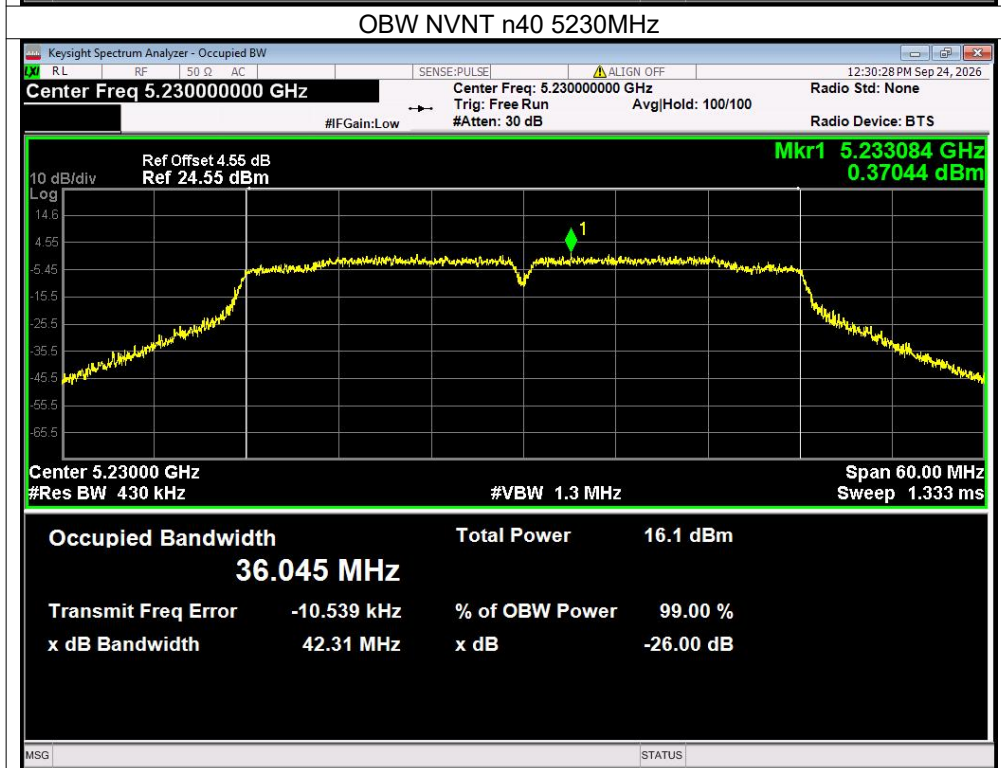
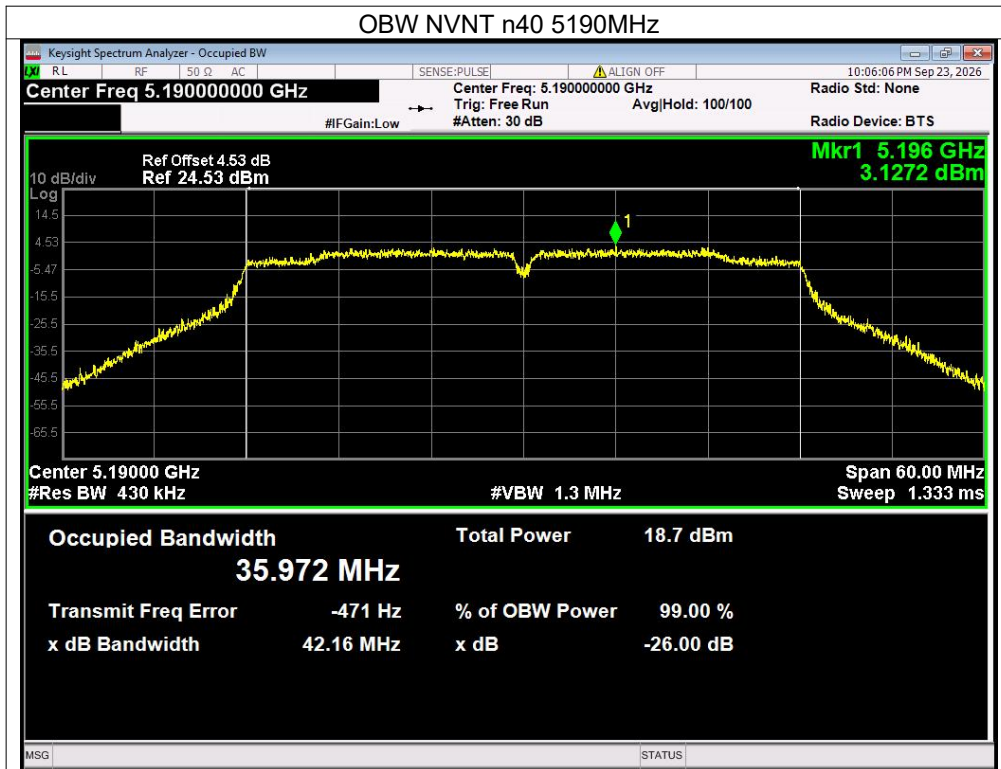
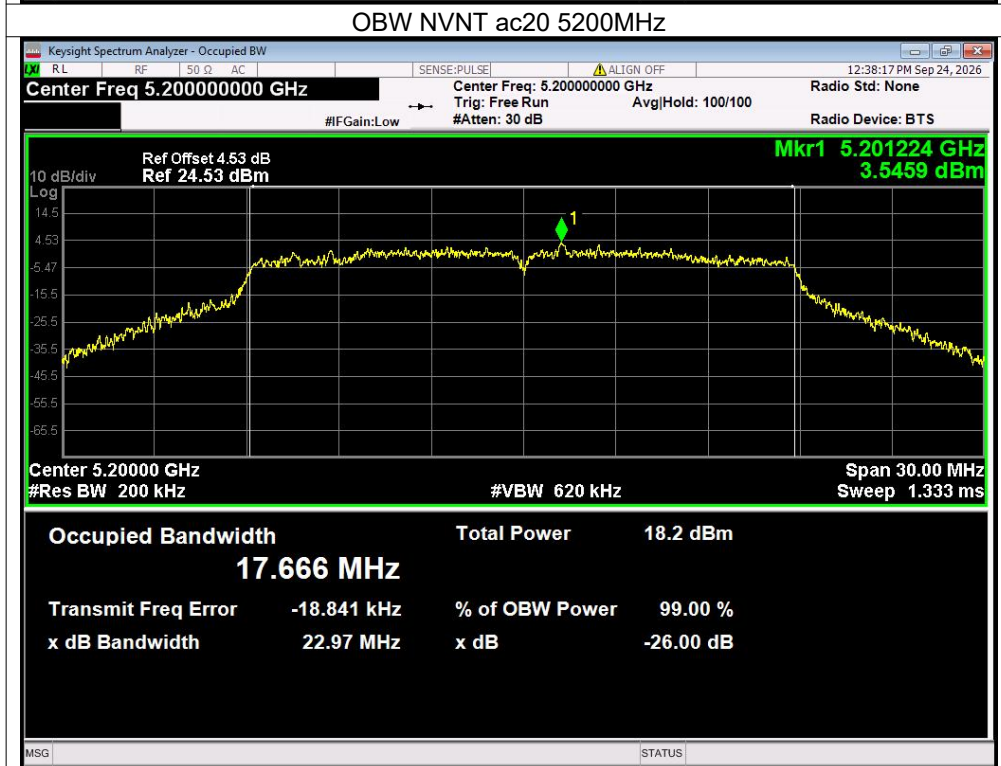
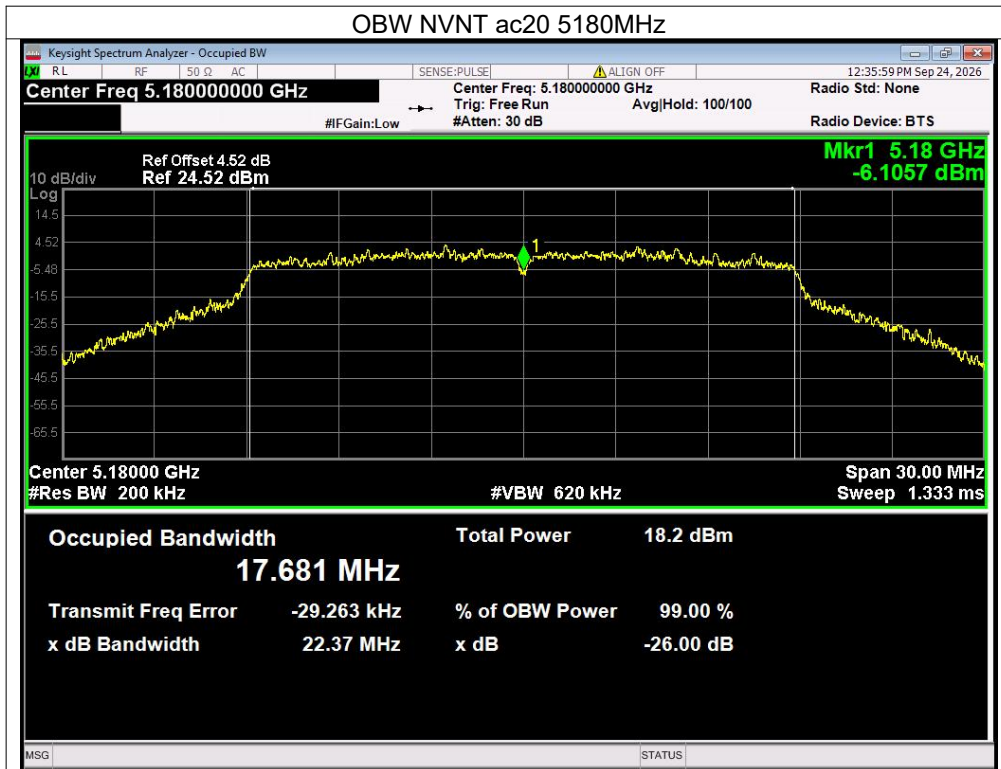
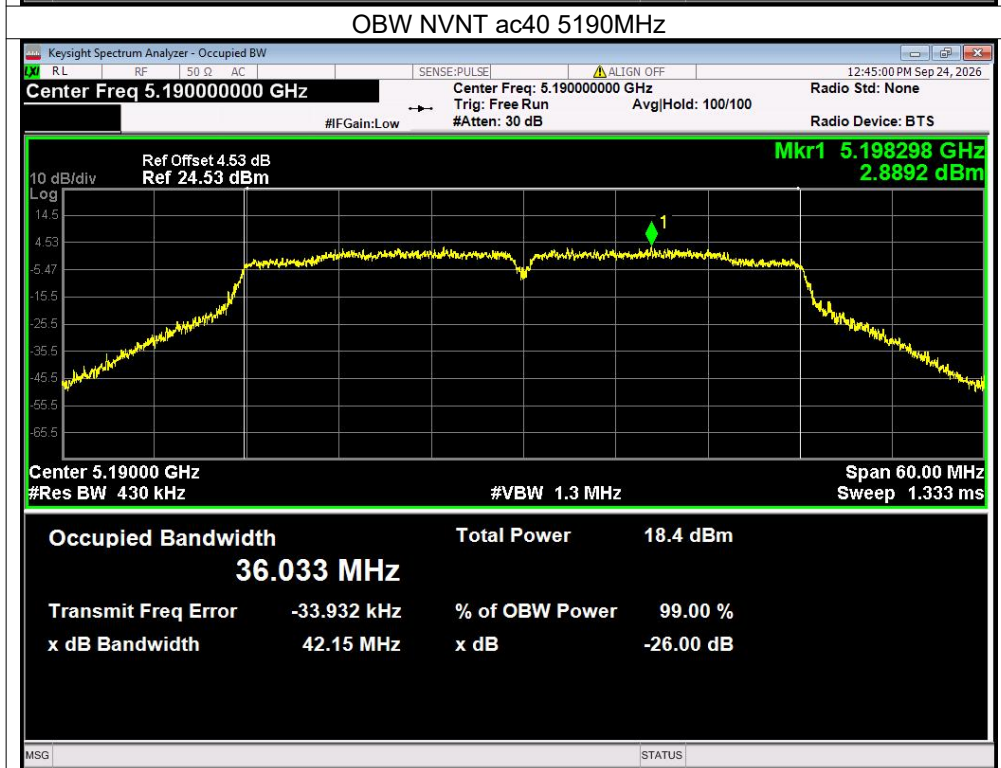



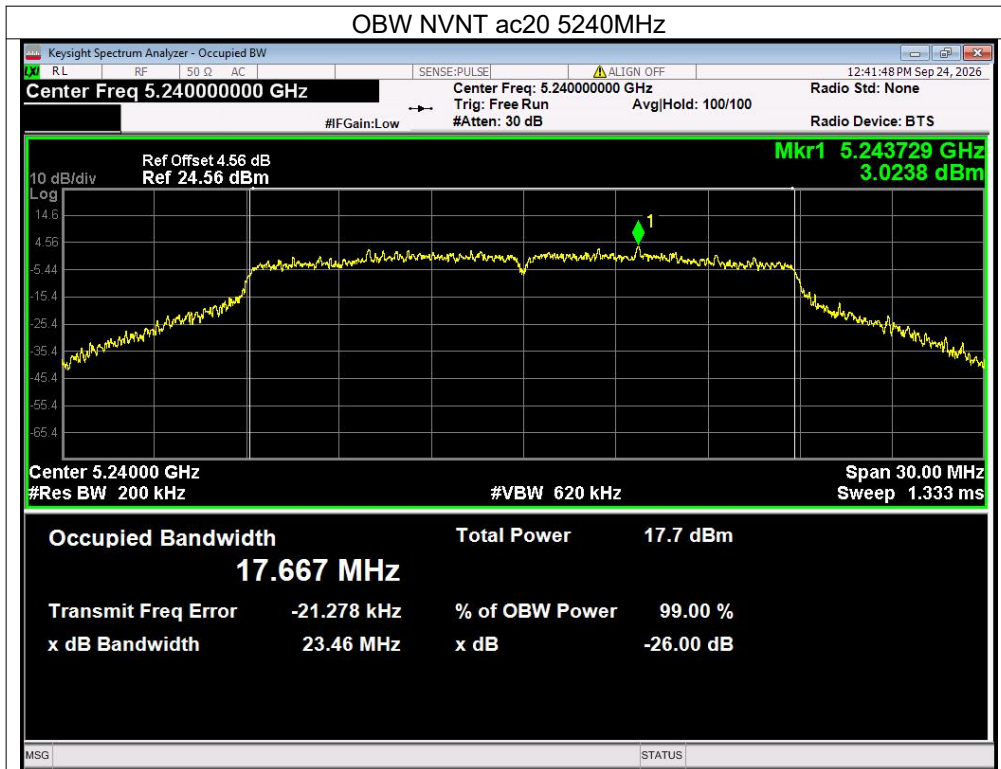


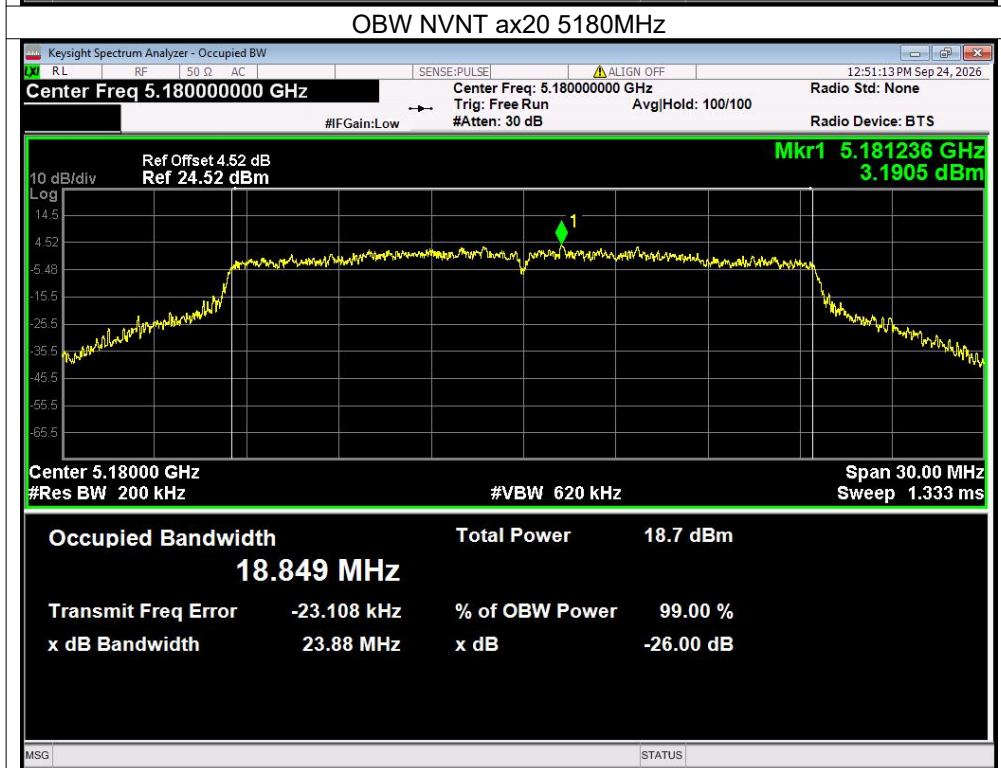

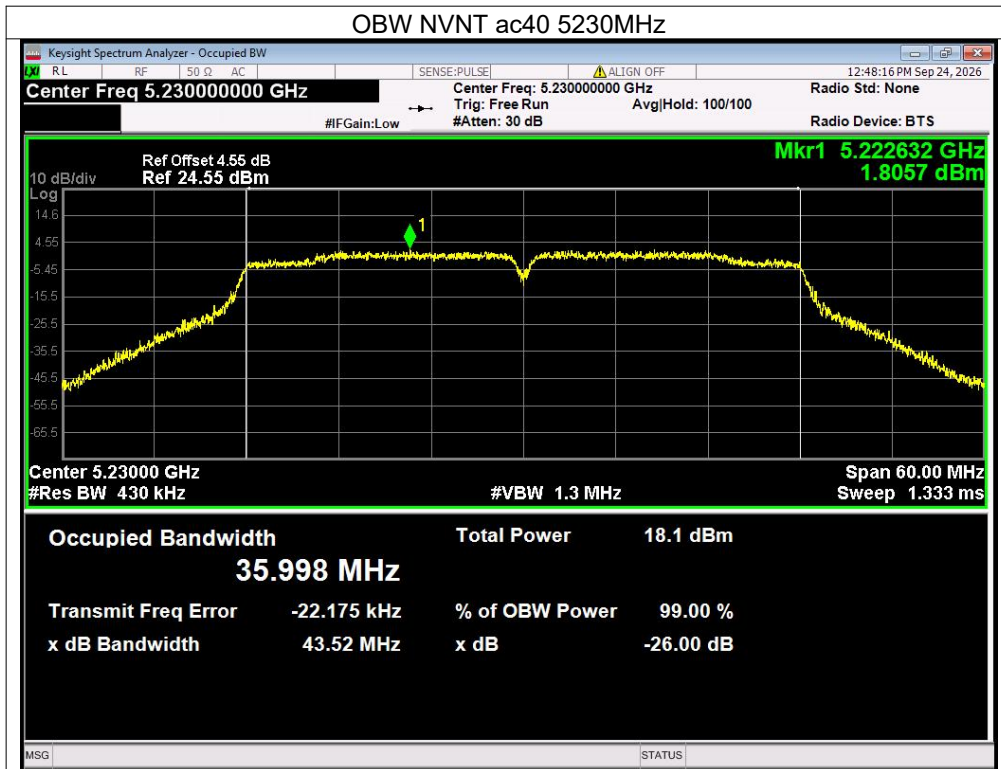

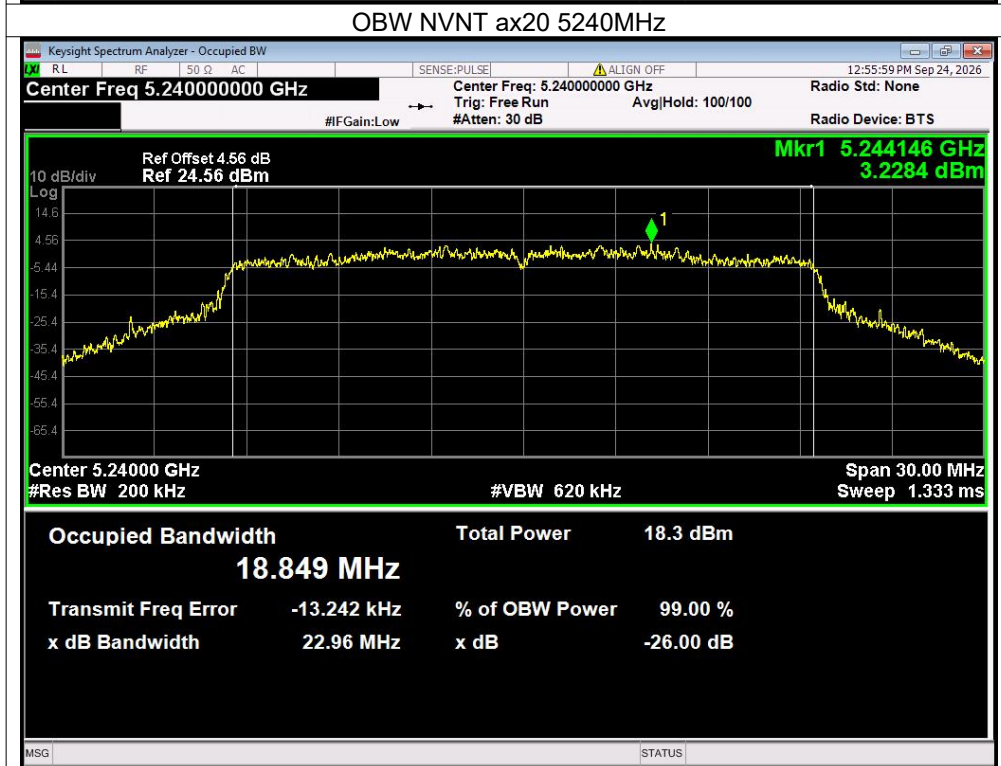

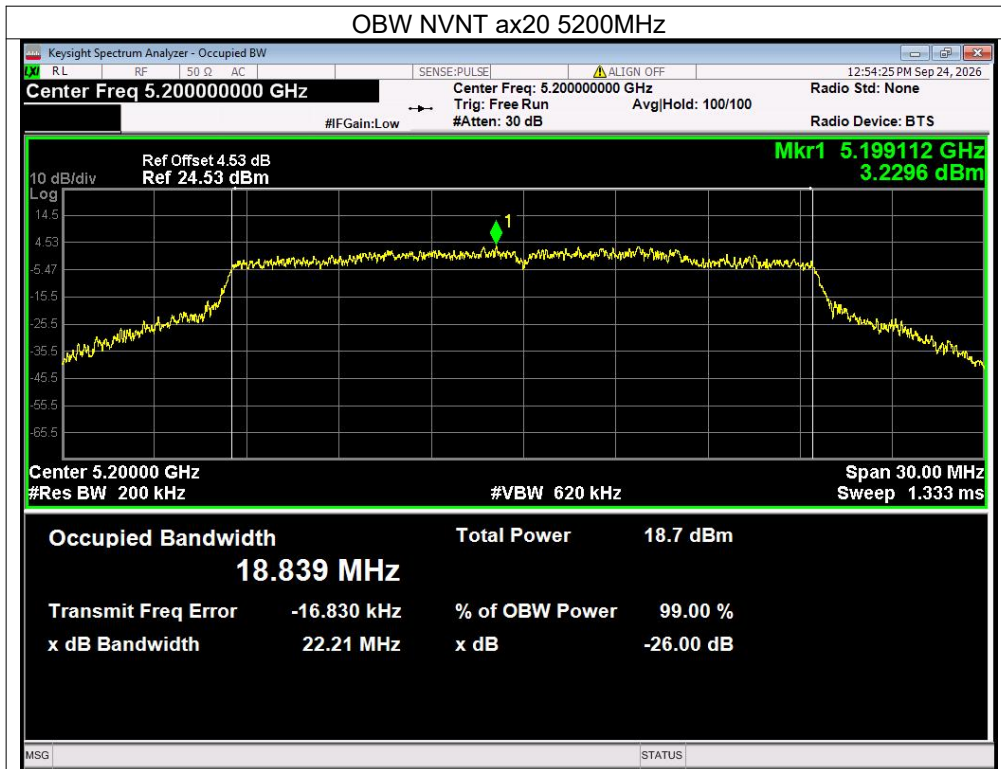


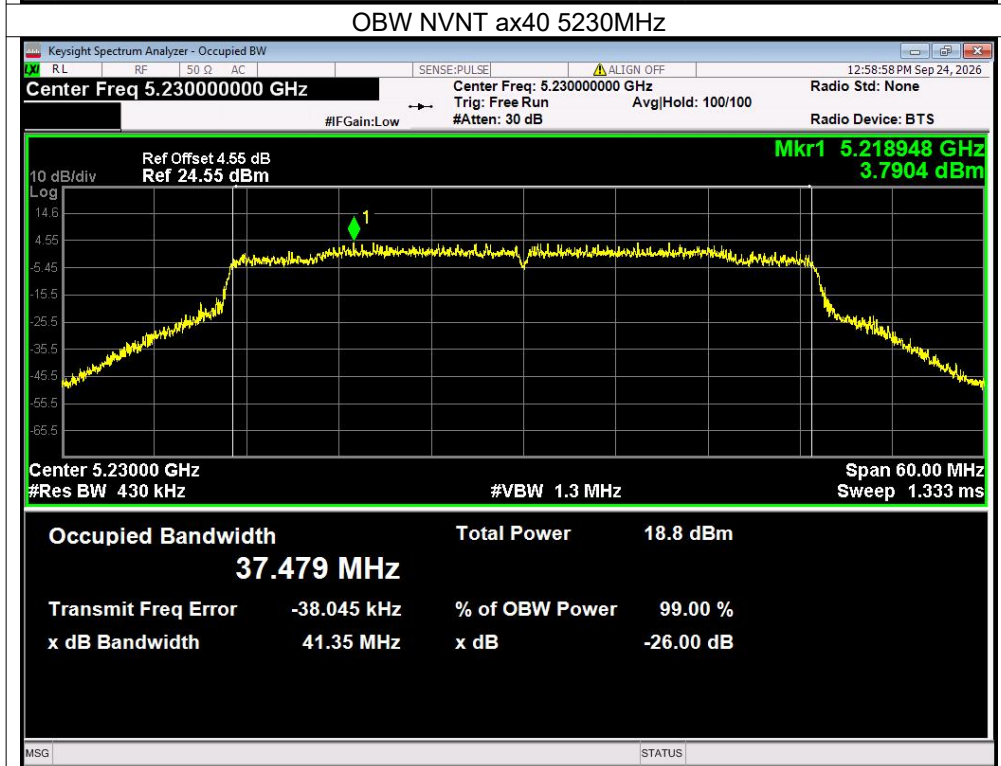
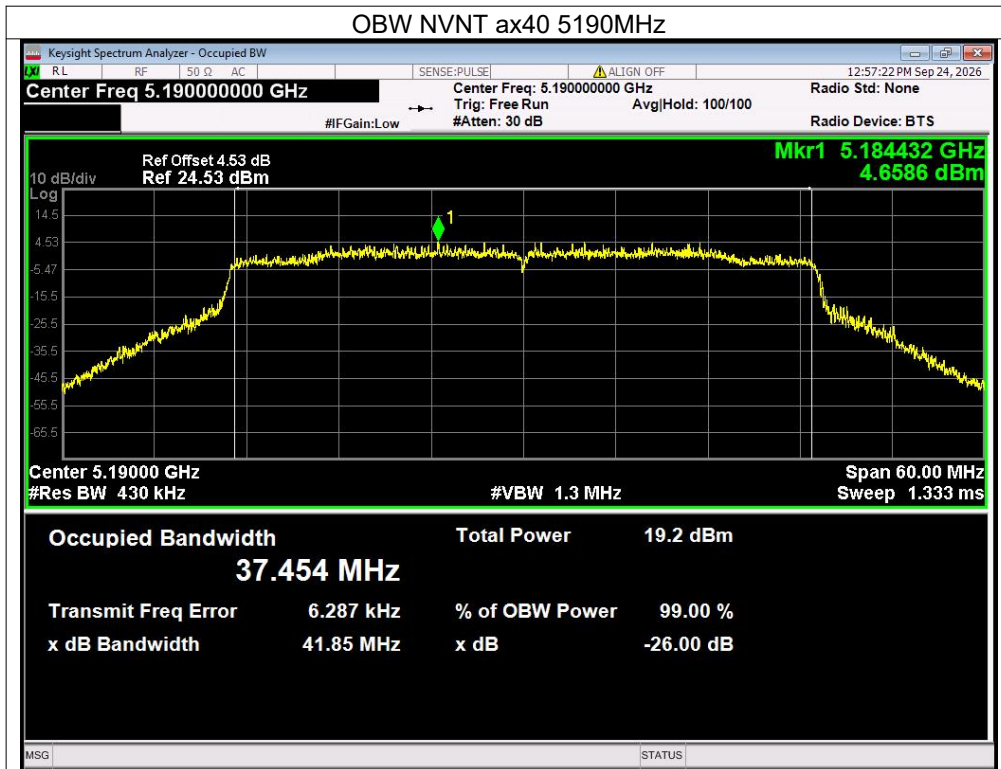







Maximum Power Spectral Density Level



Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
a	5180	2.059	0.21	2.269	≤ 11	Pass
a	5200	2.14	0.21	2.35	≤ 11	Pass
a	5240	2.129	0.21	2.339	≤ 11	Pass
n20	5180	2.605	0.21	2.815	≤ 11	Pass
n20	5200	2.828	0.21	3.038	≤ 11	Pass
n20	5240	2.585	0.21	2.795	≤ 11	Pass
n40	5190	-0.973	0.2	-0.773	≤ 11	Pass
n40	5230	-1.166	0.2	-0.966	≤ 11	Pass
ac20	5180	2.52	0.21	2.73	≤ 11	Pass
ac20	5200	2.266	0.21	2.476	≤ 11	Pass
ac20	5240	1.833	0.2	2.033	≤ 11	Pass
ac40	5190	-0.849	0.21	-0.639	≤ 11	Pass
ac40	5230	-1.079	0.21	-0.869	≤ 11	Pass
ax20	5180	2.137	0.2	2.337	≤ 11	Pass
ax20	5200	2.066	0.2	2.266	≤ 11	Pass
ax20	5240	1.56	0.21	1.77	≤ 11	Pass
ax40	5190	-1.284	0.2	-1.084	≤ 11	Pass
ax40	5230	-1.641	0.2	-1.441	≤ 11	Pass


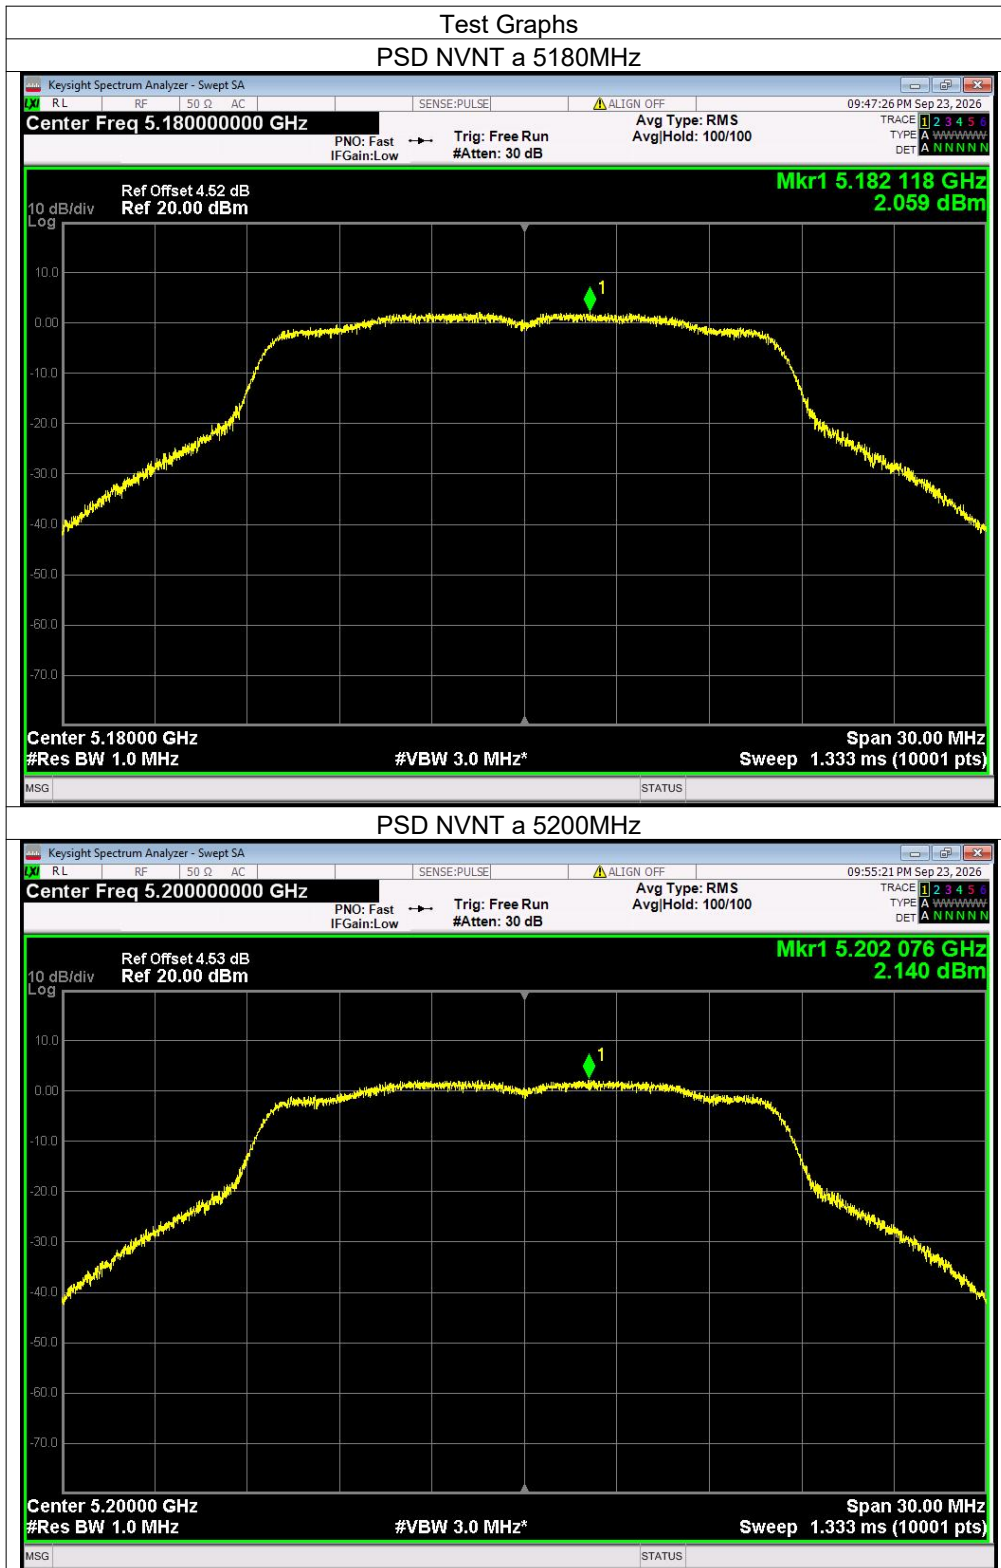


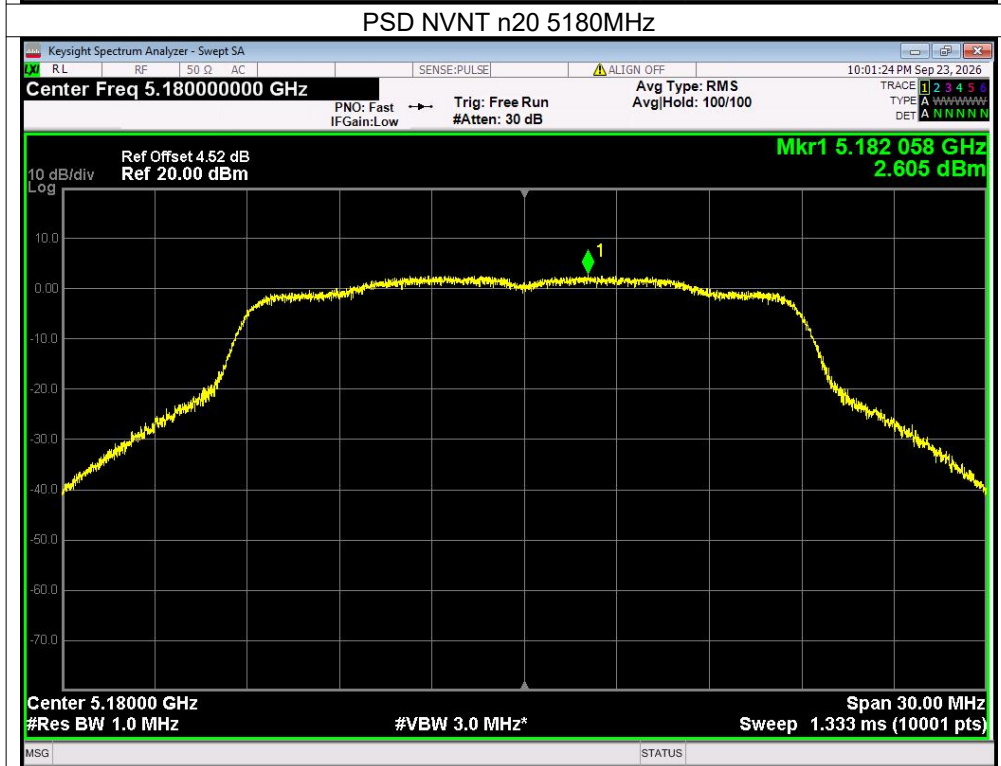
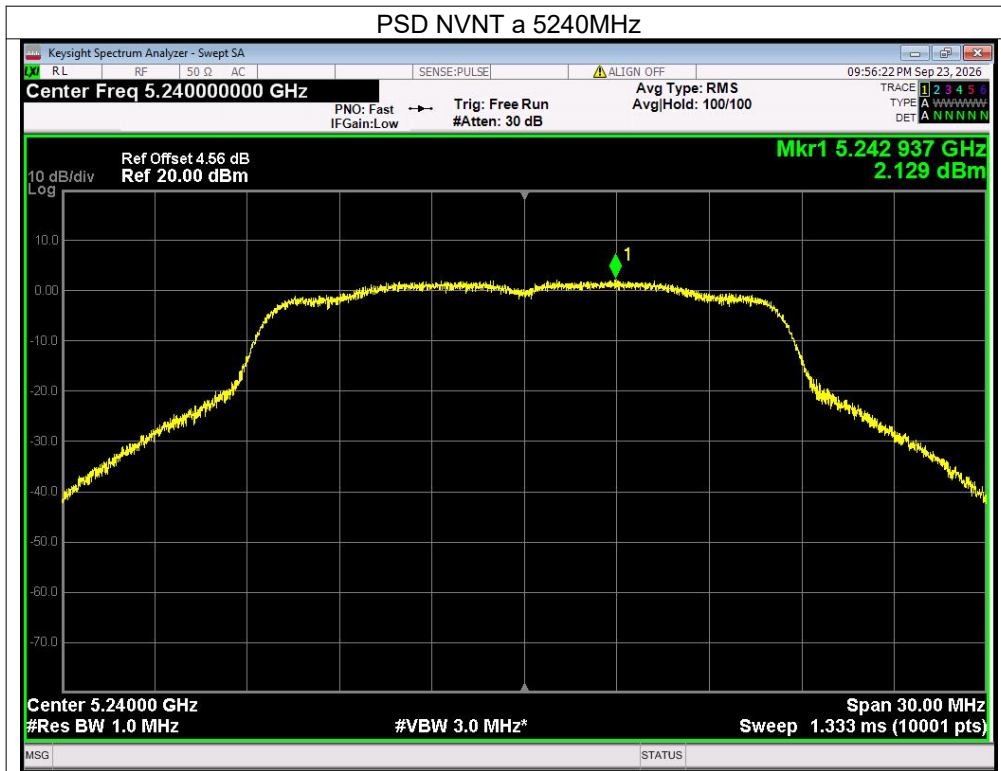



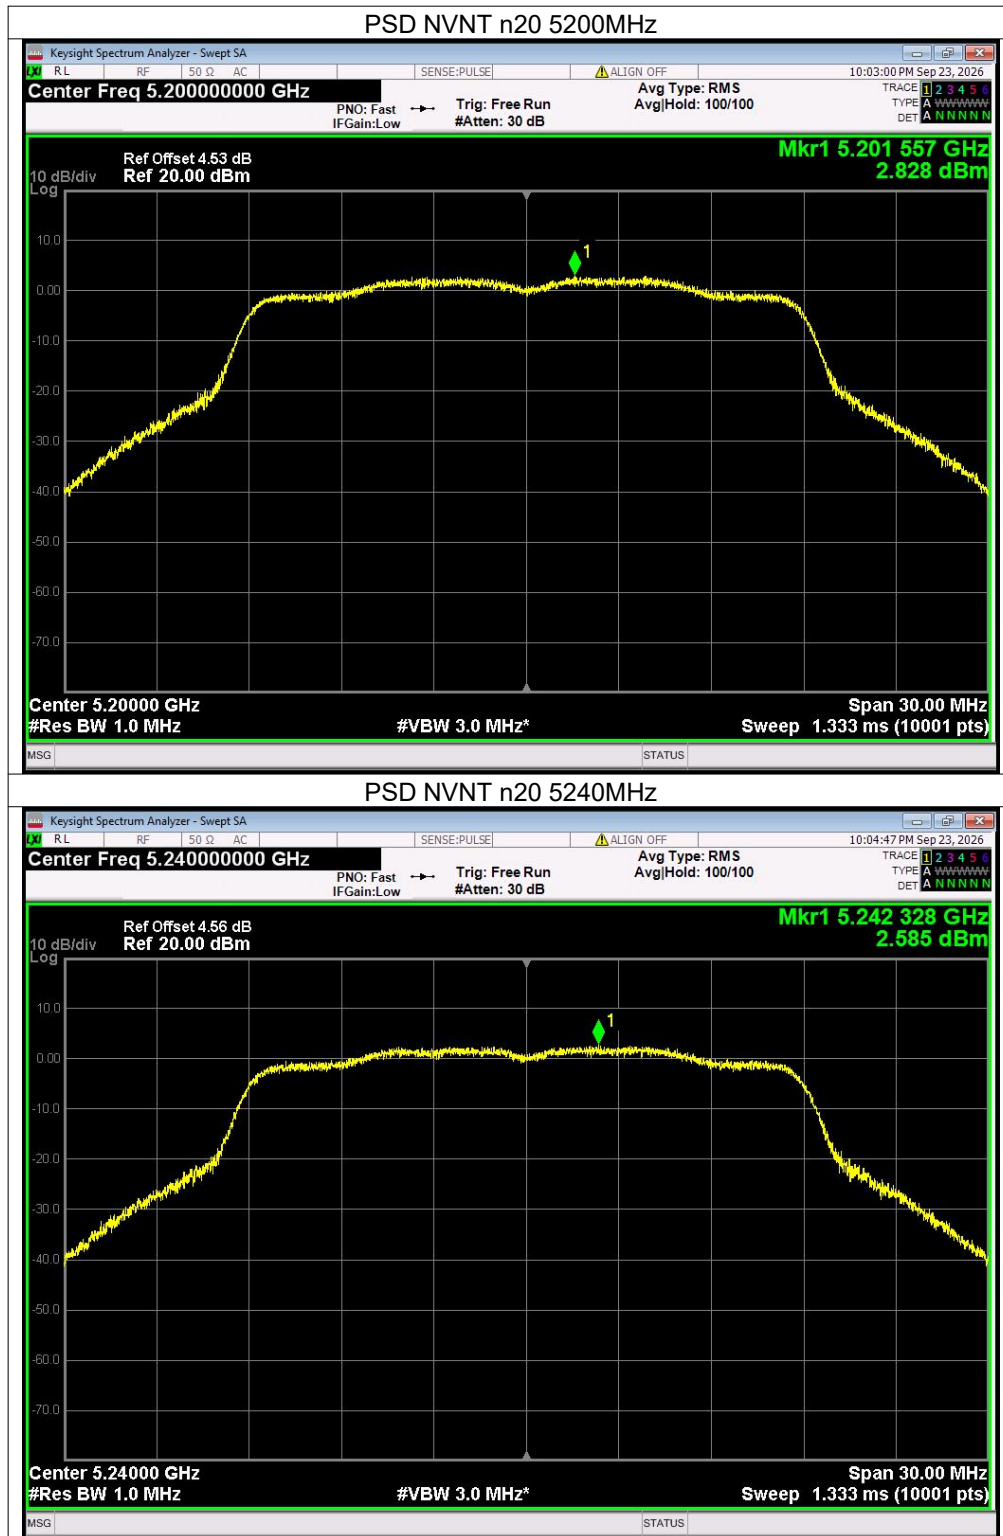


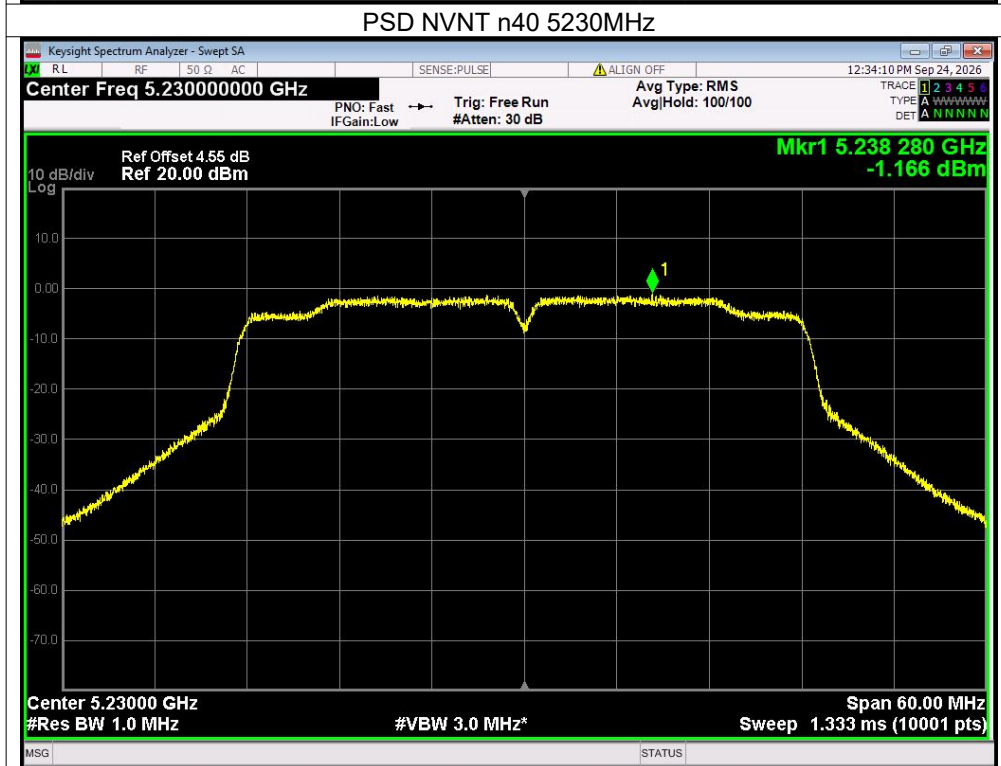
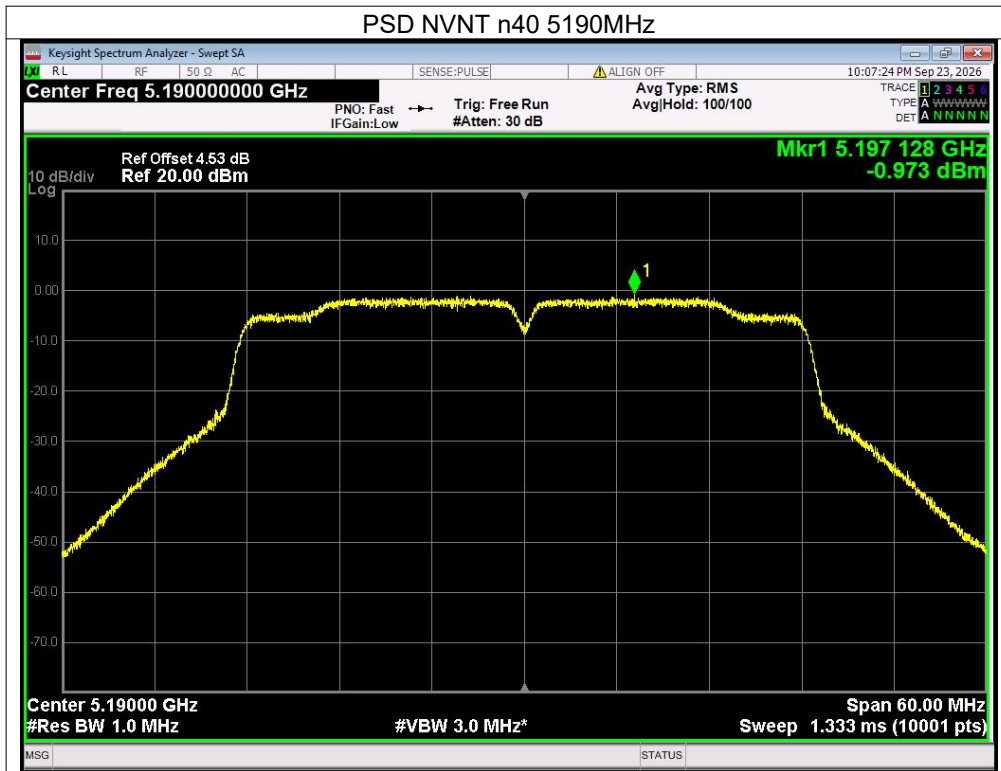


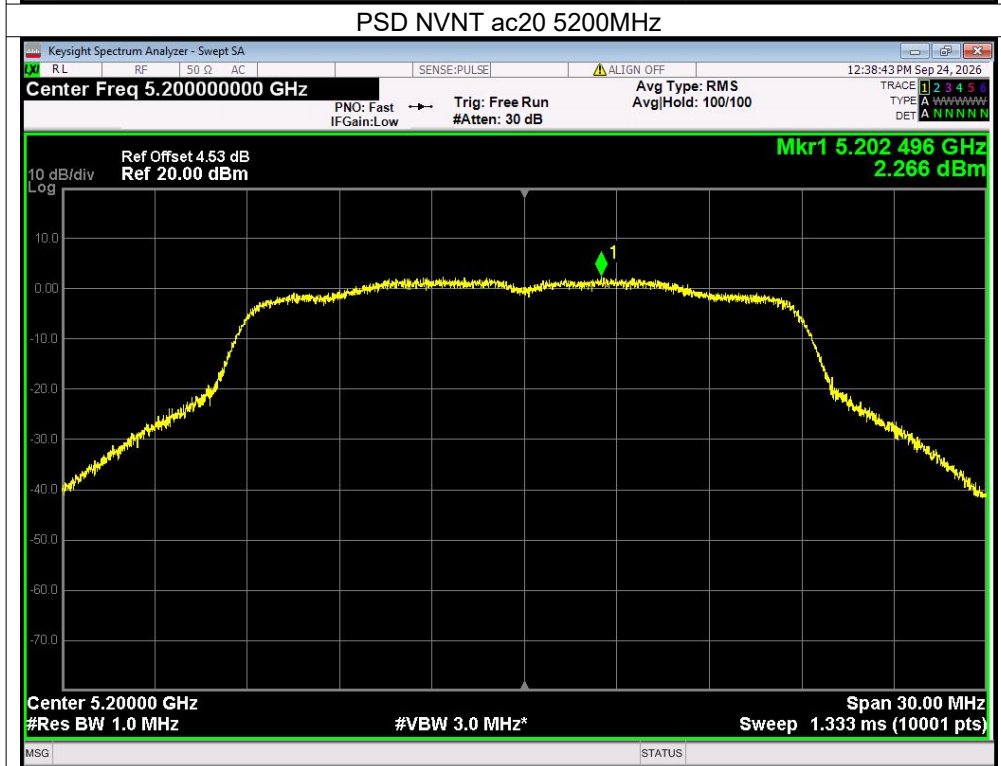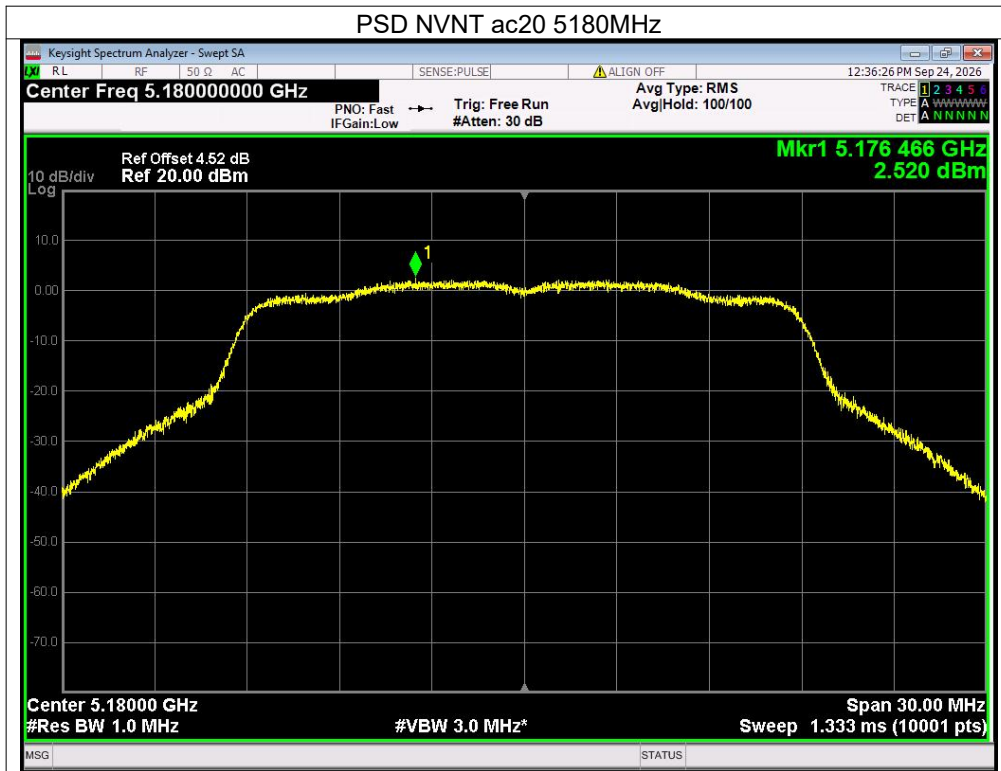

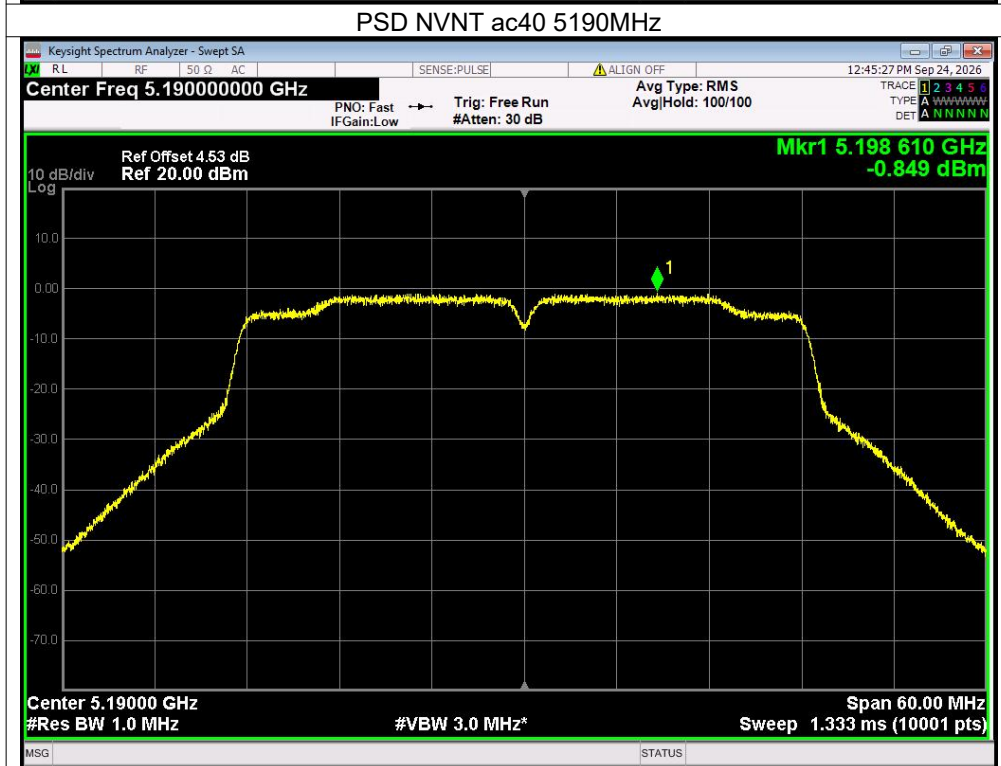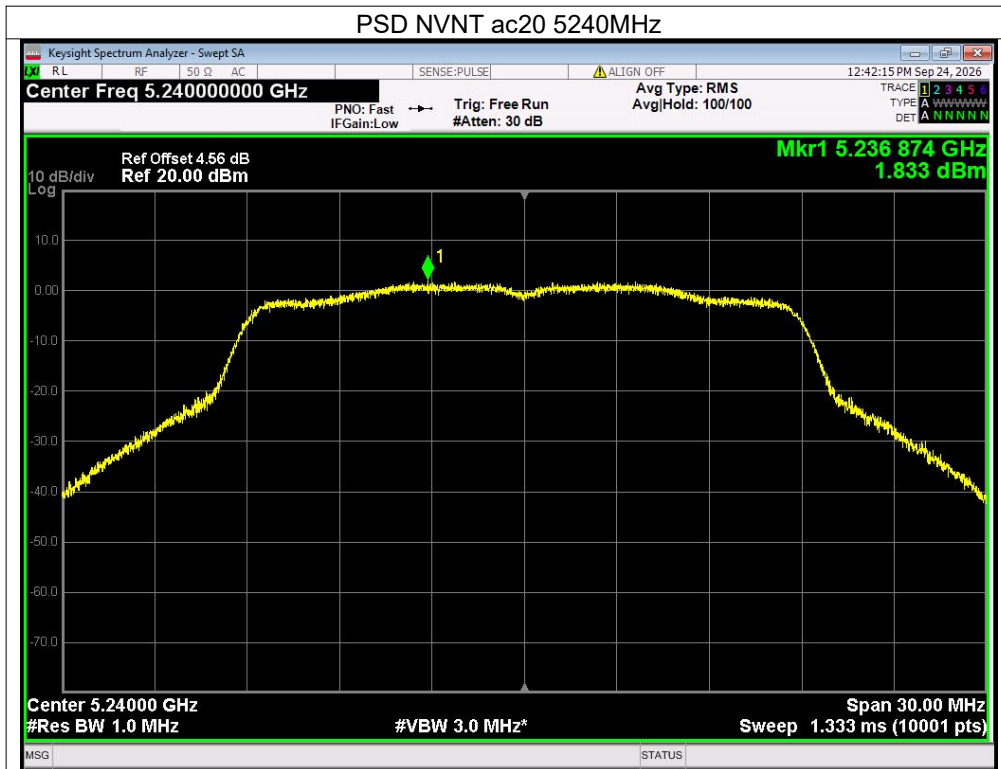

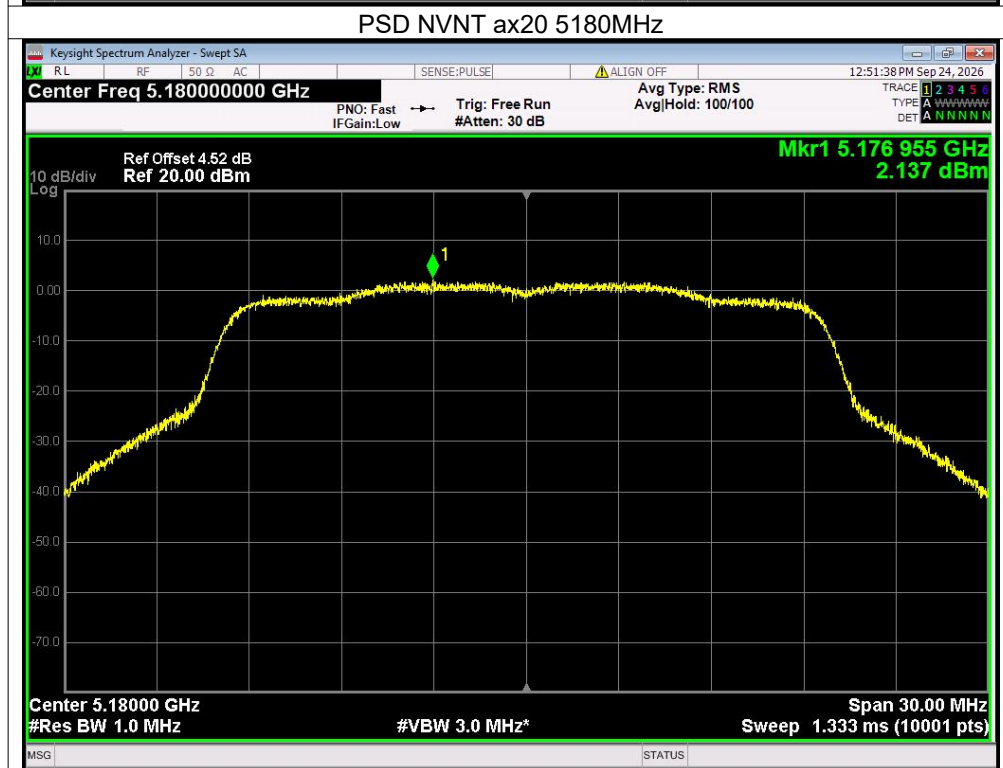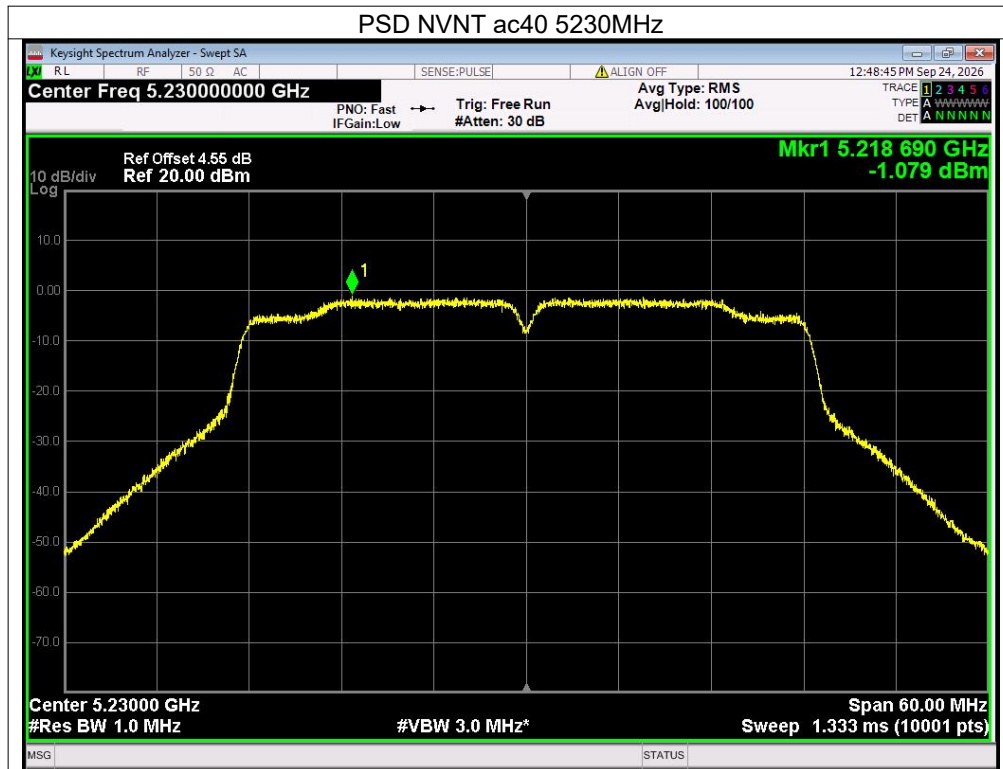

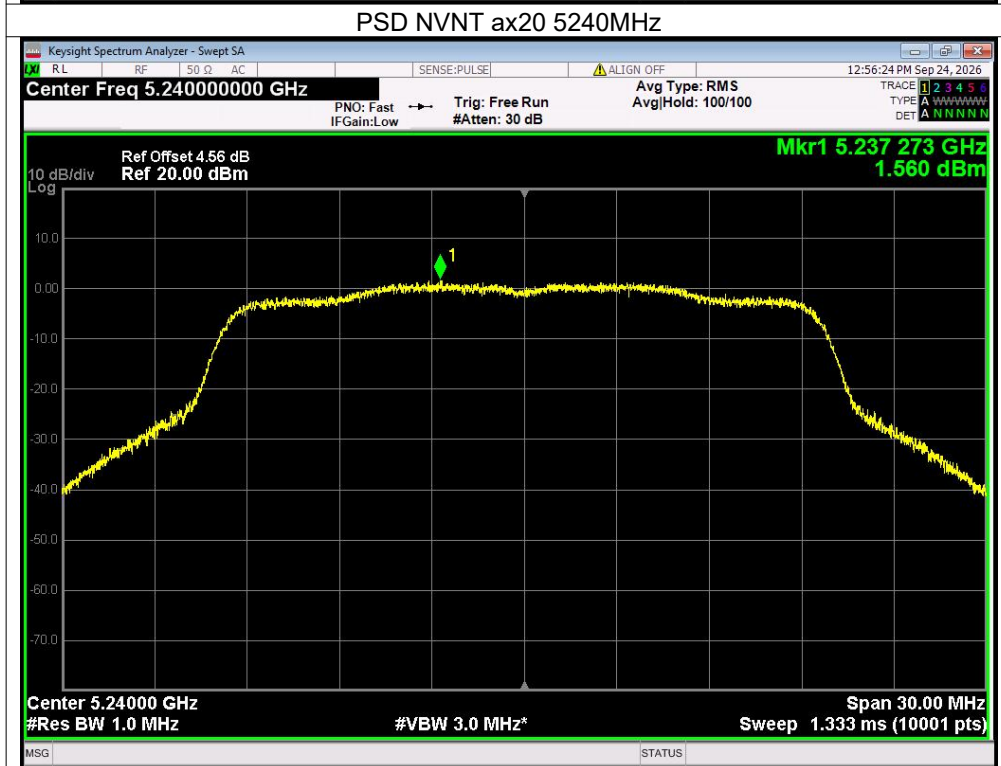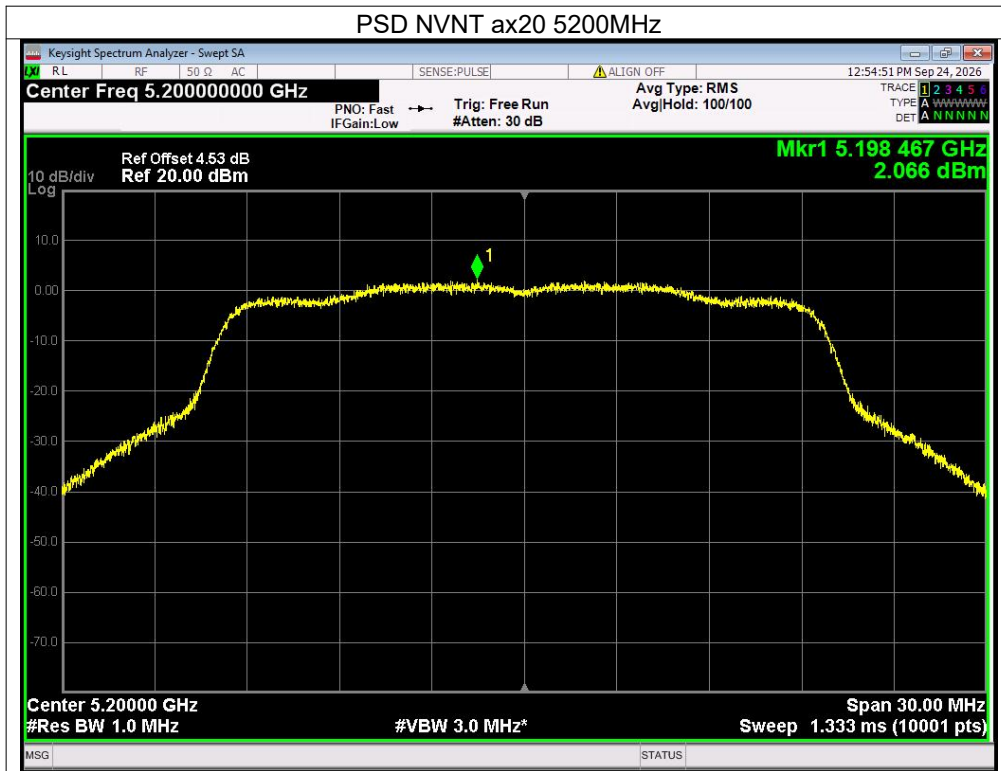

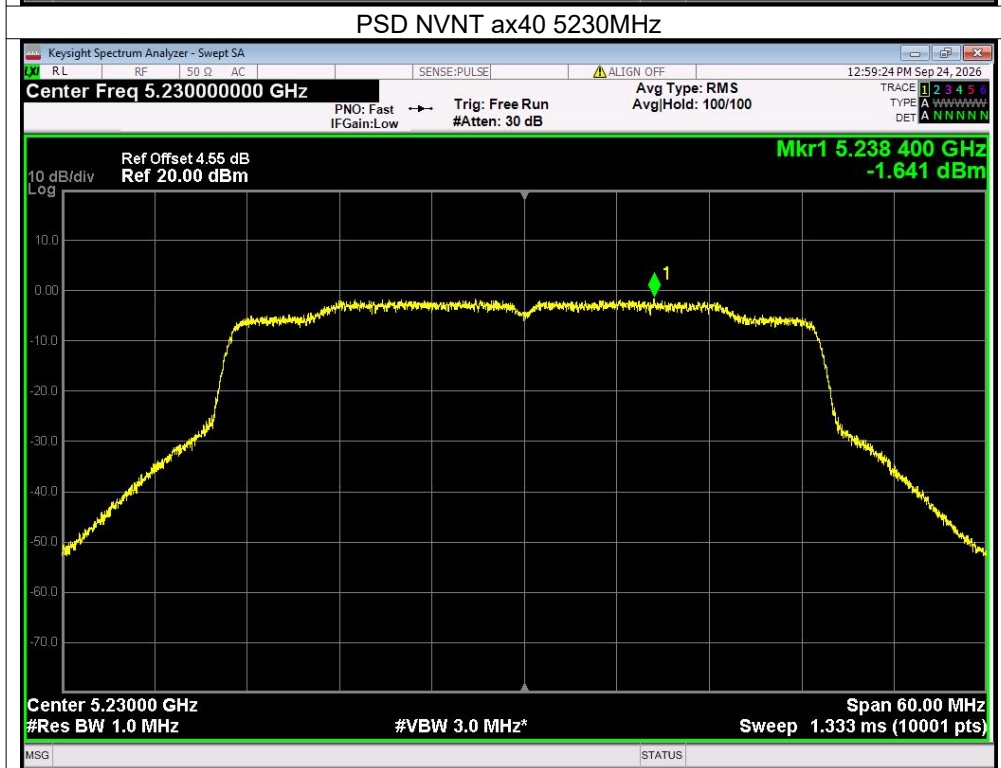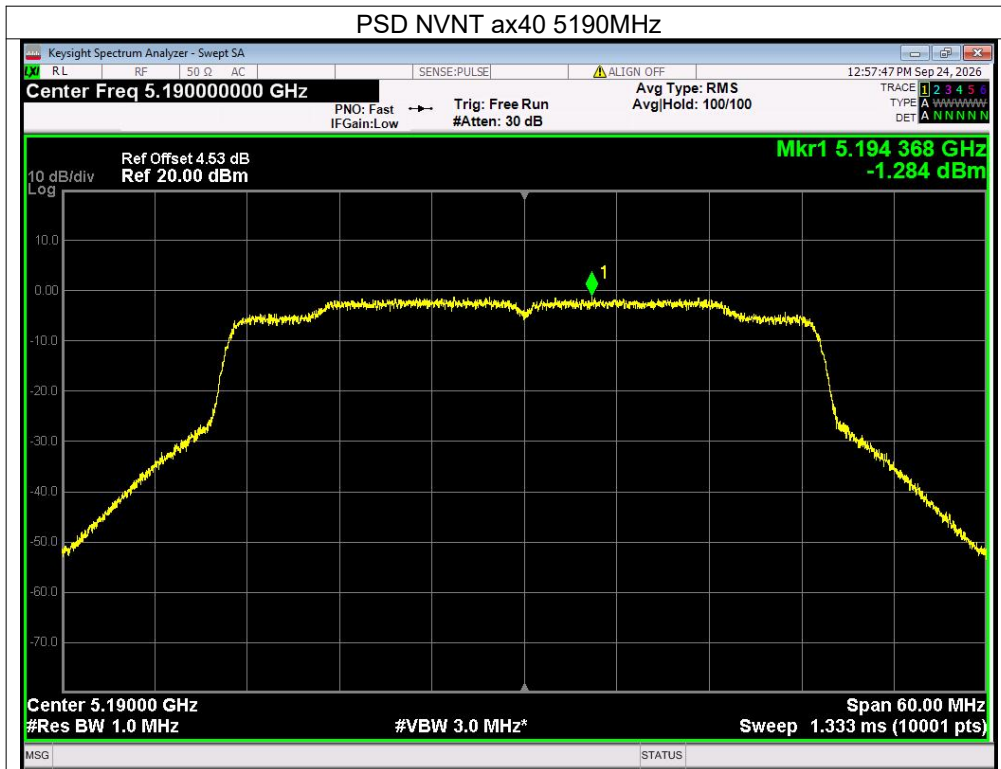



5.3G WLAN

Duty Cycle

Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
a	5260	0.961	1.007	95.43	0.2	1.04	0.26
a	5300	0.96	1.008	95.24	0.21	1.04	0.34
a	5320	0.96	1.007	95.33	0.21	1.04	0.21
n20	5260	0.96	1.008	95.24	0.21	1.04	0.41
n20	5300	0.953	1	95.3	0.21	1.05	0.29
n20	5320	0.961	1.007	95.43	0.2	1.04	0.37
n40	5270	0.977	1.023	95.5	0.2	1.02	0.26
n40	5310	0.977	1.023	95.5	0.2	1.02	0.37
ac20	5260	0.953	1	95.3	0.21	1.05	0.52
ac20	5300	0.952	1	95.2	0.21	1.05	0.06
ac20	5320	0.952	0.999	95.3	0.21	1.05	0.49
ac40	5270	0.953	0.999	95.4	0.2	1.05	0.11
ac40	5310	0.952	0.999	95.3	0.21	1.05	0.52
ax20	5260	0.979	1.026	95.42	0.2	1.02	0.39
ax20	5300	0.979	1.026	95.42	0.2	1.02	0.48
ax20	5320	0.979	1.027	95.33	0.21	1.02	0.38
ax40	5270	0.977	1.024	95.41	0.2	1.02	0.34
ax40	5310	0.977	1.024	95.41	0.2	1.02	0.51

