

Antenna Specification

Antenna Type : Internal Antenna

Antenna Gain : 1.27dBi

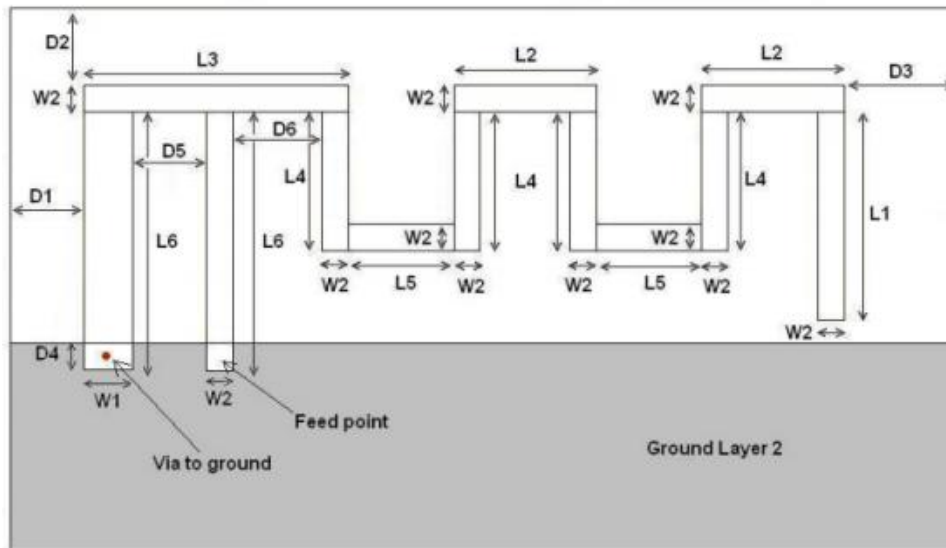
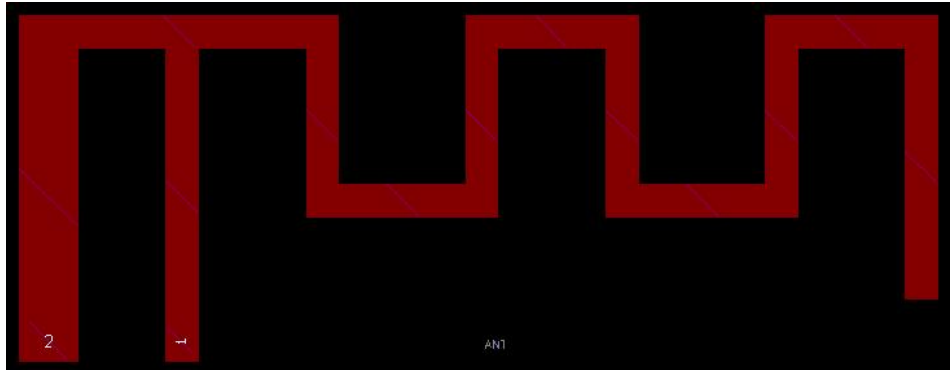


Figure 3: Antenna Dimensions

L1	3.94 mm
L2	2.70 mm
L3	5.00 mm
L4	2.64 mm
L5	2.00 mm
L6	4.90 mm
W1	0.90 mm
W2	0.50 mm
D1	0.50 mm
D2	0.30 mm
D3	0.30 mm
D4	0.50 mm
D5	1.40mm
D6	1.70 mm

Table 1: Antenna Dimensions

Manufacturer:Foshan Ruide IOT Technology Co., Ltd
Address : 1-3 Ruixiang Road, Fengxiang Industrial Park, Daliang Xinjiao
Neighborhood Committee, Shunde District, Foshan City.

1. Frequency Band

Tx:2400MHz~2480MHz

Rx:2400MHZ~2480MHZ


2. Antenna Parameters summary(2440MHz)

Quantity	Value	Units
Peak Directivity	1.6855	
Peak Gain	1.27	dBi
Radiated Efficiency	0.8812	

3. Plane definition

XY-plane	Theta=90°
XZ-plane	Phi=0°
YZ-plane	Phi=90°


4、VSWR

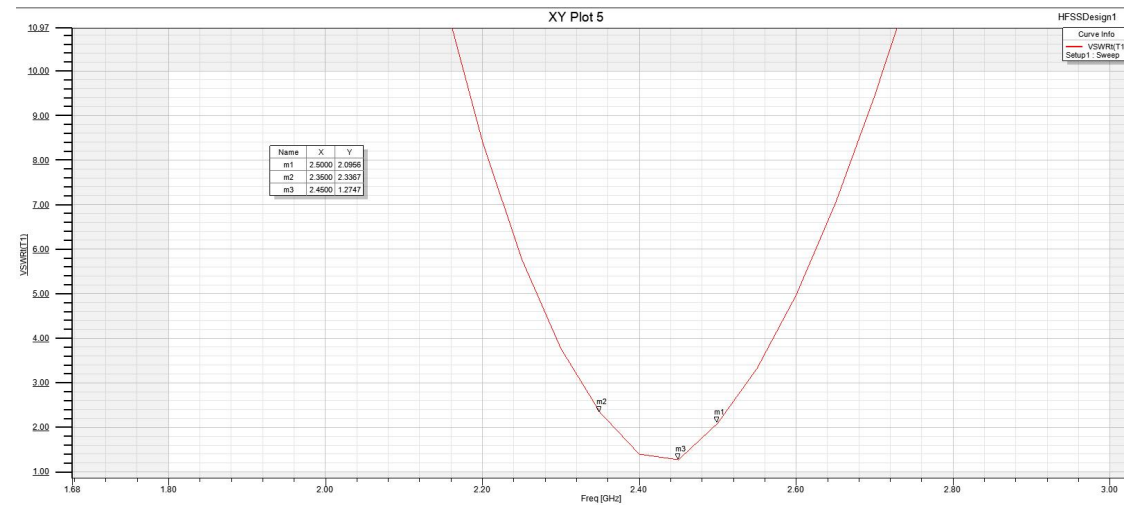


5、Radiation Patterns(GAIN)

Plane	XY			XZ			YZ		
Frequency(MHz)	2400	2440	2480	2400	2440	2480	2400	2440	2480
Peak Gain(dbi)	0.67	0.68	0.65	1.21	1.27	1.23	0.55	0.53	0.52

XY-Plane

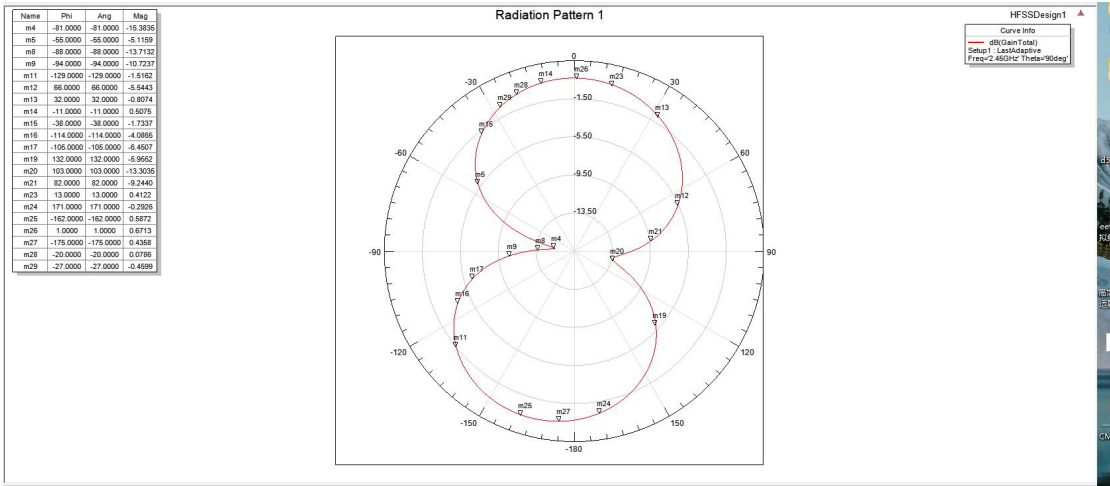

XZ-Plane

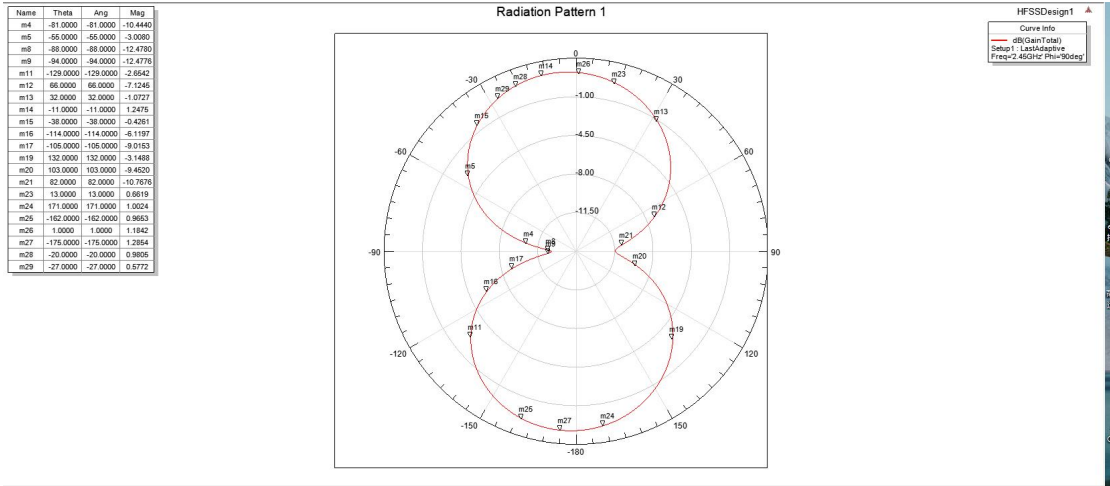

YZ-Plane

Name	Theta	Phi	Mag
m4	-81.0000	-81.0000	0.2649
m5	-55.0000	-55.0000	0.6501
m8	-88.0000	-88.0000	0.2442
m9	-94.0000	-94.0000	0.2499
m11	-129.0000	-129.0000	0.6429
m12	66.0000	66.0000	0.8110
m13	32.0000	32.0000	1.1364
m14	-11.0000	-11.0000	1.1461
m15	-38.0000	-38.0000	0.8181
m16	-114.0000	-114.0000	0.4153
m17	-105.0000	-105.0000	0.3153
m19	132.0000	132.0000	0.8651
m20	103.0000	103.0000	0.6991
m21	82.0000	82.0000	0.6964
m23	13.0000	13.0000	1.2202
m24	171.0000	171.0000	1.2656
m25	-162.0000	-162.0000	1.1347
m26	1.0000	1.0000	1.2105
m27	-175.0000	-175.0000	1.2383
m28	-20.0000	-20.0000	1.0618
m29	-27.0000	-27.0000	0.9776

