

承認書

APPROVAL

客 户
CUSTOMER: Dongguan Chuangtong International Technology Co., Ltd.

地 址
ADDRESS: No. 801, 75 Xiangfeng Street, Dalingshan Town,
Dongguan City, Guangdong Province

品 名 规 格
DESCRIPTION: antenna-WIFI2.4/5G


客 户 料 号
CUS PART NO.:

日 期
D A T E: 2020. 4. 15


工 程 ENGINEERING DEPARTMENT	品 保 Q C DEPARTMENT	业 务 SALES DEPARTMENT
Wu Shuyi	Liu Li	Wang Hongtao

1.测试项目与设备/Test items and equipment


	测试项目/Test items	设备/equipment
1. S11 参数 (S-parameter)	1. 回波损耗 (Return Loss) 2. 电压驻波比 (VSWR)	Network Analyzer:Agilent E5071B HP 8753D
2. 有源测试 (Active)	1. 发射功率 (TRP) 2. 接收灵敏度 (TIS)	1. Darkroom: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber2. Comprehensive tester:Agilent 8960 E5515B ×2 StarPoint SP6011
3.无源测试 (Passive)	1.天线增益 (Gain) 2.天线效率 率 (Efficiency)	1. Darkroom:ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2.Network Analyzer:Agilent E5071B HP 8753D

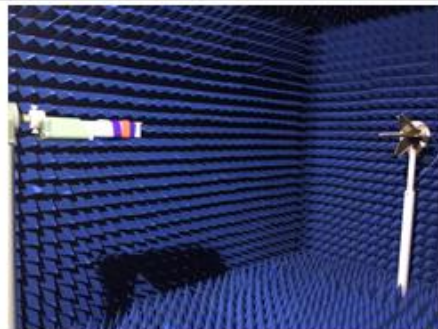

2. Matching circuit -WIFI antenna:

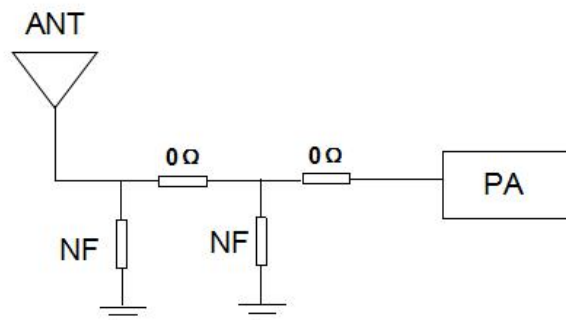

3. Antenna structure diagram:

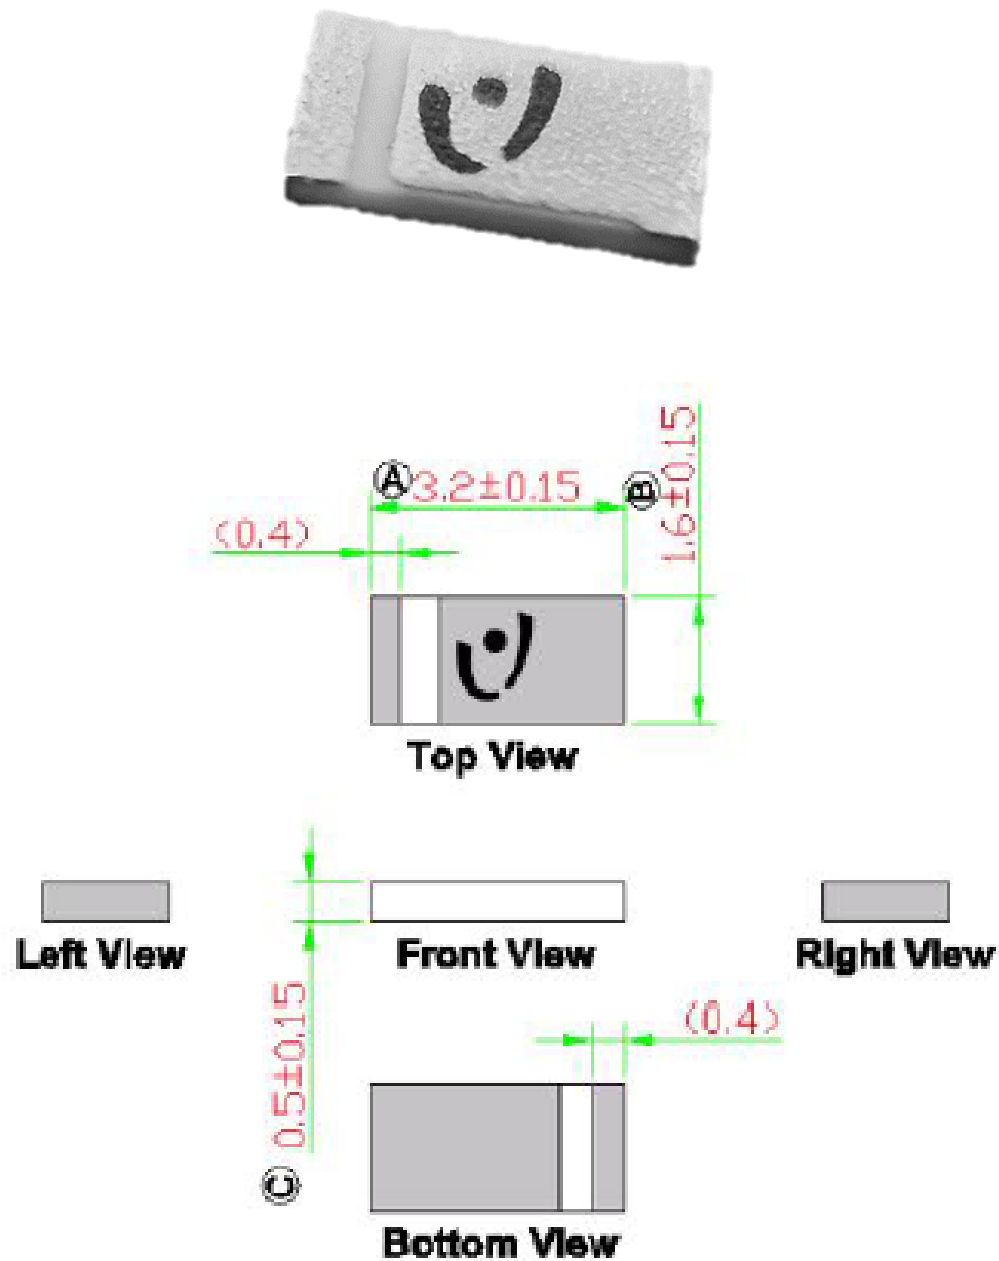

NOTE:

1. All materials are RoHS 2.0 compliant.
2. *A~C* Critical Dimensions.
3. *(< >)* Reference Dimensions.

PIN Definition


TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

4. Network test chart:

SWR

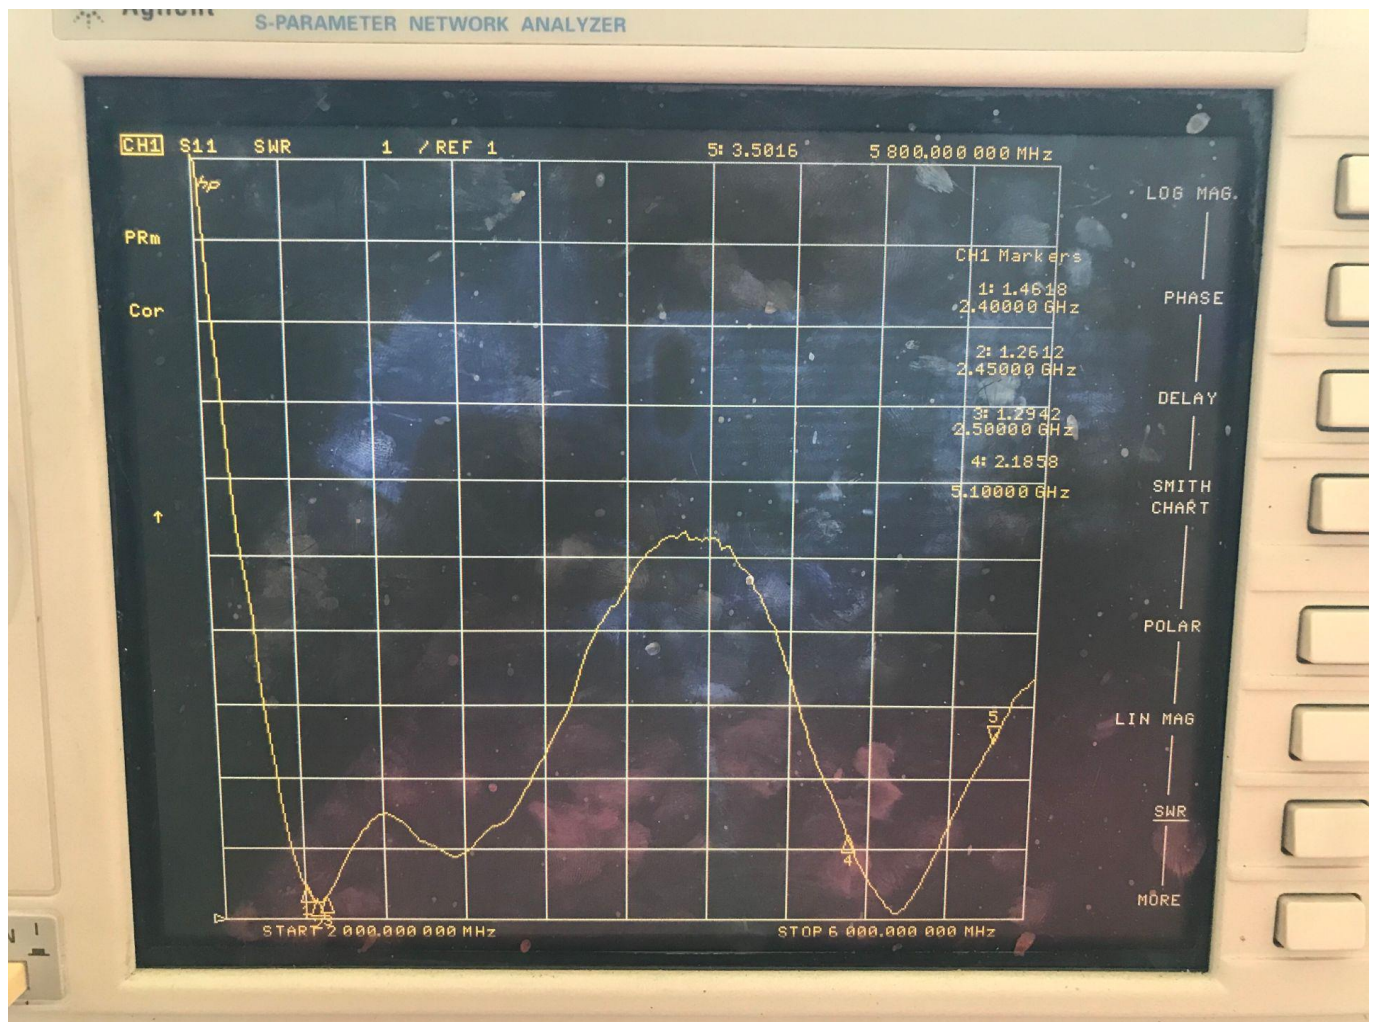


5. Antenna efficiency and gain

Passive Test For WIFI										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	50.95	-2.93	2.57	0.42	22.906	28.047	2.57	-23.43	48.09	47.94
2410	50.35	-2.98	2.48	0.33	23.585	26.761	2.48	-24.02	48.07	47.87
2420	51.21	-2.91	3.00	0.31	25.17	26.045	2.46	-26.2	48.18	48
2430	53.88	-2.69	2.59	0.44	27.509	26.373	2.59	-27.38	48.17	47.99
2440	56.87	-2.45	2.76	0.61	29.67	27.204	2.76	-26.16	48.33	48.11
2450	59.47	-2.26	2.83	0.68	31.157	28.317	2.83	-27.79	48.44	48.14
2460	60.02	-2.22	2.73	0.58	31.354	28.668	2.73	-26.56	48.41	48.06
2470	60.23	-2.2	2.63	0.48	31.501	28.732	2.63	-25.39	48.49	48.11
2480	60.97	-2.15	2.62	0.47	32.315	28.653	2.62	-23.73	48.63	48.18
2490	62.93	-2.01	2.71	0.56	34.131	28.803	2.71	-22.93	48.76	48.29
2500	63.47	-1.97	2.79	0.64	35.22	28.248	2.79	-22.05	48.69	48.16


Passive Test For D5										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
5100	58.78	-2.31	2.56	1.41	29.514	29.267	2.56	-12.14	57.95	57.06
5150	57.4	-2.41	2.33	1.18	28.84	28.562	2.33	-13.21	57.91	57.19
5200	58.34	-2.34	2.68	0.85	28.705	29.637	3	-13.5	57.55	56.83
5250	66.37	-1.78	2.3	1.15	32.315	34.054	2.3	-16.53	57.72	56.91
5300	62.1	-2.07	2.8	0.65	29.853	32.252	2.8	-16.97	57.16	56.32
5350	66	-1.8	2.61	0.46	31.193	34.807	2.61	-13.58	57.61	56.81
5400	62.43	-1.4	2.4	0.25	33.881	38.553	2.4	-10.95	58.32	57.48
5450	58.63	-1.7	2.27	0.12	31.467	36.162	2.27	-10.38	58.49	57.41
5500	58.69	-2.31	2.01	-0.14	27.064	31.628	2.01	-10.44	58.91	57.66
5550	61.45	-2.12	2.8	0.65	28.718	32.727	2.8	-10.14	59.82	58.58
5600	64.35	-1.91	2.93	0.97	31.234	33.119	3.02	-10.29	59.51	58.82
5650	62.16	-1.42	2.87	1.72	35.974	36.184	2.87	-10.44	60.1	59.5
5700	59.74	-0.98	3.00	1.88	40.089	39.653	3.03	-9.38	60.54	59.93
5750	54.03	-0.76	2.77	1.62	41.682	42.35	2.77	-9.8	60.86	60.31
5850	54.41	-0.74	2.82	1.67	41.05	43.364	2.82	-13.19	61.14	60.57

电 性 能 指 标		Electrical Specifications	
频率范围	2400~2500/5100~5850MHz	Frequency Range	2400~2500/5100~5850MHz
电压驻波比	≤2.0	VSWR	≤2.0
输入阻抗	50 Ω	Input Impedance	50 Ω
增益	3.00dBi	Gain	3.00dBi
最大输入功率	50W	Maximum Input Power	50W
机 械 指 标		Mechanical Specifications	
工作温度	-40℃~+85℃	Working Temperature	-40℃~+85℃
工作湿度	20~80%	Working Humidity	20~80%


2450.000MHz

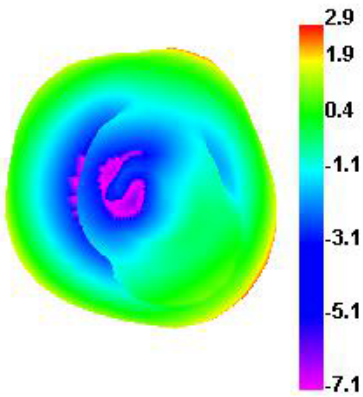


2450.000MHz H

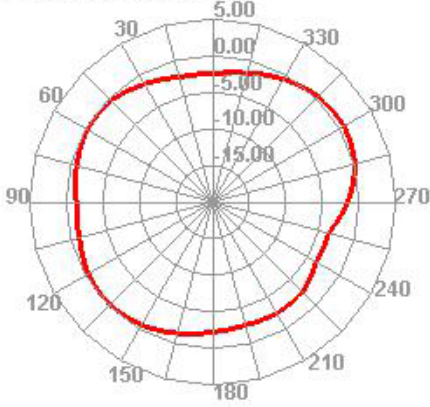


2450.000MHz E1

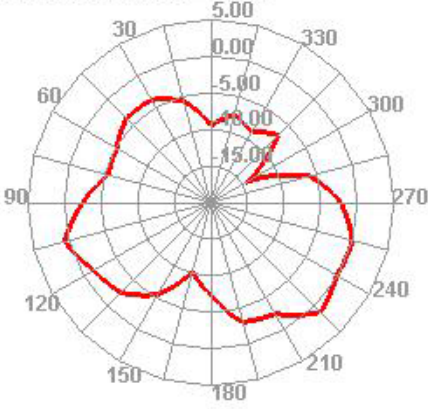


2450.000MHz E2

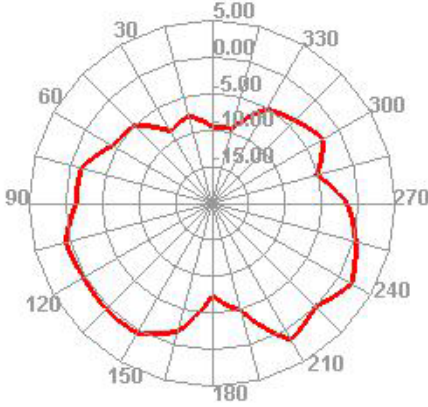


2410.000MHz

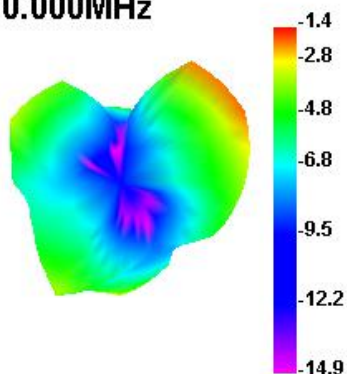


2410.000MHz H

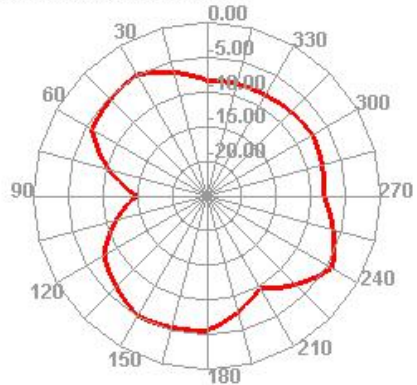


2410.000MHz E1

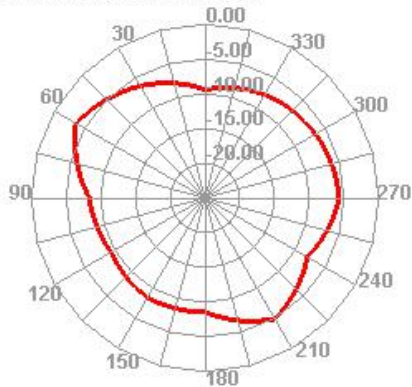


2410.000MHz E2

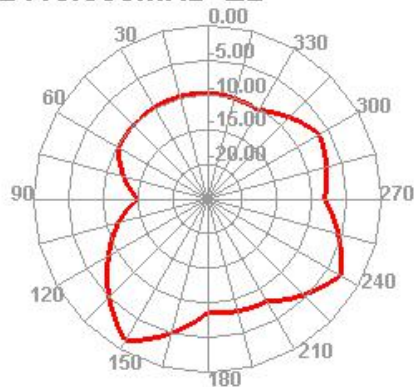


2480.000MHz

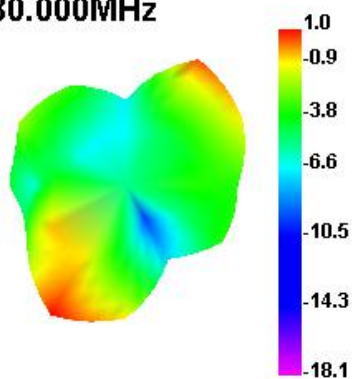


2480.000MHz H

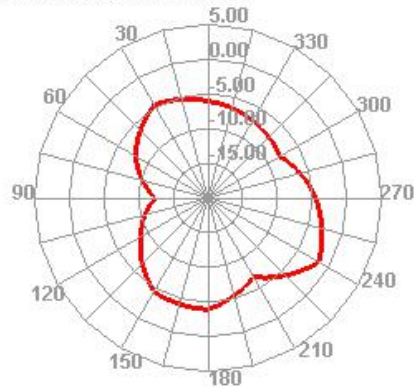


2480.000MHz E1

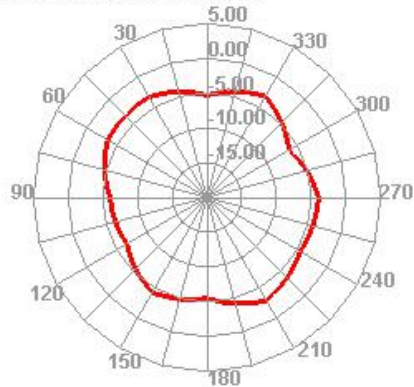


2480.000MHz E2

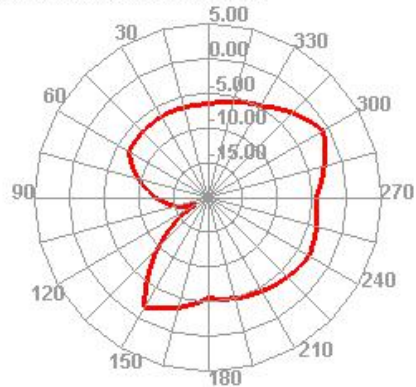


5150.000MHz

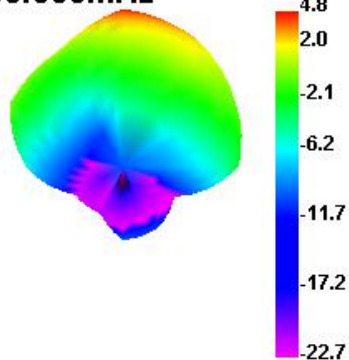


5150.000MHz H

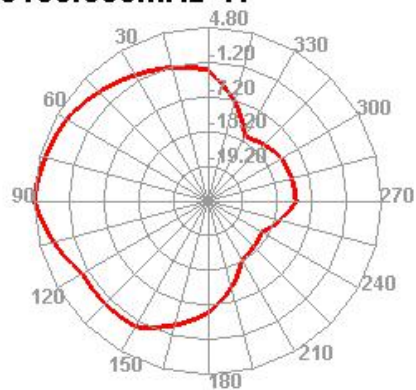


5150.000MHz E1

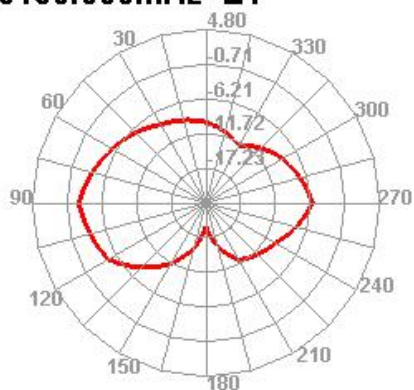


5150.000MHz E2

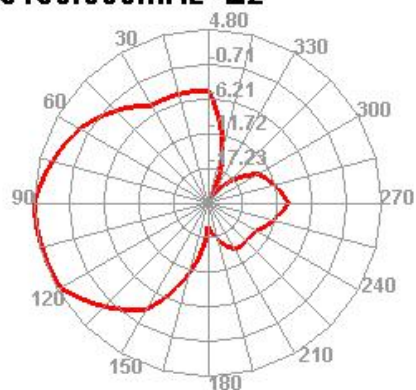


5500.000MHz




5500.000MHz H

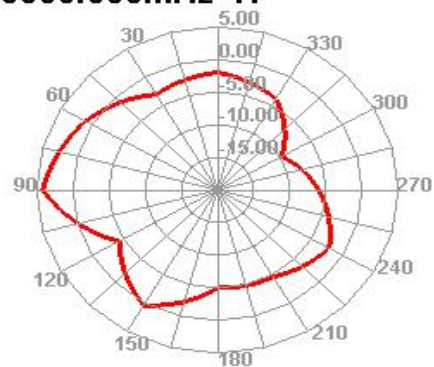


5500.000MHz E1

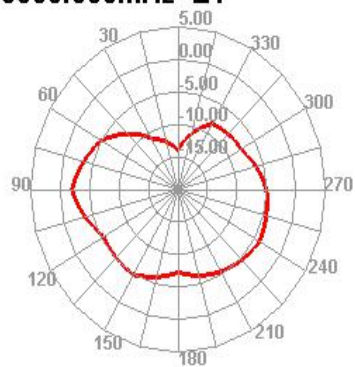


5500.000MHz E2

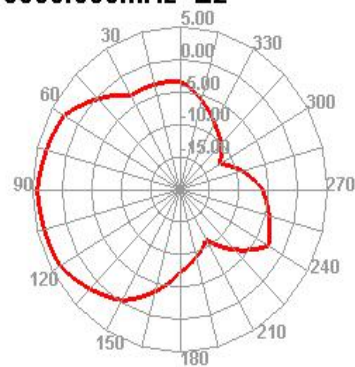


5750.000MHz

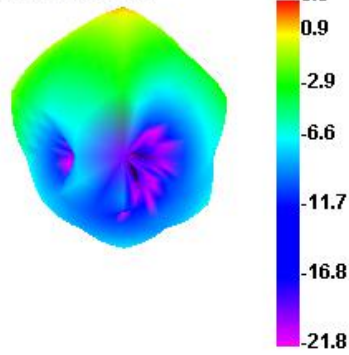


5750.000MHz H

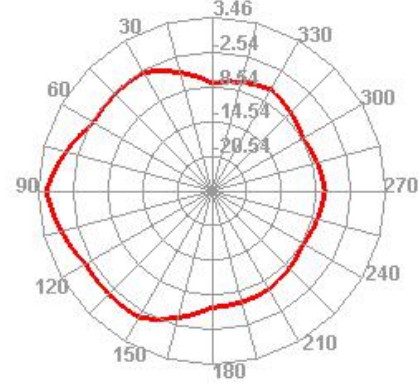


5750.000MHz E1

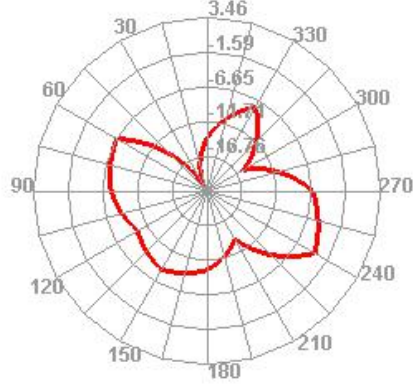


5750.000MHz E2

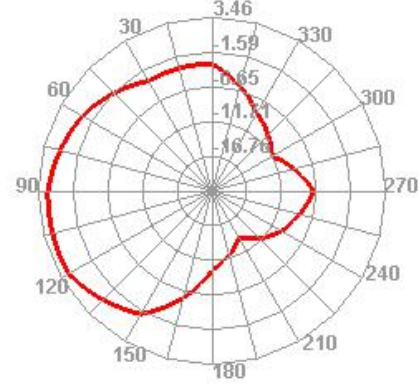


5850.000MHz

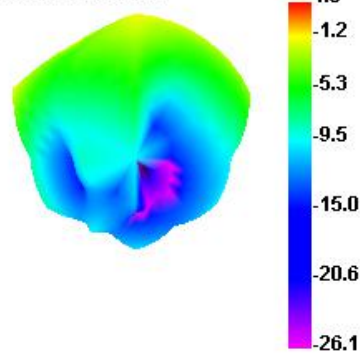

5850.000MHz H

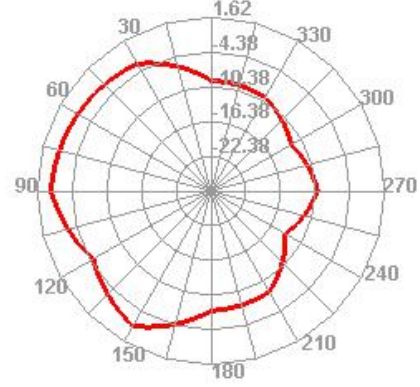

5850.000MHz E1

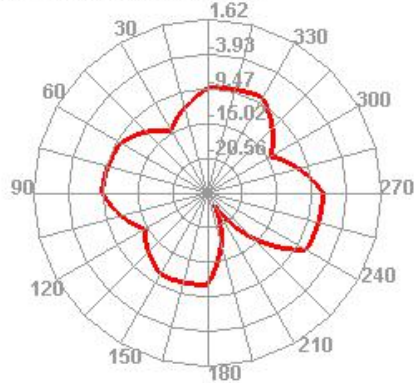

5850.000MHz E2

