

Motor networking

Turn on your phone's Bluetooth and connect to Wi-Fi before you connect to the Internet.



1. Scan the QR code or search for "Tuya Smart" app in the app store to download and register for the tuya account.

2. Open the "My Home" interface of the tuya smart app and click the "+" icon in the upper right corner.

3. Select "Gateway Control" to find your ZigBee Gateway, and follow its instructions. Return to "Home" interface after completing its instruction.

4. Back to the "Home" interface of the app and click the "+" icon in the upper right.

5. Manually select "Small Home Appliances" - "Curtain (ZigBee)".


6. Click "Done" after selecting the right Gateway.

7. Long press the motor "set key", when the indicator light is on, you can stop pressing the "set key", and press the indicator light again, indicating that the motor enters the distribution network state.

8. Adding device... If the time is over, please follow the above steps to re-operate.

9. The device added successfully.

Lithium battery charging



Low battery: The battery will emit a warning sound.



Fully charged: The battery indicator light will go out.





Charging: The battery indicator light is red.

Tuya ZigBee


Lithium Battery Motor Specification

Curtain motor can be hidden in the curtain box, the motor supports: intelligent version, and remote control version.

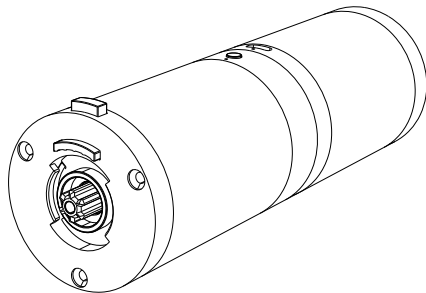


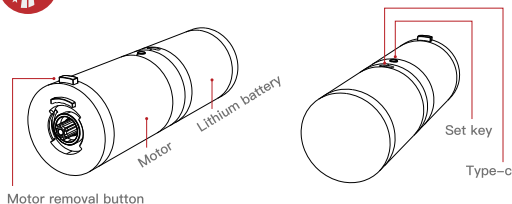

Lithium battery installation




1. Align the lithium battery with the hole at the rear of the motor and gently insert it.




2. Rotate the battery approximately 35° towards the set key, and the assembly is complete.

Motor installation




1. After aligning the motor shaft core with the hole position of the gearbox, gently insert the motor.




2. The motor rotates 90° towards the track and the assembly is completed.

Motor disassembly




1. Press and hold the disassembly button of the motor and rotate it 90° at the same time.




2. Take it out downward and the motor is disassembled successfully.


Remote control illustration



The percentage function can be used only after it is open and close.




Remote control cancels pairing step




Press and hold the set key of the motor for about 2 seconds, the indicator light turns on, and then release. Click the set key of the motor again for about 7 seconds, the indicator is off, and the pairing is cancelled successfully.

Remote control pairing steps




1. Press and hold the motor's set button for about 2 seconds until the indicator lights up, then release.



2. Press the left or right select key on the remote control to select the remote control channel. After confirming the channel, press the study key on the back of the remote control, and the indicator light will turn off to indicate successful code matching.

Switch running direction



Press and hold the motor set key for about 10 seconds, and don't let go of the indicator light until the motor indicator light flashes and release the key, the motor will reverse operation.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.