

**FCC - TEST REPORT**

Report Number : **709502606856-00A** Date of Issue: September 04, 2026

Model : RFE-KG2

Product Type : Remote control

Applicant : Tech Tool Sourcing Co.,Ltd.

Address : 5F WENSHI BUILDING, NO.1998 SOUTH YANGGAO ROAD PUDONG DISTRICT, SHANGHAI, China

Production Facility : Hansi Holding co., Ltd.

Address : SHANGBUTOU, QINGJIANG, YUEQING, ZHEJIANG, CHINA

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : 24



*TÜV SÜD Products Testing (Shanghai) Co., Ltd. is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Products Testing (Shanghai) Co., Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Products Testing (Shanghai) Co., Ltd. reports shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Products Testing (Shanghai) Co., Ltd. reports issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*



**1 Table of Contents**

1 Table of Contents..... 2

2 Report Modification Record ..... 3

3 Details about the Test Laboratory ..... 3

4 Description of the Equipment Under Test ..... 4

5 Summary of Test Standards ..... 5

6 Summary of Test Results..... 6

7 General Remarks ..... 7

8 Systems test configuration..... 8

9 Test Setups..... 9

10 Test Methodology ..... 11

    10.1 Radiated Emission..... 11

    10.2 20dB Bandwidth Measurement ..... 19

    10.3 Deactivation Time ..... 20

11 Test Equipment List ..... 21

12 System Measurement Uncertainty..... 22

13 Photographs of Test Set-ups ..... 23

14 Photographs of EUT ..... 24



## 2 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

| Issue            | Description of Change | Date of Issue |
|------------------|-----------------------|---------------|
| 709502606856-00A | First Issue           | 09/04/2026    |

## 3 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Products Testing (Shanghai) Co., Ltd.  
No.16 Lane, 1951 Du Hui Road,  
Shanghai 201108,  
P.R. China

Telephone: +86 21 6037 6300

FCC Registration No.: 820234

FCC Designation Number: CN1183

ISED CAB identifier CN0101

IC Registration No.: 31668

## 4 Description of the Equipment Under Test

|                            |                                                                                                                               |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Product:                   | Remote control                                                                                                                |
| Model no.:                 | RFE-KG2                                                                                                                       |
| FCC ID:                    | 2BXDU-RVC124-RING                                                                                                             |
| Options and accessories:   | NA                                                                                                                            |
| Rating:                    | 3V DC                                                                                                                         |
| RF Transmission Frequency: | 433.92MHz                                                                                                                     |
| No. of Operated Channel:   | 1                                                                                                                             |
| Modulation:                | ASK                                                                                                                           |
| Hardware Version:          | V5                                                                                                                            |
| Software Version:          | V1.1                                                                                                                          |
| Channel list:              | 433.92MHz                                                                                                                     |
| Antenna Type:              | Built-in antenna                                                                                                              |
| Description of the EUT:    | The Equipment Under Test (EUT) is an Remote control with SRD function. We tested it and listed the worst data in this report. |
| Test sample no.:           | SHA-1061827-1                                                                                                                 |

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment, antenna gain or any information supplied.



**5 Summary of Test Standards**

| Test Standards                             |                                                              |
|--------------------------------------------|--------------------------------------------------------------|
| FCC Part 15 Subpart C<br>10-1-2025 Edition | RADIO FREQUENCY DEVICES<br>Subpart C - Intentional Radiators |

All the test methods were according to ANSI C63.10-2020.

## 6 Summary of Test Results

| Technical Requirements                |                                  |             |                |
|---------------------------------------|----------------------------------|-------------|----------------|
| FCC Part 15 Subpart C                 |                                  |             |                |
| Test Condition                        |                                  | Test Site   | Test Result    |
| §15.207                               | Conducted emission AC power port | Shield room | Not Applicable |
| §15.205, §15.209, 15.35 (c)§15.231(b) | The Field strength of Emissions  | 3m chamber  | Pass           |
| §15.231(c)                            | 20dB Bandwidth Measurement       | Shield room | Pass           |
| §15.231(a)(1)                         | Deactivation Time                | Shield room | Pass           |
| §15.203                               | Antenna requirement              | See Note 2  | Pass           |

### Remark

Note 1: N/A – Not Applicable. Conducted emission is not apply for battery operated device.

Note 2: The EUT uses a Built-in antenna. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.



## 7 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2BXDU-RVC124-RING complies with Section 15.207, 15.205, 15.209, 15.231 of the FCC Part 15, Subpart C Rules.

We tested it and listed the worst data in this report.

### SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: July 30, 2026

Testing Start Date: August 3, 2026

Testing End Date: September 4, 2026

- TÜV SÜD Products Testing (Shanghai) Co., Ltd.

Reviewed by:

Prepared by:

Tested by:



Hui TONG  
Reviewer Manager

Wenqiang LU  
Project Engineer

Mei JIANG  
EMC Test Engineer




## 8 Systems test configuration

Auxiliary Equipment Used during Test:

| DESCRIPTION | MANUFACTURER | MODEL NO.(SHIELD) | S/N(LENGTH) |
|-------------|--------------|-------------------|-------------|
| --          | --           | --                | --          |


## 9 Test Setups

### 9.1 AC Power Line Conducted Emission test setups

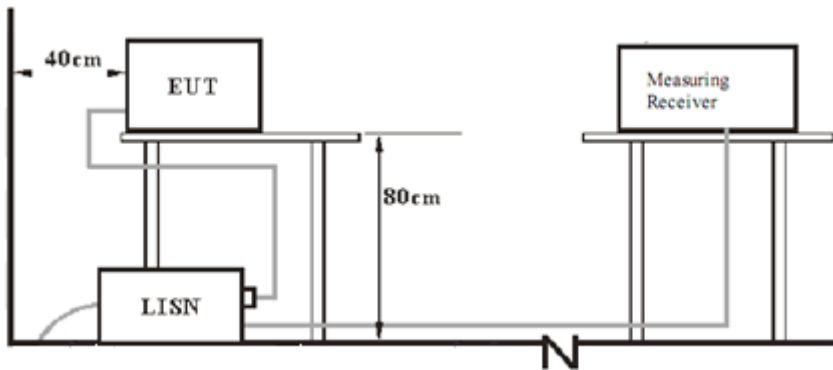


### 9.2 Radiated test setups


9kHz ~ 30MHz Test Setup:

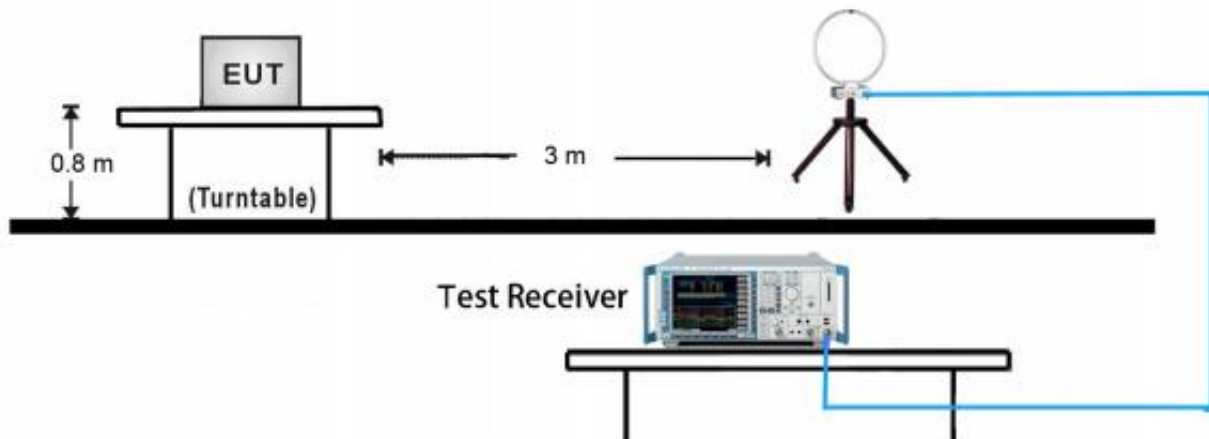


30MHz ~ 1GHz Test Setup:

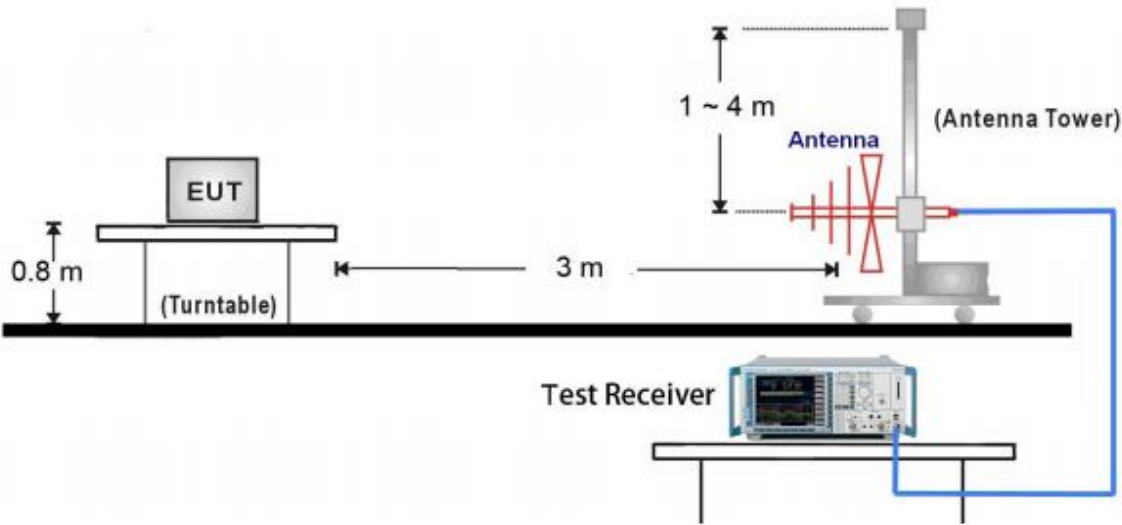

Above 1GHz Test Setup:

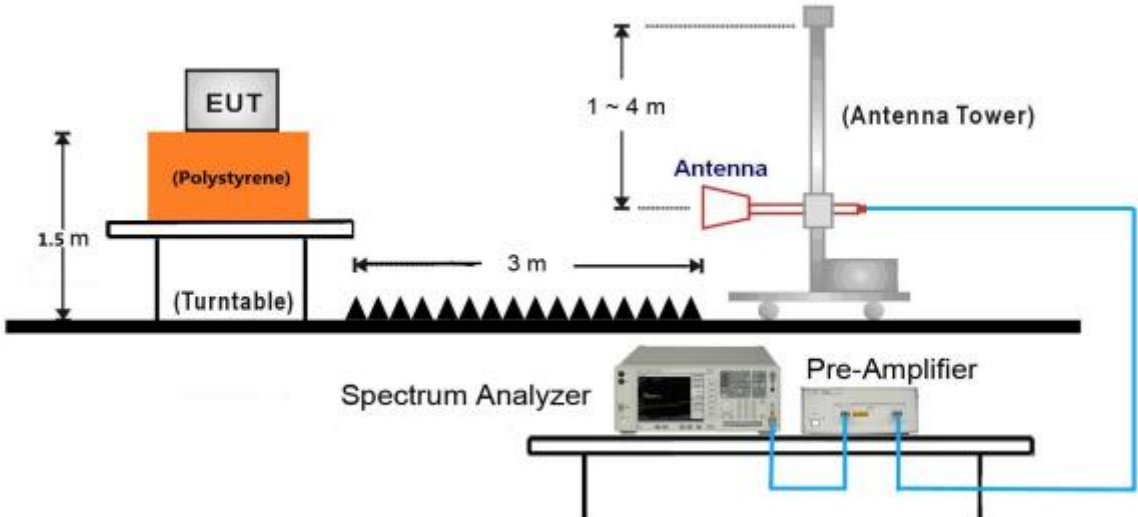

9.3 Conducted RF test setups



## 10 Test Methodology

### 10.1 Radiated Emission

#### Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:  
9kHz -150kHz  
RBW = 200Hz, VBW = 1kHz for peak measurement, Sweep = auto,  
Detector function = peak, Trace = max hold.  
150kHz - 30MHz  
RBW = 10 kHz, VBW = 30 kHz for peak measurement, Sweep = auto,  
Detector function = peak, Trace = max hold.  
30MHz - 1GHz  
RBW = 100 kHz, VBW = 300 kHz for peak measurement, Sweep = auto,  
Detector function = peak, Trace = max hold.  
For Above 1GHz  
RBW = 1MHz, VBW $\geq$ 3RBW for peak measurement, Sweep = auto, Detector function = peak,  
Trace = max hold.

## Limit

1. FCC Limit: In addition to the provisions of § 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

| Fundamental frequency (MHz)          | Field Strength of Fundamental (Microvolts /meter) | Field Strength of spurious emissions ((Microvolts /meter) |
|--------------------------------------|---------------------------------------------------|-----------------------------------------------------------|
| 40.66-40.70                          | 2,250                                             | 225                                                       |
| 70-130                               | 1,250                                             | 125                                                       |
| 130-174                              | 1,250 to 3,750 *                                  | 125 to 375 *                                              |
| 174-260                              | 3,750                                             | 375                                                       |
| 260-470                              | 3,750 to 12, 500*                                 | 375 to 1,250*                                             |
| Above 470                            | 12,500                                            | 1,250                                                     |
| *Linear interpolation with frequency |                                                   |                                                           |

(a) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(b) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in § 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of § 15.205 shall be demonstrated using the measurement instrumentation specified in that section.

(c) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

### Limits for 15.209 Radiated emission limits

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

Note 1: Limit 3m(dBμV/m)=Limit 300m(dBμV/m)+40Log(300m/3m) (Below 30MHz)

Note 2: Limit 3m(dBμV/m)=Limit 30m(dBμV/m)+40Log(30m/3m) (Below 30MHz)

Note 3: dBμV/m = 20log(μV/m)

## Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

| Radiated Emission |                         |                  |                       |                   |                    |              |        |               |
|-------------------|-------------------------|------------------|-----------------------|-------------------|--------------------|--------------|--------|---------------|
| Value             | Emissions Frequency MHz | E-Field Polarity | Emission Level dBμV/m | Average Factor dB | AV Emission dBμV/m | Limit dBμV/m | Margin | Emission Type |
| Below 1GHz        |                         |                  |                       |                   |                    |              |        |               |
| PK                | 433.92                  | H                | 75.7                  | /                 | /                  | 100.83       | 25.13  | Fundamental   |
| AV                | 433.92                  | H                | 75.7                  | -9.62             | 66.08              | 80.83        | 14.75  | Fundamental   |
| PK                | 433.92                  | V                | 65.0                  | /                 | /                  | 100.83       | 35.83  | Fundamental   |
| AV                | 433.92                  | V                | 65.0                  | -9.62             | 55.38              | 80.83        | 25.45  | Fundamental   |
| PK                | 867.88                  | H                | 62.9                  | /                 | /                  | 80.83        | 17.93  | Spurious      |
| AV                | 867.88                  | H                | 62.9                  | -9.62             | 53.28              | 60.83        | 7.55   | Spurious      |
| PK                | 867.84                  | V                | 57.5                  | /                 | /                  | 80.83        | 23.33  | Spurious      |
| AV                | 867.84                  | V                | 57.5                  | -9.62             | 47.88              | 60.83        | 12.95  | Spurious      |
| Above 1GHz        |                         |                  |                       |                   |                    |              |        |               |
| PK                | 2169.6                  | H                | 60.3                  | /                 | /                  | 80.83        | 20.53  | Spurious      |
| AV                | 2169.6                  | H                | 60.3                  | -9.62             | 50.68              | 60.83        | 10.15  | Spurious      |
| PK                | 2603.5                  | H                | 57.9                  | /                 | /                  | 80.83        | 22.93  | Spurious      |
| AV                | 2603.5                  | H                | 57.9                  | -9.62             | 48.28              | 60.83        | 12.55  | Spurious      |
| PK                | 3037.6                  | H                | 58.2                  | /                 | /                  | 80.83        | 22.63  | Spurious      |
| AV                | 3037.6                  | H                | 58.2                  | -9.62             | 48.58              | 60.83        | 12.25  | Spurious      |
| PK                | 3471.1                  | H                | 54.1                  | /                 | /                  | 80.83        | 26.73  | Spurious      |
| AV                | 3471.1                  | H                | 54.1                  | -9.62             | 44.48              | 60.83        | 16.35  | Spurious      |
| PK                | *4339.6                 | H                | 55.6                  | /                 | /                  | 74           | 18.4   | Spurious      |
| AV                | *4339.6                 | H                | 55.6                  | -9.62             | 45.98              | 54           | 8.02   | Spurious      |
| PK                | *4773.2                 | H                | 57.8                  | /                 | /                  | 74           | 16.2   | Spurious      |
| AV                | *4773.2                 | H                | 57.8                  | -9.62             | 48.18              | 54           | 5.82   | Spurious      |
| PK                | 1735.6                  | V                | 45.5                  | /                 | /                  | 80.83        | 35.33  | Spurious      |
| AV                | 1735.6                  | V                | 45.5                  | -9.62             | 35.88              | 60.83        | 24.95  | Spurious      |
| PK                | 2169.8                  | V                | 52.9                  | /                 | /                  | 80.83        | 27.93  | Spurious      |
| AV                | 2169.8                  | V                | 52.9                  | -9.62             | 43.28              | 60.83        | 17.55  | Spurious      |
| PK                | 3037.6                  | V                | 50.1                  | /                 | /                  | 80.83        | 30.73  | Spurious      |
| AV                | 3037.6                  | V                | 50.1                  | -9.62             | 40.48              | 60.83        | 20.35  | Spurious      |
| PK                | 3471.9                  | V                | 55.7                  | /                 | /                  | 80.83        | 25.13  | Spurious      |
| AV                | 3471.9                  | V                | 55.7                  | -9.62             | 46.08              | 60.83        | 14.75  | Spurious      |
| PK                | *4339.6                 | V                | 53.2                  | /                 | /                  | 74           | 20.8   | Spurious      |
| AV                | *4339.6                 | V                | 53.2                  | -9.62             | 43.58              | 54           | 10.42  | Spurious      |
| PK                | *4773.4                 | V                | 53.3                  | /                 | /                  | 74           | 20.7   | Spurious      |
| AV                | *4773.4                 | V                | 53.3                  | -9.62             | 43.68              | 54           | 10.32  | Spurious      |


### Remark:

- 1: Data of measurement within this frequency range shown "/" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured..
- 2: "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- 3: Corrected Amplitude = Read level + Corrector factor  
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
- 4: Correct Factor = Antenna Factor + Cable Loss + Amplifier (for higher than 1GHz)
- 5: Corrected Reading = Original Receiver Reading + Correct Factor
- 6: Only the worst data listed in this report
- 7: AV Emission Level= PK Emission Level+20log (duty cycle)  
 Duty Cycle = (0.6087\*9)+(0.2174\*16)ms/27.101 (ms) =33.049%  
 Duty Cycle Factor =20log (Duty Cycle) =-9.62




Test Grath

Duty Cycle

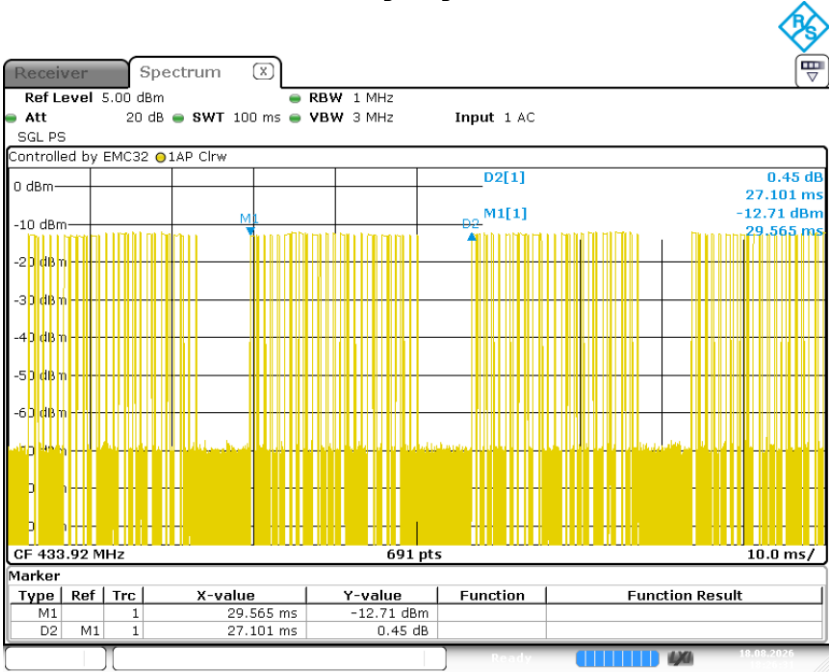

Date: 18.AUG.2026 18:26:31

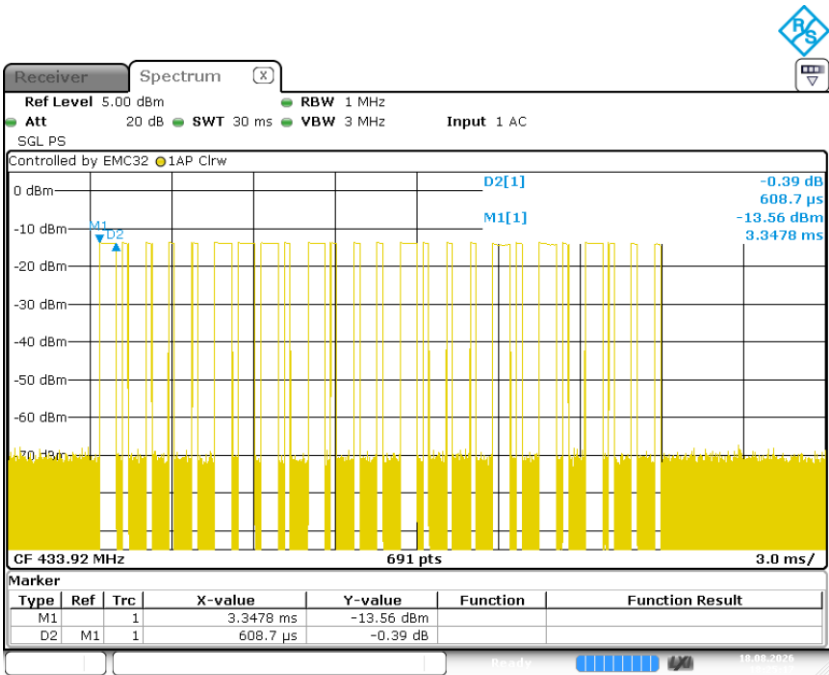


Date: 18.AUG.2026 18:25:17




Date: 18.AUG.2026 18:25:43

## 9K-30MHz

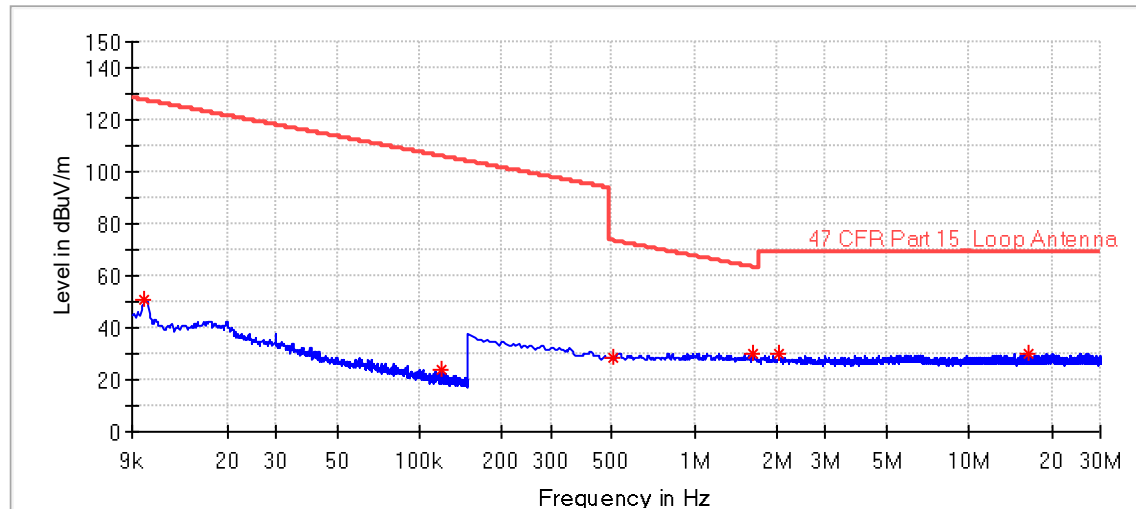

### Critical Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Margin (dB) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------|-----|---------------|--------------|---------|
| 0.009969        | 50.82            | 76.81       | X   | 271.0         | 19.6         |         |
| 0.119861        | 24.08            | 81.95       | X   | 237.0         | 18.8         |         |
| 0.505566        | 28.71            | 44.82       | X   | 132.0         | 18.8         |         |
| 1.642500        | 29.82            | 33.48       | X   | 8.0           | 18.9         |         |
| 2.024405        | 29.78            | 39.76       | X   | 37.0          | 19.0         |         |
| 16.536772       | 30.15            | 39.39       | X   | 120.0         | 18.9         |         |

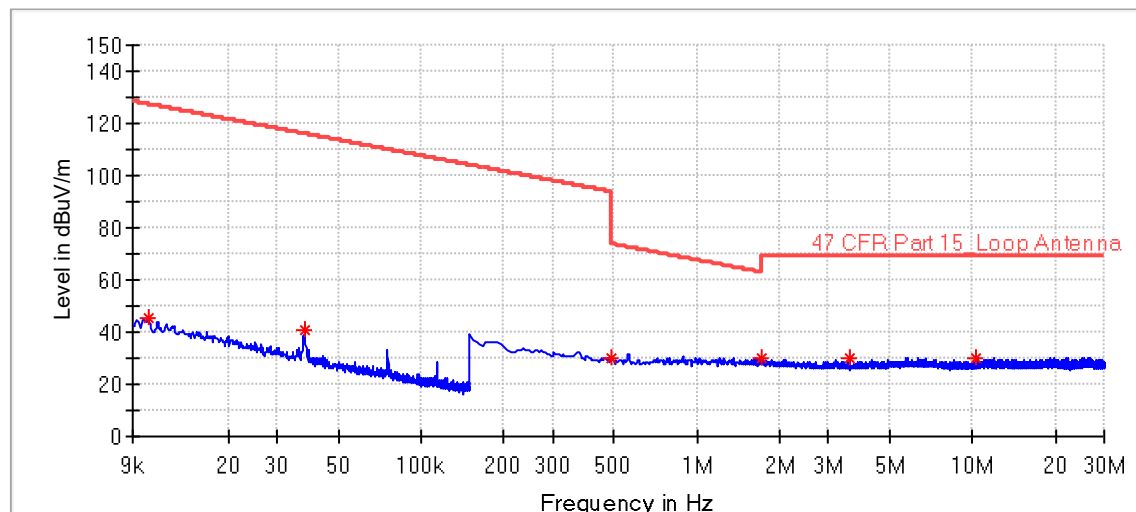


### Critical Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Margin (dB) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------|-----|---------------|--------------|---------|
| 0.010234        | 45.32            | 82.08       | Y   | 151.0         | 19.6         |         |
| 0.037905        | 41.01            | 75.02       | Y   | 346.0         | 18.9         |         |
| 0.492397        | 30.17            | 43.59       | Y   | 88.0          | 18.8         |         |
| 1.703956        | 30.05            | 32.92       | Y   | 278.0         | 19.0         |         |
| 3.587140        | 29.73            | 39.81       | Y   | 26.0          | 19.0         |         |
| 10.342897       | 30.35            | 39.19       | Y   | 347.0         | 18.9         |         |




Horizontal: 30-1GHz

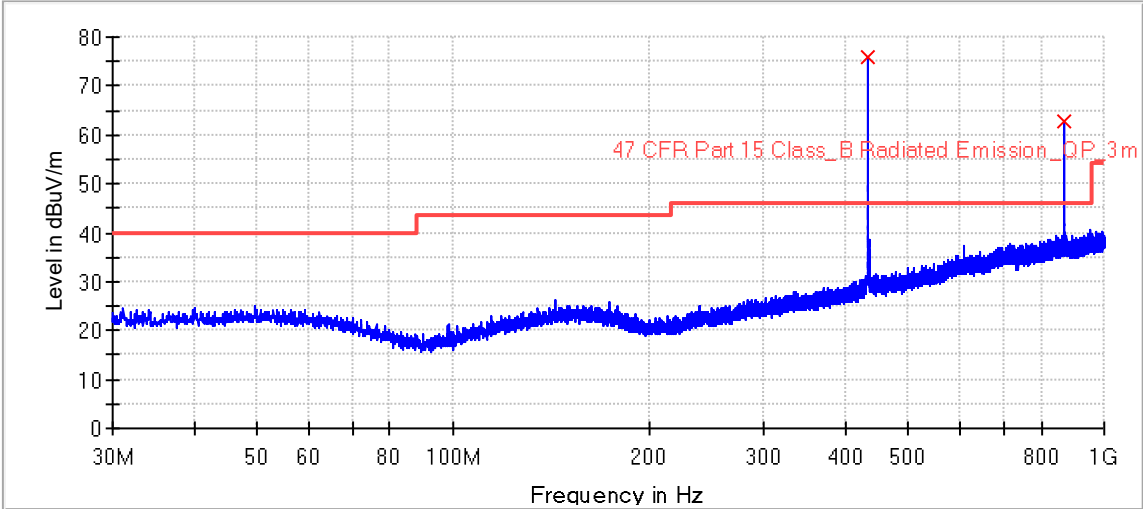

Limit and Margin


| Frequency (MHz) | MaxPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin - PK+ (dB) | Limit - PK+ (dBuV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|-----|---------------|--------------|-------------------|----------------------|
| 433.920000      | 75.7             | 1000.0          | 120.000         | 150.0       | H   | 142.0         | 25.2         | --                | --                   |
| 867.880000      | 62.9             | 1000.0          | 120.000         | 150.0       | H   | 84.0          | 33.3         | --                | --                   |

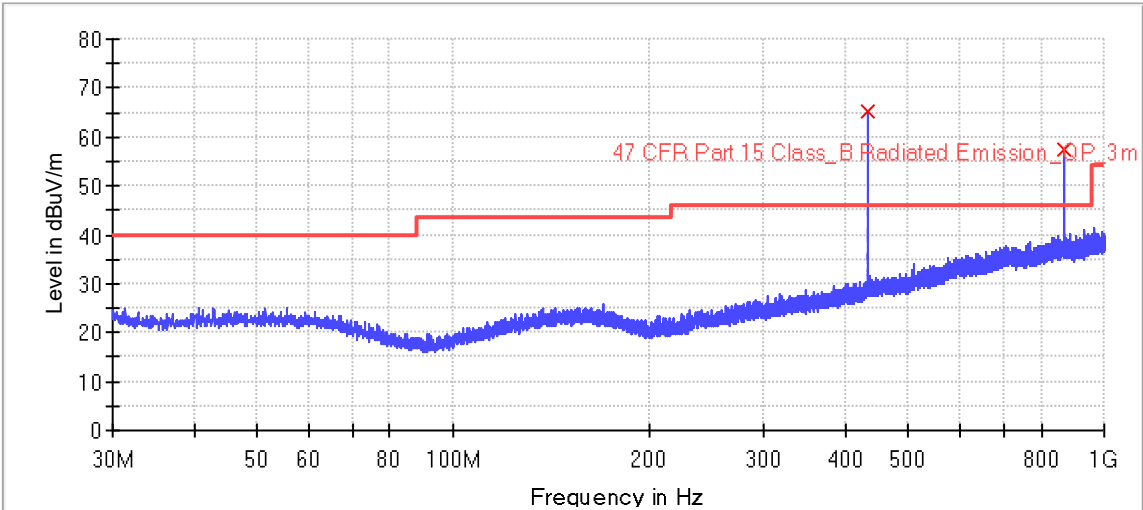

Limit and Margin


| Frequency (MHz) | MaxPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin - PK+ (dB) | Limit - PK+ (dBuV/m) |
|-----------------|------------------|-----------------|-----------------|-------------|-----|---------------|--------------|-------------------|----------------------|
| 433.920000      | 65.0             | 1000.0          | 120.000         | 100.0       | V   | 42.0          | 25.2         | --                | --                   |
| 867.880000      | 57.5             | 1000.0          | 120.000         | 100.0       | V   | 157.0         | 33.3         | --                | --                   |

## Horizontal: 1-5GHz

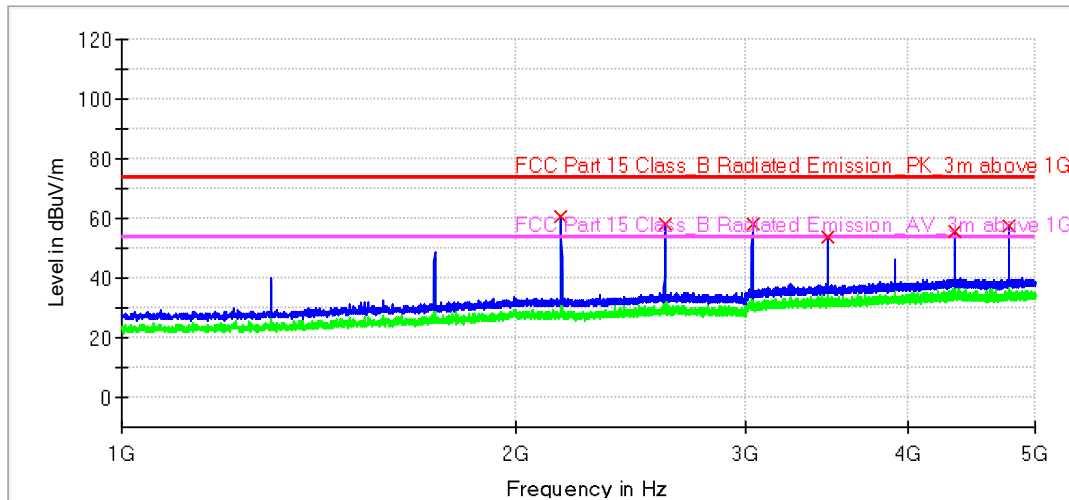

### Limit and Margin

| Frequency (MHz) | MaxPeak (dBuV/m) | CAverage (dBuV/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Margin - PK+ (dB) | Limit - PK+ (dBuV/m) |
|-----------------|------------------|-------------------|-------------|-----|---------------|------------|-------------------|----------------------|
| 2169.600000     | 60.3             | ---               | 150.0       | H   | 162.0         | -11.8      | ---               | ---                  |
| 2603.600000     | 57.9             | ---               | 150.0       | H   | 45.0          | -9.9       | ---               | ---                  |
| 3037.600000     | 58.2             | ---               | 150.0       | H   | 9.0           | -8.0       | ---               | ---                  |
| 3471.600000     | 54.1             | ---               | 150.0       | H   | 13.0          | -6.4       | ---               | ---                  |
| 4339.600000     | 55.6             | ---               | 150.0       | H   | 105.0         | -3.2       | ---               | ---                  |
| 4773.600000     | 57.8             | ---               | 150.0       | H   | 44.0          | -2.4       | ---               | ---                  |

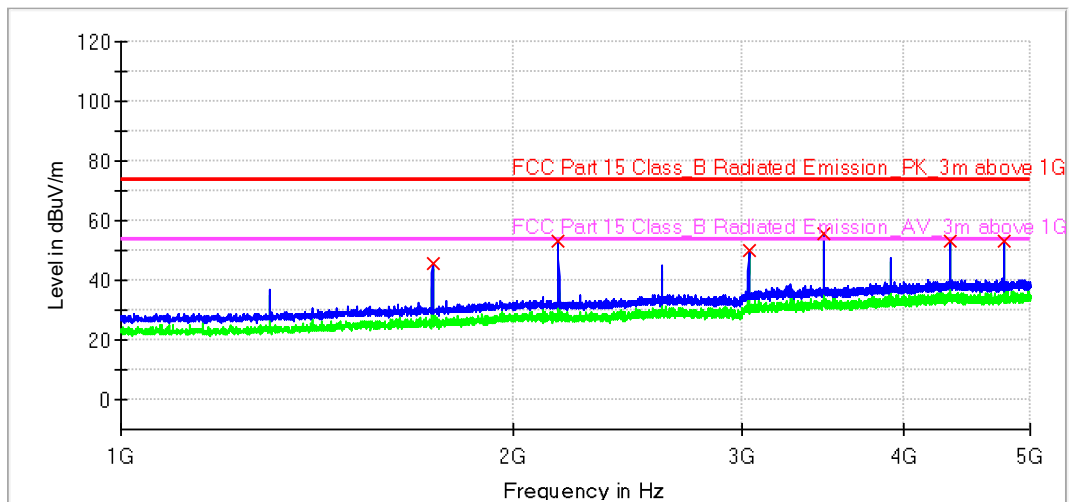

### Limit and Margin

| Frequency (MHz) | MaxPeak (dBuV/m) | CAverage (dBuV/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Margin - PK+ (dB) | Limit - PK+ (dBuV/m) |
|-----------------|------------------|-------------------|-------------|-----|---------------|------------|-------------------|----------------------|
| 1735.600000     | 45.5             | ---               | 150.0       | V   | 16.0          | -13.9      | ---               | ---                  |
| 2169.600000     | 52.9             | ---               | 150.0       | V   | 42.0          | -11.8      | ---               | ---                  |
| 3037.600000     | 50.1             | ---               | 150.0       | V   | 95.0          | -8.0       | ---               | ---                  |
| 3471.600000     | 55.7             | ---               | 150.0       | V   | 206.0         | -6.4       | ---               | ---                  |
| 4339.600000     | 53.2             | ---               | 150.0       | V   | 156.0         | -3.2       | ---               | ---                  |
| 4773.600000     | 53.3             | ---               | 150.0       | V   | 24.0          | -2.4       | ---               | ---                  |



10.220dB Bandwidth Measurement

Test Method

- 1. Set to the maximum power setting and enable the EUT transmit continuously.
- 2. Use the following test receiver settings:  
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel  
RBW =1% to 5% of the 20dB bandwidth of the emission being measured, VBW≥RBW,  
Sweep = auto, Detector function = peak, Trace = max hold
- 3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth. Record the results.
- 4. Repeat above procedures until all frequencies measured were complete.


Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = 0.25% \* 433.92 MHz = 1084 kHz

Test Result

| Channel | 20dB Bandwidth (KHz) | Limit (KHz) | Result |
|---------|----------------------|-------------|--------|
| 1       | 10.8689KHz           | ≤1084.8     | Pass   |

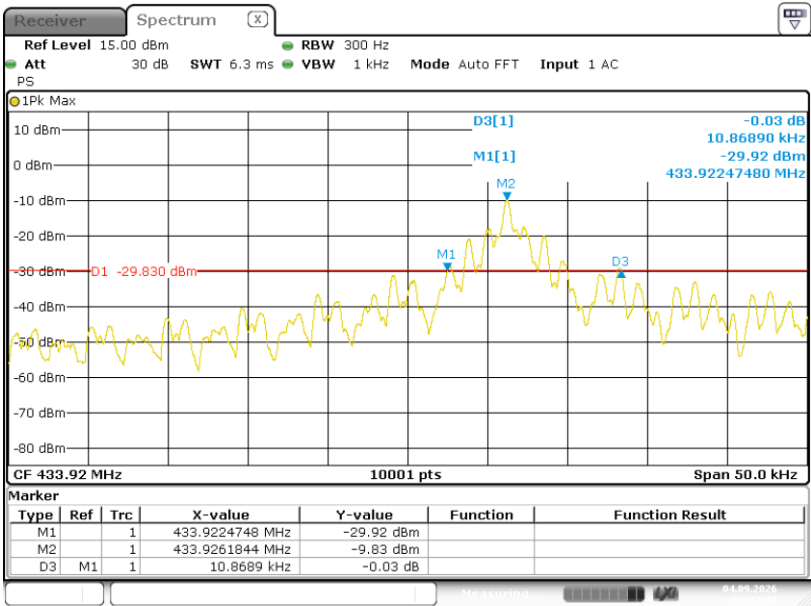

Date: 4 SEP 2026 12:22:30



10.3 Deactivation Time

Test Method


- 1. The EUT was placed on 0.8m height table, the RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT in transmitting mode.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as  $RBW \geq OBW$ ,  $VBW \geq RBW$ , Span=0Hz, detector=peak.
- 5. Repeat above procedures until all frequency measured was complete.

Limit

According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:  
(√) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.  
(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.  
(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

Test Result

| Channel | Frequency | Deactivation Time | Limit | Result |
|---------|-----------|-------------------|-------|--------|
| 1       | 433.92MHz | 231.9ms           | ≤5s   | Pass   |

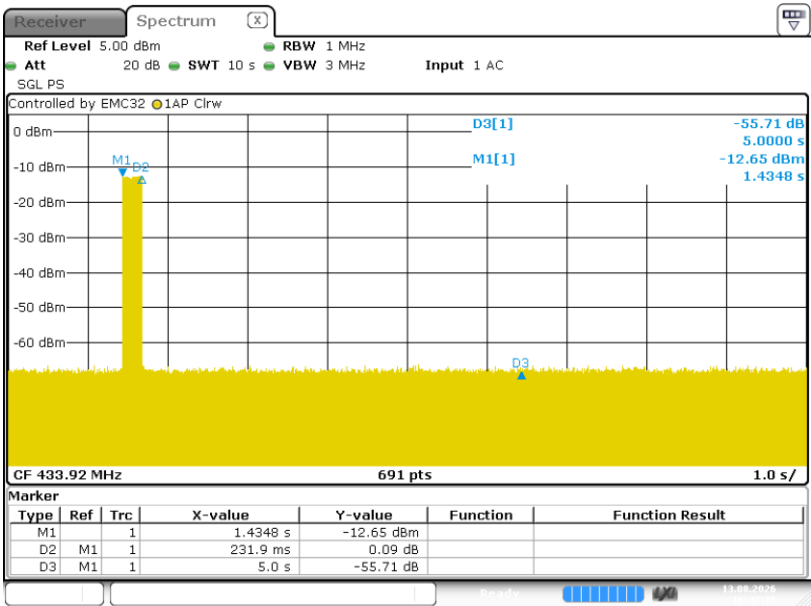

Date: 13.AUG.2026 16:42:16

## 11 Test Equipment List

### List of Test Instruments Test Site1

#### RF Conductive Test

| Description                  | Manufacturer | Model no. | Equipment ID.   | Calibration Date | Calibration Due |
|------------------------------|--------------|-----------|-----------------|------------------|-----------------|
| Signal and spectrum analyzer | R&S          | FSV40     | S1503003-YQ-EMC | 2026-8-3         | 2027-8-2        |

#### Radiated Emission Test

| USED                                | Equipment Name                       | Model       | Manufacturer   | Equipment ID.    | Calibration Date | Calibration Due |
|-------------------------------------|--------------------------------------|-------------|----------------|------------------|------------------|-----------------|
| <input checked="" type="checkbox"/> | EMI test receiver                    | ESR3        | R&S            | S1503109-YQ-EMC  | 2026-8-3         | 2027-8-2        |
| <input checked="" type="checkbox"/> | Trilog super broadband test antenna  | VULB9168    | SCHWARZBECK    | S1808296-YQ-EMC  | 2026-6-25        | 2027-6-24       |
| <input checked="" type="checkbox"/> | Double-ridged waveguide horn antenna | HF907       | R&S            | S1503009-YQ-EMC  | 2026-4-14        | 2027-4-13       |
| <input checked="" type="checkbox"/> | Pre-amplifier                        | HPAP-9K0130 | Shenzhen HzEMC | S2110423b-YQ-EMC | 2026-8-3         | 2027-8-2        |
| <input checked="" type="checkbox"/> | Signal and spectrum analyzer         | FSV40       | R&S            | S1503003-YQ-EMC  | 2026-8-3         | 2027-8-2        |
| <input checked="" type="checkbox"/> | Loop antenna                         | HFH2-Z2     | R&S            | S1503013-YQ-EMC  | 2026-6-25        | 2027-6-24       |
| <input checked="" type="checkbox"/> | RE_Cable_01 Coaxial Cable            | MWX221      | JUNFLON        | 1906S057         | 2026-8-1         | 2027-7-31       |
| <input checked="" type="checkbox"/> | RE_Cable_02 Coaxial Cable            | RG214       | HUBER+SUHNER   | 1358176          | 2026-8-1         | 2027-7-31       |
| <input checked="" type="checkbox"/> | RE_Cable_03 Coaxial Cable            | MWX221      | JUNFLON        | J12J102482       | 2026-8-1         | 2027-7-31       |

#### Measurement Software Information

| Test Item | Software | Manufacturer    | Version   |
|-----------|----------|-----------------|-----------|
| RE        | EMC 32   | Rohde & Schwarz | V10.50.40 |



**12 System Measurement Uncertainty**

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

**System Measurement Uncertainty**

| Items                                    | Extended Uncertainty                                                                                       |
|------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Conducted Disturbance at Mains Terminals | 150kHz to 30MHz, LISN, 3.16dB                                                                              |
| Radiated Disturbance                     | 30MHz to 1GHz, 5.03dB (Horizontal)<br>5.12dB (Vertical)<br>1GHz to 18GHz, 5.49dB<br>18GHz to 40GHz, 5.63dB |
| Carrier power conducted measurement      | 50MHz~18GHz, 1.238dB                                                                                       |
| Spurious Emission Conducted Measurement  | 9kHz ~40GHz, 1.224dB                                                                                       |

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3.



## 13 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



## 14 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

---

THE END