

RF TEST REPORT

FCC ID: 2BXGA-EC14

Product Name: Wireless Carplay adapter

Brand Name: JuneHome, Eoibeik

Model Name: EC14

Report No.: N26050608018E

Prepared for

Yixinwang(Shenzhen)Trading Co., Ltd
A-10D, Shennan Garden, No. 11, Kexing Road, Technology Park Community, Yuehai Street, Nanshan District, Shenzhen

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
Building 1/2/11/12, No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China.
Tel. 0755-23200050
Website: <http://www.ntek.org.cn>

Table of Contents

1	REVISION HISTORY	4
2	TEST SUMMARY	5
3	TEST RESULT CERTIFICATION	7
4	FACILITIES AND ACCREDITATIONS.....	8
	4.1 FACILITIES.....	8
	4.2 LABORATORY ACCREDITATIONS AND LISTINGS	8
	4.3 MEASUREMENT UNCERTAINTY	8
5	GENERAL DESCRIPTION OF EUT	9
	5.1 DETAILS OF E.U.T.....	9
	5.2 EUT FEATURE AND SPECIFICATION	9
	5.3 ANTENNA SPECIFICATIONS	9
	5.4 DEVIATION FROM STANDARDS	9
	5.5 ABNORMALITIES FROM STANDARD CONDITION	9
6	DESCRIPTION OF TEST MODES AND OPERATION CONFIGURATION OF EUT	10
	6.1 DESCRIPTION OF TEST MODES	10
	6.2 OPERATION CONFIGURATION OF EUT	10
7	SETUP OF EQUIPMENT UNDER TEST	11
	7.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	11
	7.2 SUPPORT EQUIPMENT	12
8	EQUIPMENT LIST	13
9	EVALUATION RESULTS (EVALUATION)	15
	9.1 ANTENNA REQUIREMENT	15
	9.1.1 Conclusion:	15
10	RADIO SPECTRUM MATTER TEST RESULTS (RF)	16
	10.1 CONDUCTED EMISSION AT AC POWER LINE	16
	10.1.1 Test Setup Diagram:.....	16
	10.1.2 E.U.T. Operation:	17
	10.1.3 Test Data:	17
	10.2 99% BANDWIDTH.....	18
	10.2.1 Test Setup Diagram:.....	18
	10.2.2 E.U.T. Operation:	18
	10.2.3 Test Data:	18
	10.3 20DB BANDWIDTH.....	19
	10.3.1 Test Setup Diagram:.....	19
	10.3.2 E.U.T. Operation:	19
	10.3.3 Test Data:	19
	10.4 MAXIMUM CONDUCTED OUTPUT POWER.....	20
	10.4.1 Test Setup Diagram:.....	20
	10.4.2 E.U.T. Operation:	20
	10.4.3 Test Data:	21
	10.5 CHANNEL SEPARATION.....	22
	10.5.1 Test Setup Diagram:.....	22
	10.5.2 E.U.T. Operation:	22
	10.5.3 Test Data:	22
	10.6 NUMBER OF HOPPING FREQUENCIES	23
	10.6.1 Test Setup Diagram:.....	23
	10.6.2 E.U.T. Operation:	23
	10.6.3 Test Data:	23
	10.7 DWELL TIME.....	24
	10.7.1 Test Setup Diagram:.....	24
	10.7.2 E.U.T. Operation:	24
	10.7.3 Test Data:	24

10.8	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	25
10.8.1	Test Setup Diagram:.....	26
10.8.2	E.U.T. Operation:.....	26
10.8.3	Test Data:	26
10.9	BAND EDGE EMISSIONS (RADIATED)	27
10.9.1	Test Setup Diagram:.....	28
10.9.2	E.U.T. Operation:.....	28
10.9.3	Test Data:	29
10.10	EMISSIONS IN FREQUENCY BANDS (BELOW 30MHZ)	37
10.10.1	Test Setup Diagram:.....	38
10.10.2	E.U.T. Operation:.....	38
10.10.3	Test Data:	38
10.11	EMISSIONS IN FREQUENCY BANDS (30M - 1GHZ).....	39
10.11.1	Test Setup Diagram:.....	40
10.11.2	E.U.T. Operation:.....	40
10.11.3	Test Data:	41
10.12	EMISSIONS IN FREQUENCY BANDS (1G - 18GHZ)	43
10.12.1	Test Setup Diagram:.....	44
10.12.2	E.U.T. Operation:.....	44
10.12.3	Test Data:	45
10.13	EMISSIONS IN FREQUENCY BANDS (ABOVE 18GHZ)	51
10.13.1	Test Setup Diagram:.....	52
10.13.2	E.U.T. Operation:.....	52
10.13.3	Test Data:	53
11	TEST SETUP PHOTOS	55
12	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	56
A1	DWELL TIME.....	58
A2	MAXIMUM CONDUCTED OUTPUT POWER.....	68
A3	-20DB BANDWIDTH.....	74
A4	OCCUPIED CHANNEL BANDWIDTH	80
A5	CARRIER FREQUENCIES SEPARATION	86
A6	NUMBER OF HOPPING CHANNEL	92
A7	BAND EDGE.....	95
A8	BAND EDGE(HOPPING)	102
A9	CONDUCTED RF SPURIOUS EMISSION	109

1 Revision History

Revision History			
Report No.	Version	Description	Issued Date
N26050608018E	Rev.01	Initial issue of report	Jul. 29, 2026

2 Test Summary

FCC Rule	Test Item	Method	Tested By	Result
47 CFR Part 15.203/15.247 (b)(4)	Antenna requirement	---	Abel Chen	Pass
47 CFR 15.207	Conducted Emission at AC power line	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.2	---	N/A
47 CFR 15.247(a)(1)	20dB Bandwidth	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.9.2 KDB 558074 D01 15.247 Meas Guidance v05r02	Yuqiang Xiao	Pass
47 CFR 15.247(b)(1)	Maximum Conducted Output Power	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.5 KDB 558074 D01 15.247 Meas Guidance v05r02	Yuqiang Xiao	Pass
47 CFR 15.247(a)(1)	Channel Separation	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.2 KDB 558074 D01 15.247 Meas Guidance v05r02	Yuqiang Xiao	Pass
47 CFR 15.247(a)(1)(iii)	Number of Hopping Frequencies	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.3 KDB 558074 D01 15.247 Meas Guidance v05r02	Yuqiang Xiao	Pass
47 CFR 15.247(a)(1)(iii)	Dwell Time	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.4 KDB 558074 D01 15.247 Meas Guidance v05r02	Yuqiang Xiao	Pass
47 CFR 15.247(d)	Emissions in non-restricted frequency bands	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.7&6.10.4 KDB 558074 D01 15.247 Meas Guidance v05r02	Yuqiang Xiao	Pass
47 CFR 15.247(d), 15.209, 15.205	Band edge emissions (Radiated)	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.10.5 KDB 558074 D01 15.247 Meas Guidance v05r02	Harry Huang	Pass
47 CFR 15.247(d), 15.209, 15.205	Emissions in frequency bands (below 30MHz)	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	Pass Qiu	Pass
47 CFR 15.247(d), 15.209, 15.205	Emissions in frequency bands (30M - 1GHz)	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.5 KDB 558074 D01 15.247 Meas Guidance v05r02	Pass Qiu	Pass
47 CFR 15.247(d),	Emissions in	ANSI C63.10-2020+Cor.1-	Harry Huang	Pass

15.209, 15.205	frequency bands (1G - 18GHz)	2023+C63.10a-2024+Errata to C63.10a-2024, section 6.6 KDB 558074 D01 15.247 Meas Guidance v05r02		
47 CFR 15.247(d), 15.209, 15.205	Emissions in frequency bands (above 18GHz)	ANSI C63.10-2020+Cor.1- 2023+C63.10a-2024+Errata to C63.10a-2024, section 6.6 KDB 558074 D01 15.247 Meas Guidance v05r02	Harry Huang	Pass

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. The antenna gain provided by customer. NTEK is not responsible for the accuracy of antenna gain parameter.

3 Test Result Certification

CLIENT INFORMATION

Applicant:	Yixinwang(Shenzhen)Trading Co., Ltd
Address of Applicant:	A-10D, Shennan Garden, No. 11, Kexing Road, Technology Park Community, Yuehai Street, Nanshan District, Shenzhen
Manufacturer:	JuneHome (ShenZhen) Technology Co.,Ltd
Address of Manufacturer:	204, BLDG 5, Ganglian Village Liantang Aavenue, Luohu District Shenzhen, Guangdong China

EUT INFORMATION

Product Name:	Wireless Carplay adapter
Brand Name:	JuneHome, Eoibeik
Model Name:	EC14
Sample Received Date:	May. 12, 2026
Sample Number:	S2605090344-1#
Applicable Standards	47 CFR Part 15.247
Measurement Procedures	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 KDB 558074 D01 15.247 Meas Guidance v05r02

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd. The test results demonstrate that the Equipment Under Test (EUT) complies with the requirements of the applicable standards listed in this report. This validity applies solely to the tested sample identified in the report. No part of this report may be reproduced except in full without the written approval of Shenzhen NTEK Testing Technology Co., Ltd. This document may only be revised by personnel of Shenzhen NTEK Testing Technology Co., Ltd., and any revisions shall be recorded within the document revision records.

Date of Test:	May. 12, 2026 to Jul. 25, 2026
Issue Date:	Jul. 29, 2026
Test Result:	Pass

Prepared By:	<i>Abel Chen</i>	Reviewed by:	<i>Aaron Cheng</i>	Approved By:	<i>Alex Li</i>
	Abel Chen (Project Engineer)		Aaron Cheng (Supervisor)		Alex Li (Manager)

4 Facilities and Accreditations

4.1 Facilities

All measurement facilities used to collect the measurement data are located at

Building 1/2/11/12, No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 16-1-4.

4.2 Laboratory Accreditations And Listings

Site Description	
CNAS-Lab.	: Registration Code L5516
A2LA-Lab.	: Certificate Number 4298.01
FCC-Accredited	: Test Firms Registration Number: 463705 Designation Number: CN1184
ISED Wireless Device Testing Laboratories	: The ISED Company Number is 9270A CAB identifier:CN0074

4.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where the expanded uncertainty U is obtained by multiplying the standard uncertainty by a coverage factor $k=2$, corresponding to a confidence level of approximately 95%.

Item	Uncertainty
Conducted Emission at AC power line(9kHz~150kHz)	3.70dB
Conducted Emission at AC power line(150kHz~30MHz)	3.30dB
Radiated Emission(9KHz~30MHz)	5.26dB
Radiated Emission(30MHz~1GHz)	4.90dB
Radiated Emission(1GHz~18GHz)	5.10dB
Radiated Emission(18GHz~40GHz)	5.76dB
RF power, conducted	1.34dB
Spurious emissions, conducted	2.71dB
Occupied Bandwidth	1.00%
Radio Frequency	0.2ppm
Time	5%
Temperature	1°C
Humidity	5%

5 General Description of EUT

5.1 Details of E.U.T.

Product Name	Wireless Carplay adapter
Brand Name	JuneHome, Eoibeik
Model Name	EC14
Family Model	EC12, EC13, EC15, EC16, EC17, EC18, EC19, EC20, EC21, EC22, EC23, EC24, EC25, EC26, B1, B3, B6, B8, B9, C1, C3, C6, C8, C9, U3, U6, U8, U9, U10, U11, U12, U13, U14
Model Difference	All Model have the same circuitry and RF module, different in appearance and Model name.
Note 1: The above information was declared by manufacturer.	

5.2 EUT Feature And Specification

Operating Frequency	2402MHz~2480MHz		
Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK		
Number of Channels	79		
Power Supply	☒ DC supply: DC 5V		
	☐ Adapter supply:		
Hardware Version	V1.0		
Firmware Version	N/A		
Software Version	V1.0		
Frequency and Channel list:			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	39	2441
1	2403	40	2442
...	...	...	...
37	2439	77	2479
38	2440	78	2480
Note 1: The above information was declared by manufacturer.			
Note 2: $F=2402\text{MHz}+k\times 1\text{ MHz}$ ($k=0,1,\cdots,78$)			

5.3 Antenna Specifications

Antenna system	SISO
Antenna 1:	
Antenna Manufacturer	ShenZhen Huaxinwei communication technology Co.,Ltd.
Antenna Model	N/A
Antenna Connector	N/A
Antenna Type	PCB antenna
Antenna Gain	0.8 dBi
Note: The above information was declared by manufacturer.	

5.4 Deviation from Standards

None

5.5 Abnormalities from Standard Condition

None

6 Description of Test Modes and Operation Configuration of EUT

6.1 Description of Test Modes

- The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.
- AC power line Conducted Emission was tested under maximum output power.
- The measurements are performed at the highest, middle, lowest available channels.
- The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

The following summary table is showing all test modes to demonstrate in compliance with the standard

No	Title	Description
TM1	TX-GFSK (Non-Hopping)	Keep the EUT in continuously transmitting mode (non-hopping) with GFSK modulation at lowest, middle and highest channel.
TM2	TX- $\pi/4$ DQPSK (Non-Hopping)	Keep the EUT in continuously transmitting mode (non-hopping) with $\pi/4$ DQPSK modulation at lowest, middle and highest channel.
TM3	TX-8DPSK (Non-Hopping)	Keep the EUT in continuously transmitting mode (non-hopping) with 8DPSK modulation at lowest, middle and highest channel.
TM4	TX-GFSK (Hopping)	Keep the EUT in continuously transmitting mode (hopping) with GFSK modulation,.
TM5	TX- $\pi/4$ DQPSK (Hopping)	Keep the EUT in continuously transmitting mode (hopping) with $\pi/4$ DQPSK modulation.
TM6	TX-8DPSK (Hopping)	Keep the EUT in continuously transmitting mode (hopping) with 8DPSK modulation.

Note: Model EC14 selected as representative model for the test and its data was recorded in this report.

6.2 Operation Configuration of EUT


Test Software	ADB command		
RF Power Setting as following:			
Mode	Channel	Frequency(MHz)	Power Setting Value
GFSK	0	2402	Default
GFSK	39	2441	Default
GFSK	78	2480	Default
GFSK_hopping	N/A	N/A	Default
π /4 DQPSK	0	2402	Default
π /4 DQPSK	39	2441	Default
π /4 DQPSK	78	2480	Default
π /4 DQPSK_hopping	N/A	N/A	Default
8DPSK	0	2402	Default
8DPSK	39	2441	Default
8DPSK	78	2480	Default
8DPSK_hopping	N/A	N/A	Default

Note: The above information was declared by manufacturer.


7 Setup Of Equipment Under Test

7.1 Block Diagram Configuration Of Test System

For Radiated Test Cases

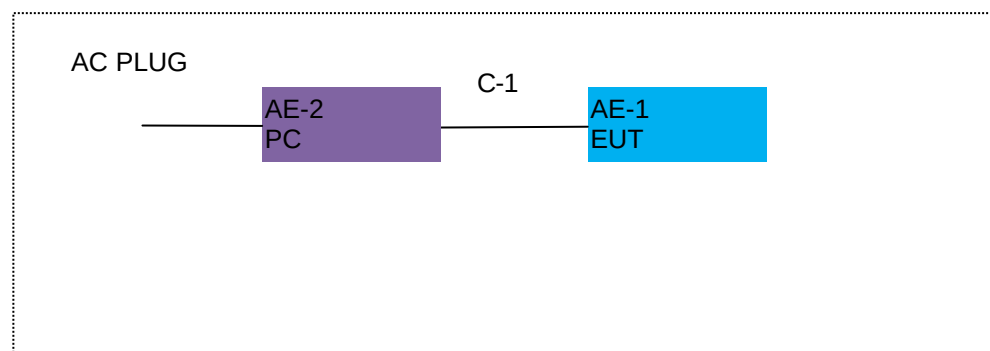

For Conducted Test Cases

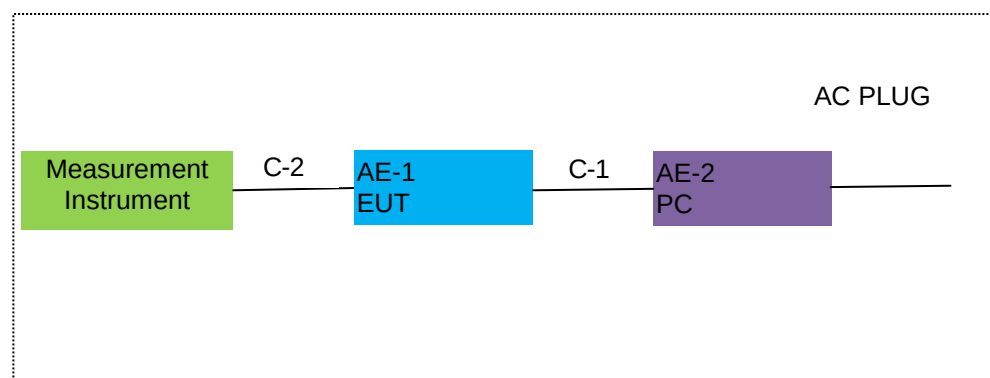

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests.

7.2 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Wireless Carplay adapter	EC14	N/A	EUT
AE-2	ASUS	S5506MA155-0ECBXHRJ20	SBN0KD007514467	AE

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB cable	NO	NO	100cm
C-2	RF cable	YES	NO	10cm

8 Equipment List

Conducted measurements at antenna port

Equipment	Manufacturer	Model No	Serial No.	Cal Date	Cal Due Date
Power meter	MWRFTest	MW100-PSB	N/A	2025-09-16	2026-09-15
Power meter	MWRFTest	MW100-PSB	N/A	2025-09-16	2026-09-15
Power meter	MWRFTest	MW100-PSB	N/A	2025-09-16	2026-09-15
Power meter	MWRFTest	MW100-PSB	N/A	2025-09-16	2026-09-15
Spread spectrum device	MWRFTest	MW100-7UD	N/A	2025-09-16	2026-09-15
Spectrum Analyzer	R&S	FSV40	101417	2026-04-08	2027-04-07
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2026-04-08	2027-04-07
Shielding Room	Taihe Mao Rui Electronic	743	N/A	2025-01-03	2028-01-02
USB RF Power Sensor	DARE	RPR3006 W	15I00041SNO84	2026-04-08	2027-04-07

Radiated spurious emissions

Equipment	Manufacturer	Model No	Serial No.	Cal Date	Cal Due Date
Low Noise Amplifier	EMC Solutions	TRLA-180400G50	25102901	2026-04-08	2027-04-07
Wideband Radio Communication Tester	R&S	CMW500	153336	2026-04-08	2027-04-07
Spectrum Analyzer	Keysight	N9020B	MY60112710	2025-12-25	2026-12-24
Semi Anechoic Chamber	N/A	966	N/A	2024-05-20	2027-05-19
Spectrum Analyzer	Keysight	N9020A	MY53280244	2026-04-15	2027-04-14
Broadband Horn Antenna	SCHWARZBEC K	BBHA 9120 D	2816	2024-05-18	2027-05-17
AMPLIFIER	Sonoma	310N	186604	2026-04-08	2027-04-07
Broadband Horn Antenna	SCHWARZBEC K	BBHA 9170	803	2024-05-12	2027-05-11
Active Loop Antenna	SCHWARZBEC K	FMZB 1519 B	055	2024-05-17	2027-05-16
Spectrum Analyzer	R&S	FSV40	101417	2026-04-08	2027-04-07
Low Noise Amplifier	B&Z	BZ-P540-550850-452727	16476-11729	2026-04-16	2027-04-15
Pre-Amplifier	EMC	EMC05183 5SE	980246	2026-04-08	2027-04-07
Broadband Horn Antenna	EM	EM-AH-10180	2011071402	2024-05-12	2027-05-11

Measurement Software

Manufacturer	Software Name	Software Version	Description
MWRFTtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
Farad	EZ-EMC_RE	AIT-03A	Radiated Test

9 Evaluation Results (Evaluation)

9.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---

9.1.1 Conclusion:


The EUT uses a PCB antenna, the max antenna gain is 0.8 dBi, which is deemed to comply with the antenna requirement.

10 Radio Spectrum Matter Test Results (RF)

10.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.2 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	a) The mains terminal disturbance voltage test was conducted in a shielded room. b) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. c) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, d) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. e) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. f) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band. g) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.		

10.1.1 Test Setup Diagram:

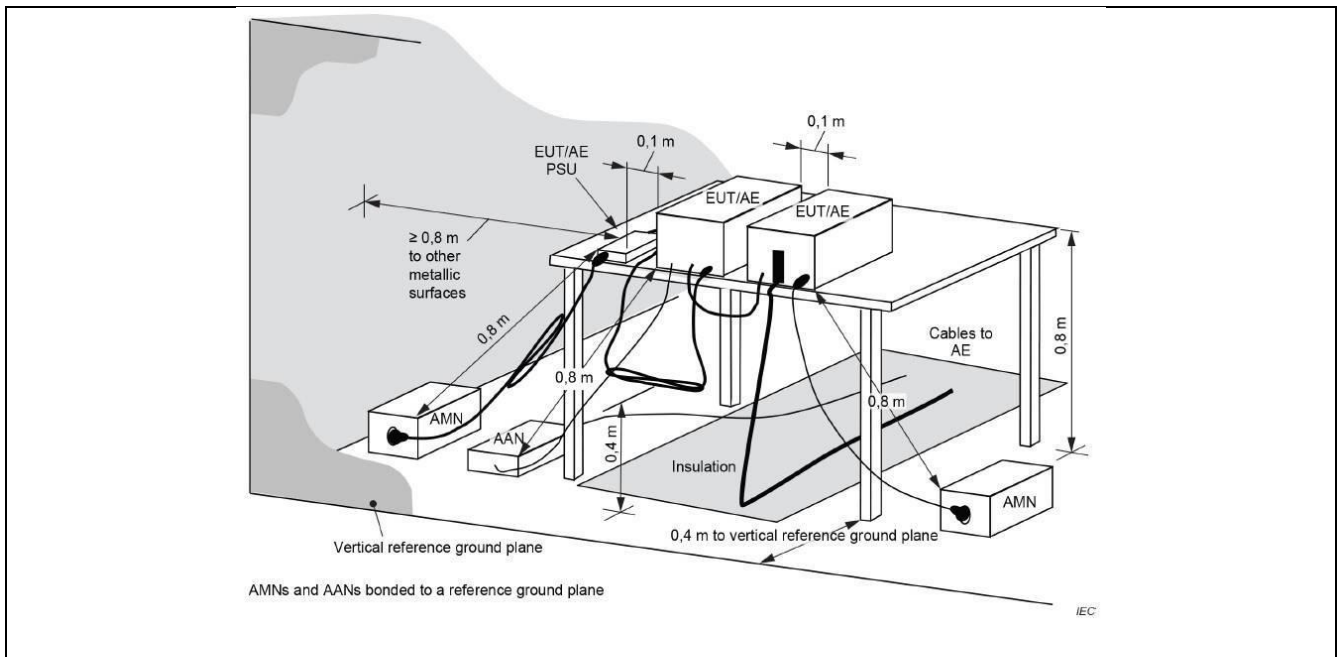

10.1.2E.U.T. Operation:

Operating Environment:					
Temperature:	25.3 °C	Humidity:	57.3 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	N/A				
Final test mode:	N/A				


10.1.3 Test Data:

Not Applicable
This device do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

10.2 99% Bandwidth

Test Requirement:	Reporting purposes only
Test Limit:	---
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.9.3. Frequency hopping shall be disabled for this test.
Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Span = The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) RBW = 1% to 5% of the OBW. c) VBW $\geq 3 \times$ RBW d) Sweep = auto; e) Detector function = peak f) Trace = max hold g) Use the 99% power bandwidth function of the instrument and report the measured bandwidth. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.2.1 Test Setup Diagram:

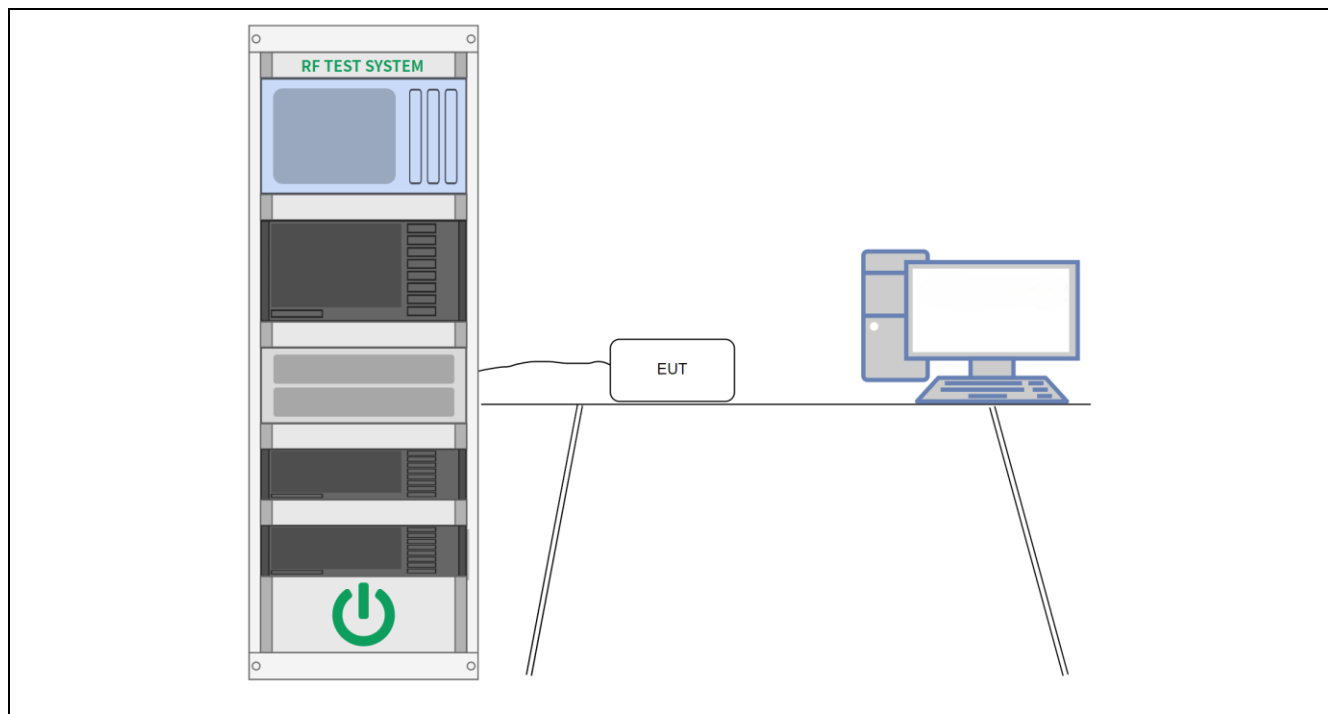

10.2.2 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	54 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM2, TM3				


10.2.3 Test Data:

Please Refer to Appendix for Details.

10.3 20dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(1)
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 6.9.2. Frequency hopping shall be disabled for this test. KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel. b) RBW = 1% to 5% of the OBW. c) VBW $\geq 3 \times$ RBW d) Sweep = auto; e) Detector function = peak f) Trace = max hold g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.3.1 Test Setup Diagram:

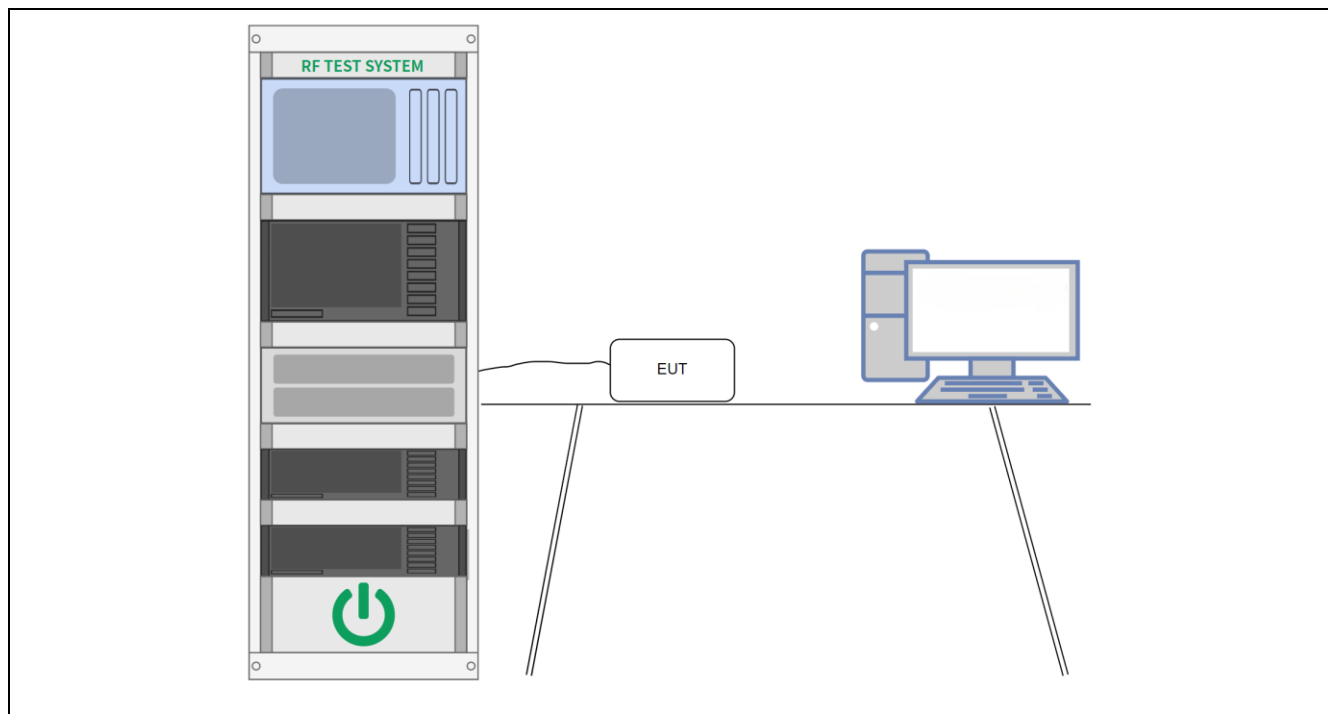

10.3.2 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	54 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM2, TM3				


10.3.3 Test Data:

Please Refer to Appendix for Details.

10.4 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(1)
Test Limit:	Refer to 47 CFR 15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.5 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. Frequency hopping shall be disabled for this test. Use the following spectrum analyzer settings: a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel. b) RBW > 20 dB bandwidth of the emission being measured. c) VBW ≥ RBW. d) Sweep: No faster than coupled (auto) time. e) Detector function: Peak. f) Trace: Max-hold. g) Allow trace to stabilize. h) Use the marker-to-peak function to set the marker to the peak of the emission. i) The indicated level is the peak output power, after any corrections for external attenuators and cables. j) A spectral plot of the test results and setup description shall be included in the test report. NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

10.4.1 Test Setup Diagram:

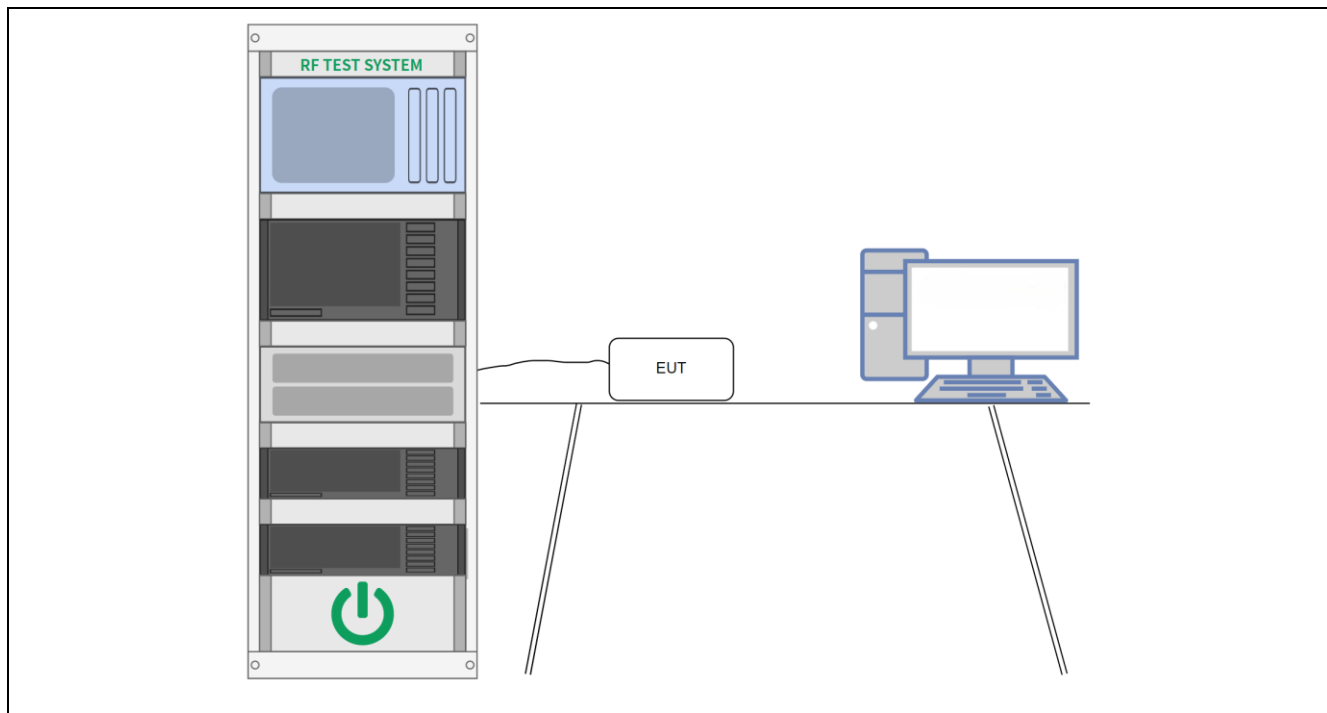

10.4.2 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	54 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM2, TM3				


10.4.3 Test Data:

Please Refer to Appendix for Details.

10.5 Channel Separation

Test Requirement:	47 CFR 15.247(a)(1)
Test Limit:	Refer to 47 CFR 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.2 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings: a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) $\geq$ RBW. d) Sweep: No faster than coupled (auto) time. e) Detector function: Peak. f) Trace: Max-hold. g) Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A spectral plot of the data shall be included in the test report.

10.5.1 Test Setup Diagram:

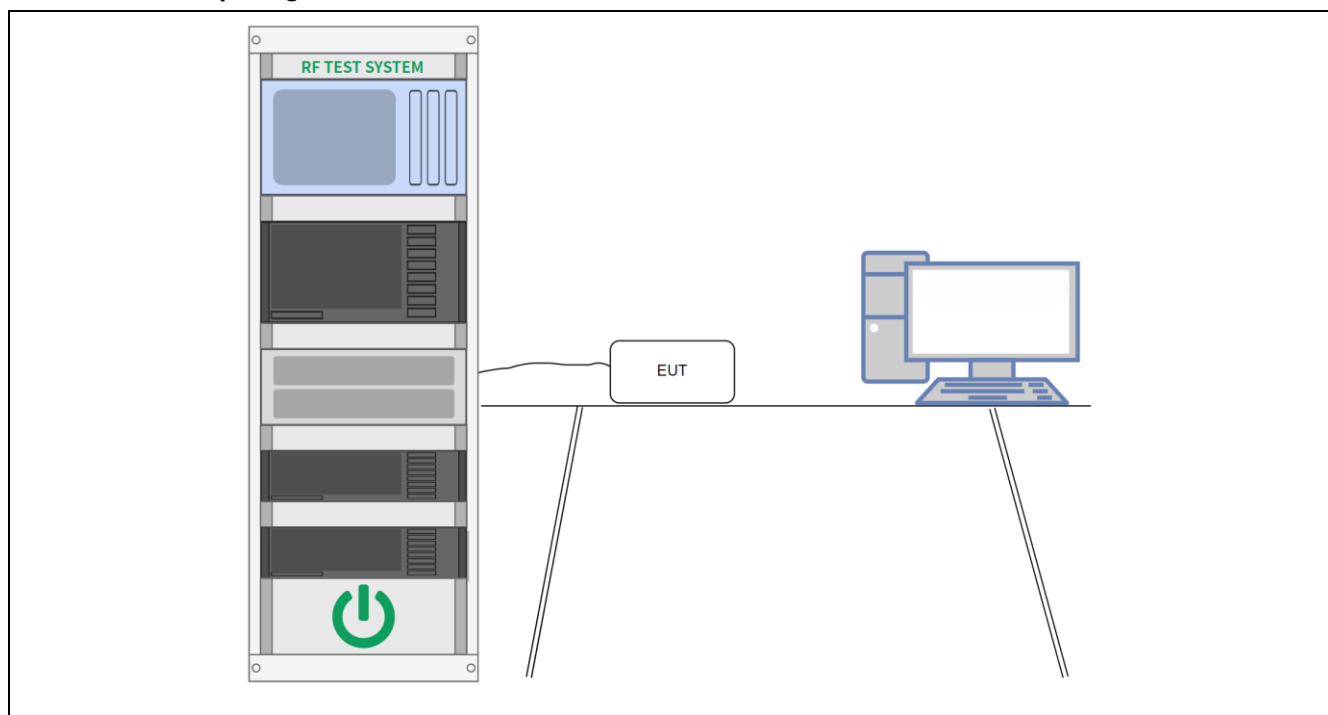

10.5.2 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	54 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM4, TM5, TM6				
Final test mode:	TM4, TM5, TM6				


10.5.3 Test Data:

Please Refer to Appendix for Details.

10.6 Number of Hopping Frequencies

Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Limit:	Refer to 47 CFR 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.3 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings: a) Span: The frequency band of operation. Depending on the number of channels the device supports, it could be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen. b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. c) VBW $\geq$ RBW. d) Sweep: No faster than coupled (auto) time. e) Detector function: Peak. f) Trace: Max-hold. g) Allow the trace to stabilize. It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A spectral plot of the data shall be included in the test report.

10.6.1 Test Setup Diagram:

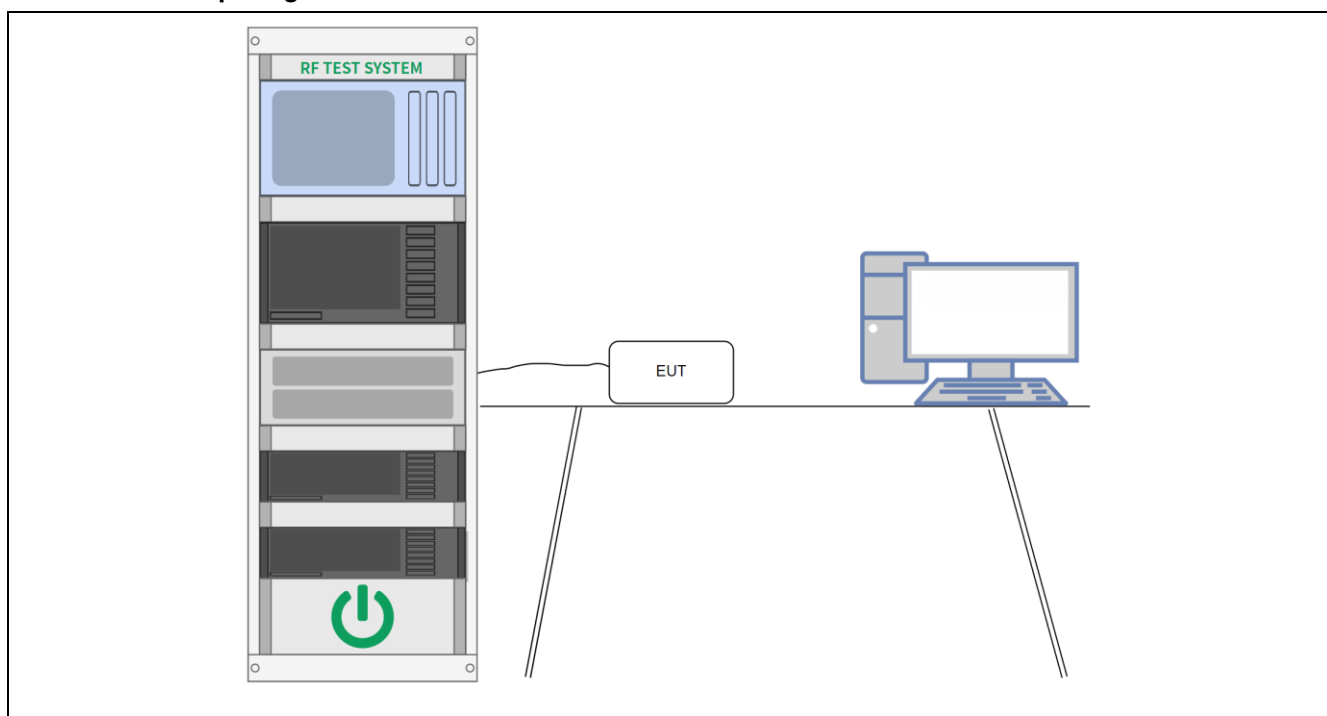

10.6.2 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	54 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM4, TM5, TM6				
Final test mode:	TM4, TM5, TM6				


10.6.3 Test Data:

Please Refer to Appendix for Details.

10.7 Dwell Time

Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Limit:	Refer to 47 CFR 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, section 7.8.4 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Span = zero span, centered on a hopping channel b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel. c) Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel. d) Detector function = peak e) Trace = max hold f) Use the marker-delta function to determine the dwell time Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.7.1 Test Setup Diagram:

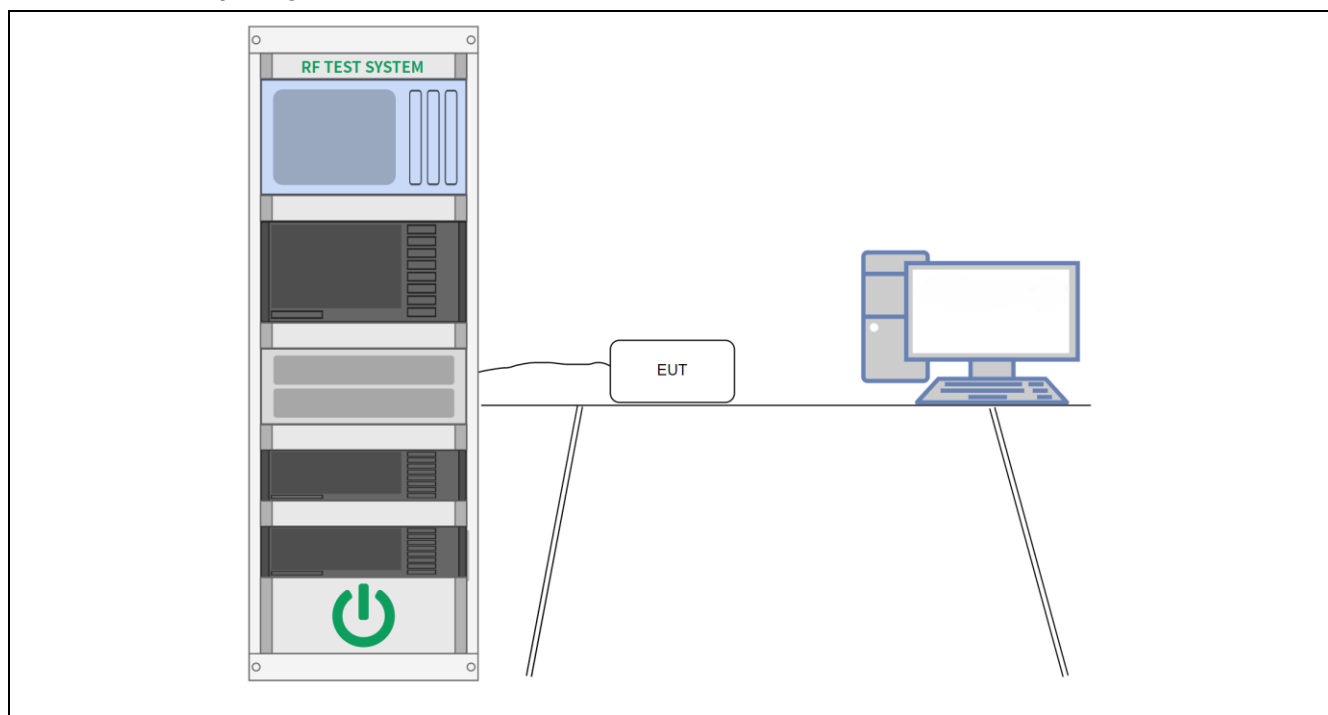

10.7.2 E.U.T. Operation:


Operating Environment:					
Temperature:	25 °C	Humidity:	54 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM4, TM5, TM6				
Final test mode:	TM4, TM5, TM6				

10.7.3 Test Data:

Please Refer to Appendix for Details.

10.8 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 section 7.8.7 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: Step 1: Measurement Procedure REF a) Set instrument center frequency to 2400 MHz or 2483.5 MHz. b) Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation. c) Set the RBW = 100 kHz. d) Set the VBW $\geq 3 \times$ RBW. e) Detector = peak. f) Sweep time = auto couple. g) Sweep points $\geq 2 \times$ Span/RBW h) Trace mode = max hold. i) Allow the trace to stabilize. j) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission. Step 2: Measurement Procedure OOB a) Set RBW = 100 kHz. b) Set VBW ≥ 300 kHz. c) Detector = peak. d) Sweep = auto couple. e) Trace Mode = max hold. f) Allow trace to fully stabilize. g) Use the peak marker function to determine the maximum amplitude level. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

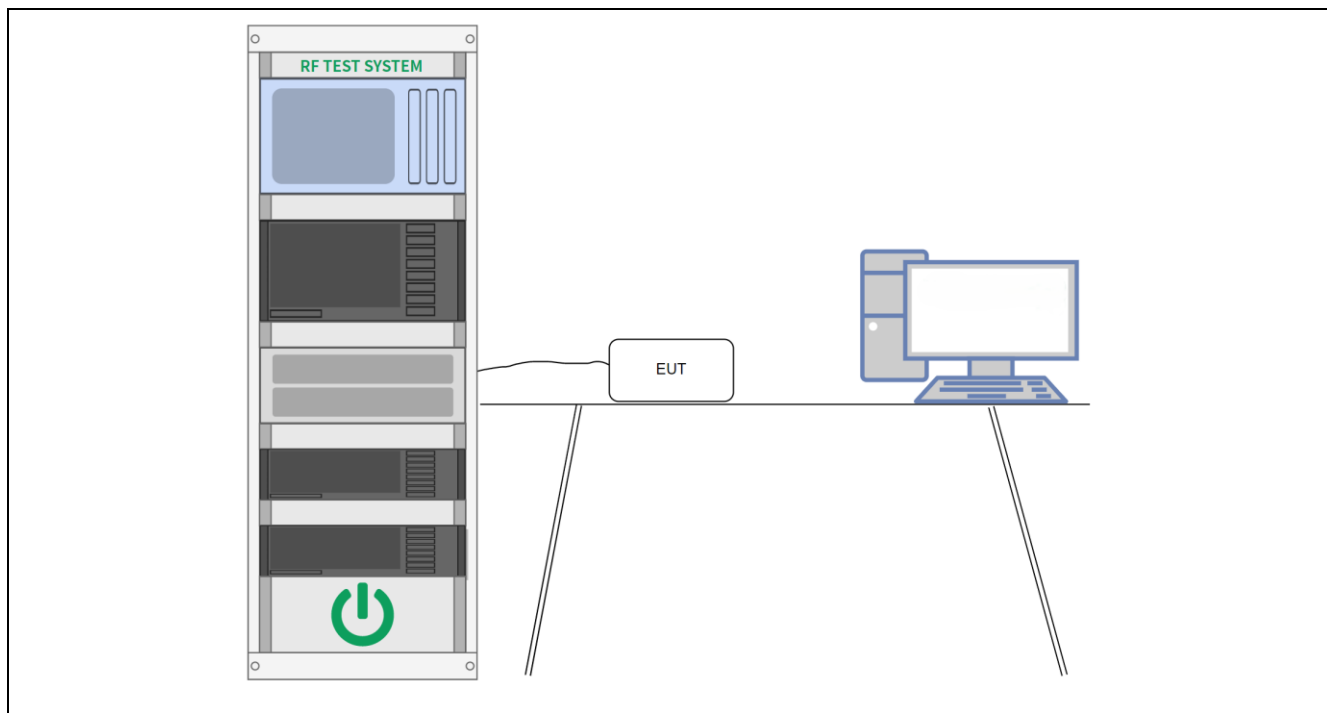10.8.1 Test Setup Diagram:**10.8.2 E.U.T. Operation:**

Operating Environment:					
Temperature:	25 °C	Humidity:	54 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

10.8.3 Test Data:


Please Refer to Appendix for Details.

10.9 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).																																																																									
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																																																							
	0.009-0.490	2400/F(kHz)	300																																																																							
	0.490-1.705	24000/F(kHz)	30																																																																							
	1.705-30.0	30	30																																																																							
	30-88	100 **	3																																																																							
	88-216	150 **	3																																																																							
	216-960	200 **	3																																																																							
	Above 960	500	3																																																																							
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																																																									
	Table 1 – Restricted frequency bands <table> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> <tr> <td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr> <td>0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr> <td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr> <td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr> <td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr> <td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr> <td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr> <td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr> <td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr> <td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr> <td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr> <td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr> <td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr> <td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr> <td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr> <td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>Above 38.6</td></tr> <tr> <td>13.36-13.41</td><td></td><td></td><td></td></tr> </table>			MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4	6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	Above 38.6	13.36-13.41		
MHz	MHz	MHz	GHz																																																																							
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																							
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																							
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																							
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																							
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																							
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5																																																																							
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																							
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4																																																																							
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																							
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																							
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4																																																																							
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																							
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																							
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																							
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																							
12.57675-12.57725	322-335.4	3600-4400	Above 38.6																																																																							
13.36-13.41																																																																										
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 section 6.10.5 KDB 558074 D01 15.247 Meas Guidance v05r02																																																																									
Procedure:	Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels). a) Use radiated spurious emission test procedure described in clause 10.12. The transmitter output (antenna port) was connected to the antenna. b) Set the PK and AV limit line. c) Record the fundamental emission and emissions out of the band-edge. d) Determine band-edge compliance as required. Where, a) Factor = Antenna Factor + Cable Loss, the value was added to Original																																																																									

Receiver Reading by the software automatically.
b) Level = Reading + Factor.
c) Margin = Level – Limit

10.9.1 Test Setup Diagram:

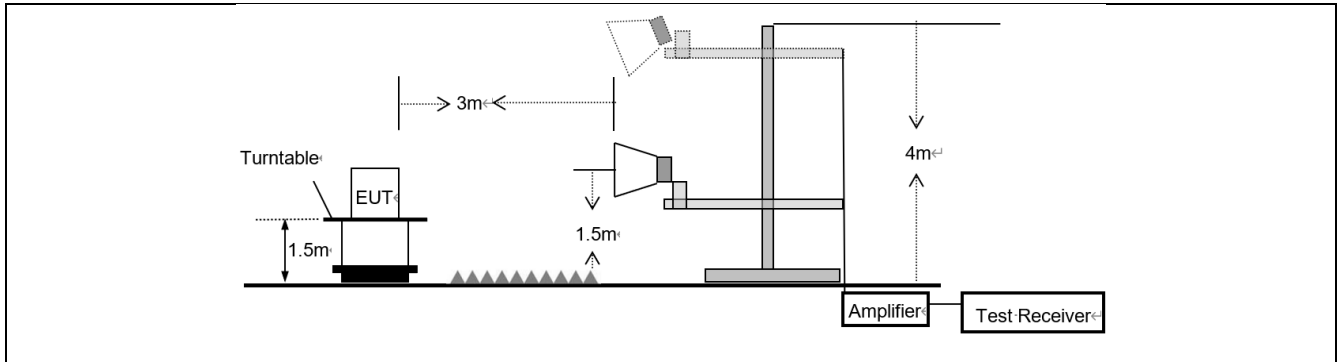


10.9.2 E.U.T. Operation:

Operating Environment:					
Temperature:	23 °C	Humidity:	52 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM3				

10.9.3 Test Data:


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

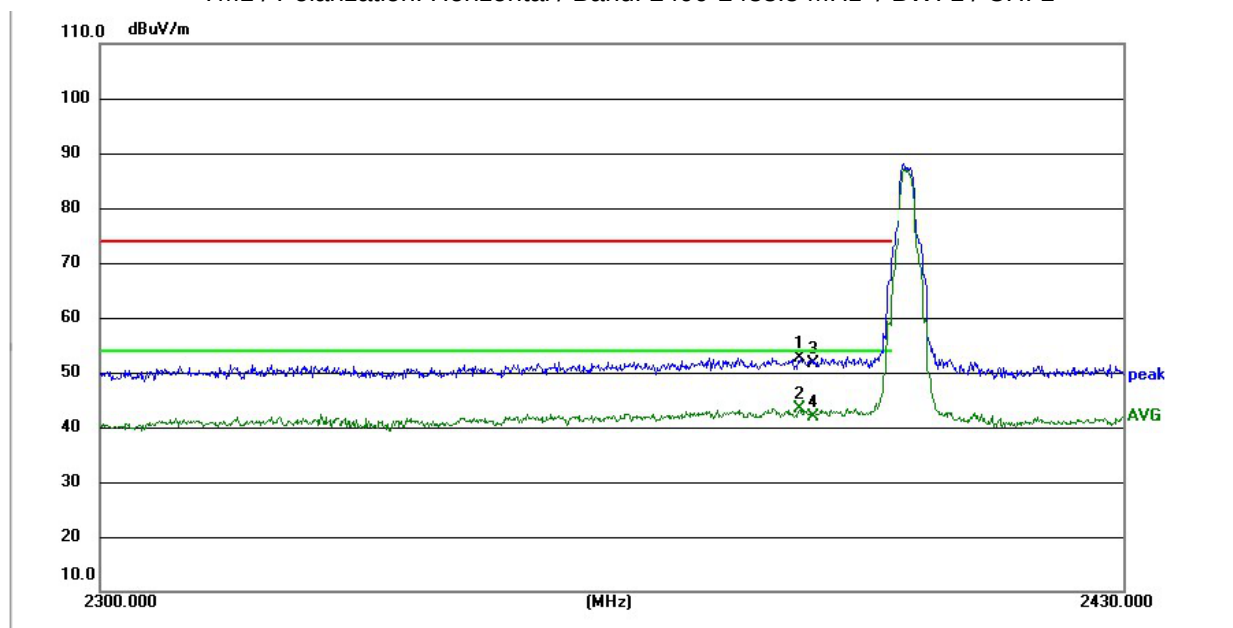

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2388.257	22.74	29.87	52.61	74.00	-21.39	peak	P	
2 *	2388.257	13.42	29.87	43.29	54.00	-10.71	AVG	P	
3	2390.000	21.67	29.88	51.55	74.00	-22.45	peak	P	
4	2390.000	12.07	29.88	41.95	54.00	-12.05	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

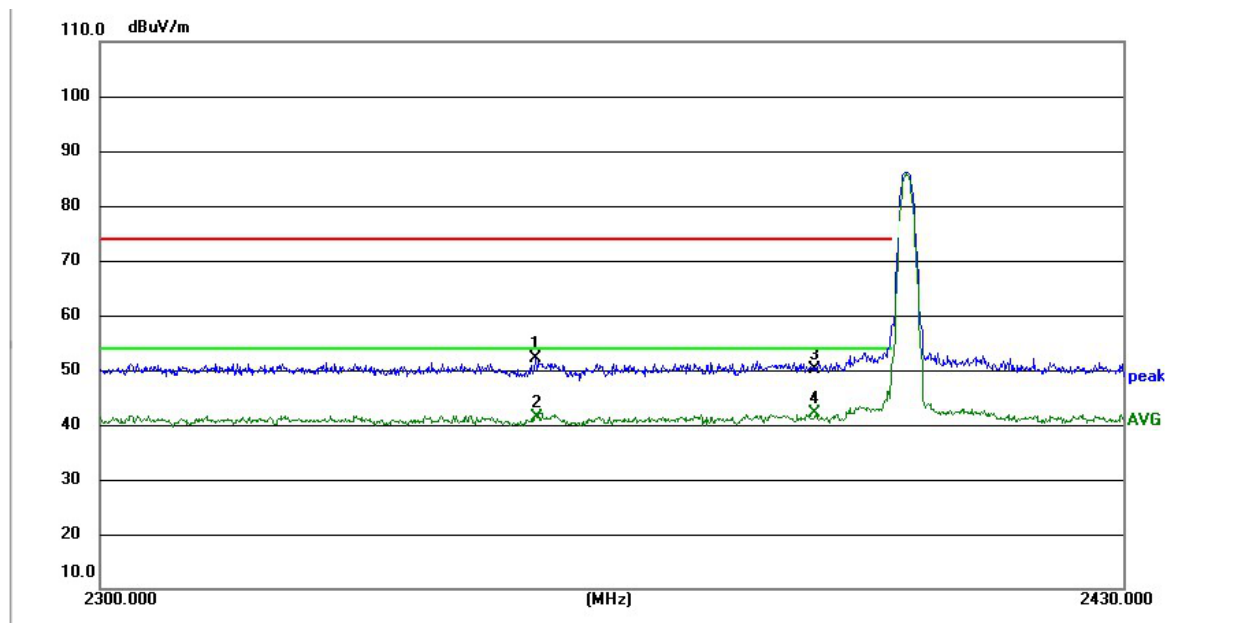

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2354.561	22.49	29.57	52.06	74.00	-21.94	peak	P	
2	2354.678	11.71	29.57	41.28	54.00	-12.72	AVG	P	
3	2390.000	20.30	29.88	50.18	74.00	-23.82	peak	P	
4 *	2390.000	12.22	29.88	42.10	54.00	-11.90	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H

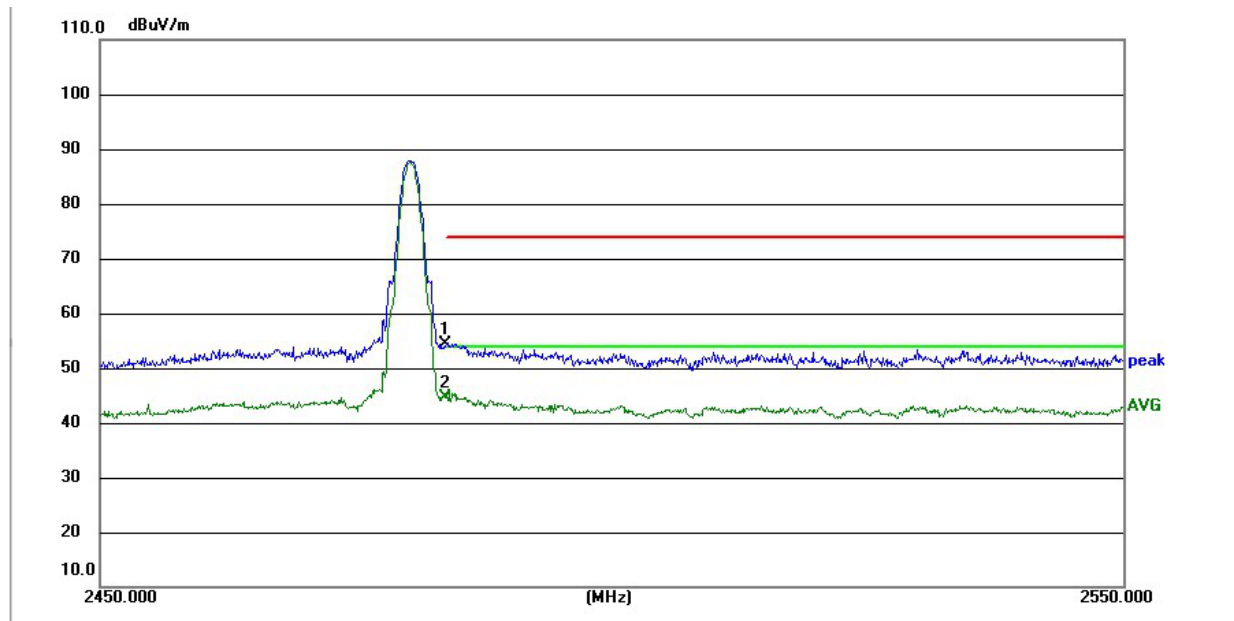

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2483.500	23.69	30.69	54.38	74.00	-19.62	peak	P	
2 *	2483.500	14.04	30.69	44.73	54.00	-9.27	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H

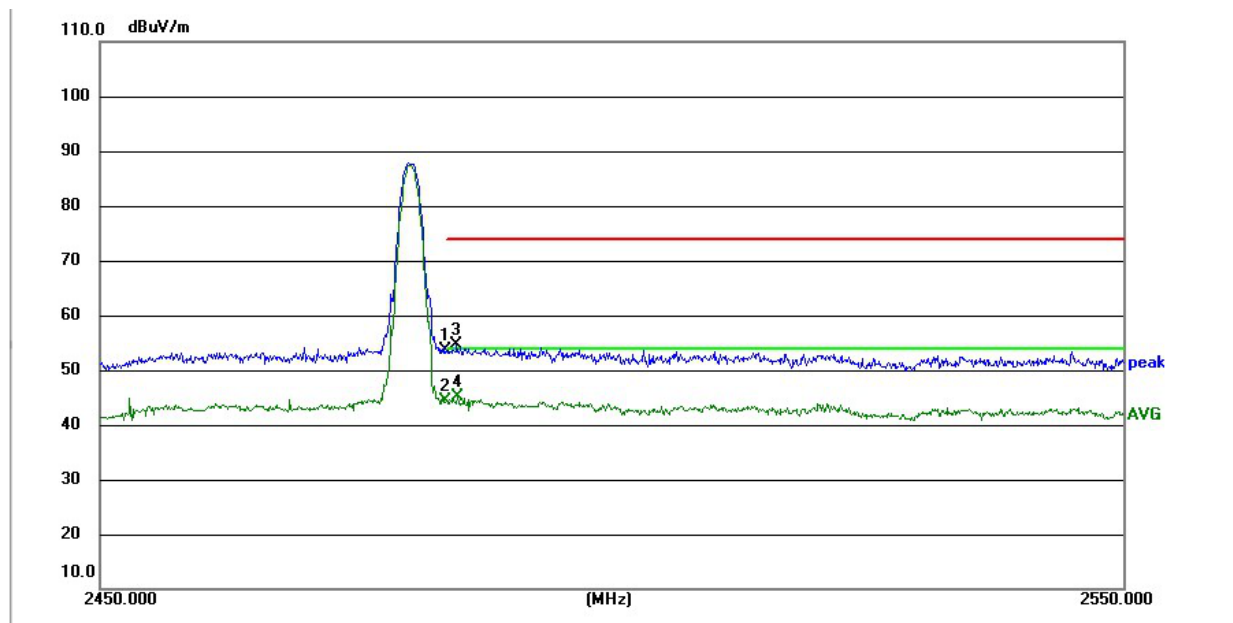

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2483.500	22.86	30.69	53.55	74.00	-20.45	peak	P	
2	2483.500	13.57	30.69	44.26	54.00	-9.74	AVG	P	
3	2484.520	23.81	30.70	54.51	74.00	-19.49	peak	P	
4 *	2484.560	14.33	30.70	45.03	54.00	-8.97	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1.2 / CH: L

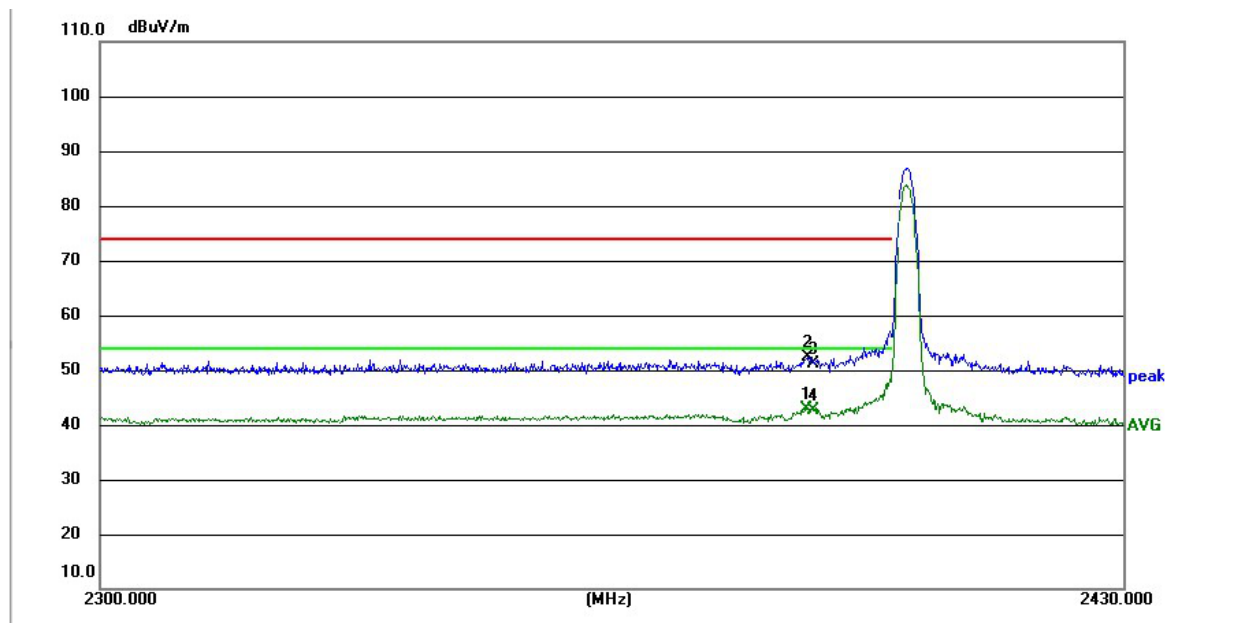

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	2388.998	13.02	29.87	42.89	54.00	-11.11	AVG	P	
2	2389.154	22.41	29.87	52.28	74.00	-21.72	peak	P	
3	2390.000	21.35	29.88	51.23	74.00	-22.77	peak	P	
4	2390.000	12.77	29.88	42.65	54.00	-11.35	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1.2 / CH: L

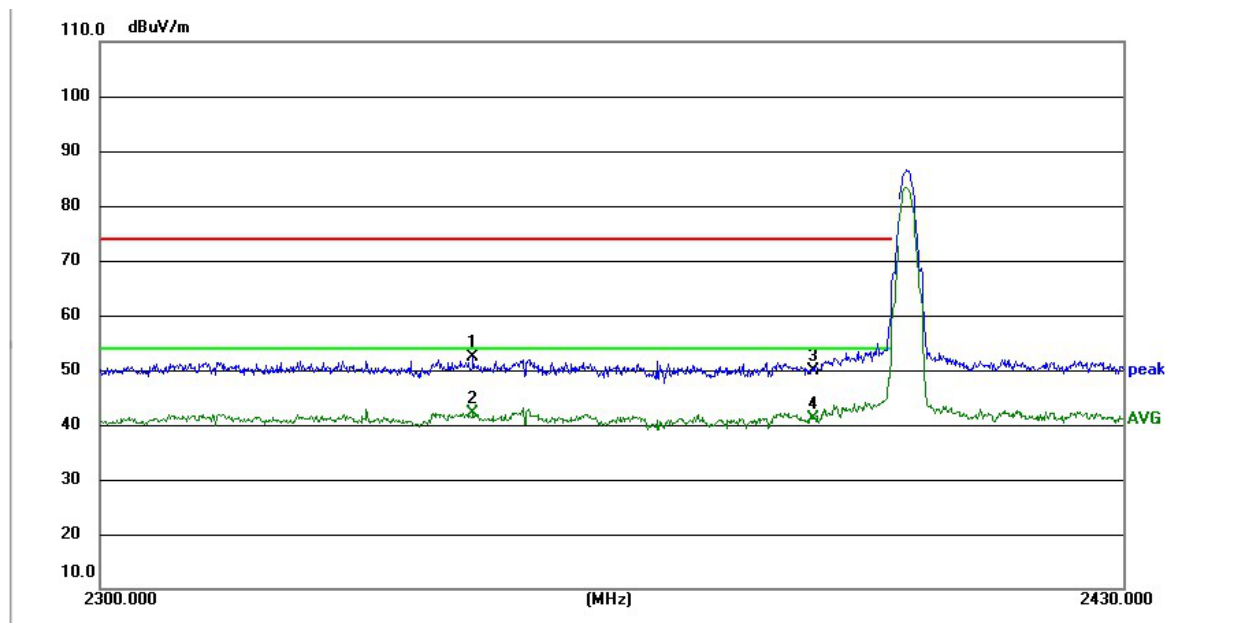

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2346.683	22.77	29.56	52.33	74.00	-21.67	peak	P	
2 *	2346.683	12.56	29.56	42.12	54.00	-11.88	AVG	P	
3	2390.000	20.06	29.88	49.94	74.00	-24.06	peak	P	
4	2390.000	11.25	29.88	41.13	54.00	-12.87	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1.2 / CH: H

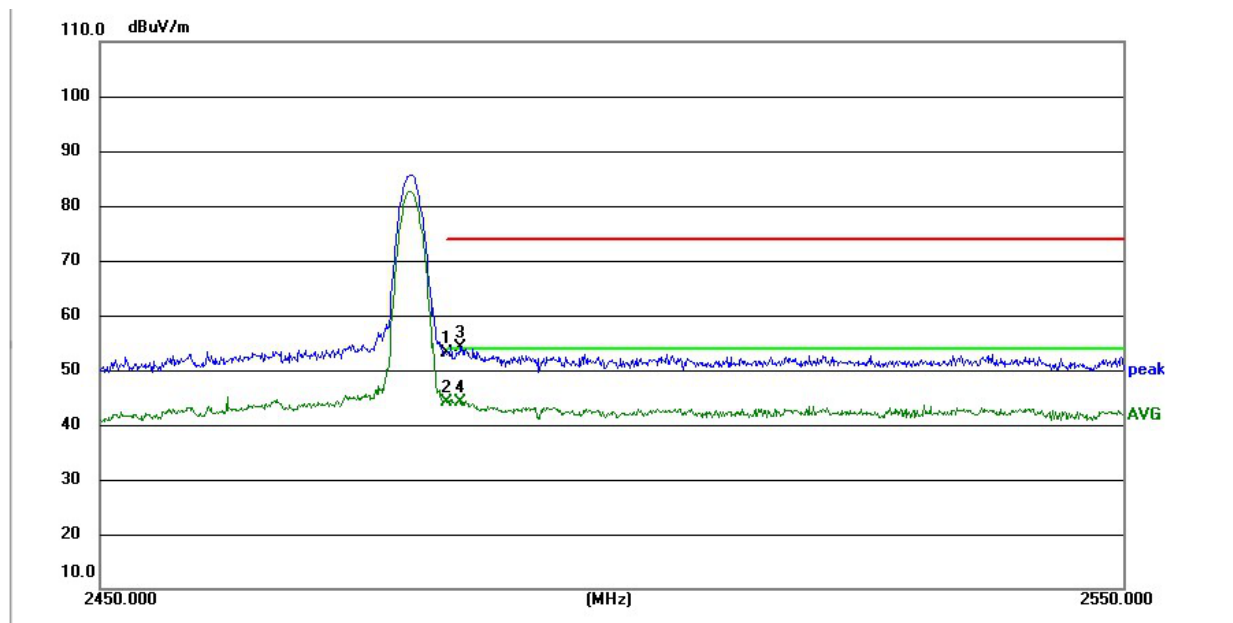

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2483.500	22.33	30.69	53.02	74.00	-20.98	peak	P	
2 *	2483.500	13.53	30.69	44.22	54.00	-9.78	AVG	P	
3	2484.790	23.35	30.71	54.06	74.00	-19.94	peak	P	
4	2484.790	13.37	30.71	44.08	54.00	-9.92	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1.2 / CH: H

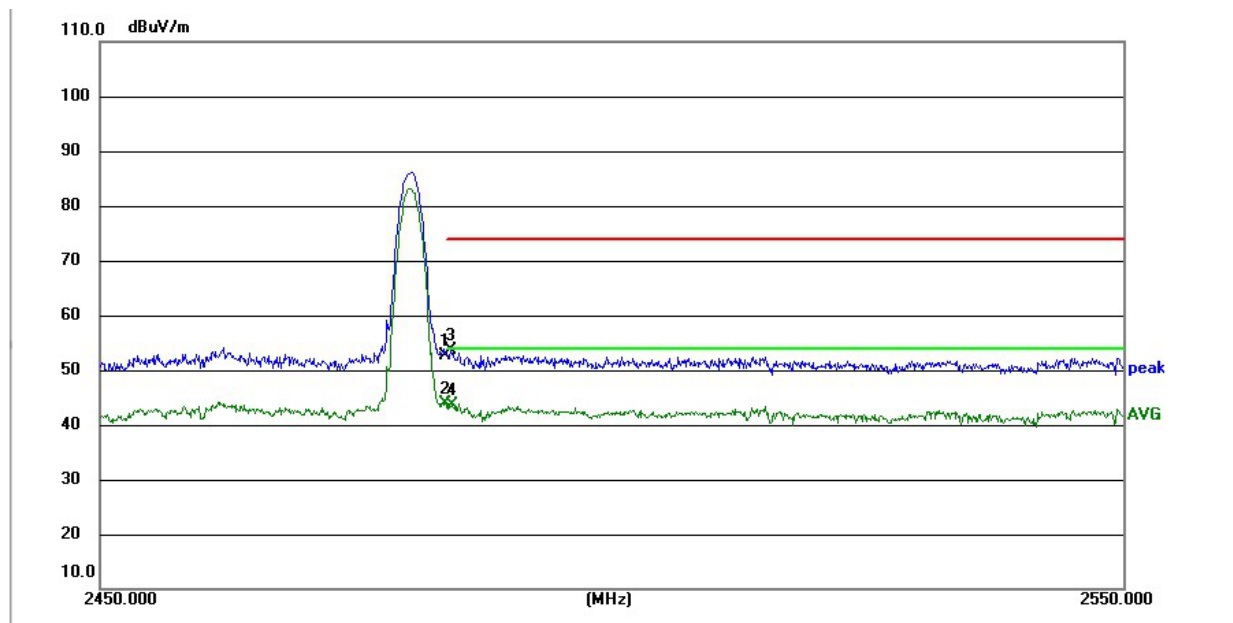

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2483.500	21.83	30.69	52.52	74.00	-21.48	peak	P	
2 *	2483.500	13.09	30.69	43.78	54.00	-10.22	AVG	P	
3	2483.870	22.86	30.69	53.55	74.00	-20.45	peak	P	
4	2484.050	13.06	30.69	43.75	54.00	-10.25	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

10.10 Emissions in frequency bands (below 30MHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).																																																																									
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																																																							
	0.009-0.490	2400/F(kHz)	300																																																																							
	0.490-1.705	24000/F(kHz)	30																																																																							
	1.705-30.0	30	30																																																																							
	30-88	100 **	3																																																																							
	88-216	150 **	3																																																																							
	216-960	200 **	3																																																																							
	Above 960	500	3																																																																							
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																																																									
	Table 1 – Restricted frequency bands <table> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> <tr> <td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr> <td>0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr> <td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr> <td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr> <td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr> <td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr> <td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr> <td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr> <td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr> <td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr> <td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr> <td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr> <td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr> <td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr> <td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr> <td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>Above 38.6</td></tr> <tr> <td>13.36-13.41</td><td></td><td></td><td></td></tr> </table>			MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4	6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	Above 38.6	13.36-13.41		
MHz	MHz	MHz	GHz																																																																							
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																							
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																							
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																							
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																							
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																							
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5																																																																							
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																							
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4																																																																							
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																							
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																							
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4																																																																							
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																							
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																							
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																							
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																							
12.57675-12.57725	322-335.4	3600-4400	Above 38.6																																																																							
13.36-13.41																																																																										
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 section 6.4 KDB 558074 D01 15.247 Meas Guidance v05r02																																																																									
Procedure:	a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b) The EUT was set 3 meters away from the interference-receiving antenna. c) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights 1 meter and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. d) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. e) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																																																																									

f) The radiation measurements are performed in X, Y, Z axis positioning. only the test worst case mode is recorded in the report.(for portable and mobile devices)


Where,

a) Factor = Antenna Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

b) Level = Reading + Factor.

c) Margin = Level – Limit

10.10.1 Test Setup Diagram:

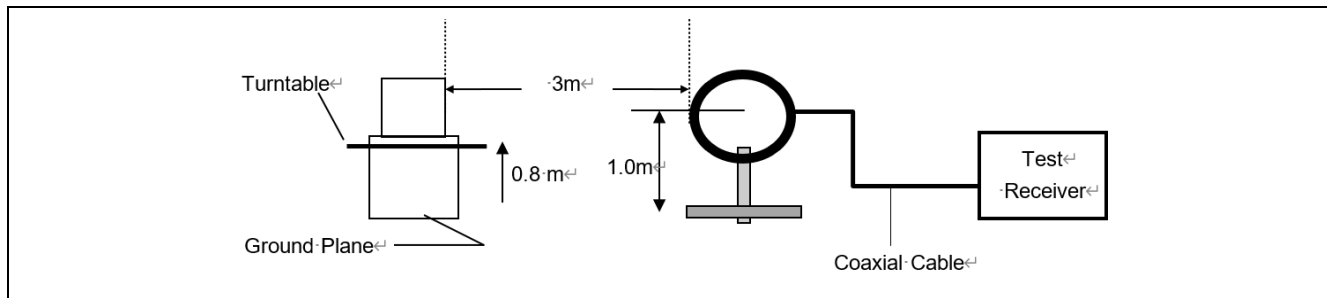

10.10.2 E.U.T. Operation:

Operating Environment:					
Temperature:	23 °C	Humidity:	52 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1, TM2, TM3				
Final test mode:	TM1				

10.10.3 Test Data:

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

10.11 Emissions in frequency bands (30M - 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).																																																																									
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																																																							
	0.009-0.490	2400/F(kHz)	300																																																																							
	0.490-1.705	24000/F(kHz)	30																																																																							
	1.705-30.0	30	30																																																																							
	30-88	100 **	3																																																																							
	88-216	150 **	3																																																																							
	216-960	200 **	3																																																																							
	Above 960	500	3																																																																							
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																																																									
	Table 1 – Restricted frequency bands <table> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> <tr> <td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr> <td>0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr> <td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr> <td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr> <td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr> <td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr> <td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr> <td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr> <td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr> <td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr> <td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr> <td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr> <td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr> <td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr> <td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr> <td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>Above 38.6</td></tr> <tr> <td>13.36-13.41</td><td></td><td></td><td></td></tr> </table>			MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4	6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	Above 38.6	13.36-13.41		
MHz	MHz	MHz	GHz																																																																							
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																							
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																							
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																							
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																							
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																							
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5																																																																							
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																							
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4																																																																							
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																							
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																							
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4																																																																							
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																							
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																							
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																							
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																							
12.57675-12.57725	322-335.4	3600-4400	Above 38.6																																																																							
13.36-13.41																																																																										
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02																																																																									
Procedure:	a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading. e) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f) If the emission level of the EUT in peak mode was 10dB lower than the limit																																																																									

specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


Where,

a) Factor = Antenna Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

b) Level = Reading + Factor.

c) Margin = Level – Limit

10.11.1 Test Setup Diagram:

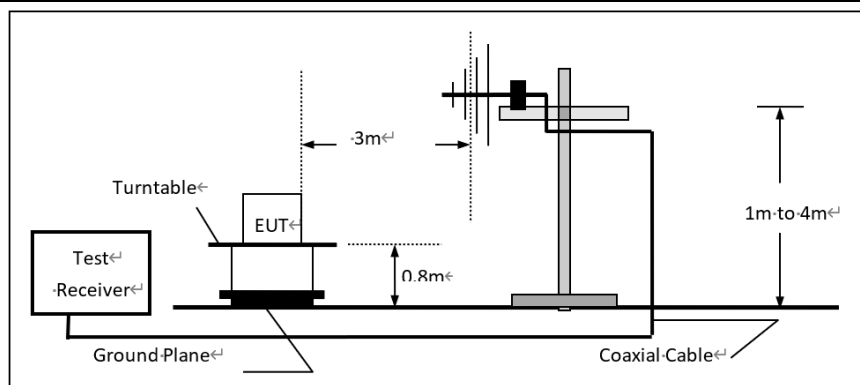


10.11.2 E.U.T. Operation:

Operating Environment:					
Temperature:	23 °C	Humidity:	52 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1				
Final test mode:	TM1				

10.11.3 Test Data:


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

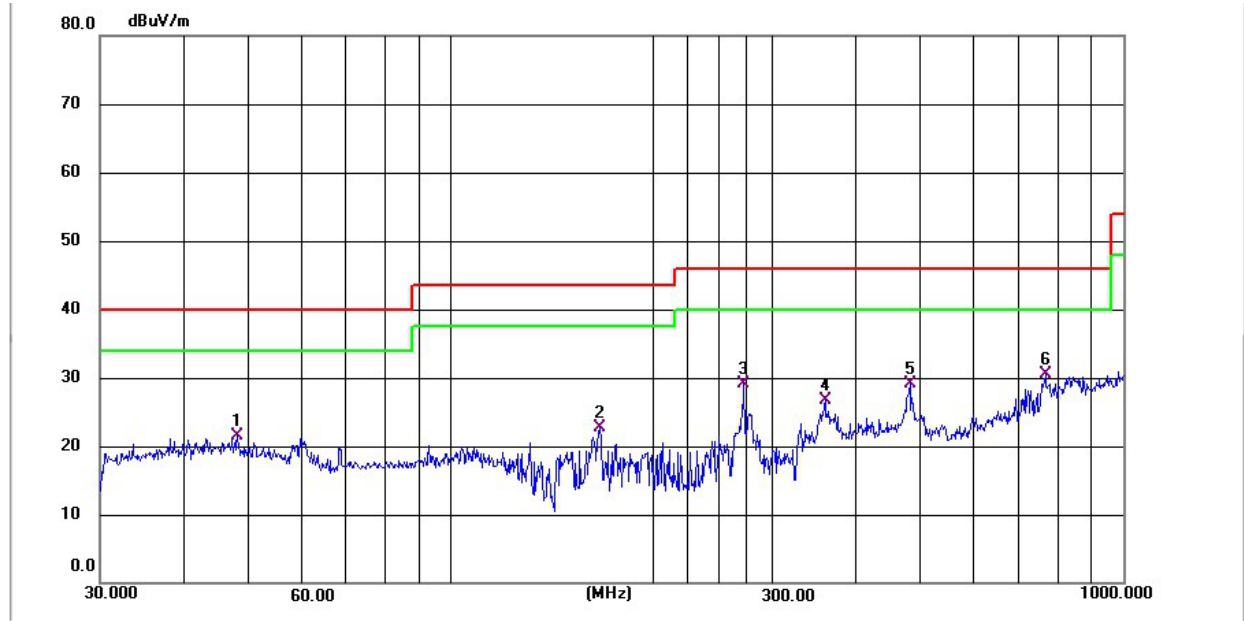

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	47.9940	1.57	19.95	21.52	40.00	-18.48	QP	P	
2	166.6512	7.91	14.88	22.79	43.50	-20.71	QP	P	
3	272.2776	9.66	19.38	29.04	46.00	-16.96	QP	P	
4	359.1860	5.51	21.24	26.75	46.00	-19.25	QP	P	
5	482.2155	5.03	24.07	29.10	46.00	-16.90	QP	P	
6 *	766.0571	2.31	28.15	30.46	46.00	-15.54	QP	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

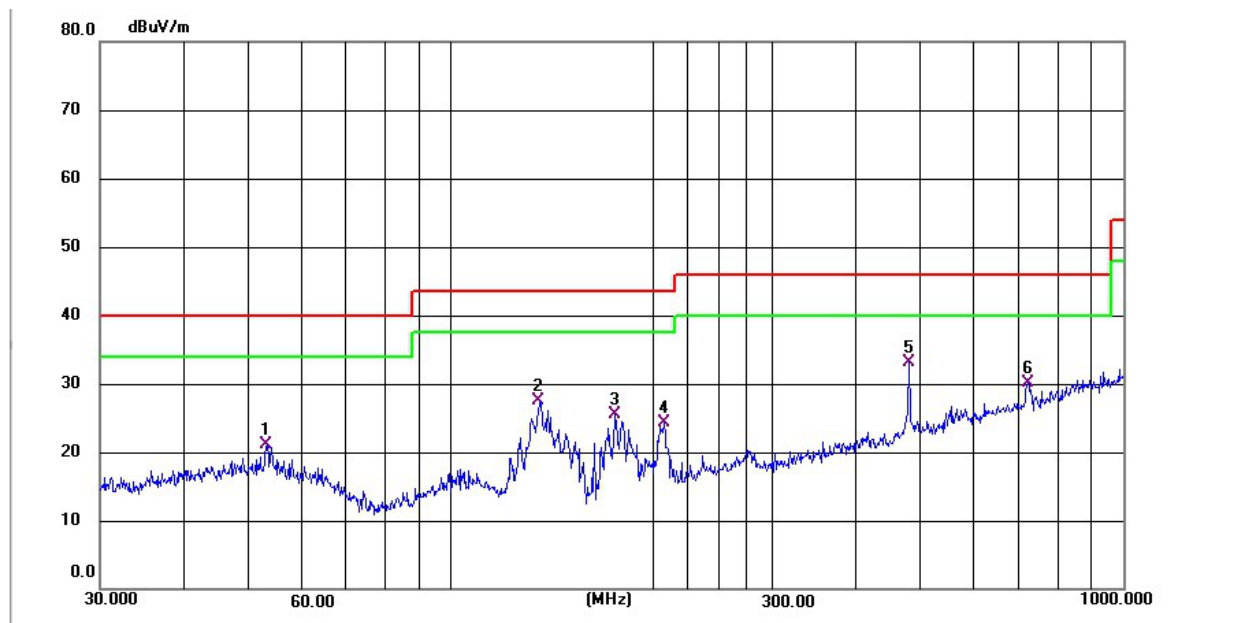

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	53.1310	1.34	19.77	21.11	40.00	-18.89	QP	P	
2	135.5060	12.76	14.71	27.47	43.50	-16.03	QP	P	
3	175.0370	9.70	15.76	25.46	43.50	-18.04	QP	P	
4	207.1230	6.76	17.45	24.21	43.50	-19.29	QP	P	
5 *	480.5280	9.12	24.00	33.12	46.00	-12.88	QP	P	
6	721.7260	2.52	27.57	30.09	46.00	-15.91	QP	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

10.12 Emissions in frequency bands (1G - 18GHz)


Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).																																																																									
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																																																							
	0.009-0.490	2400/F(kHz)	300																																																																							
	0.490-1.705	24000/F(kHz)	30																																																																							
	1.705-30.0	30	30																																																																							
	30-88	100 **	3																																																																							
	88-216	150 **	3																																																																							
	216-960	200 **	3																																																																							
	Above 960	500	3																																																																							
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																																																									
	Table 1 – Restricted frequency bands <table> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> <tr> <td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr> <td>0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr> <td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr> <td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr> <td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr> <td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr> <td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr> <td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr> <td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr> <td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr> <td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr> <td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr> <td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr> <td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr> <td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr> <td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>Above 38.6</td></tr> <tr> <td>13.36-13.41</td><td></td><td></td><td></td></tr> </table>			MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4	6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	Above 38.6	13.36-13.41		
MHz	MHz	MHz	GHz																																																																							
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																							
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																							
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																							
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																							
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																							
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5																																																																							
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																							
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4																																																																							
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																							
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																							
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4																																																																							
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																							
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																							
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																							
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																							
12.57675-12.57725	322-335.4	3600-4400	Above 38.6																																																																							
13.36-13.41																																																																										
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 section 6.6 KDB 558074 D01 15.247 Meas Guidance v05r02																																																																									
Procedure:	a) The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading. e) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.																																																																									

- f) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g) Test the EUT in the lowest channel ,middle channel, the Highest channel
- h) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, only the test worst case is recorded in the report.
- i) Repeat above procedures until all frequencies measured was complete.

Where,

- a) Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- b) Level = Reading + Factor.
- c) Margin = Level – Limit

10.12.1 Test Setup Diagram:

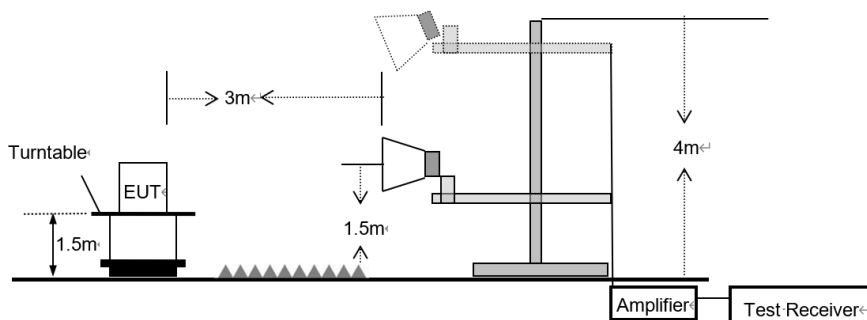


10.12.2 E.U.T. Operation:

Operating Environment:

Temperature:	23 °C	Humidity:	52 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1, TM2, TM3				
Final test mode:	TM1				

10.12.3 Test Data:


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

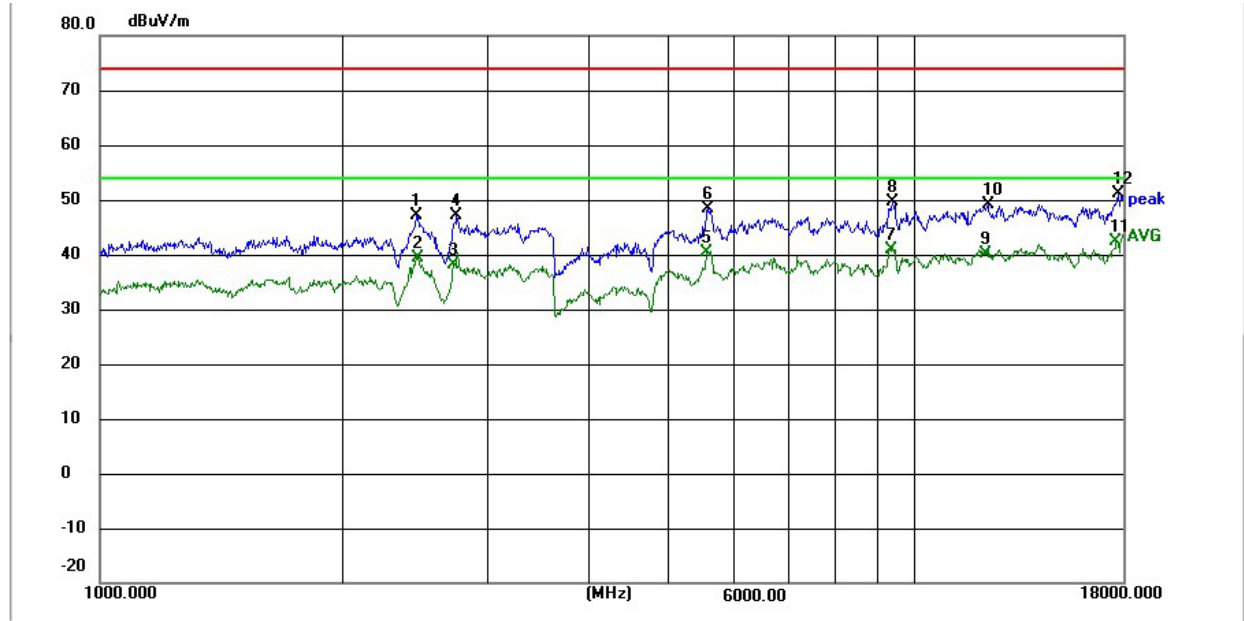

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2453.925	60.15	-12.93	47.22	74.00	-26.78	peak	P	
2	2459.450	52.20	-12.82	39.38	54.00	-14.62	AVG	P	
3	2725.500	49.20	-11.04	38.16	54.00	-15.84	AVG	P	
4	2749.300	57.84	-10.83	47.01	74.00	-26.99	peak	P	
5	5554.300	46.13	-5.71	40.42	54.00	-13.58	AVG	P	
6	5571.300	54.12	-5.78	48.34	74.00	-25.66	peak	P	
7	9321.925	40.62	0.15	40.77	54.00	-13.23	AVG	P	
8	9386.950	49.56	0.19	49.75	74.00	-24.25	peak	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

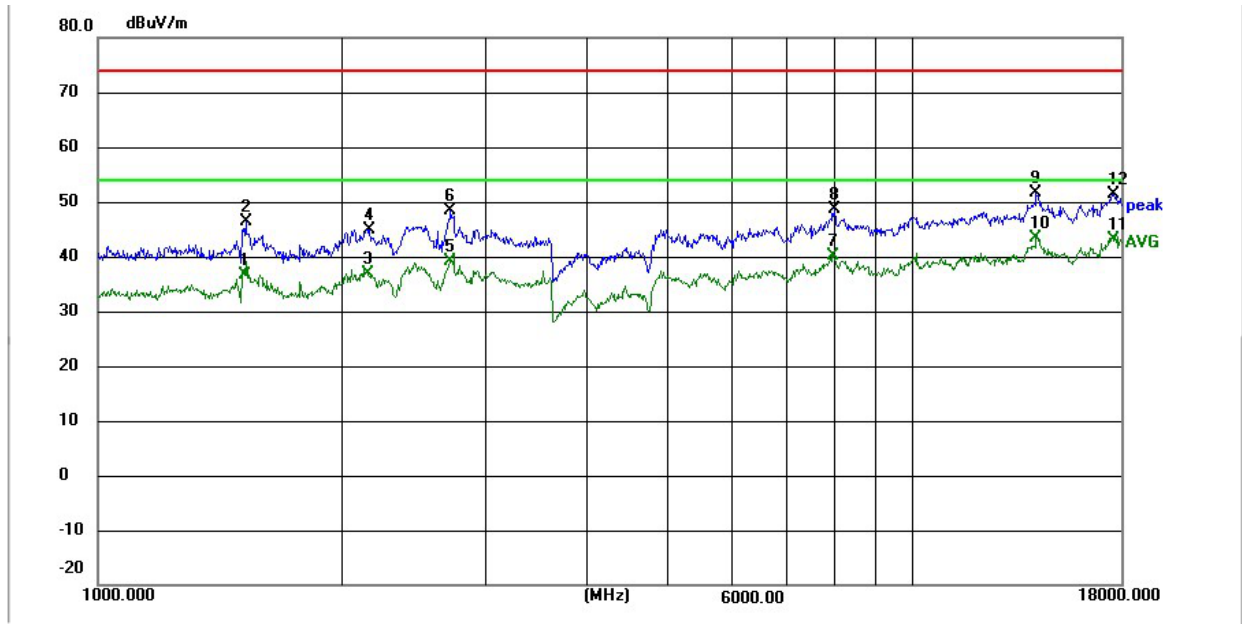

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	1513.400	53.69	-17.01	36.68	54.00	-17.32	AVG	P	
2	1520.200	63.27	-17.00	46.27	74.00	-27.73	peak	P	
3	2152.600	49.66	-12.82	36.84	54.00	-17.16	AVG	P	
4	2160.250	57.90	-12.97	44.93	74.00	-29.07	peak	P	
5	2705.950	50.25	-11.18	39.07	54.00	-14.93	AVG	P	
6	2713.175	59.48	-11.13	48.35	74.00	-25.65	peak	P	
7	7983.600	41.80	-1.60	40.20	54.00	-13.80	AVG	P	
8	7995.075	50.40	-1.70	48.70	74.00	-25.30	peak	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: M

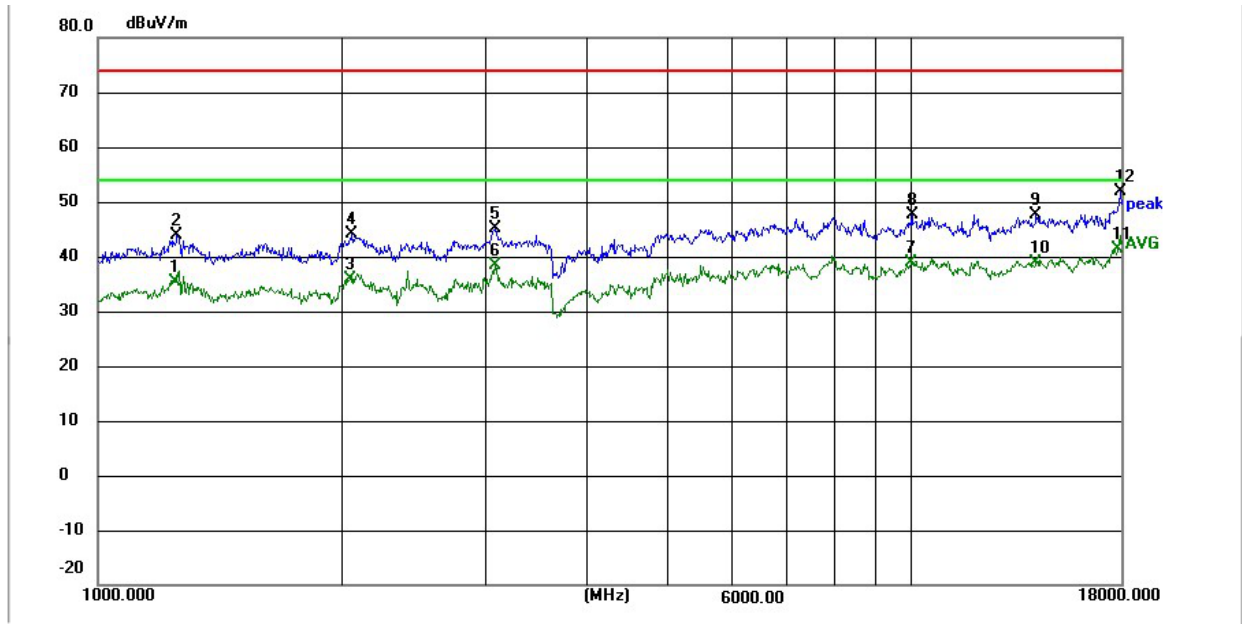

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	1243.100	53.29	-17.95	35.34	54.00	-18.66	AVG	P	
2	1250.750	61.83	-17.87	43.96	74.00	-30.04	peak	P	
3	2046.775	48.75	-12.94	35.81	54.00	-18.19	AVG	P	
4	2058.675	56.85	-12.82	44.03	74.00	-29.97	peak	P	
5	3070.600	54.74	-9.59	45.15	74.00	-28.85	peak	P	
6	3070.600	47.92	-9.59	38.33	54.00	-15.67	AVG	P	
7	9976.850	37.78	1.06	38.84	54.00	-15.16	AVG	P	
8	10001.075	46.36	1.15	47.51	74.00	-26.49	peak	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: M

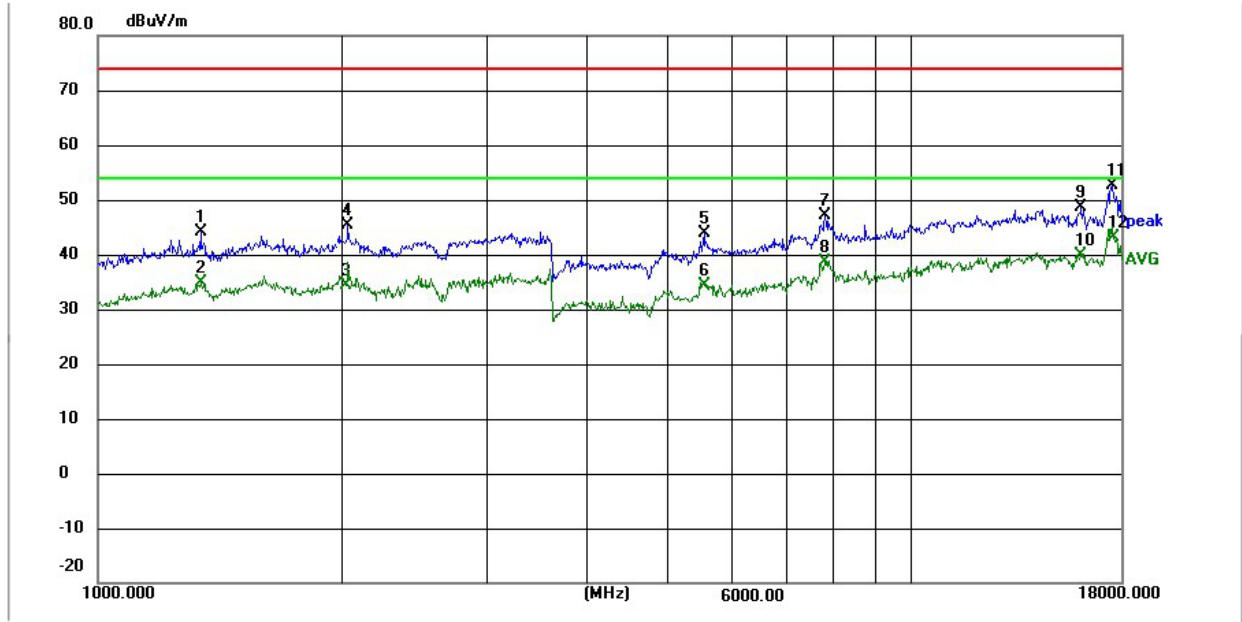

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	1336.600	62.14	-17.91	44.23	74.00	-29.77	peak	P	
2	1336.600	52.78	-17.91	34.87	54.00	-19.13	AVG	P	
3	2023.400	47.62	-13.27	34.35	54.00	-19.65	AVG	P	
4	2032.325	58.52	-13.14	45.38	74.00	-28.62	peak	P	
5	5539.000	49.47	-5.59	43.88	74.00	-30.12	peak	P	
6	5563.225	40.10	-5.74	34.36	54.00	-19.64	AVG	P	
7	7798.300	48.63	-1.46	47.17	74.00	-26.83	peak	P	
8	7798.300	40.11	-1.46	38.65	54.00	-15.35	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H

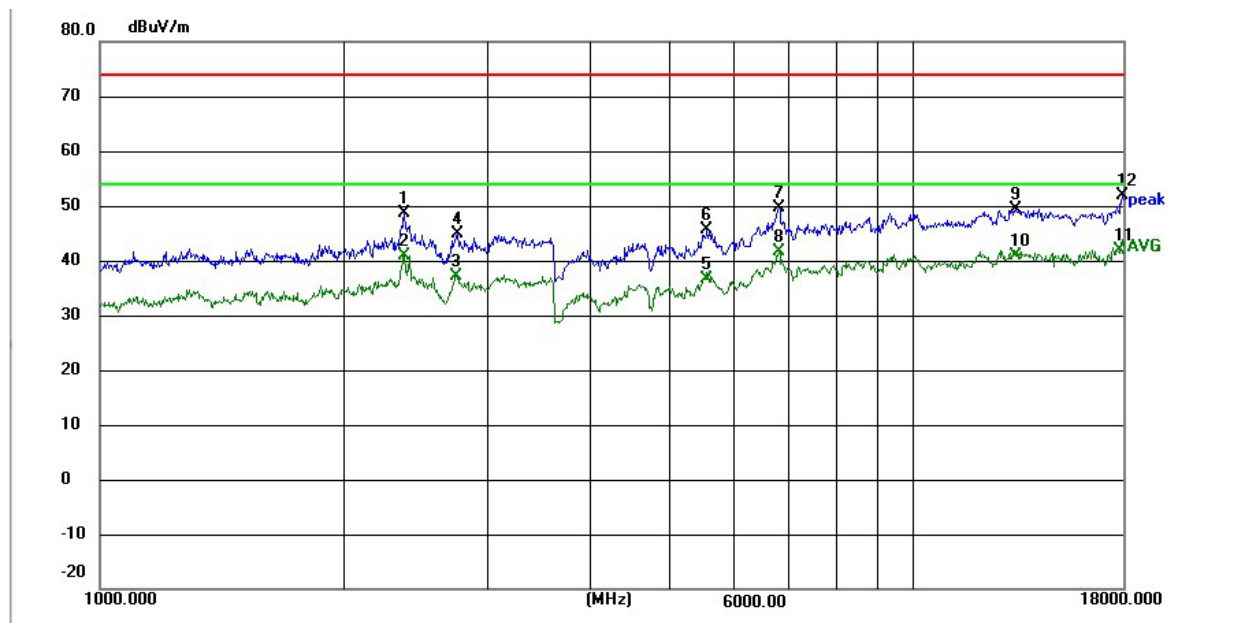

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	2372.325	62.14	-13.49	48.65	74.00	-25.35	peak	P	
2	2372.325	54.44	-13.49	40.95	54.00	-13.05	AVG	P	
3	2742.925	48.06	-10.88	37.18	54.00	-16.82	AVG	P	
4	2752.275	55.69	-10.81	44.88	74.00	-29.12	peak	P	
5	5543.250	42.36	-5.63	36.73	54.00	-17.27	AVG	P	
6	5555.575	51.34	-5.71	45.63	74.00	-28.37	peak	P	
7	6808.475	52.84	-3.28	49.56	74.00	-24.44	peak	P	
8	6808.475	45.02	-3.28	41.74	54.00	-12.26	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H

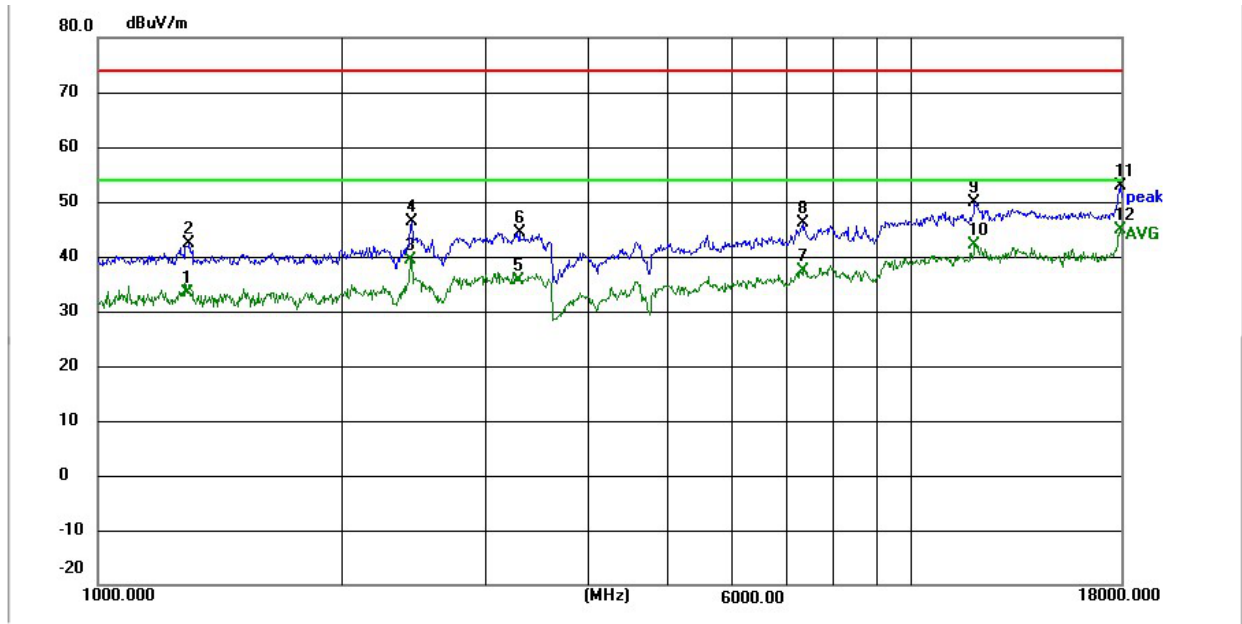

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	1289.425	51.27	-17.85	33.42	54.00	-20.58	AVG	P	
2	1296.225	60.17	-17.85	42.32	74.00	-31.68	peak	P	
3	2428.000	52.39	-13.08	39.31	54.00	-14.69	AVG	P	
4	2431.400	59.36	-13.08	46.28	74.00	-27.72	peak	P	
5	3283.100	44.96	-9.25	35.71	54.00	-18.29	AVG	P	
6	3297.125	53.84	-9.39	44.45	74.00	-29.55	peak	P	
7	7314.225	39.53	-2.17	37.36	54.00	-16.64	AVG	P	
8	7343.550	48.00	-1.85	46.15	74.00	-27.85	peak	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

10.13 Emissions in frequency bands (above 18GHz)


Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).																																																																									
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																																																							
	0.009-0.490	2400/F(kHz)	300																																																																							
	0.490-1.705	24000/F(kHz)	30																																																																							
	1.705-30.0	30	30																																																																							
	30-88	100 **	3																																																																							
	88-216	150 **	3																																																																							
	216-960	200 **	3																																																																							
	Above 960	500	3																																																																							
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																																																									
	Table 1 – Restricted frequency bands <table> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> <tr> <td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr> <td>0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr> <td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr> <td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr> <td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr> <td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr> <td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr> <td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr> <td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr> <td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr> <td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr> <td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr> <td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr> <td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr> <td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr> <td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>Above 38.6</td></tr> <tr> <td>13.36-13.41</td><td></td><td></td><td></td></tr> </table>			MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4	6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	Above 38.6	13.36-13.41		
MHz	MHz	MHz	GHz																																																																							
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																							
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																							
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																							
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																							
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																							
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5																																																																							
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																							
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4																																																																							
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																							
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																							
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4																																																																							
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																							
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																							
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																							
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																							
12.57675-12.57725	322-335.4	3600-4400	Above 38.6																																																																							
13.36-13.41																																																																										
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 section 6.6 KDB 558074 D01 15.247 Meas Guidance v05r02																																																																									
Procedure:	a) The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading. e) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.																																																																									

- f) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g) Test the EUT in the lowest channel ,middle channel, the Highest channel
- h) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, only the test worst case is recorded in the report.
- i) Repeat above procedures until all frequencies measured was complete.

Where,

- a) Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- b) Level = Reading + Factor.
- c) Margin = Level – Limit

10.13.1 Test Setup Diagram:

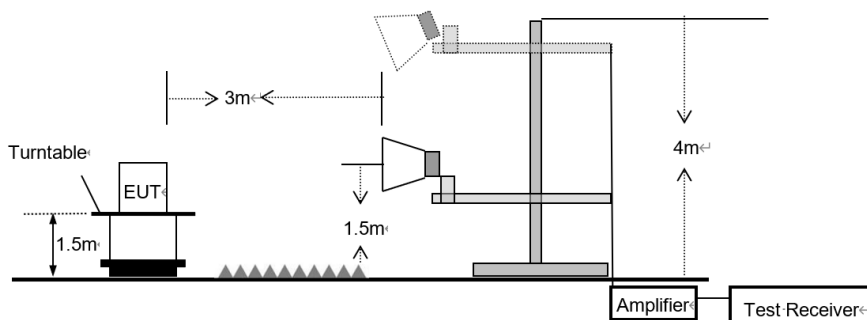


10.13.2 E.U.T. Operation:

Operating Environment:

Temperature:	23 °C	Humidity:	52 %	Atmospheric Pressure:	1010 mbar
Per-test mode:	TM1				
Final test mode:	TM1				

10.13.3 Test Data:


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

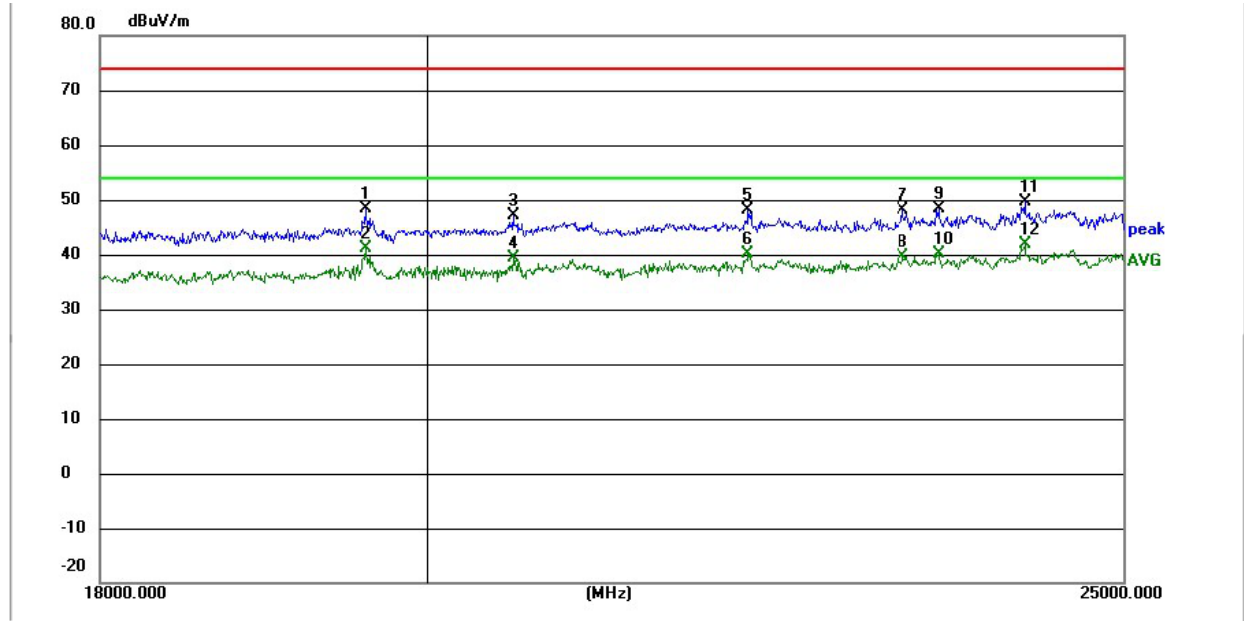

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	19608.600	61.60	-13.22	48.38	74.00	-25.62	peak	P	
2	19608.600	54.44	-13.22	41.22	54.00	-12.78	AVG	P	
3	20560.250	59.19	-12.14	47.05	74.00	-26.95	peak	P	
4	20560.250	51.62	-12.14	39.48	54.00	-14.52	AVG	P	
5	22164.475	60.02	-11.86	48.16	74.00	-25.84	peak	P	
6	22164.475	52.03	-11.86	40.17	54.00	-13.83	AVG	P	
7	23291.300	60.22	-12.02	48.20	74.00	-25.80	peak	P	
8	23297.250	51.65	-12.01	39.64	54.00	-14.36	AVG	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

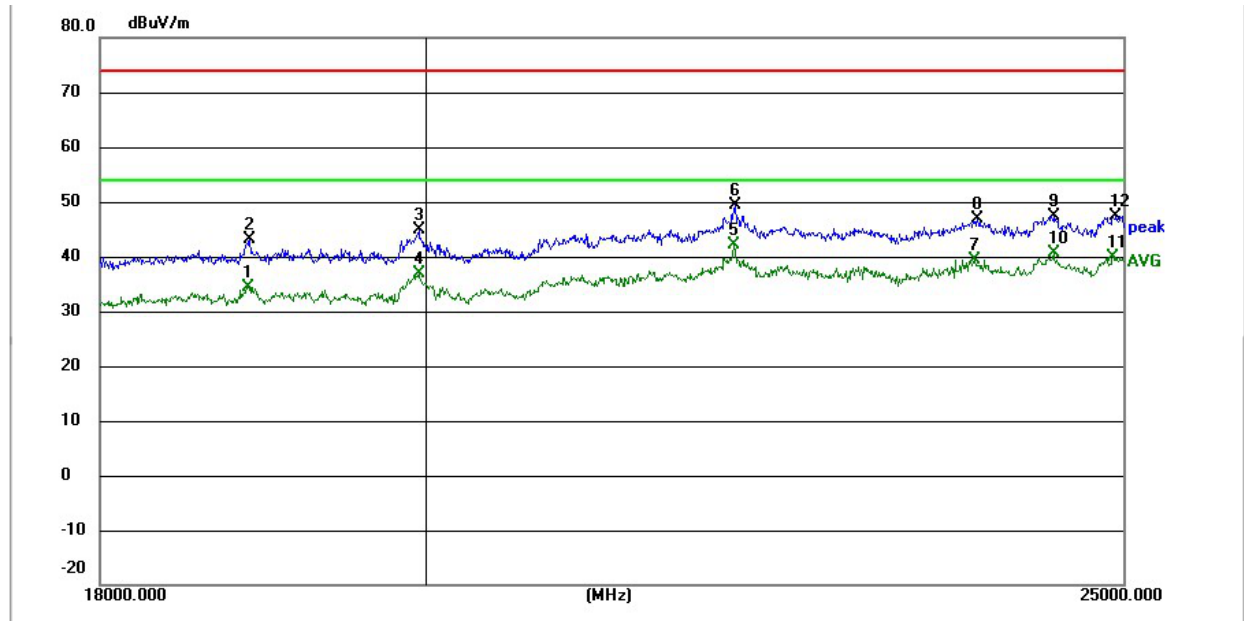

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	18878.850	48.77	-14.31	34.46	54.00	-19.54	AVG	P	
2	18884.625	57.33	-14.29	43.04	74.00	-30.96	peak	P	
3	19944.250	57.39	-12.59	44.80	74.00	-29.20	peak	P	
4	19944.250	49.48	-12.59	36.89	54.00	-17.11	AVG	P	
5 *	22063.500	54.02	-11.94	42.08	54.00	-11.92	AVG	P	
6	22076.975	61.28	-11.93	49.35	74.00	-24.65	peak	P	
7	23839.925	50.78	-11.38	39.40	54.00	-14.60	AVG	P	
8	23864.250	58.28	-11.33	46.95	74.00	-27.05	peak	P	

Note: All the modulation modes have been tested, and the worst case result was reported.

11 Test Setup Photos

Refer to Appendix - Test Setup Photos


12 EUT Constructional Details (EUT Photos)


Refer to Appendix - EUT Photos


Appendix A


A1 Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.369	77.859	211	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.626	222.762	137	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.872	252.736	88	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.378	83.16	220	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.63	218.42	134	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.88	256.32	89	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.378	78.624	208	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.63	213.53	131	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.88	267.84	93	31600	400	Pass

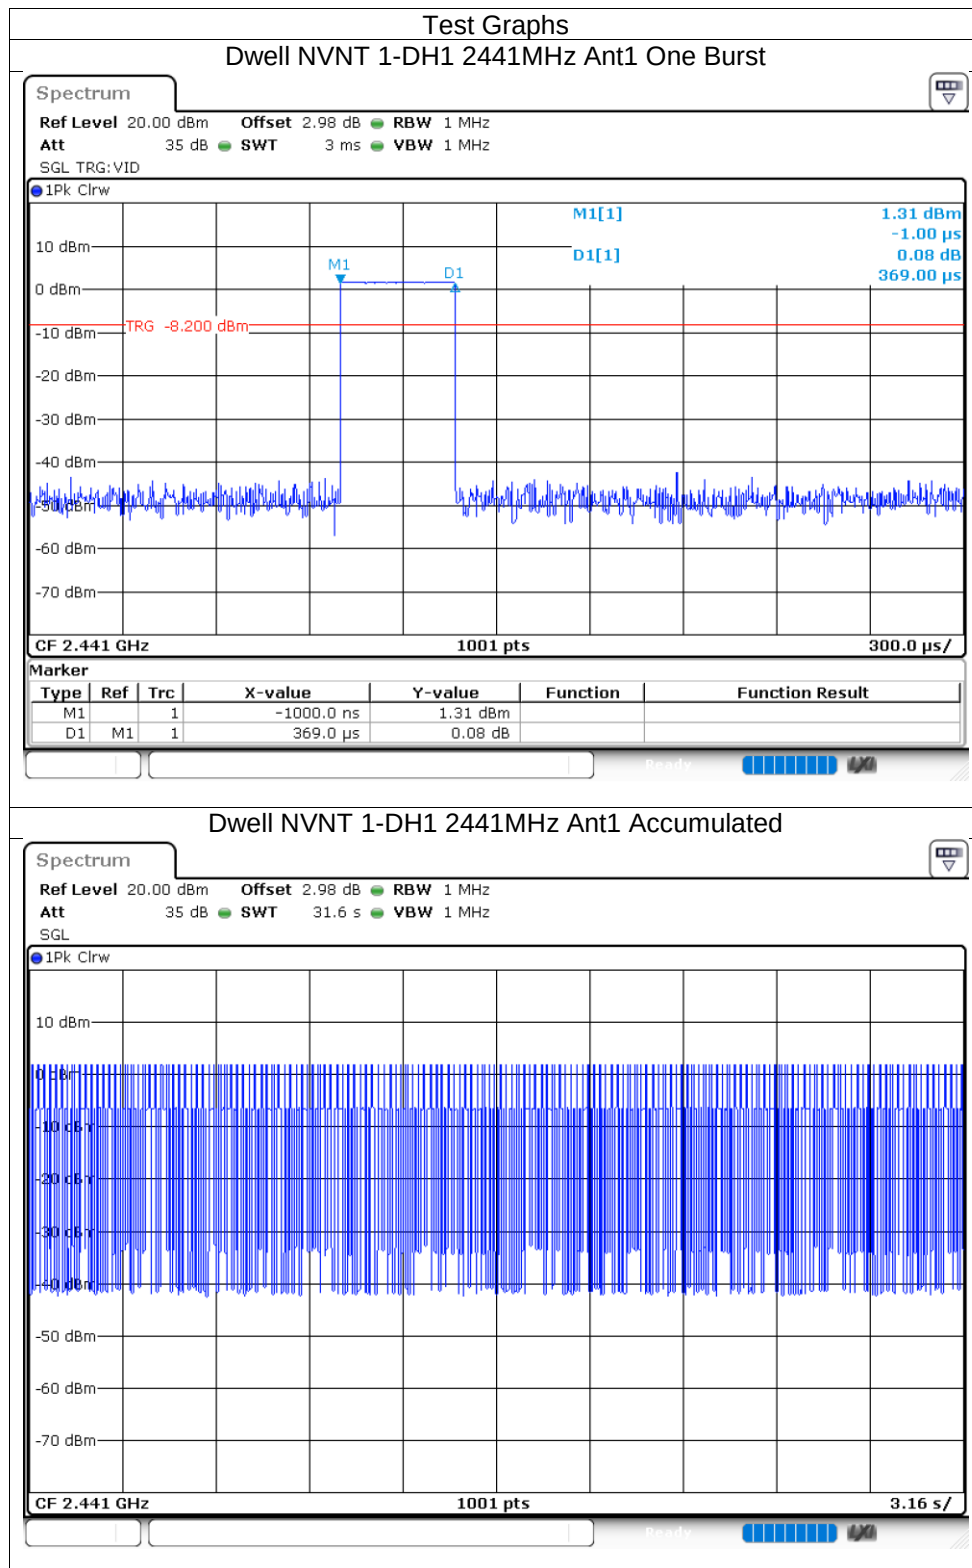


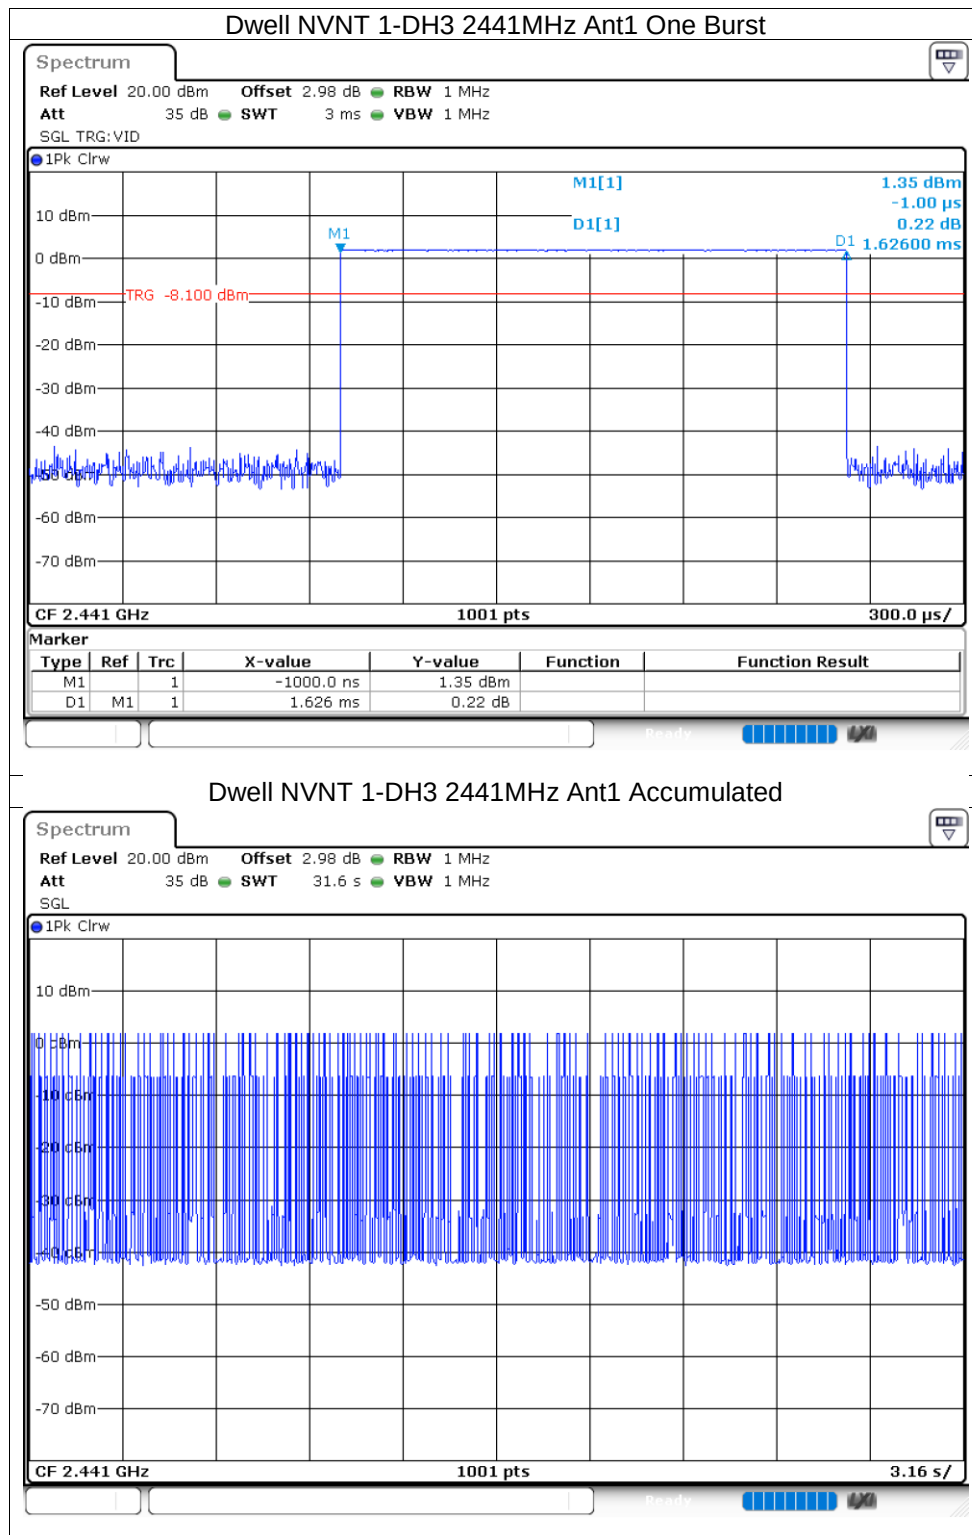


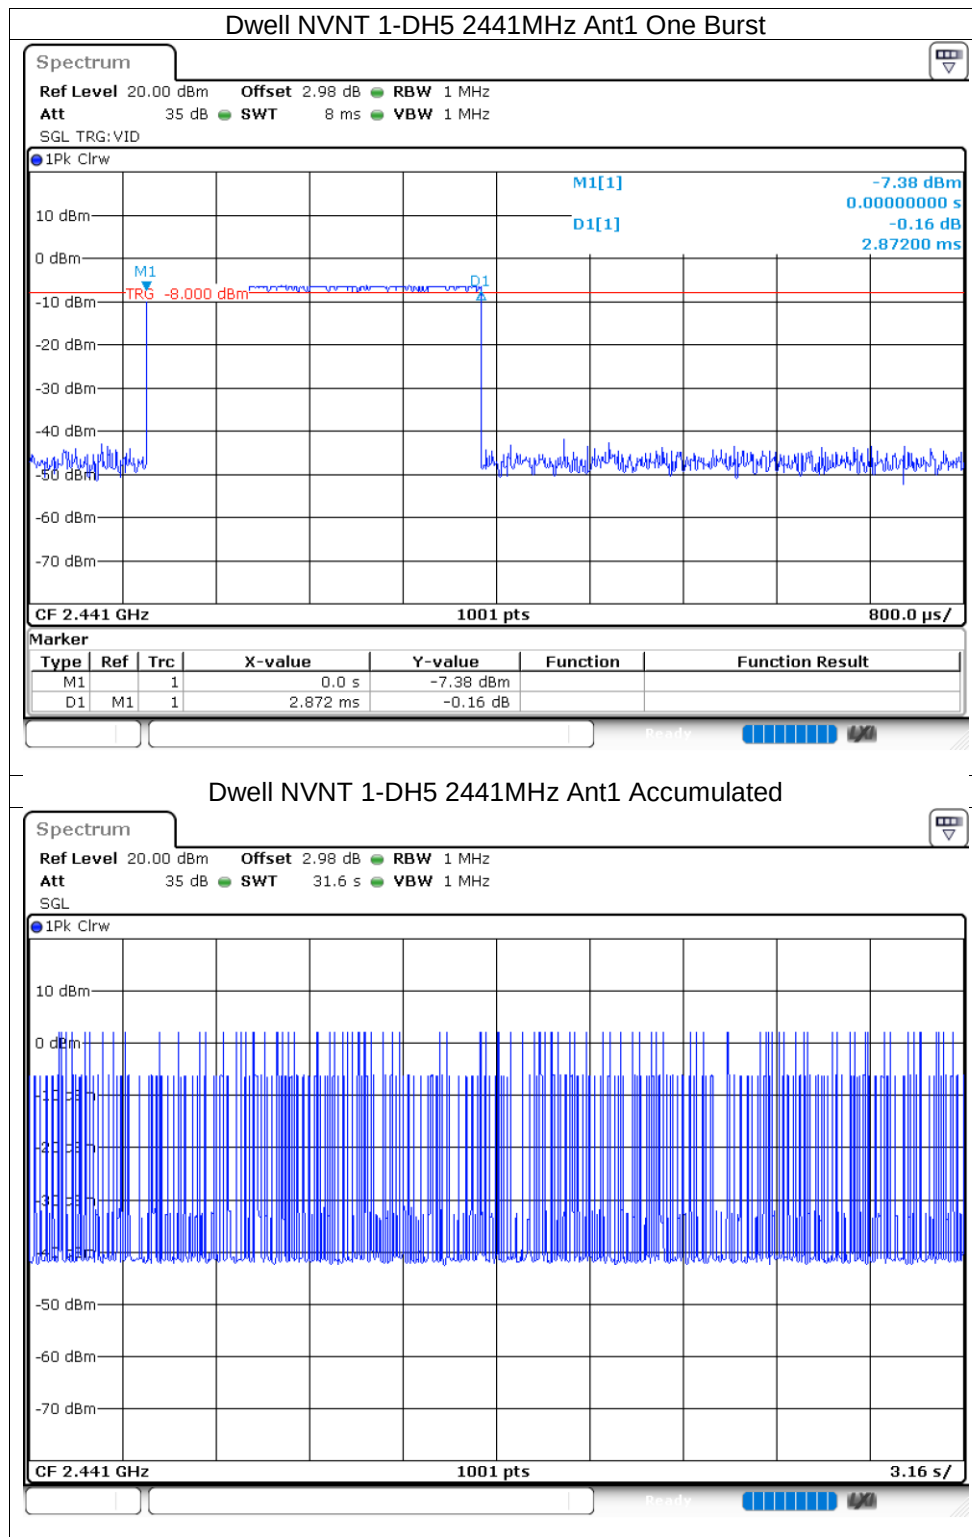


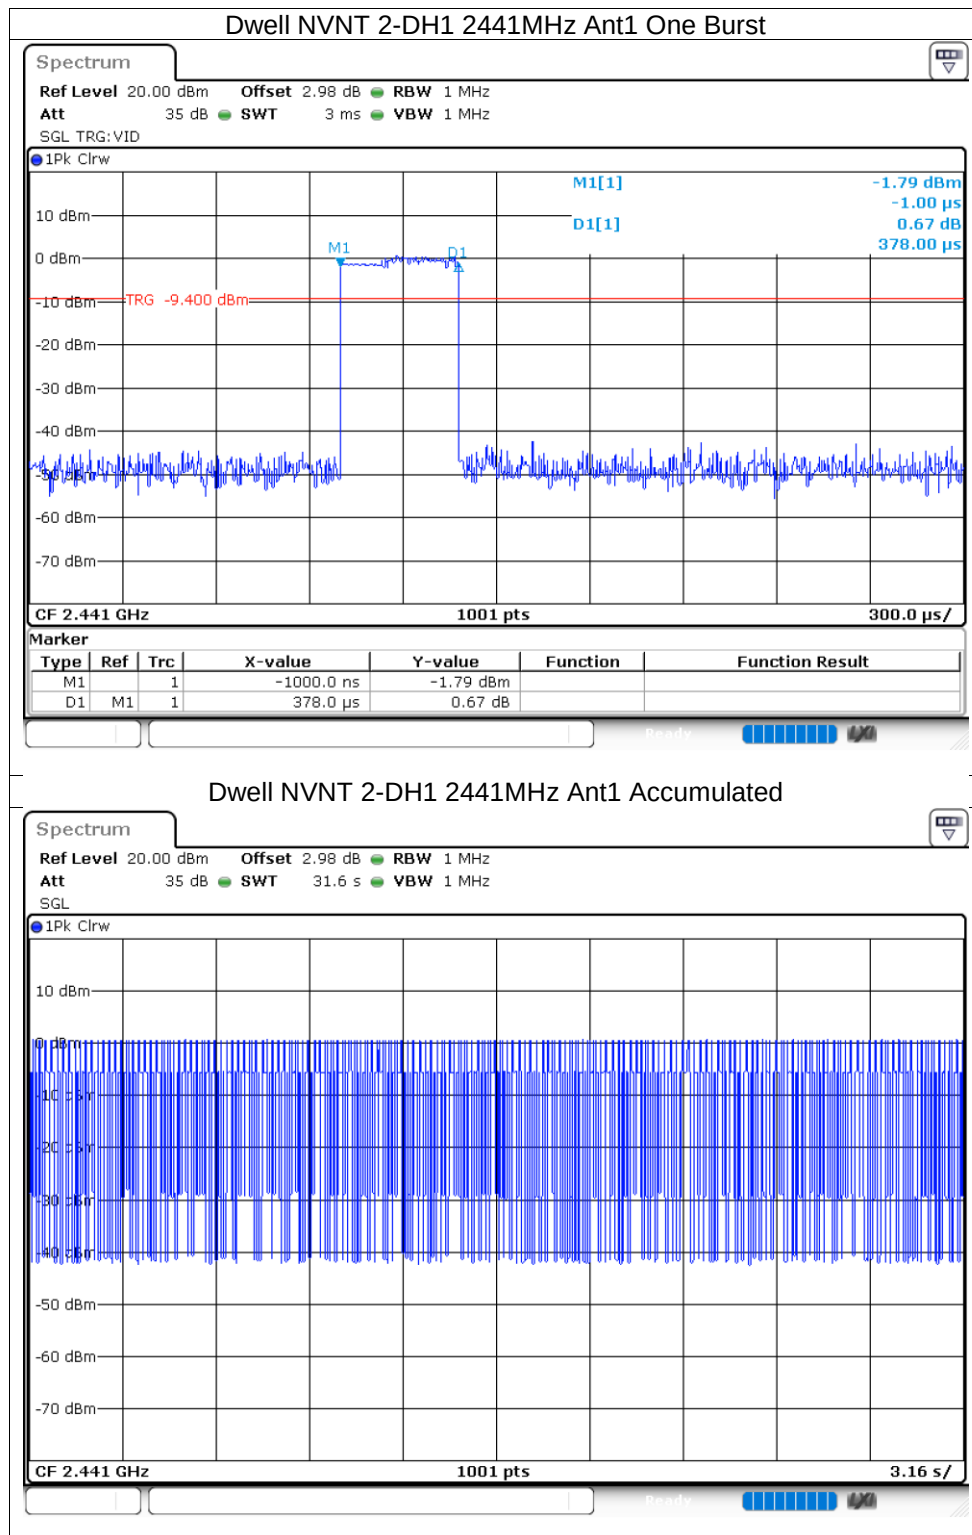


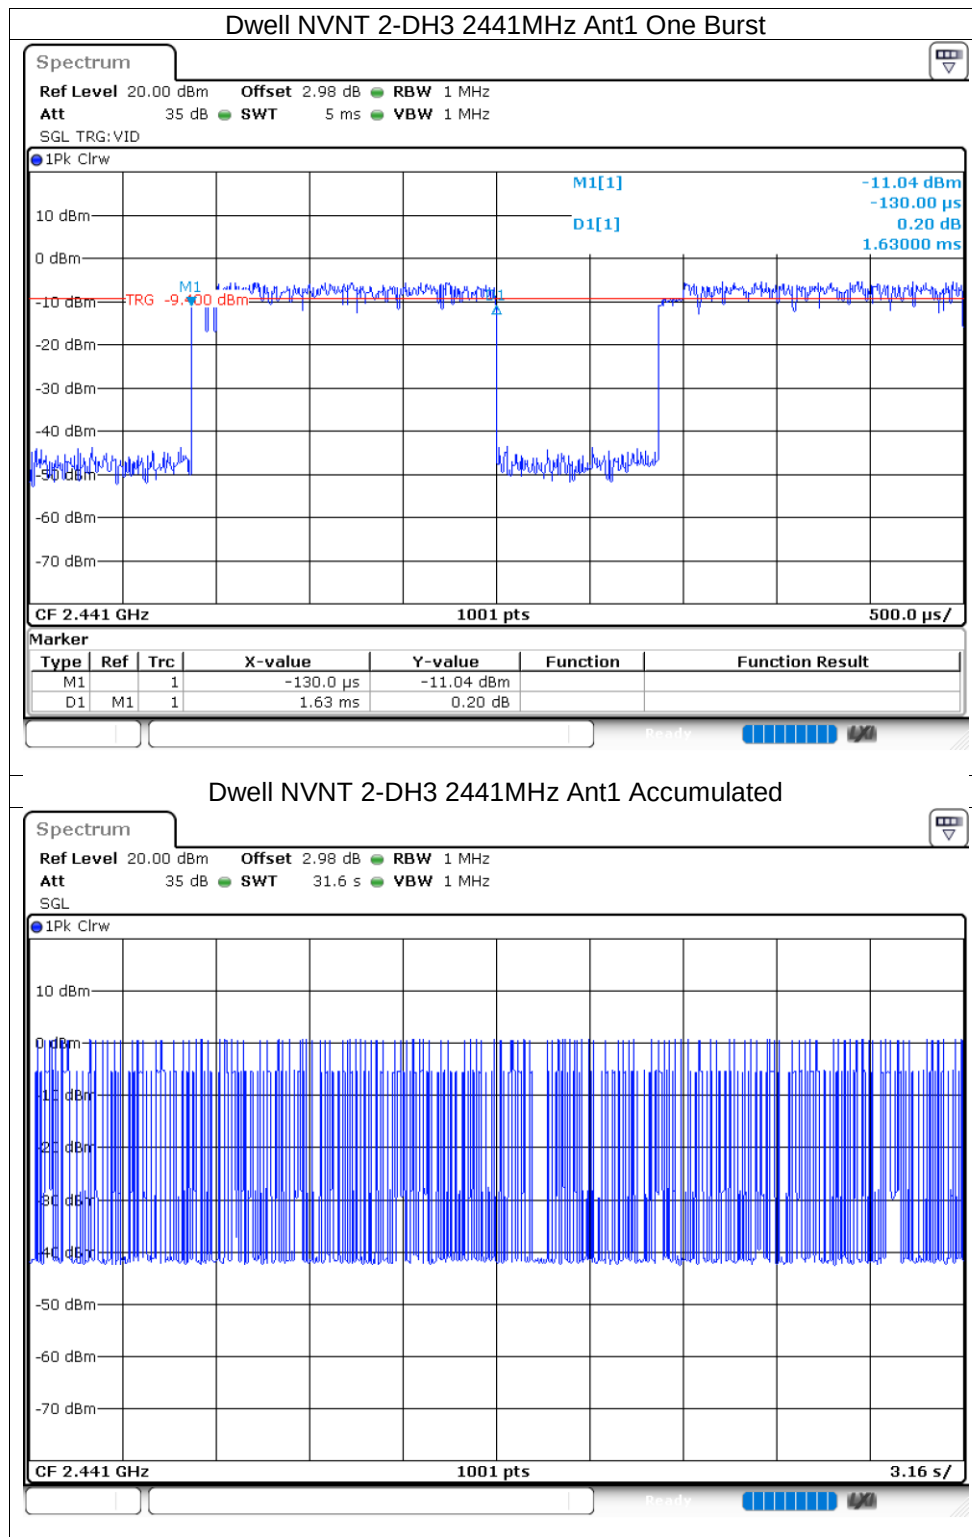

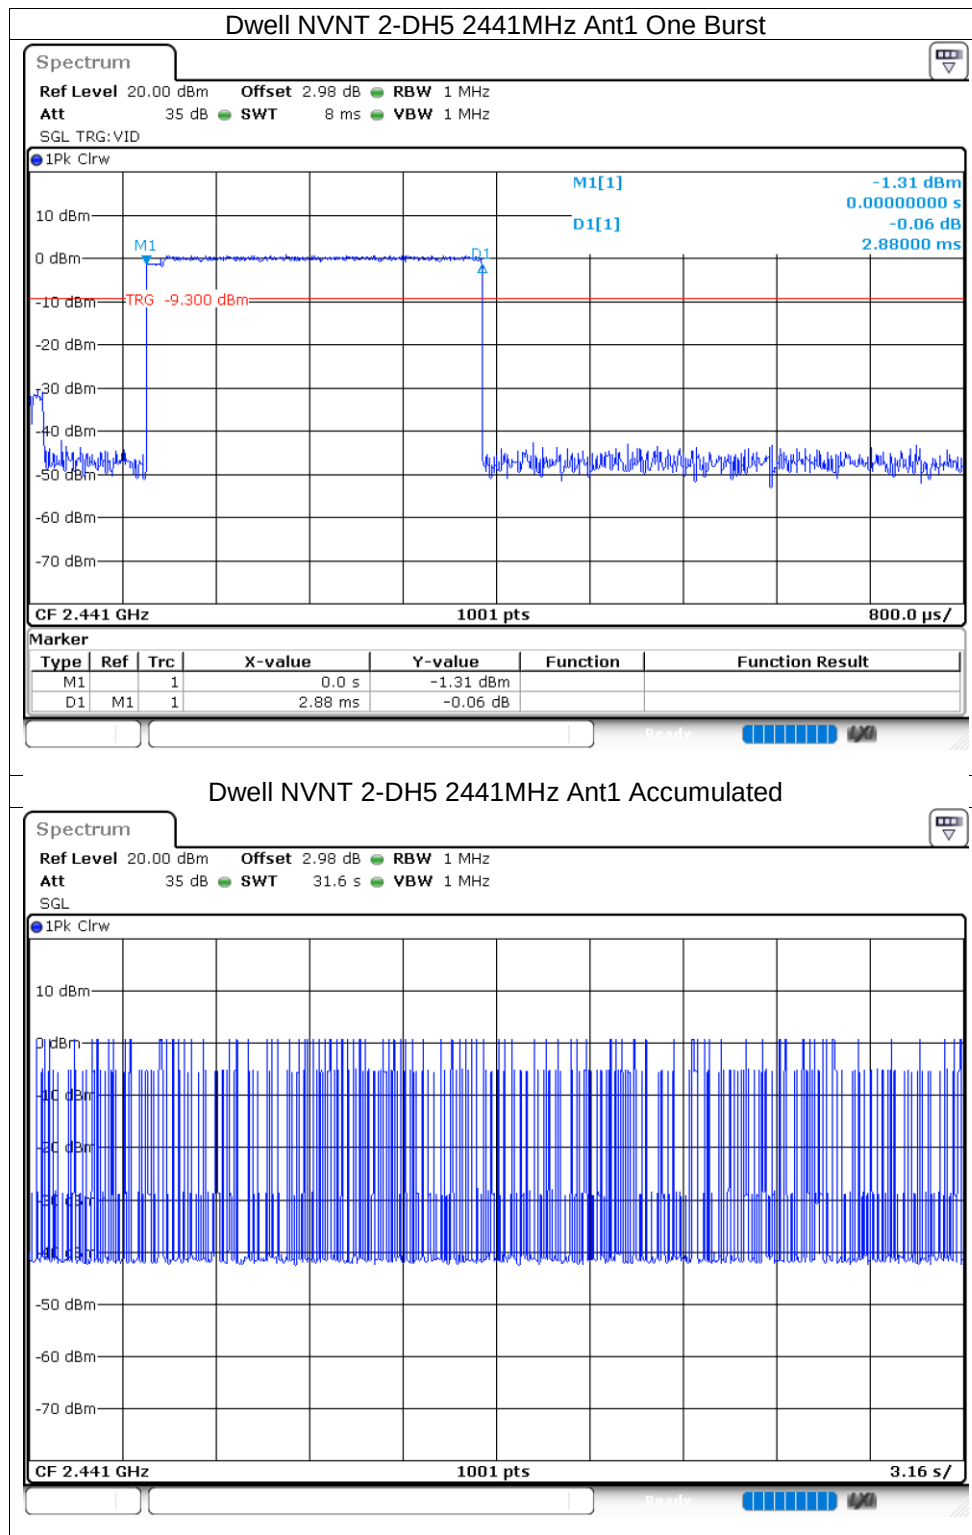

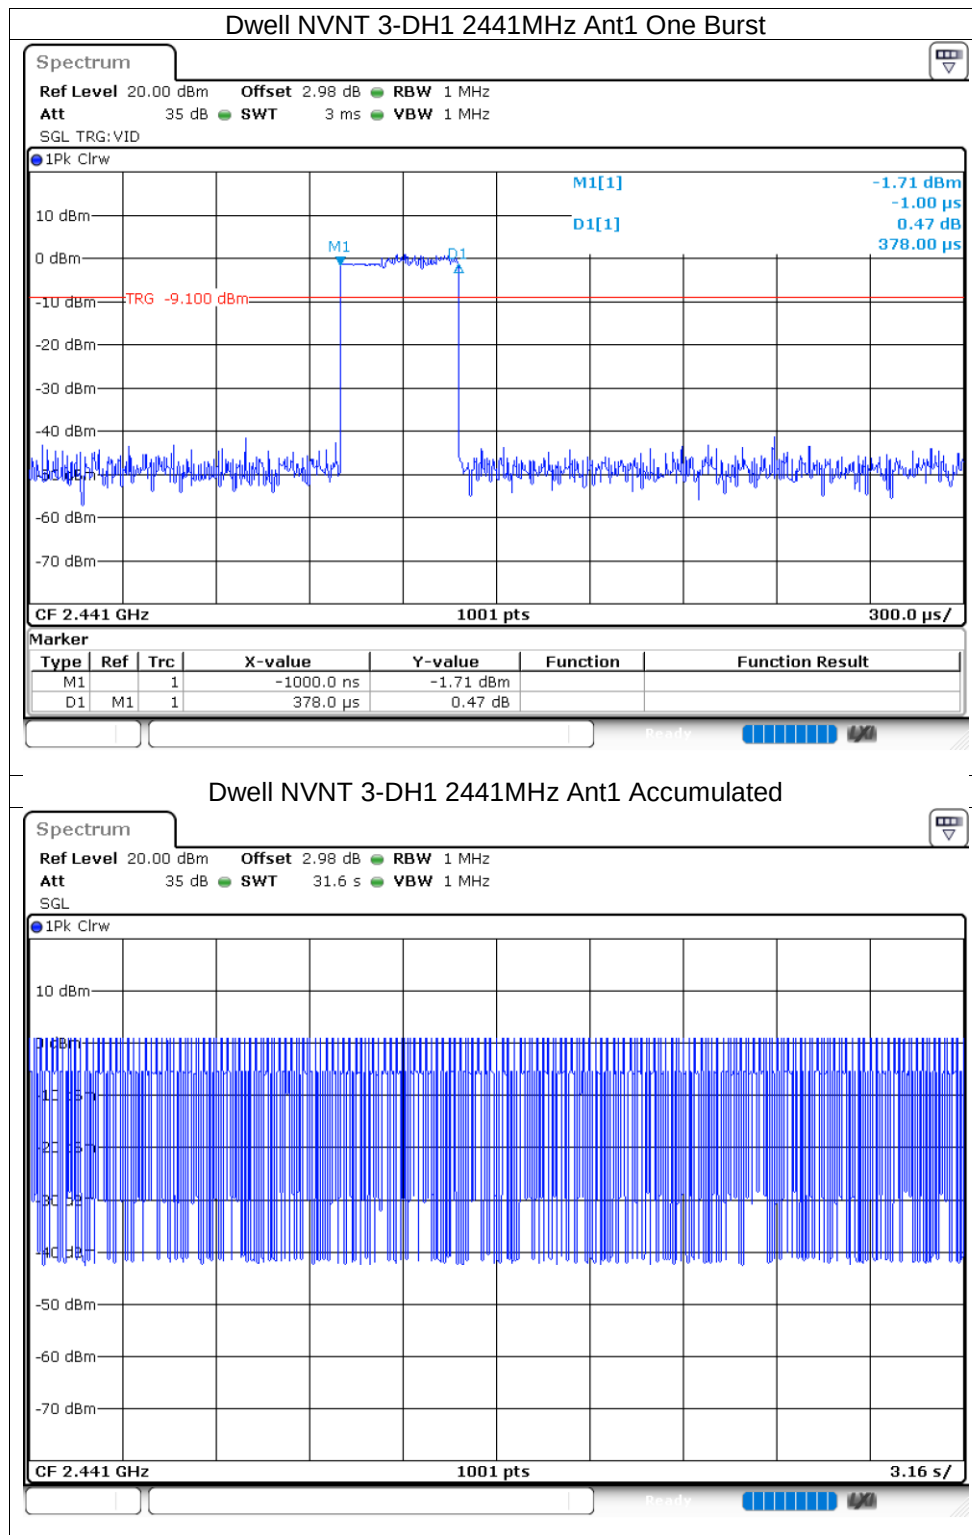

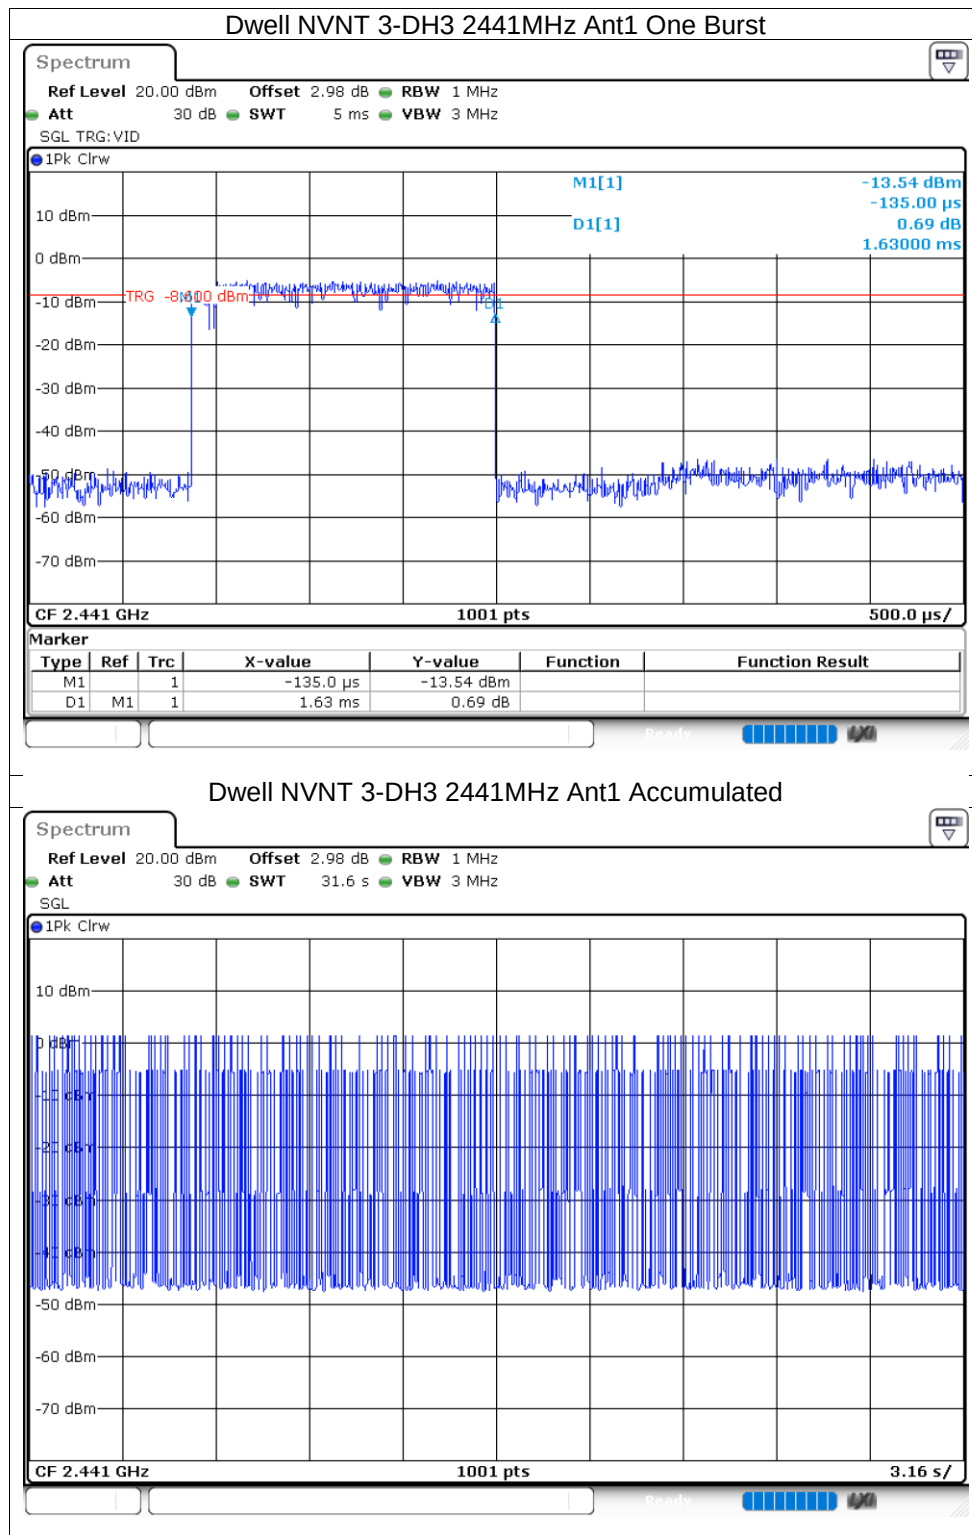

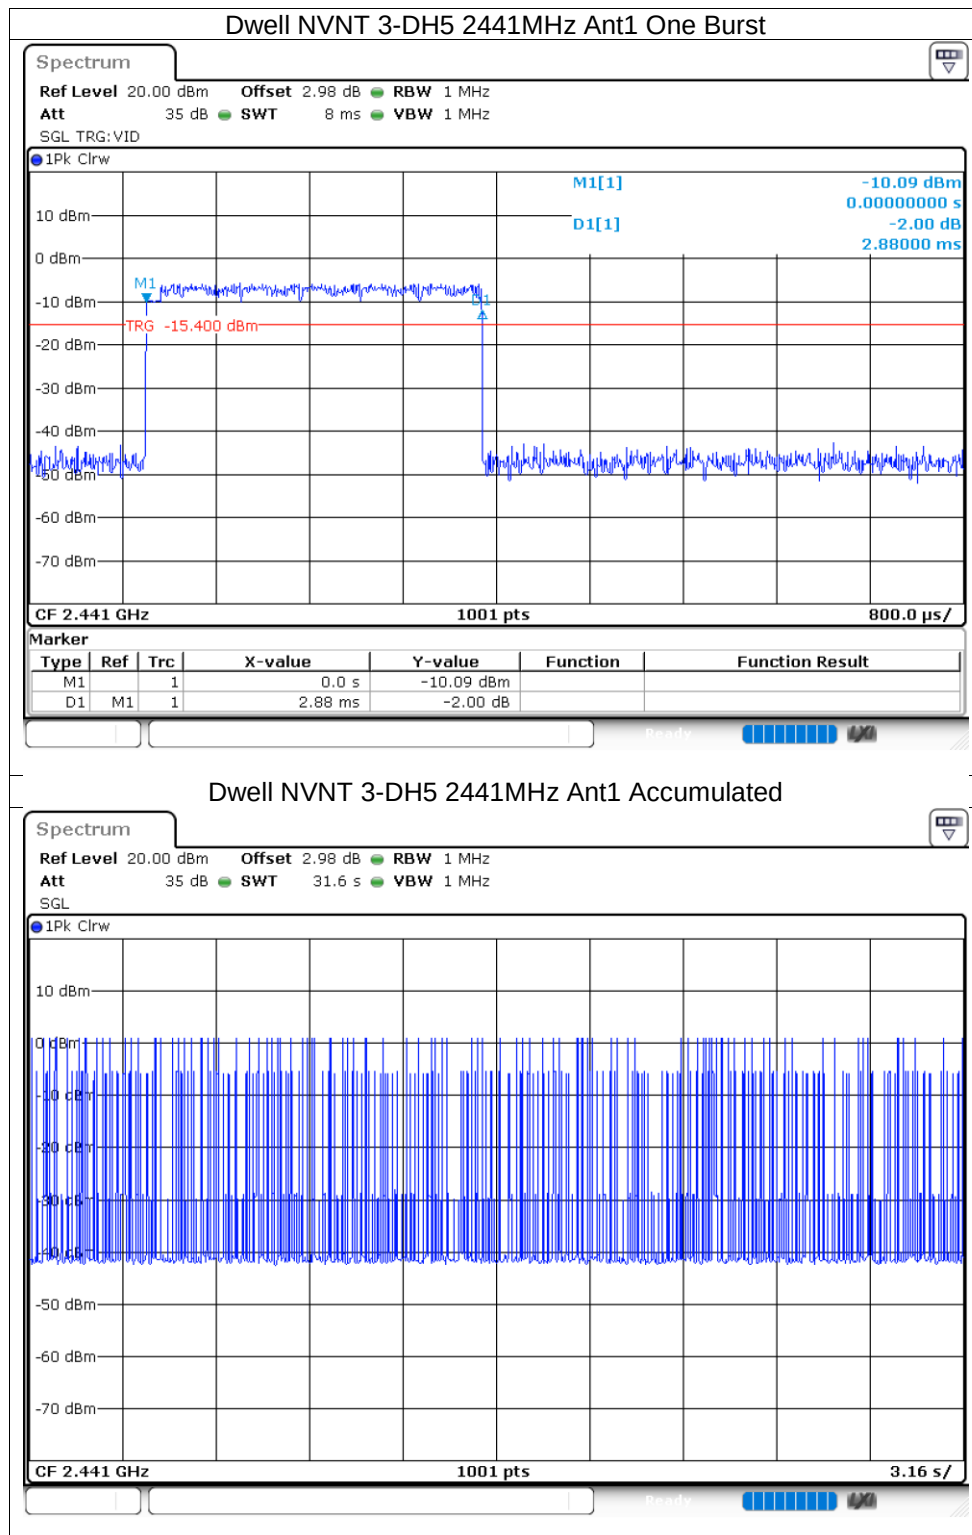

A2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	2.51	21	Pass
NVNT	1-DH5	2441	Ant1	2.15	21	Pass
NVNT	1-DH5	2480	Ant1	2.47	21	Pass
NVNT	2-DH5	2402	Ant1	1.85	21	Pass
NVNT	2-DH5	2441	Ant1	1.59	21	Pass
NVNT	2-DH5	2480	Ant1	1.88	21	Pass
NVNT	3-DH5	2402	Ant1	2.1	21	Pass
NVNT	3-DH5	2441	Ant1	1.79	21	Pass
NVNT	3-DH5	2480	Ant1	2.08	21	Pass

