

Appendix A: Test Results of Bluetooth Low Energy

APPENDIX A: TEST RESULTS OF BLUETOOTH LOW ENERGY	1
APPENDIX A.1: TEST RESULTS OF 6dB BANDWIDTH	2
Test Result.....	2
Test Graphs.....	3
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	6
Test Result.....	6
Test Graphs.....	7
APPENDIX A.3: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	10
Test Result.....	10
Test Graphs.....	11
APPENDIX A.4: TEST RESULTS OF BAND EDGE MEASUREMENTS	14
Bluetooth LE, 1Mbps.....	14
Bluetooth LE, 2Mbps.....	15
APPENDIX A.5: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION.....	16
Test Result.....	16
Test Graphs.....	17
APPENDIX A.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	24
30MHz - 1GHz	24
1GHz - 18GHz.....	26
APPENDIX A.7: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	38
APPENDIX A.8: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	46


Appendix A.1: Test Results of 6dB Bandwidth

Test Result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	2401.67	2402.33	0.5	PASS
		2440	0.66	2439.67	2440.33	0.5	PASS
		2480	0.66	2479.67	2480.33	0.5	PASS
BLE_2M	Ant1	2402	1.23	2401.36	2402.59	0.5	PASS
		2440	1.24	2439.35	2440.59	0.5	PASS
		2480	1.24	2479.35	2480.59	0.5	PASS

Test Graphs


BLE_1M_Ant1_2402

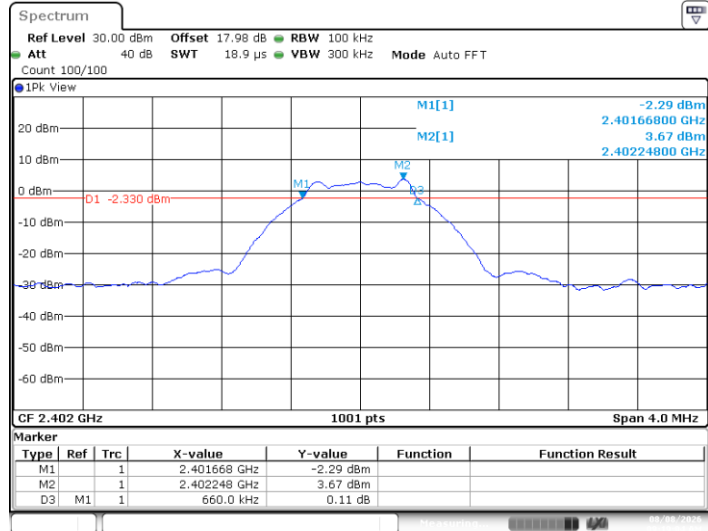


BLE_1M_Ant1_2440

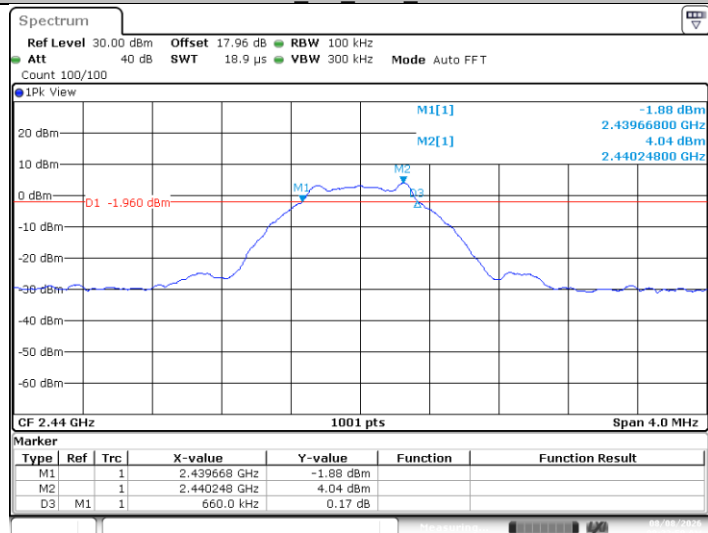


BLE_1M_Ant1_2480

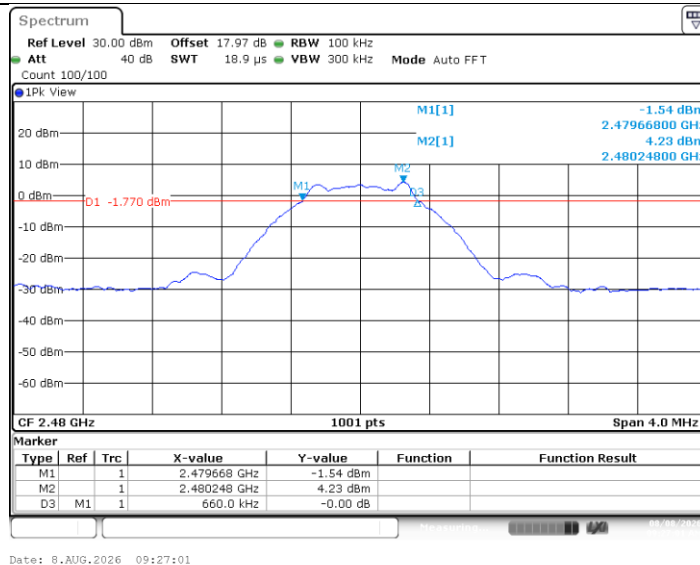


BLE 2M Ant1 2402

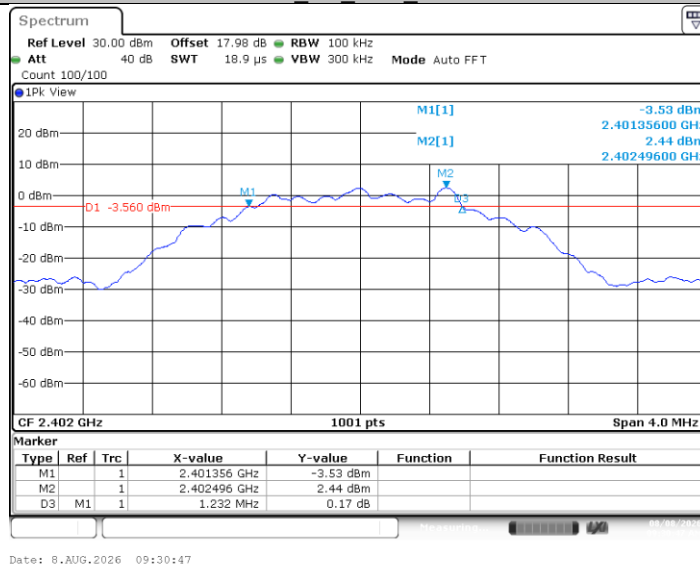

BLE 2M Ant1 2440

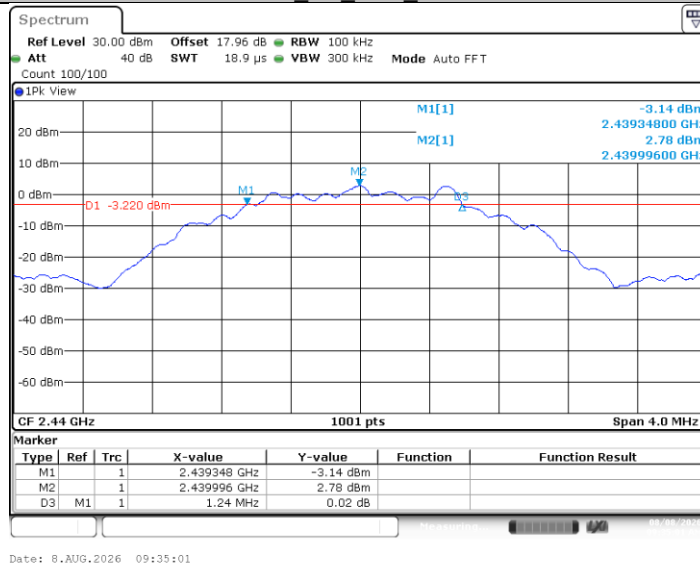

BLE 2M Ant1 2480

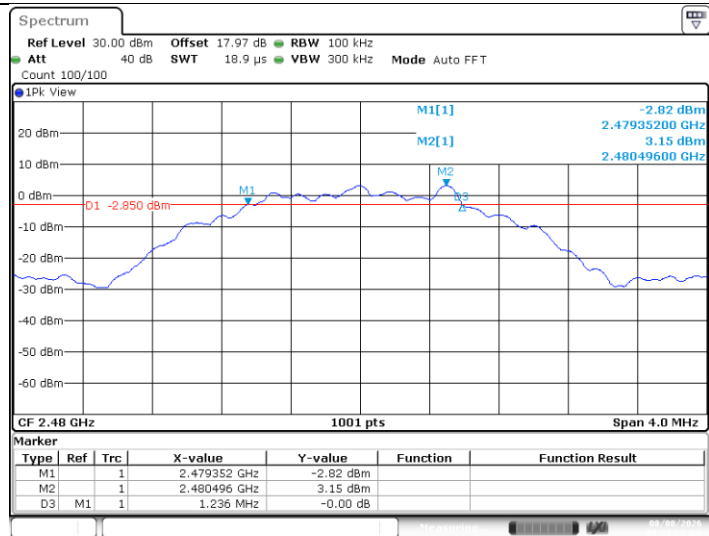

Date: 8.AUG.2026 09:37:23


Appendix A.2: Test Results of 99% Bandwidth

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0589	2401.4725	2402.5315	---	PASS
		2440	1.0589	2439.4725	2440.5315	---	PASS
		2480	1.0589	2479.4725	2480.5315	---	PASS
BLE_2M	Ant1	2402	2.1059	2400.9610	2403.0669	---	PASS
		2440	2.0979	2438.9610	2441.0589	---	PASS
		2480	2.1019	2478.9610	2481.0629	---	PASS

Test Graphs


BLE_1M_Ant1_2402

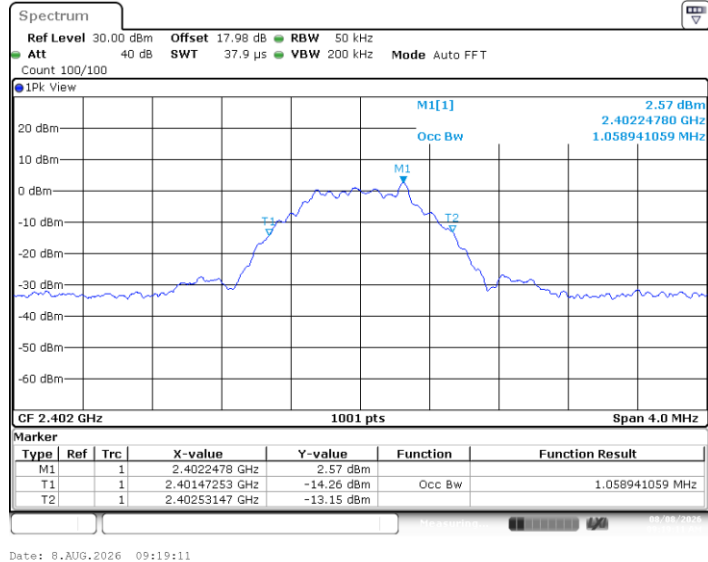


BLE_1M_Ant1_2440

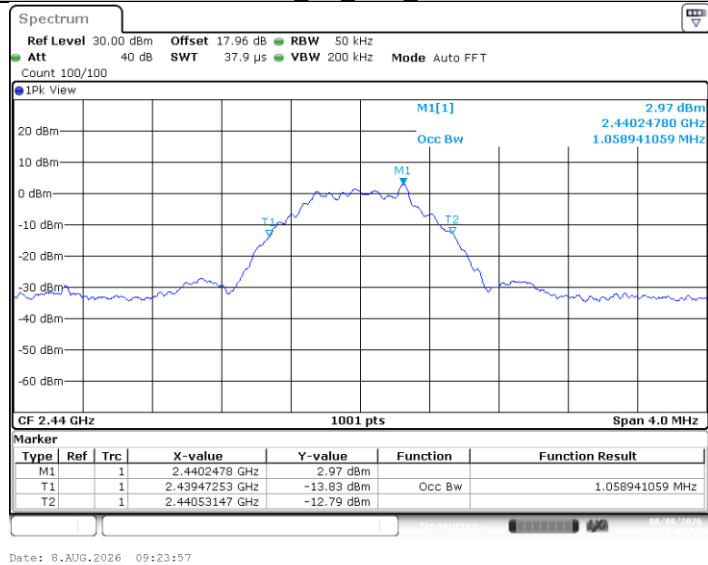


BLE_1M_Ant1_2480

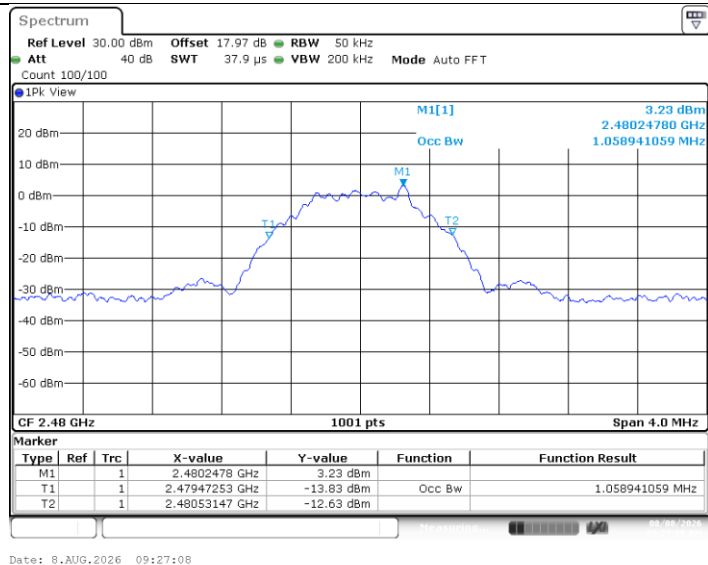


BLE 2M Ant1_2402

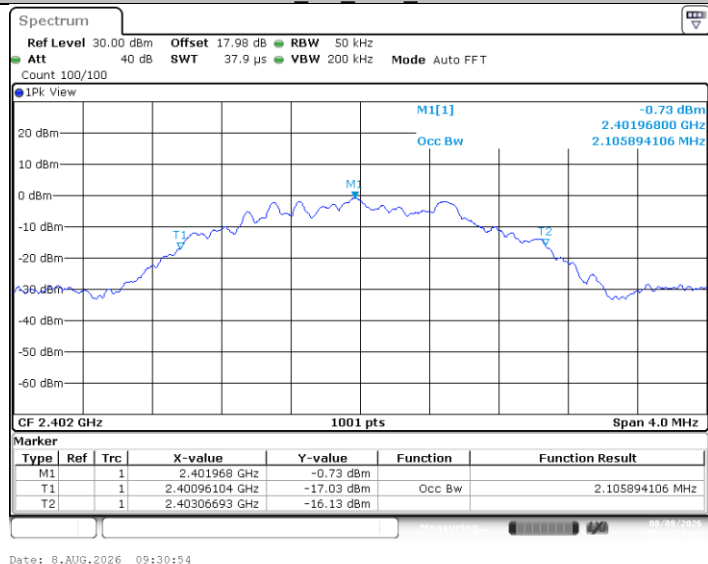

BLE 2M Ant1_2440

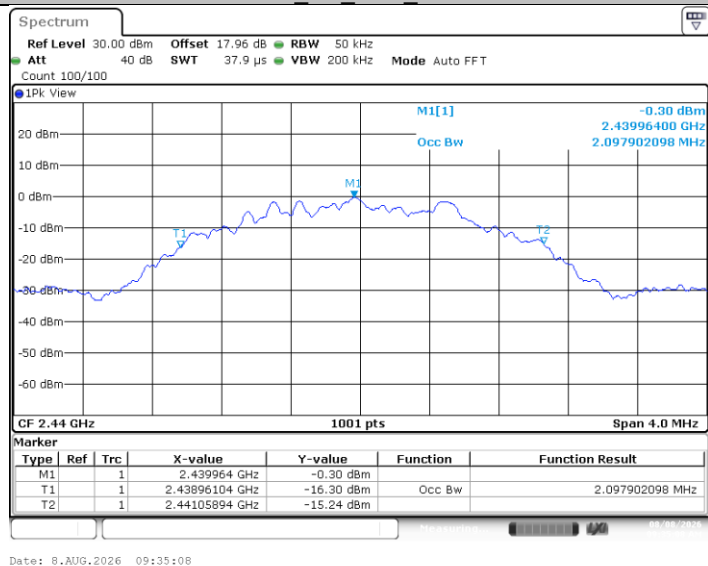

BLE 2M Ant1_2480

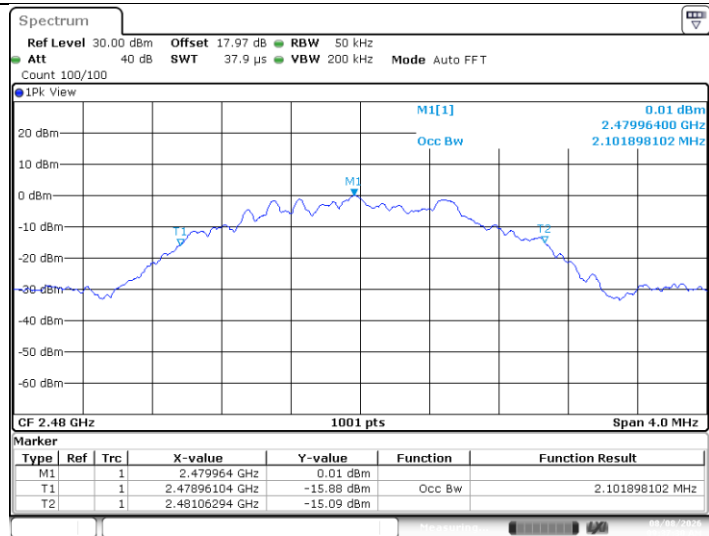

Date: 8.AUG.2026 09:37:30


Appendix A.3: Test Results of Conducted Power Spectral Density

Test Result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-12.99	≤8.00	PASS
		2440	-12.51	≤8.00	PASS
		2480	-12.40	≤8.00	PASS
BLE_2M	Ant1	2402	-15.94	≤8.00	PASS
		2440	-15.41	≤8.00	PASS
		2480	-15.24	≤8.00	PASS

Test Graphs


BLE_1M_Ant1_2402

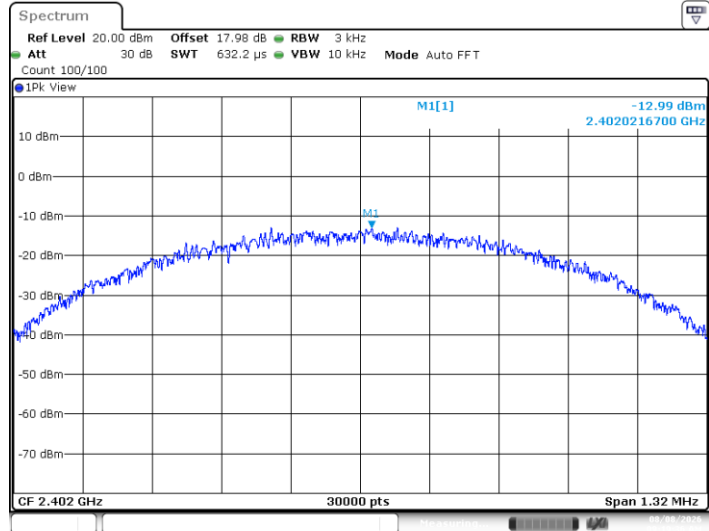


BLE_1M_Ant1_2440

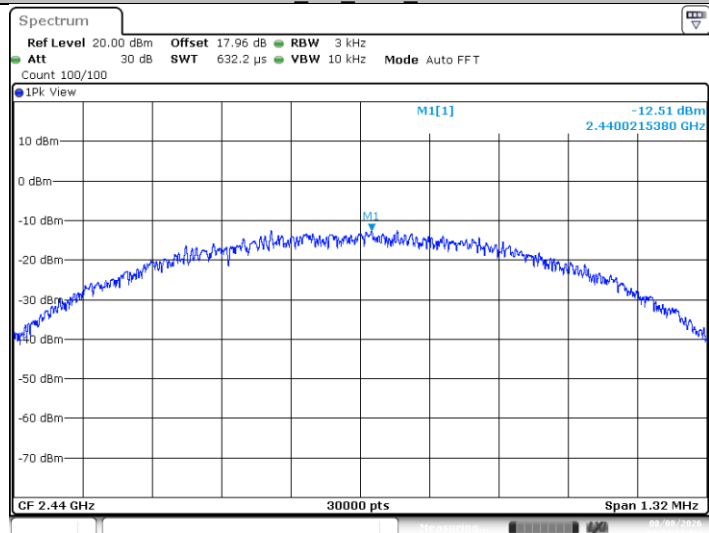


BLE_1M_Ant1_2480

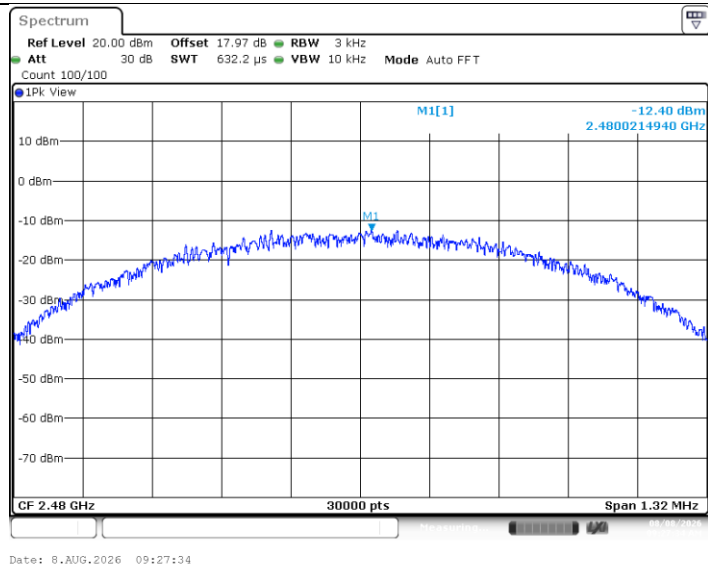


BLE 2M Ant1 2402

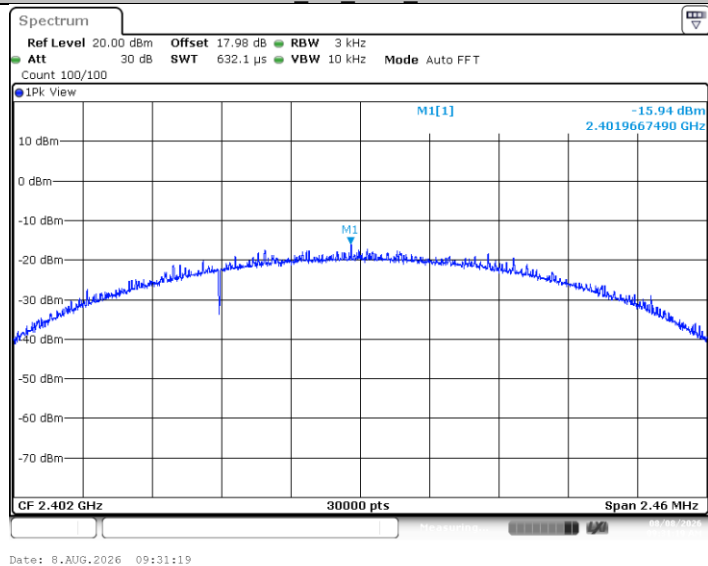

BLE 2M Ant1 2440

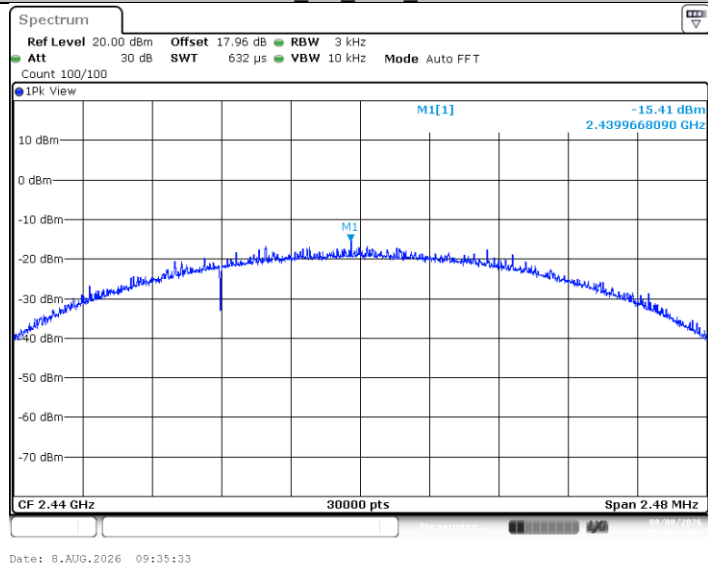


BLE 2M Ant1 2480

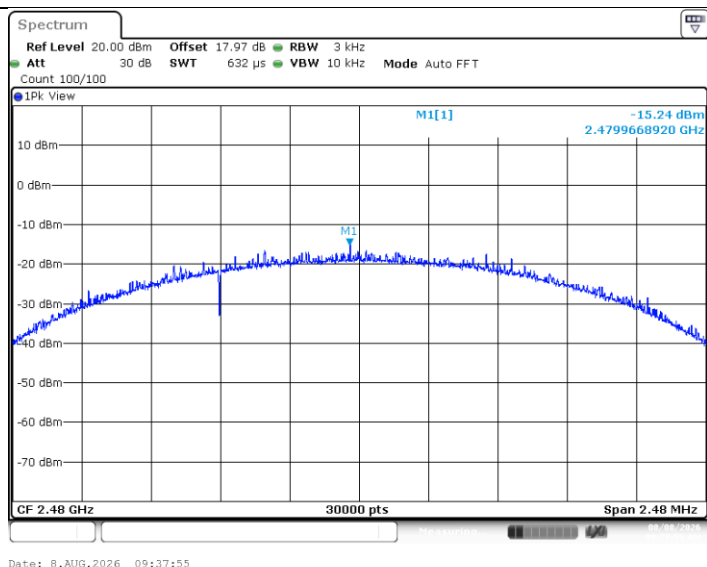


Appendix A.4: Test Results of Band Edge Measurements

Bluetooth LE, 1Mbps

Low Channel

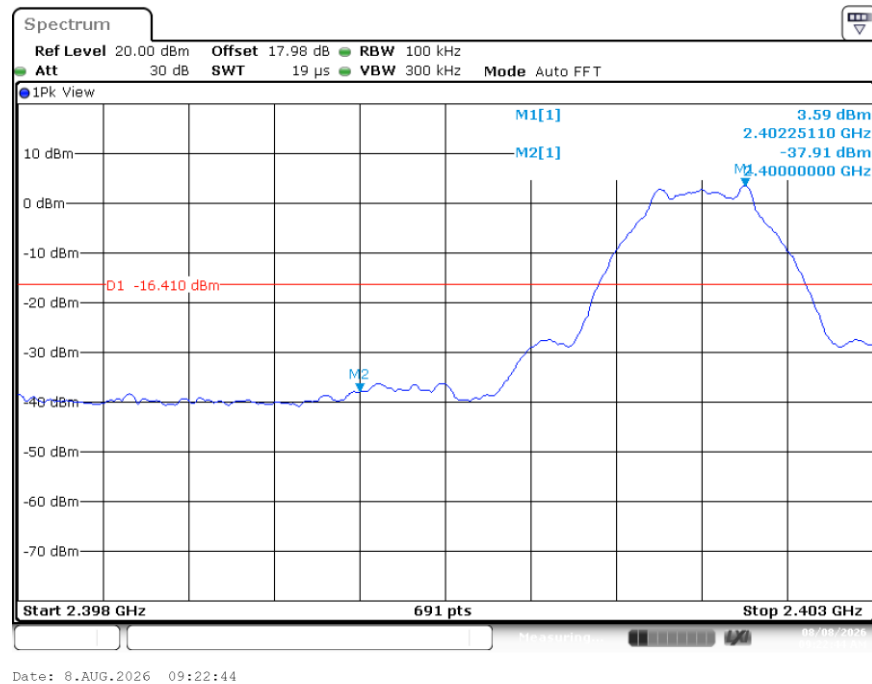


High Channel

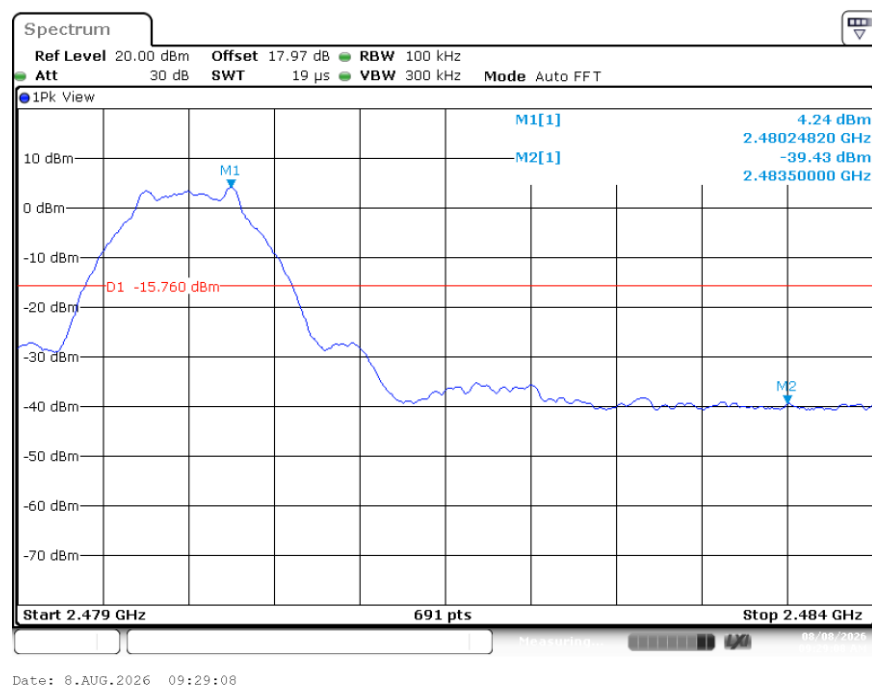


Bluetooth LE, 2Mbps

Low Channel

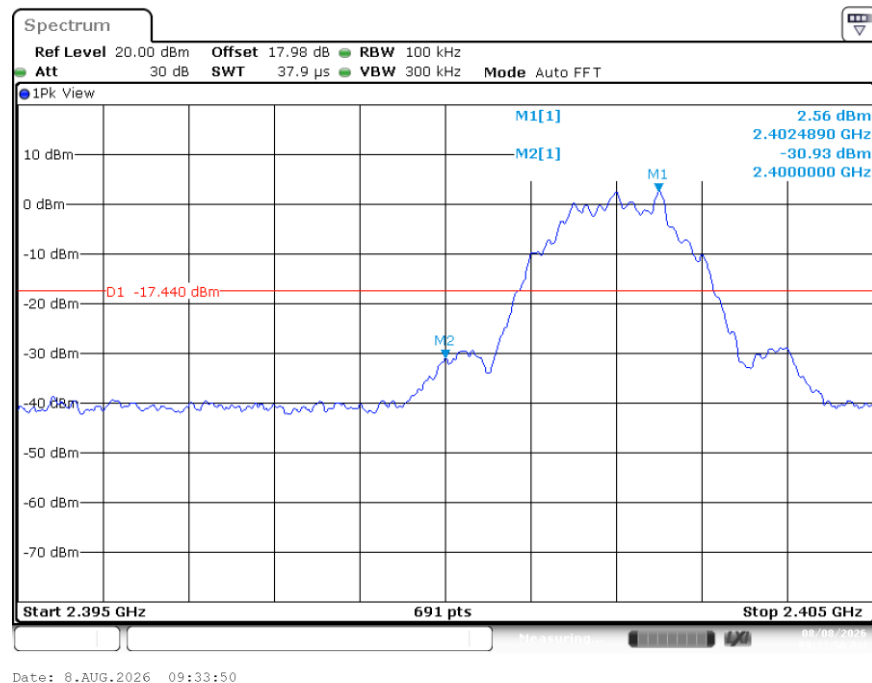

High Channel

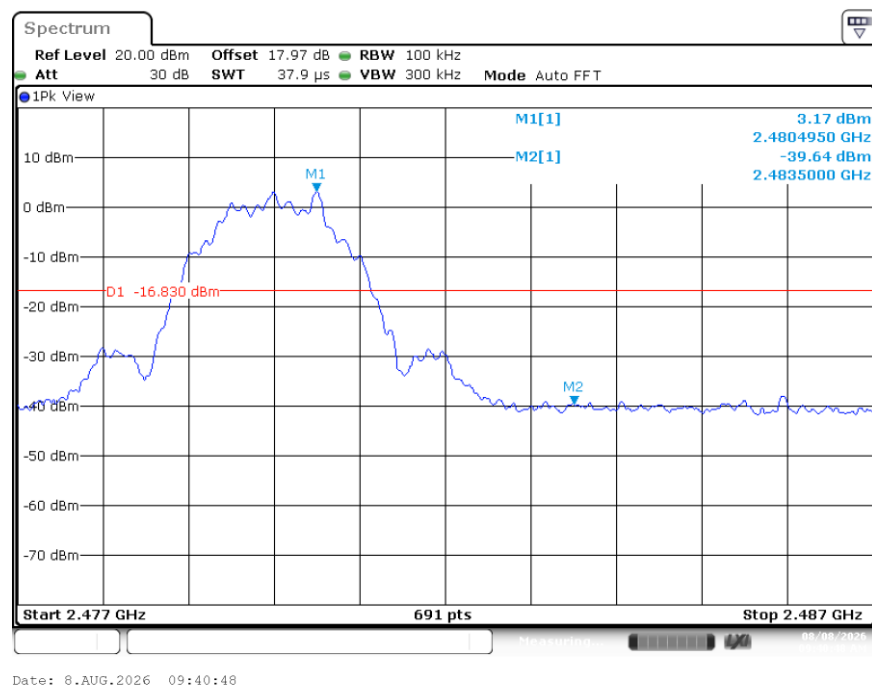


Appendix A.5: Test Results of Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	3.66	3.66	---	PASS
			30~1000	3.66	-48.9	≤-16.34	PASS
			1000~26500	3.66	-35.5	≤-16.34	PASS
		2440	Reference	4.04	4.04	---	PASS
			30~1000	4.04	-48.82	≤-15.96	PASS
			1000~26500	4.04	-35.19	≤-15.96	PASS
		2480	Reference	4.24	4.24	---	PASS
			30~1000	4.24	-48.83	≤-15.76	PASS
			1000~26500	4.24	-35.52	≤-15.76	PASS
BLE_2M	Ant1	2402	Reference	2.52	2.52	---	PASS
			30~1000	2.52	-48.65	≤-17.48	PASS
			1000~26500	2.52	-36.75	≤-17.48	PASS
		2440	Reference	3.01	3.01	---	PASS
			30~1000	3.01	-48.12	≤-16.99	PASS
			1000~26500	3.01	-39.3	≤-16.99	PASS
		2480	Reference	3.23	3.23	---	PASS
			30~1000	3.23	-48.48	≤-16.77	PASS
			1000~26500	3.23	-38.35	≤-16.77	PASS

Test Graphs


BLE_1M_Ant1_2402_0~Reference

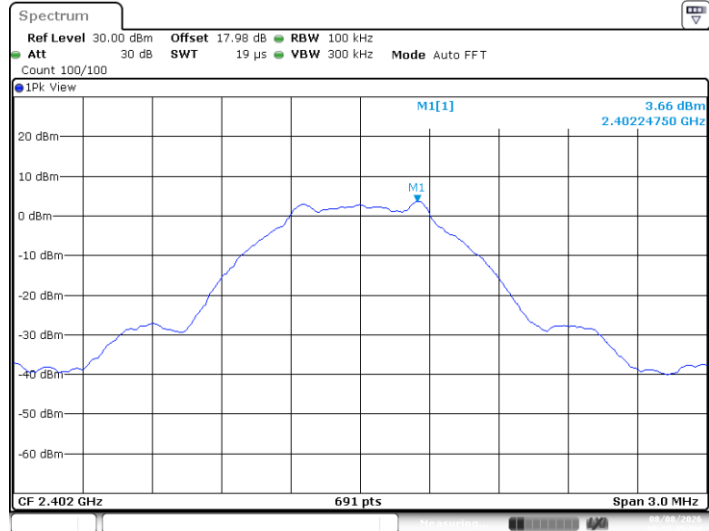


BLE_1M_Ant1_2402_30~1000

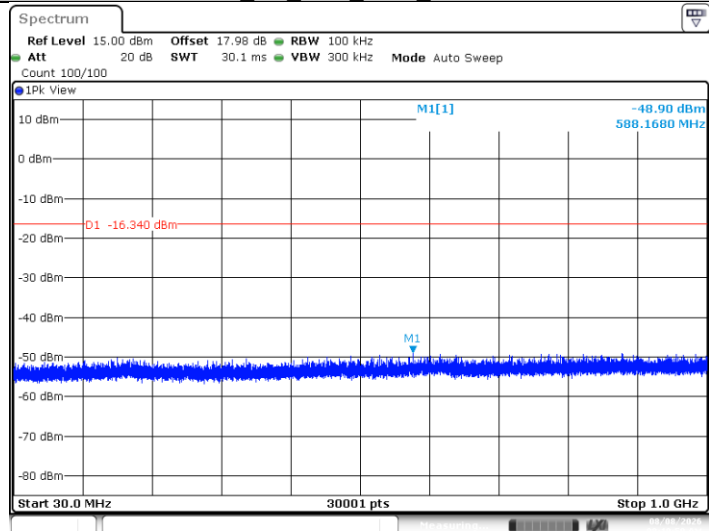


BLE_1M_Ant1_2402_1000~26500

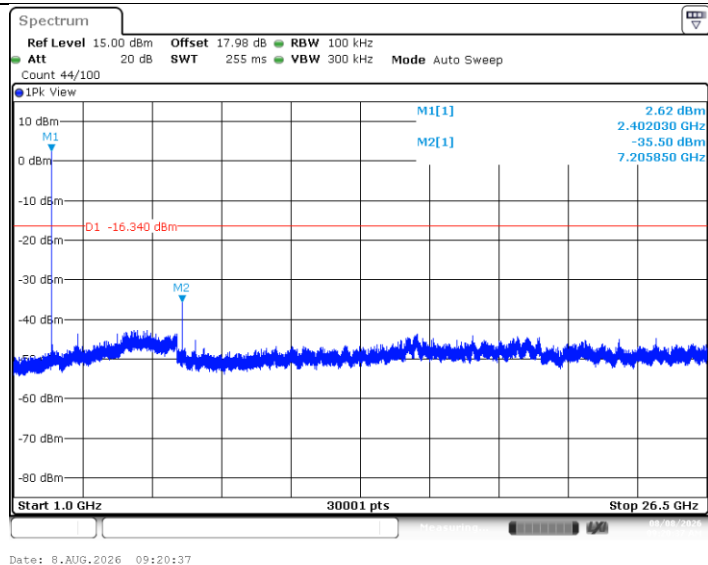


BLE_1M_Ant1_2440_0~Reference

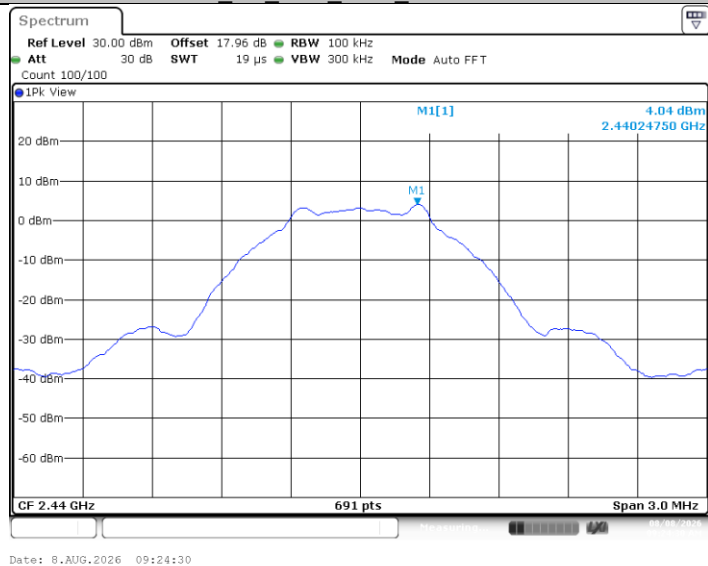


BLE_1M_Ant1_2440_30~1000

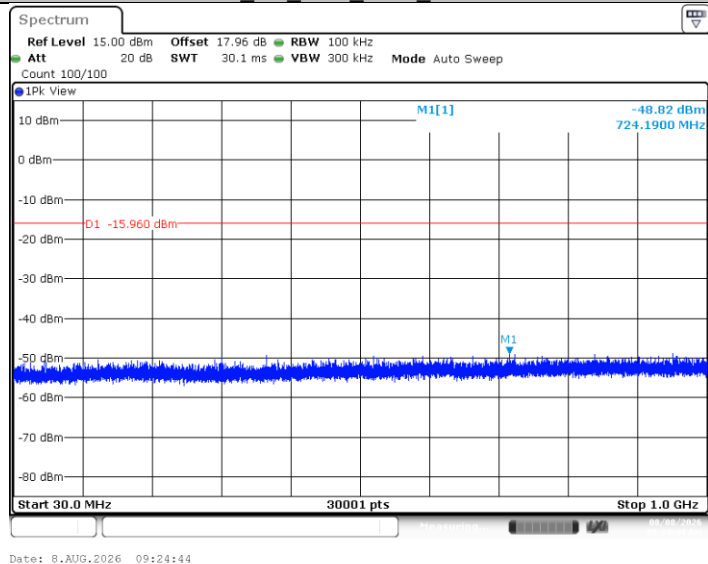


BLE_1M_Ant1_2440_1000~26500

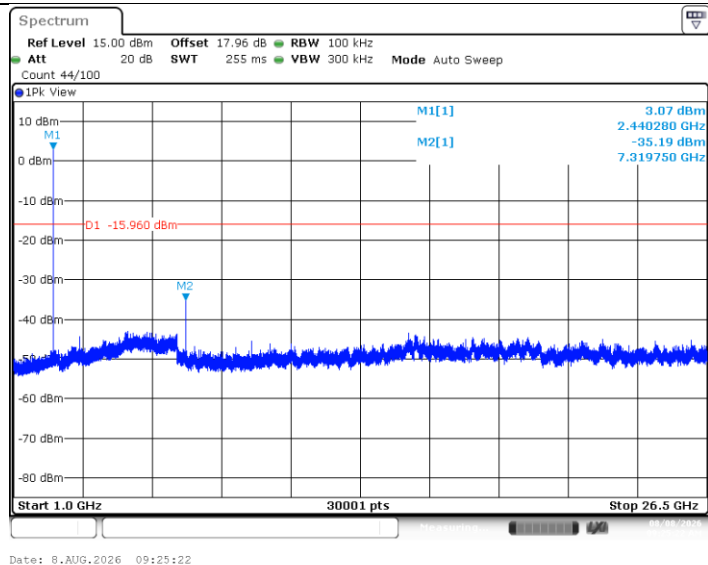


BLE_1M_Ant1_2480_0~Reference

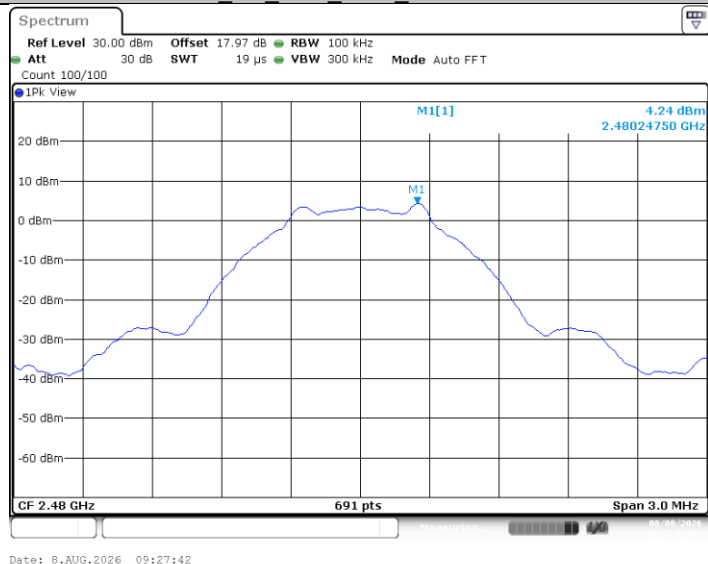


BLE_1M_Ant1_2480_30~1000

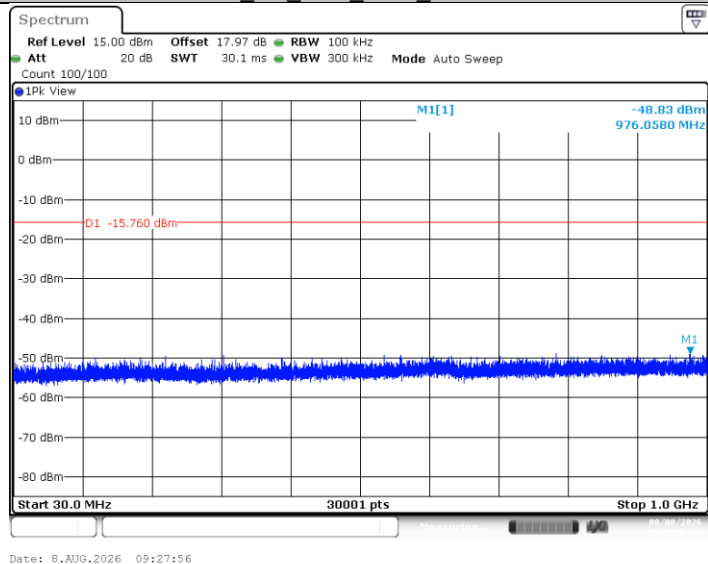


BLE_1M_Ant1_2480_1000~26500

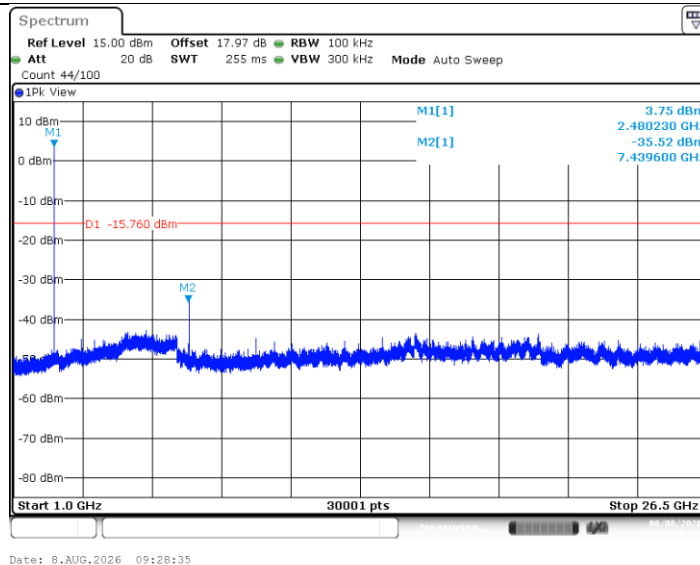


BLE_2M_Ant1_2402_0~Reference

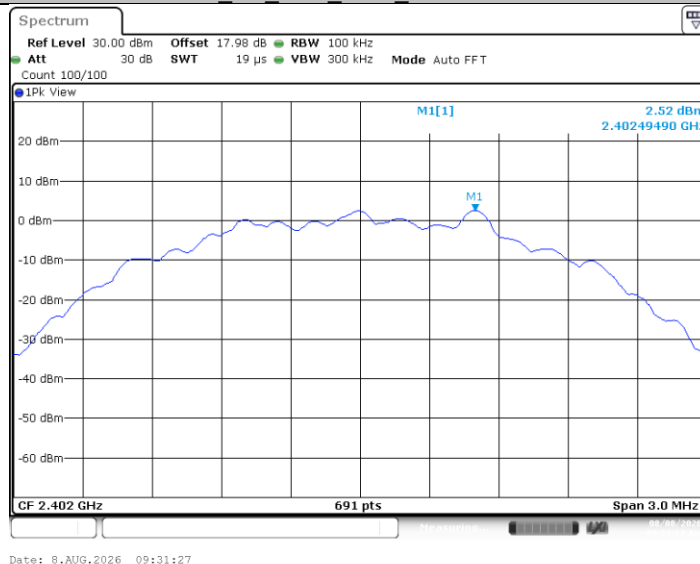


BLE_2M_Ant1_2402_30~1000

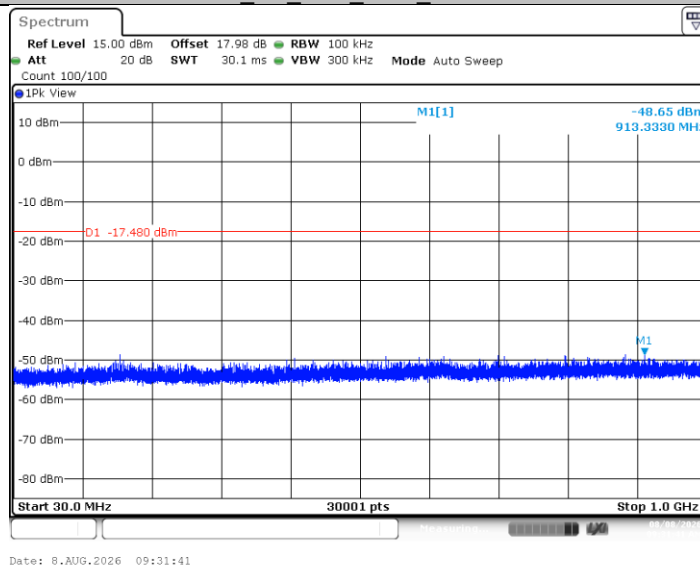


BLE_2M_Ant1_2402_1000~26500

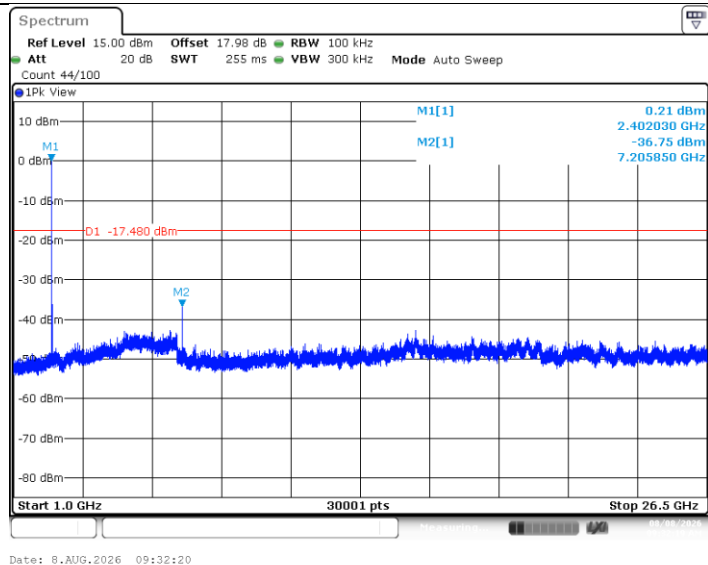


BLE_2M_Ant1_2440_0~Reference

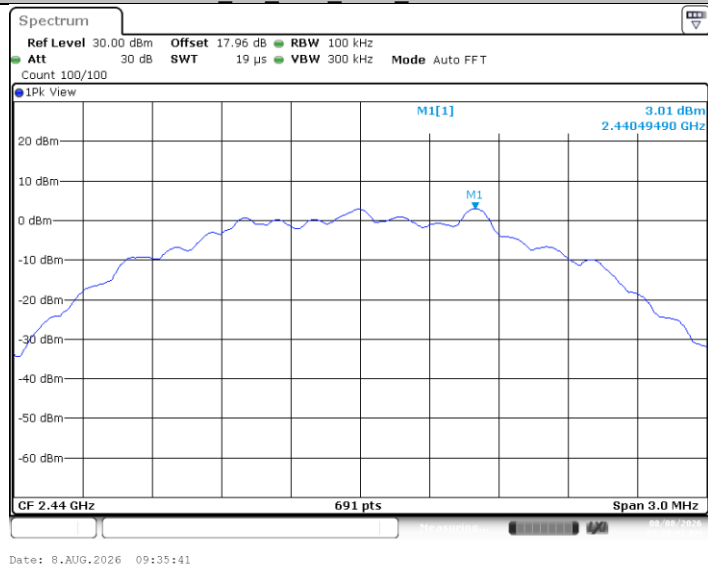


BLE_2M_Ant1_2440_30~1000

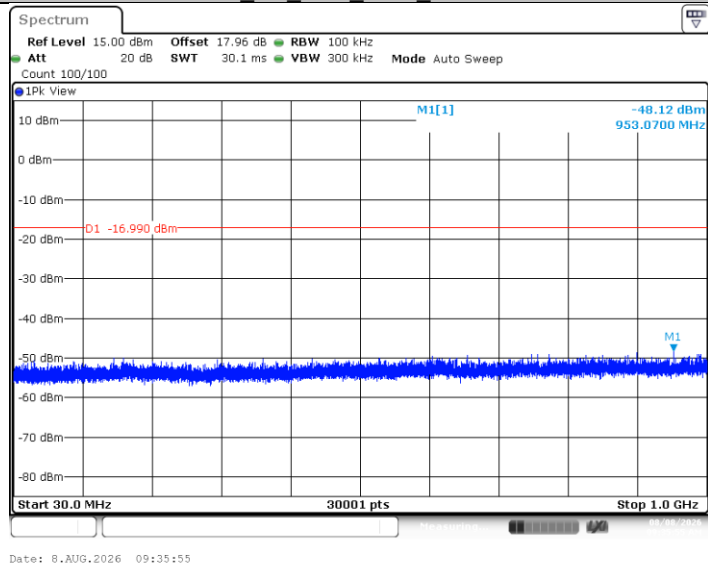


BLE_2M_Ant1_2440_1000~26500

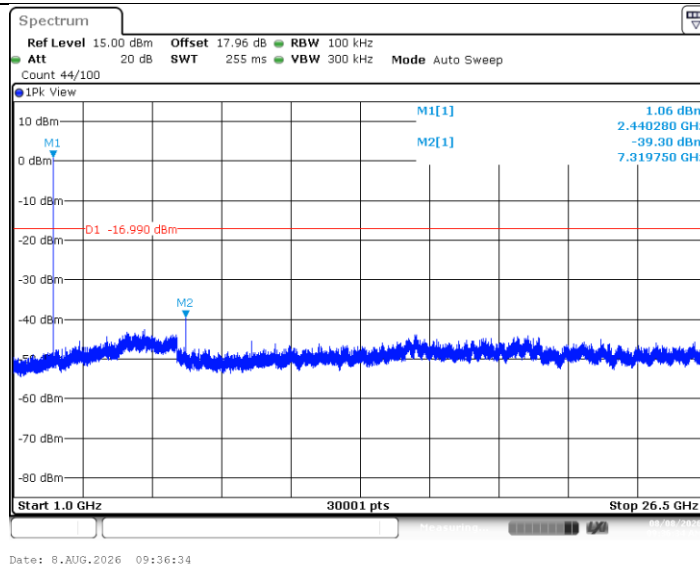


BLE_2M_Ant1_2480_0~Reference

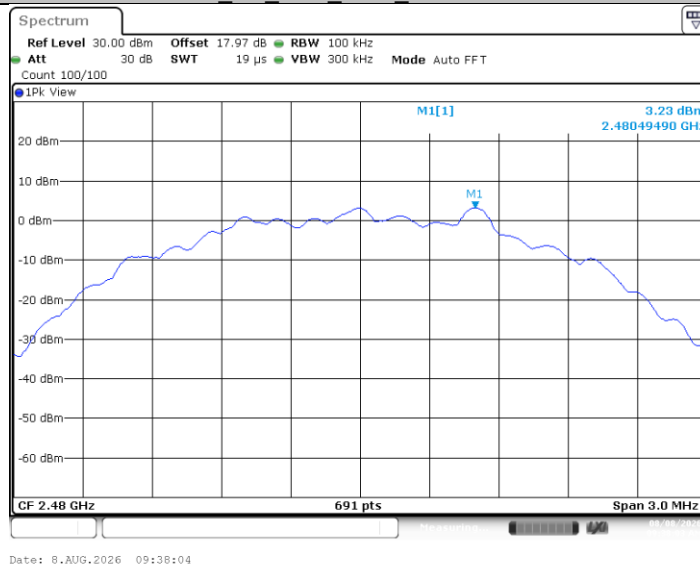

BLE_2M_Ant1_2480_30~1000

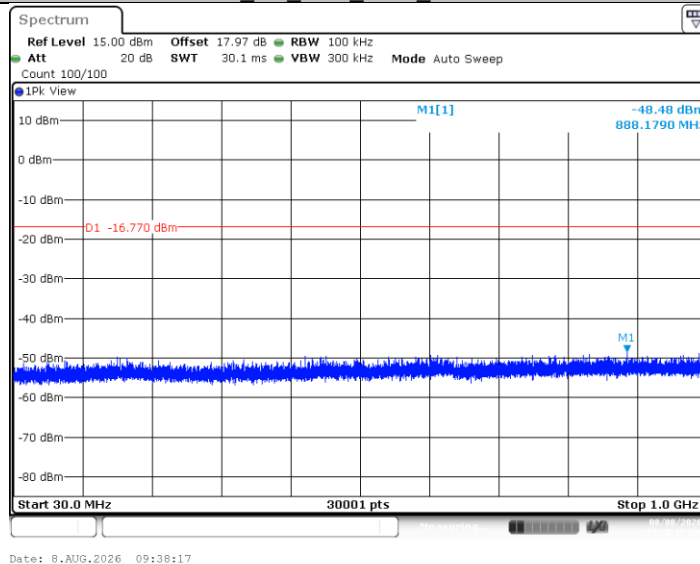

BLE_2M_Ant1_2480_1000~26500

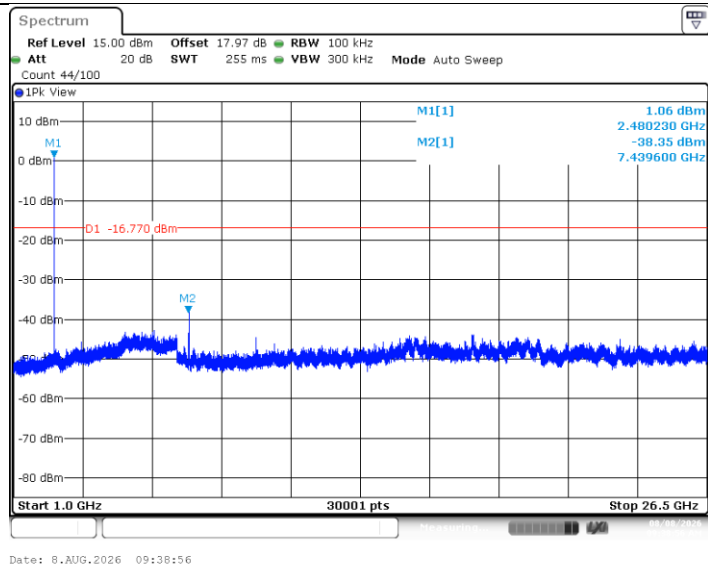

Appendix A.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

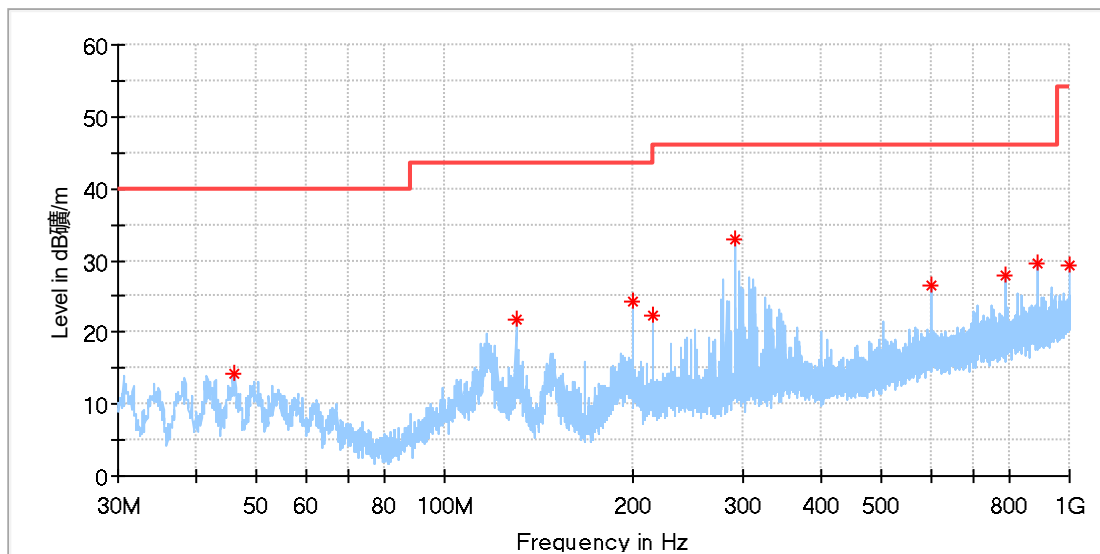

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.166667	14.32	40.00	25.68	100.0	H	14.0	-18.7
129.963889	21.82	43.50	21.68	100.0	H	67.0	-21.9
199.965556	24.15	43.50	19.35	100.0	H	36.0	-19.1
215.970556	22.40	43.50	21.10	100.0	H	67.0	-18.7
292.169444	33.03	46.00	12.97	100.0	H	232.0	-16.5
599.982778	26.44	46.00	19.56	100.0	H	224.0	-9.7
791.988889	27.95	46.00	18.05	100.0	H	54.0	-6.3
890.982778	29.53	46.00	16.47	100.0	H	207.0	-4.9
1000.000000	29.42	54.00	24.58	100.0	H	0.0	-3.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Beni
Model: LZA5211
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 27228361/A004329856-002
Test Voltage: Battery
Remark: Temp 21.8°C Humi:49%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

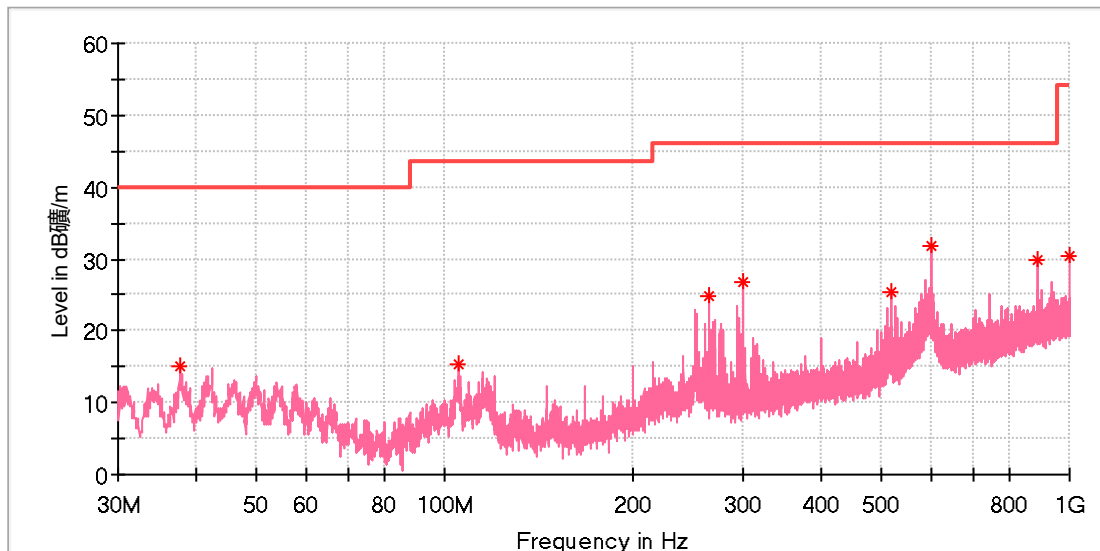

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.652222	15.19	40.00	24.81	100.0	V	67.0	-20.9
104.959444	15.43	43.50	28.07	100.0	V	230.0	-18.9
264.039444	24.82	46.00	21.18	100.0	V	42.0	-17.0
299.983333	26.77	46.00	19.23	100.0	V	330.0	-16.3
518.502778	25.53	46.00	20.47	100.0	V	214.0	-11.5
599.982778	31.70	46.00	14.30	100.0	V	221.0	-9.7
890.982778	29.91	46.00	16.09	100.0	V	221.0	-4.9
1000.000000	30.40	54.00	23.60	100.0	V	42.0	-3.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

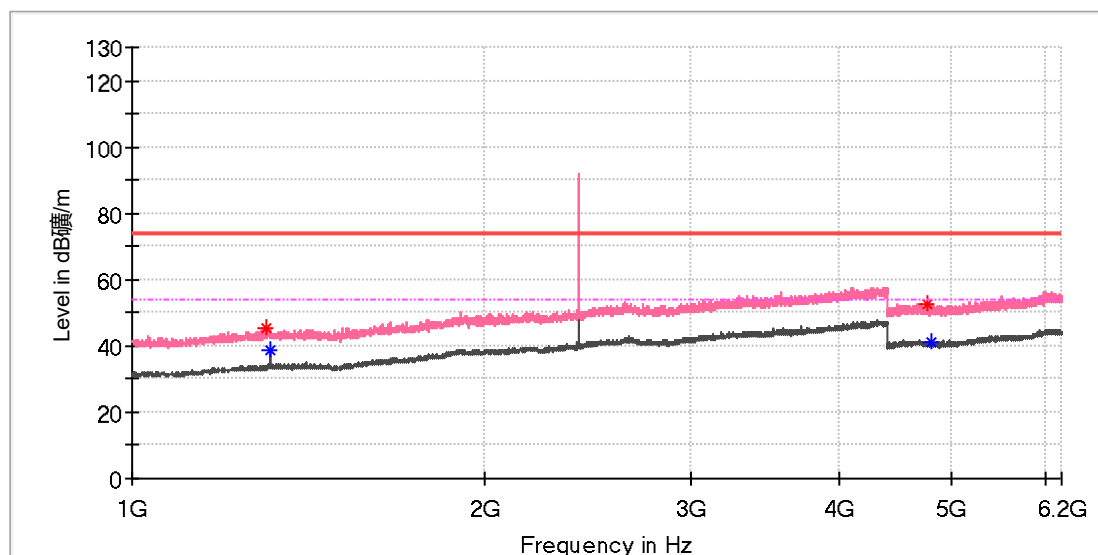

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1302.500000	45.64	---	74.00	28.36	150.0	V	272.0	2.8
1312.500000	---	38.52	54.00	15.48	150.0	V	279.0	2.8
4771.500000	52.79	---	74.00	21.21	150.0	V	319.0	13.3
4802.000000	---	40.99	54.00	13.01	150.0	V	319.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

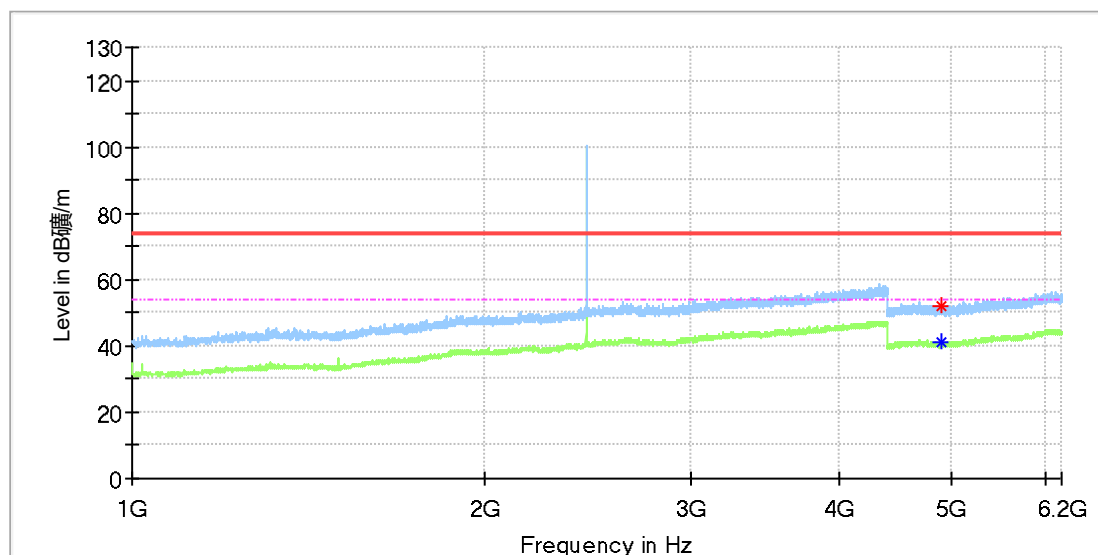

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4896.000000	51.79	---	74.00	22.21	150.0	H	355.0	13.3
4897.500000	---	40.85	54.00	13.15	150.0	H	317.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

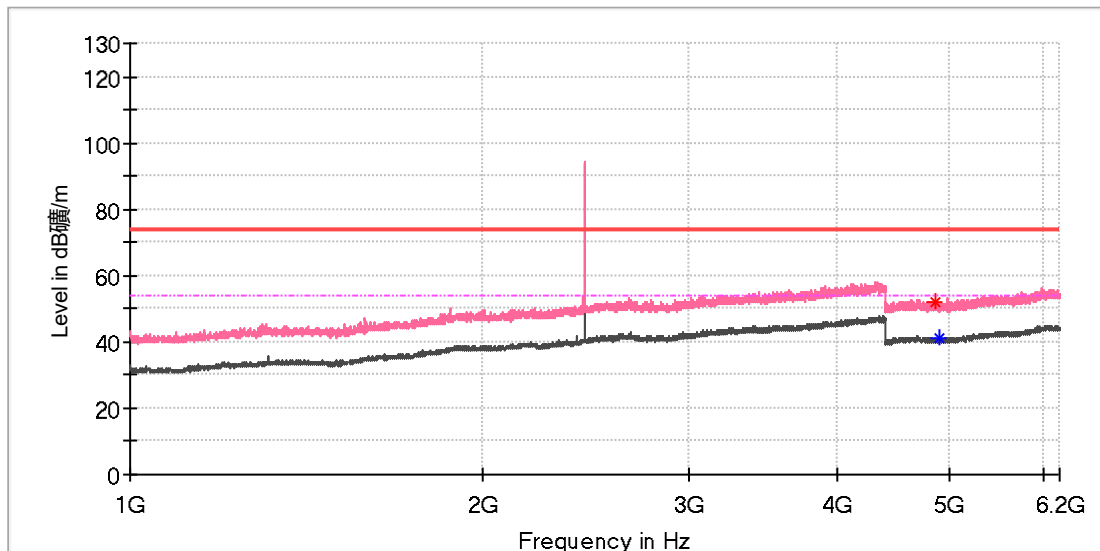

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4868.000000	52.02	---	74.00	21.98	150.0	V	225.0	13.3
4901.000000	---	40.91	54.00	13.09	150.0	V	287.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

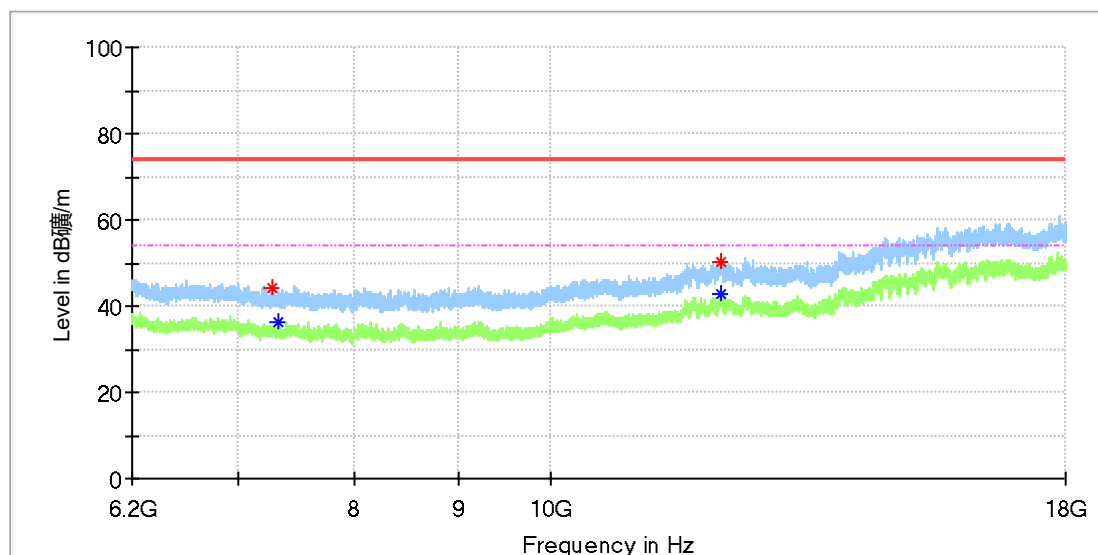

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7268.883333	44.33	---	74.00	29.67	150.0	H	54.0	8.5
7320.016667	---	36.50	54.00	17.50	150.0	H	288.0	8.2
12139.825000	---	42.60	54.00	11.40	150.0	H	276.0	16.5
12146.216667	50.46	---	74.00	23.54	150.0	H	326.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

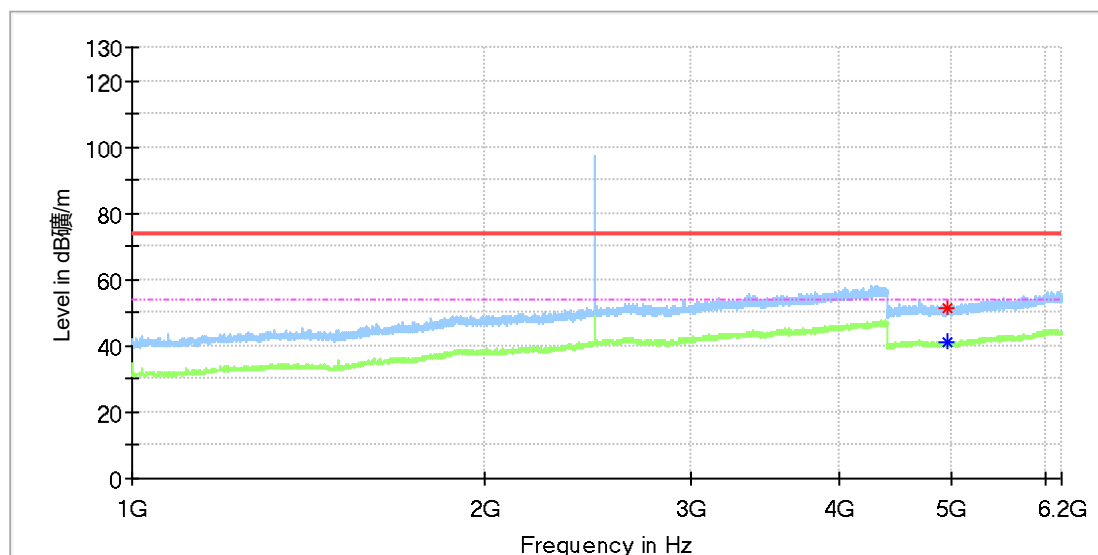

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4954.500000	51.60	---	74.00	22.40	150.0	H	316.0	13.3
4956.000000	---	41.30	54.00	12.70	150.0	H	358.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Appendix A.7: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

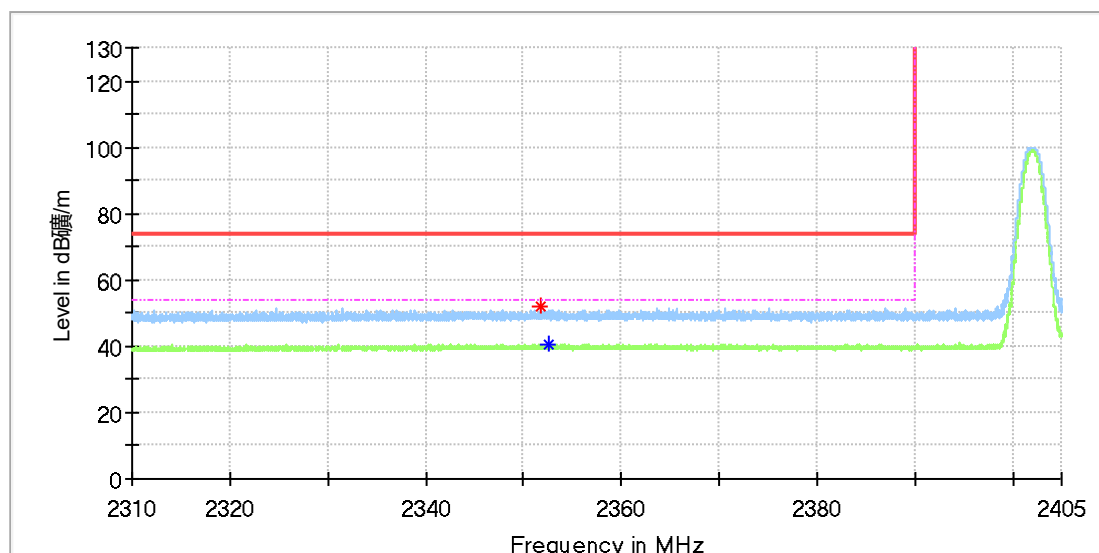

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2351.707647	51.88	---	74.00	22.12	150.0	H	308.0	8.5
2352.572353	---	40.80	54.00	13.20	150.0	H	55.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

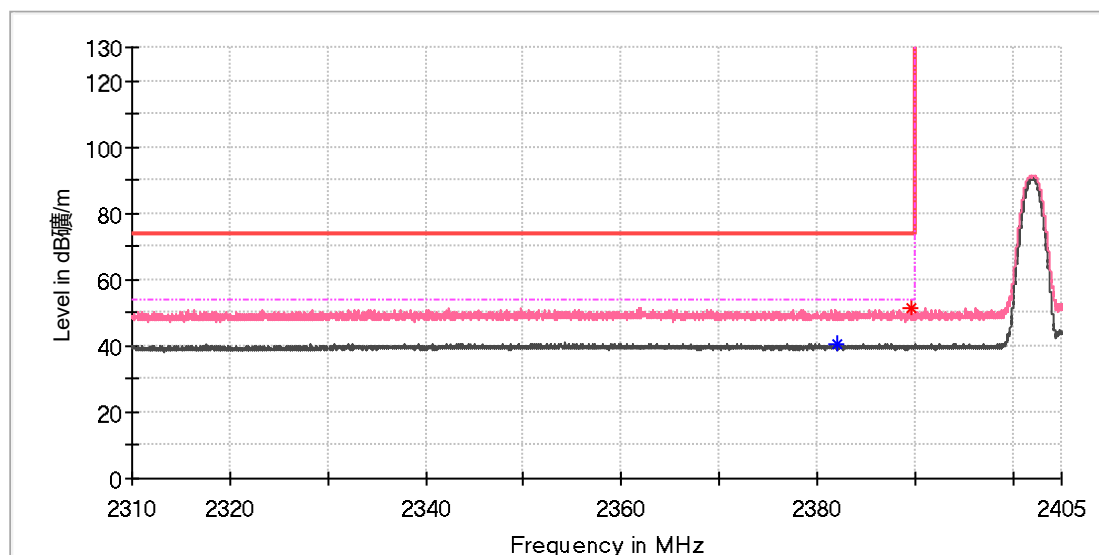

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2382.030000	---	40.65	54.00	13.35	150.0	V	346.0	8.5
2389.596177	51.58	---	74.00	22.42	150.0	V	222.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

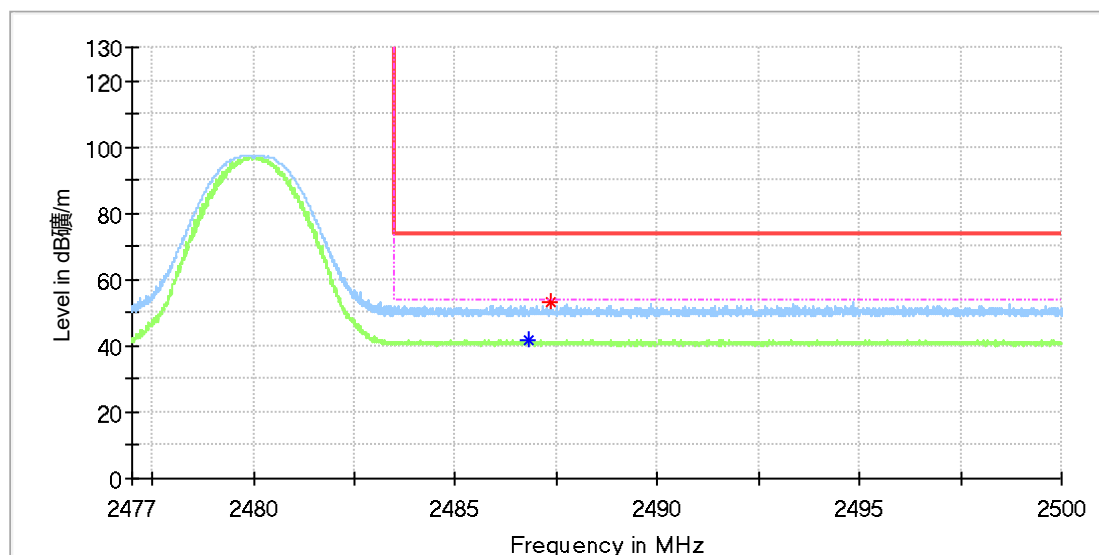

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.798824	---	41.56	54.00	12.44	150.0	H	91.0	9.0
2487.354706	52.97	---	74.00	21.03	150.0	H	214.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

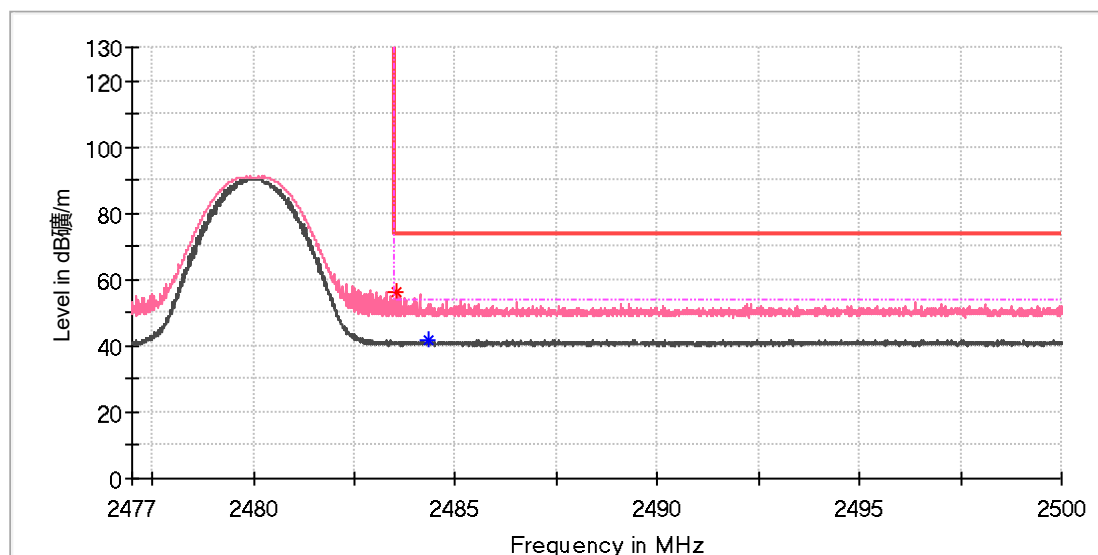

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.566177	56.19	---	74.00	17.81	150.0	V	110.0	9.0
2484.347059	---	41.50	54.00	12.50	150.0	V	181.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

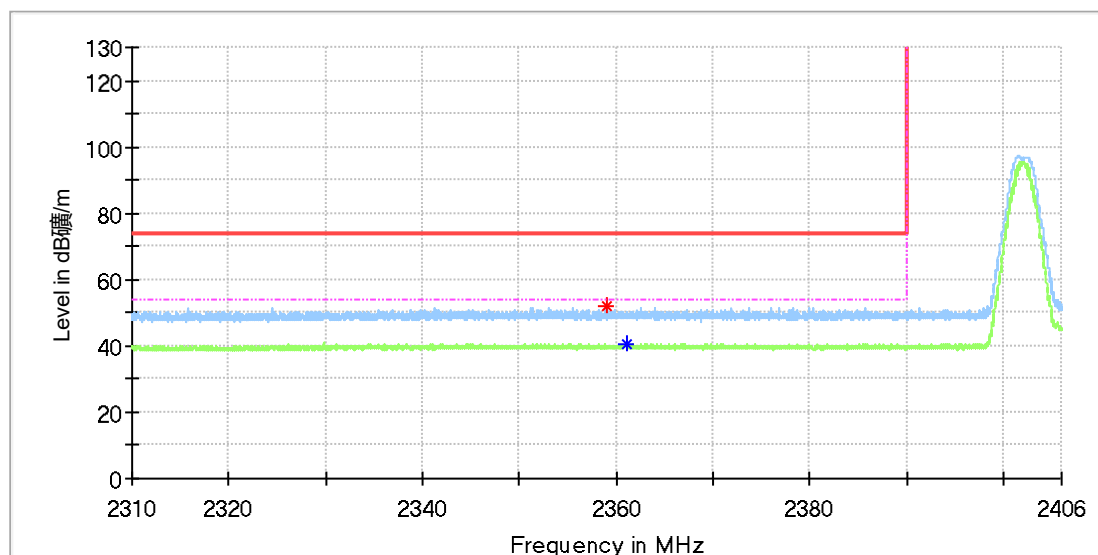

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2359.129706	51.73	---	74.00	22.27	150.0	H	107.0	8.5
2361.075294	---	40.69	54.00	13.31	150.0	H	47.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

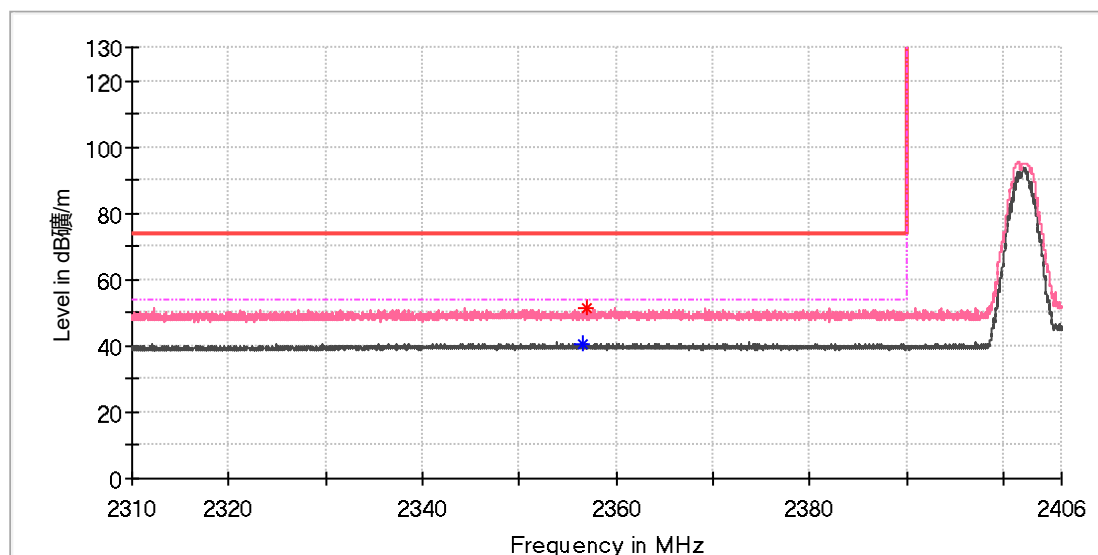

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2356.521177	---	40.75	54.00	13.25	150.0	V	107.0	8.5
2356.939118	51.56	---	74.00	22.44	150.0	V	236.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 2M_High channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

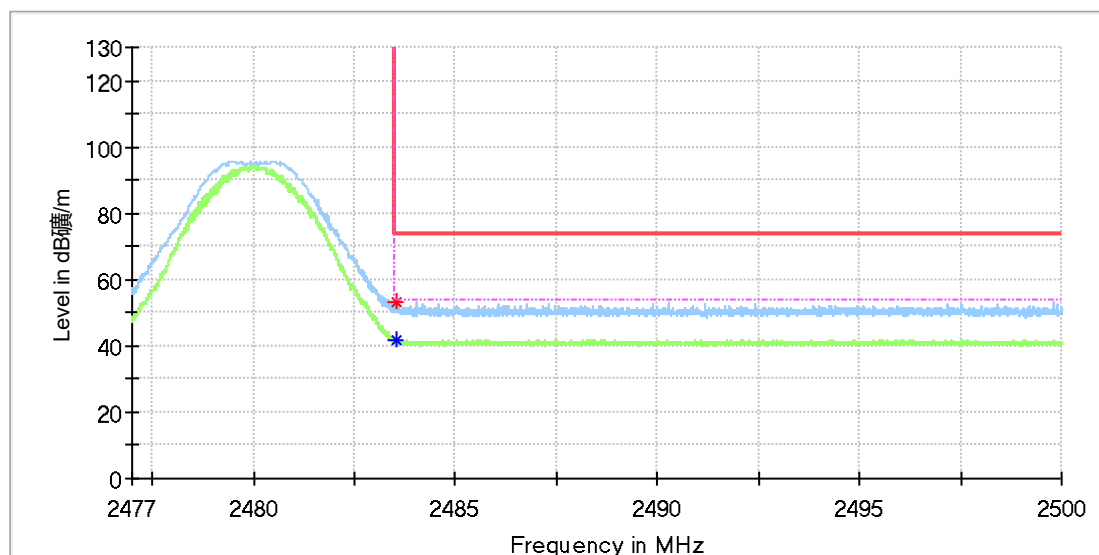

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.537647	---	41.97	54.00	12.03	150.0	H	119.0	9.0
2483.554118	53.49	---	74.00	20.51	150.0	H	104.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Beni
Model:	LZA5211
Test Mode:	BLE 2M_High channel
Order No/Sample No:	27228361/A004329856-002
Test Voltage:	Battery
Remark:	Temp 21.8°C Humi:49%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

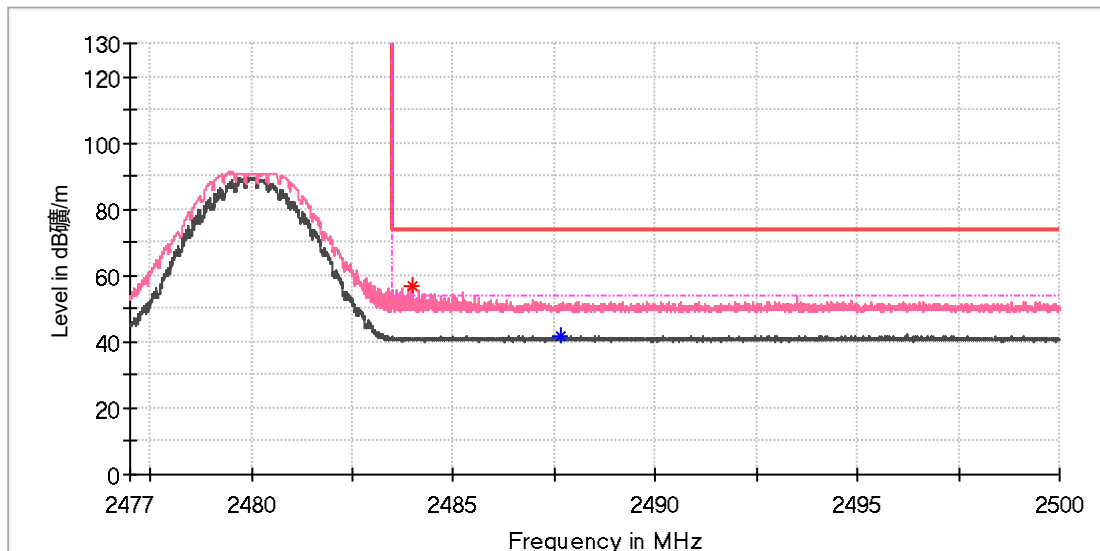

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.985294	56.88	---	74.00	17.12	150.0	V	149.0	9.0
2487.673530	---	41.93	54.00	12.07	150.0	V	34.0	9.0


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

Appendix A.8: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: Beni
Order Number: 27228361 60(P02350763)
Model: LZA5211
Test Mode: Charging + Wi-Fi/BT and SRD connecting
Test Voltage: AC 120V/60Hz
Standard: FCC PART 15
Test By./Review By: Charron Chen / Charlie Zha
Tem./Hum./Pressure: 24.0°C/49.3%/101kPa
Remark: SR 3

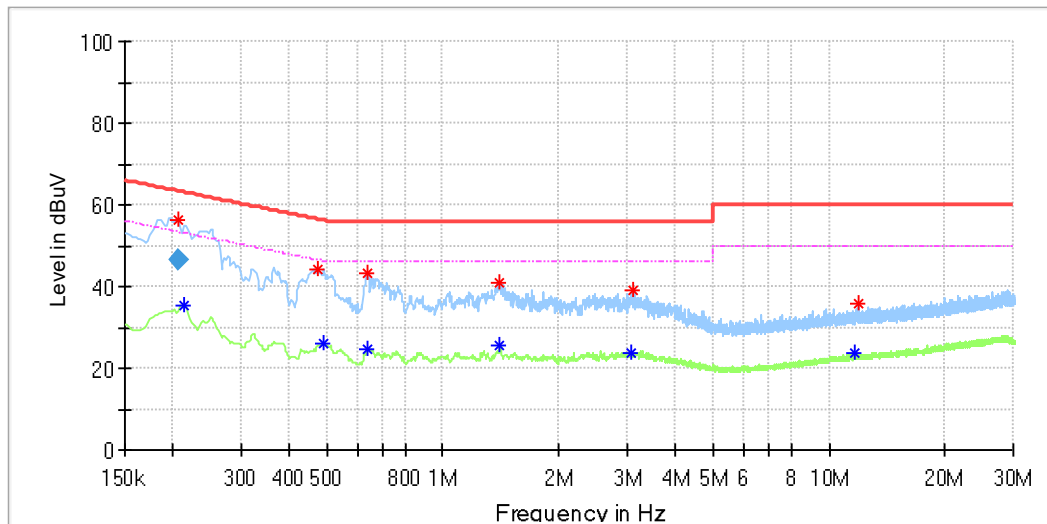

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.207	56.3	---	63.32	7.05	L1	9.7
0.215	---	35.5	53.02	17.50	L1	9.7
0.476	44.2	---	56.41	12.23	L1	9.5
0.491	---	26.3	46.15	19.89	L1	9.5
0.640	---	24.8	46.00	21.23	L1	9.7
0.640	43.1	---	56.00	12.94	L1	9.7
1.401	40.8	---	56.00	15.16	L1	9.6
1.406	---	25.7	46.00	20.29	L1	9.6
3.085	---	23.5	46.00	22.47	L1	9.6
3.123	39.1	---	56.00	16.88	L1	9.6
11.712	---	23.6	50.00	26.39	L1	9.8
11.976	36.0	---	60.00	23.99	L1	9.8

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.207	46.5	---	63.32	16.79	1000.0	9.0	L1	9.7

EUT Information

EUT Name: Beni
Order Number: 27228361 60(P02350763)
Model: LZA5211
Test Mode: Charging + Wi-Fi/BT and SRD connecting
Test Voltage: AC 120V/60Hz
Standard: FCC PART 15
Test By:/Review By: Charron Chen / Charlie Zha
Tem./Hum./Pressure: 24.0°C/49.3%/101kPa
Remark: SR 3

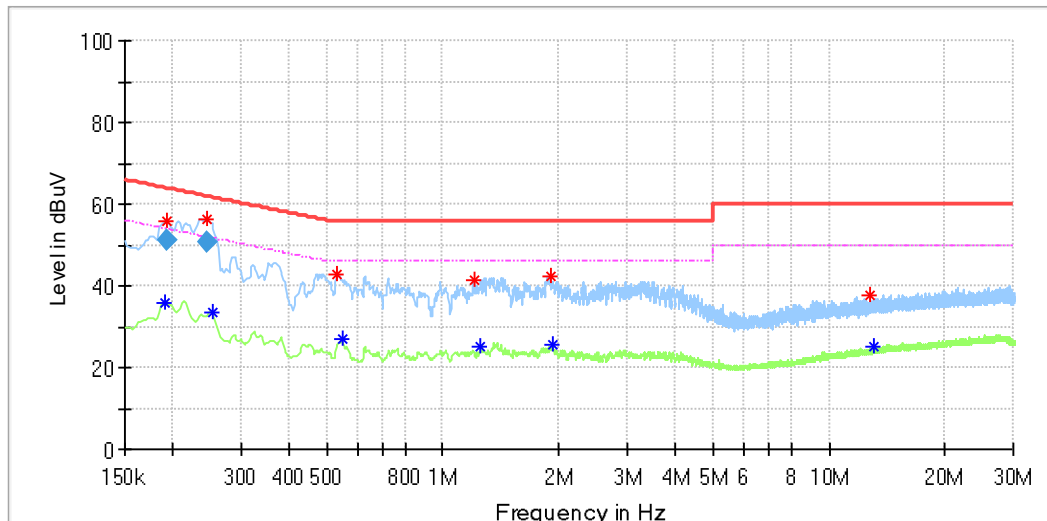

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.190	---	36.0	54.05	18.04	N	9.9
0.192	55.9	---	63.94	8.07	N	9.9
0.245	56.5	---	61.94	5.46	N	9.9
0.252	---	33.7	51.69	18.00	N	9.9
0.533	42.8	---	56.00	13.15	N	9.9
0.548	---	26.7	46.00	19.25	N	9.9
1.202	41.4	---	56.00	14.60	N	9.8
1.254	---	25.2	46.00	20.84	N	9.8
1.899	42.3	---	56.00	13.72	N	10.0
1.924	---	25.4	46.00	20.60	N	10.0
12.819	37.6	---	60.00	22.36	N	9.6
13.053	---	25.0	50.00	24.99	N	9.6

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.192	51.0	---	63.94	12.94	1000.0	9.0	N	9.9
0.245	50.5	---	61.94	11.43	1000.0	9.0	N	9.9