

SPECIFICATION FOR APPROVAL

CUSTOMER:

CUST P/N:

TX P/N: TX-D43.5*5.3*0.5-6.5UH

DESC: 43. 5*5. 3*0. 5 (2800GS) (CJX29) TX

DATE: 2026/07/29

Version: A. 0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE

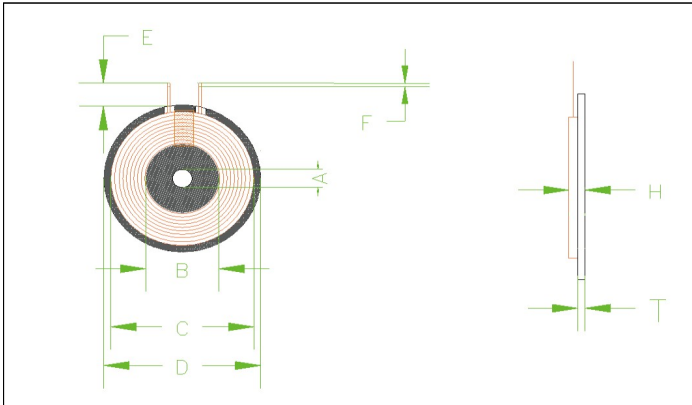
Company: Shenzhen Tianxia Technology Co., Ltd
Address: Room 523-525, C33 Science and Technology Innovation Park, Bao'an District, Shenzhen


Version Change History

[illegible]

SPECIFICATION

DESC	14*38-0.08*24P*2-12TS-38mm- D43.5*5.3*0.5 -6.5uh	Rev: A.0	CUST:	
	CUST P/N:			

一、 DIMENSION:(mm) 	A	5.3±0.3mm
	B	14±0.5mm
	C	38±1mm
	D	43.5±1mm
	E	38±3mm
	F	5mmMAX
	T	0.5±0.1mm
	H	1.8mmMAX

二、 SCHEMATIC DIAGRAM	
	

三、 Winding Specification:					
NO.	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	0.08*24P *2	12Ts	

四、 ELECTRICAL CHARACTERISTICS:					
TEMPERATURE:25±10℃, RELATIVE HUMIDITY:65±20%					
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	4.0 uH±10%	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5 uH±10%	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	600m Ω Max	100KHz/1.0V	LCZ METER 502B

PREPARED BY/DATE	CHECKED BY/DATE