




RADIO TEST REPORT

FCC ID : 2BXL5-CODA6021U
Equipment : DOCSIS ULTRA 3.1 WiFi7 Gateway, DOCSIS 4.0 WiFi7 Gateway
Brand Name : Hitron
Model Name : CODA6021U, CODA6021
Applicant : Hitron Technologies Americas, Inc.
9000 E Nichols Ave, Suite 103 Centennial, CO 80112
USA
Manufacturer : Hitron Technologies Inc.
No. 1-8, Li-Hsin 1st Rd. Hsinchu Science Park, Hsinchu
30078, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Jun. 03, 2026, and testing was started from Jul. 24, 2026 and completed on Sep. 04, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

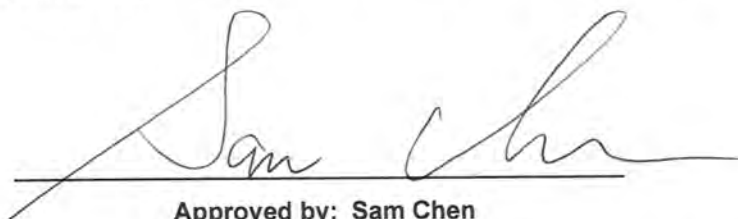

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	12
2 Test Configuration of EUT.....	13
2.1 Test Channel Mode	13
2.2 The Worst Case Measurement Configuration	16
2.3 EUT Operation during Test	18
2.4 Accessories	18
2.5 Support Equipment.....	19
2.6 Test Setup Diagram	20
3 Transmitter Test Result	23
3.1 AC Power-line Conducted Emissions	23
3.2 Emission Bandwidth	25
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	26
3.4 Peak Power Spectral Density (E.I.R.P.).....	29
3.5 Unwanted Emissions.....	32
3.6 Contention Based Protocol.....	37
4 Test Equipment and Calibration Data	38
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Photos	

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device / non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Wendy Pan**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	ax (HEW20), be (EHT20)	5955-7115	1-233 [59]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105	31 [1]
		6425	95 [1]
		6745	159 [1]

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11 a, 802.11 ax HEW20, 802.11 be EHT20	20	4TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	4TX
	802.11 ax HEW40, 802.11 be EHT40	40	4TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	4TX
	802.11 ax HEW80, 802.11 be EHT80	80	4TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	4TX
	802.11 ax HEW160, 802.11 be EHT160	160	4TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	4TX
	802.11 be EHT320	320	4TX
	802.11 be EHT320-BF	320	4TX

**Note:**

- ♦ 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ UHR20, UHR40, UHR80, UHR160, UHR320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	2.4GHz	5GHz	6GHz					
1	1	1	-	INPAQ Technology Co., Ltd.	RFPCA301816IML B401	Dipole	I-PEX	Note 1
2	2	2	-	INPAQ Technology Co., Ltd.	RFPCA301815IML B401	Dipole	I-PEX	
3	3	3	-	INPAQ Technology Co., Ltd.	RFPCA301812IML B401	Dipole	I-PEX	
4	4	4	-	INPAQ Technology Co., Ltd.	RFPCA301809IML B402	Dipole	I-PEX	
5	-	-	1	INPAQ Technology Co., Ltd.	RFPCA160808IM6 B401	Dipole	I-PEX	
6	-	-	2	INPAQ Technology Co., Ltd.	RFPCA160807IM6 B401	Dipole	I-PEX	
7	-	-	3	INPAQ Technology Co., Ltd.	RFPCA232307IM6 B401	Alford-loop	I-PEX	
8	-	-	4	INPAQ Technology Co., Ltd.	RFPCA232307IM6 B402	Alford-loop	I-PEX	
9	-	1	-	INPAQ Technology Co., Ltd.	RFPCA181117IM5B 401	Dipole	I-PEX	

Note 1:

Ant.	Antenna Gain (dBi)								
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz			
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
1	4.03	3.77	3.87	4.69	3.58	-	-	-	-
2	3.7	3.91	4.11	3.67	3.78	-	-	-	-
3	5.02	3.1	2.82	3.97	2.92	-	-	-	-
4	3.8	4.42	4.09	4.9	4.28	-	-	-	-
5	-	-	-	-	-	4.67	4.94	4.85	4.92
6	-	-	-	-	-	4.9	4.62	3.85	4.18
7	-	-	-	-	-	4.76	3.7	3.8	4.37
8	-	-	-	-	-	4.42	4.27	3.12	4.38
9	-	4.82	4.79	4.23	4.09	-	-	-	-



Item	Directional Gain (dBi)								
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz			
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
4T1S	7.4	6.49	6.81	6.97	6.33	7.48	7.88	6.12	7.86
4T2S	5.02	4.42	4.11	4.9	4.28	4.9	4.94	4.85	4.92
4T4S	5.02	4.42	4.11	4.9	4.28	4.9	4.94	4.85	4.92

Note 2: The above information was declared by manufacturer, excluding the peak gain and directional gain.

Note 3: For 2.4GHz/5GHz/6GHz, the antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.

Note 4: The antenna 9 which has the receiving function only is used for zero wait.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20_Nss 1,(M0)	1	0	20.001m	10Hz (DC>=0.98)
802.11be EHT40_Nss 1,(M0)	1	0	20.001m	10Hz (DC>=0.98)
802.11be EHT80_Nss 1,(M0)	1	0	100.013m	10Hz (DC>=0.98)
802.11be EHT160_Nss 1,(M0)	1	0	20.003m	10Hz (DC>=0.98)
802.11be EHT320_Nss 1,(M0)	1	0	20.003m	10Hz (DC>=0.98)
802.11be EHT20-BF_Nss 1,(M0)	1	0	20.001m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss 1,(M0)	1	0	20.001m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss 1,(M0)	1	0	100.013m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss 1,(M0)	1	0	20.003m	10Hz (DC>=0.98)
802.11be EHT320-BF_Nss 1,(M0)	1	0	20.003m	10Hz (DC>=0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.	
Device Type	☒ Indoor Access Point	☐ Subordinate
	☐ Indoor Client	☐ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☐ Fixed Client	☐ Very Low Power
Condition of EUT	☒ Indoor	☐ Outdoor
Channel Puncturing Function	☐ Supported	
	☒ Unsupported	
	Note: The EUT doesn't support puncturing for CBP.	
Support RU	☒ Full RU	☐ Partial RU
Test Software Version	DUT GUI Ver 2.27.1	
Software / Firmware Version for CBP	8.6.0.0.1b8	

Note: The above information was declared by manufacturer.

**1.1.5 Table for Multiple Listing**

EUT	Equipment Name	Model name	DOCSIS Chip (Location: U800)	DOCSIS 4.0 Component (Location: SW1200, U801, T801)
1	DOCSIS ULTRA 3.1 WiFi7 Gateway	CODA6021U	Brand name: MxL Model name: MXL28310	Not Supported
2	DOCSIS 4.0 WiFi7 Gateway	CODA6021	Brand name: MxL Model name: MXL28400	Supported

Note1: Based on the above, EUT 1 was selected for all test items, and EUT 2 was selected for the AC Power-line Conducted Emissions and Radiated Emissions below 1 GHz tests.

Note2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 v02r01
- ♦ FCC KDB 987594 D02 v03

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information				
Test Lab. : Sporton International Inc. Hsinchu Laboratory				
Hsinchu ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)				
(TAF: 3787) TEL: 886-3-656-9065 FAX: 886-3-656-9085				
Test site Designation No. TW3787 with FCC.				
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.				

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Black Lu	22~23.3 / 61~65	Aug. 04, 2026~ Sep. 04, 2026
Radiated (Below 1GHz)	03CH05-CB	Lex Lee	24.2~24.8 / 61~68	Aug. 07, 2026
Radiated (Above 1GHz)	03CH02-CB	Paul Hu	23.6~23.7 / 61~68	Jul. 24, 2026~ Aug. 20, 2026
	03CH03-CB	George Fan	23.9~24.2 / 61~63	
	03CH04-CB	Stim Sung	24.6~24.9 / 58~59	
	03CH05-CB	Lex Lee	23.9~24.0 / 58~64	
AC Conduction	CO02-CB	Joe Chu	23~24 / 53~54	Aug. 10, 2026
RF Conducted (Contention-Based Protocol test)	DF02-CB	Kevin Huang	21.7~22.7 / 61~64	Sep. 01, 2026~ Sep. 04, 2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.9 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	3.5 dB	Confidence levels of 95%
Bandwidth Measurement	1.6 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20_Nss1,(MCS0)_4TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6855MHz
6875MHz
6995MHz
7095MHz
7115MHz
802.11be EHT40_Nss1,(MCS0)_4TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6845MHz
6885MHz
7005MHz
7085MHz
802.11be EHT80_Nss1,(MCS0)_4TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160_Nss1,(MCS0)_4TX
6025MHz
6185MHz



6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320_Nss1,(MCS0)_4TX
6105MHz
6425MHz
6745MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6855MHz
6875MHz
6995MHz
7095MHz
7115MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6845MHz
6885MHz
7005MHz
7085MHz
802.11be EHT80-BF_Nss1,(MCS0)_4TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX



6025MHz
6185MHz
6345MHz
6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320-BF_Nss1,(MCS0)_4TX
6105MHz
6425MHz
6745MHz

Note:

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes, after evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test, the beamforming mode evaluates the output power.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT 1 + Adapter 1
2	EUT 1 + Adapter 2
3	EUT 2 + Adapter 1
4	EUT 2 + Adapter 2
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Contention Based Protocol Unwanted Emissions
Test Condition	Conducted measurement at transmit chains
1	EUT 1



The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
1	EUT 1 in Y axis + Adapter 1
2	EUT 1 in Y axis + Adapter 2
3	EUT 2 in Y axis + Adapter 1
4	EUT 2 in Y axis + Adapter 2
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Y axis, so it was selected to perform test and its test result was written in the report.	
1	EUT 1 in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains
1	EUT 1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz+WLAN 5GHz+WLAN 6GHz
Refer to Sporton Test Report No.: FA651502 for Co-location RF Exposure Evaluation.	



2.3 EUT Operation during Test

For Normal Link Mode:

During the test, the EUT operation to normal function.

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1	LUCENT TRANS	1A98-LJHL	Input: 100-240V~1.6A, 50-60Hz Output: 12.0V, 5.0A, 60.0W
Adapter 2	AtechOEM	A6003PU-120050	Input: 100-240V~50-60Hz, 2.0A Output: 12.0V, 5.0A, 60.0W
Others			
RJ-45 cable*1: Non-Shielded, 1.5m			



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	2.5G LAN 1 NB	DELL	E6430	N/A
B	Terminal System	Jinghong	JH-HE3416	N/A
C	10G WAN PC	ASUS	S300TA	TX2-RTL8821CE
D	10G LAN PC	ASUS	S300TA	TX2-RTL8821CE
E	2.4G NB	DELL	E6430	N/A
F	5G NB	DELL	E6430	N/A
G	6G NB	DELL	E7240	N/A
H	6G Device	INTEL	BE200	PD9BE200NG

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	2.5G PC	DELL	OPTIPLEX 3010	N/A
B	10G PC	DELL	OPTIPLEX 3010	N/A
C	10G PC	DELL	OPTIPLEX 3010	N/A
D	Terminal System	Jinghong	D3 CMTS JH-HE3416	N/A
E	2.4G NB	Lenovo	L440	N/A
F	5G NB	Lenovo	L440	N/A
G	6G NB	Lenovo	L440	N/A
H	WLAN module	Intel	BE200NGW	PD9BE200NG


For RF Conducted and Radiated (above 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	Lenovo	L440	N/A

For RF Conducted (Contention Based Protocol test):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	WLAN module	MediaTek Inc.	MT7927	RAS-MT7927

2.6 Test Setup Diagram

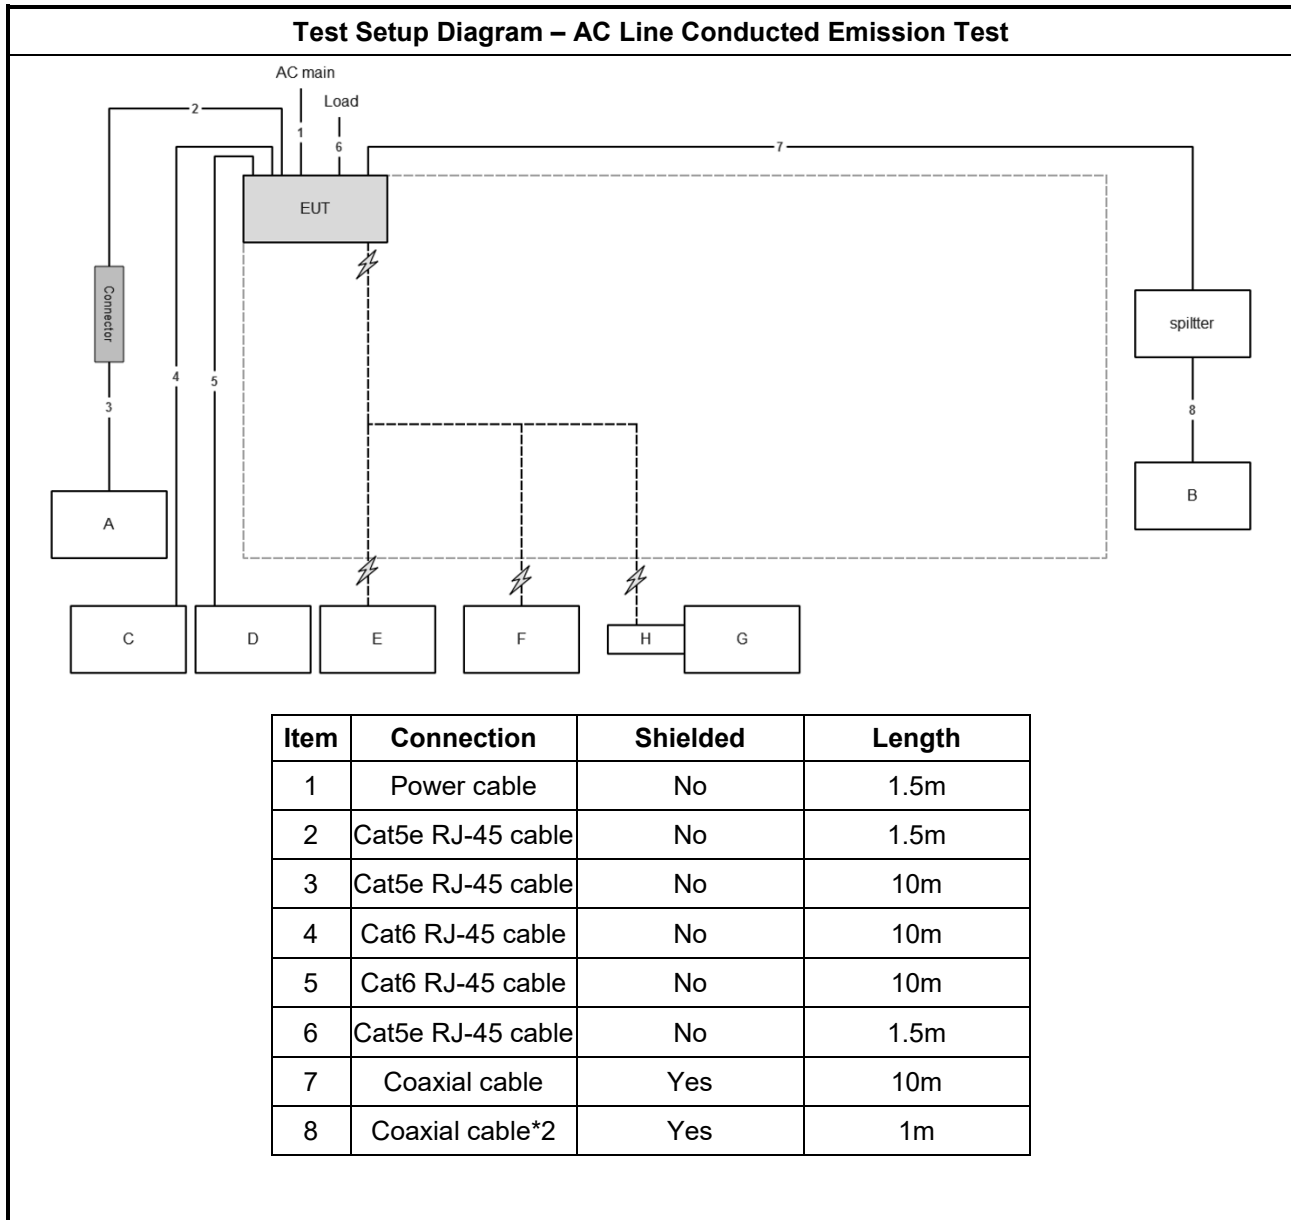




Test Setup Diagram – Radiated Below 1GHz Test

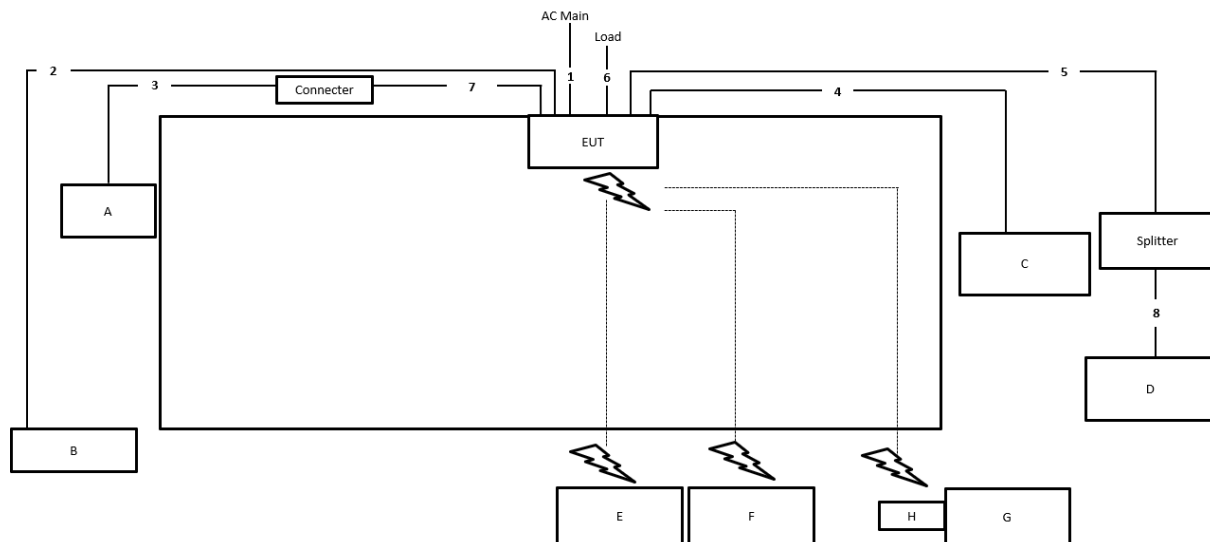

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	Coaxial cable	No	10m
6	RJ-45 cable	No	1.5m
7	RJ-45 cable	No	1.5m
8	Coaxial cable*2	No	1m

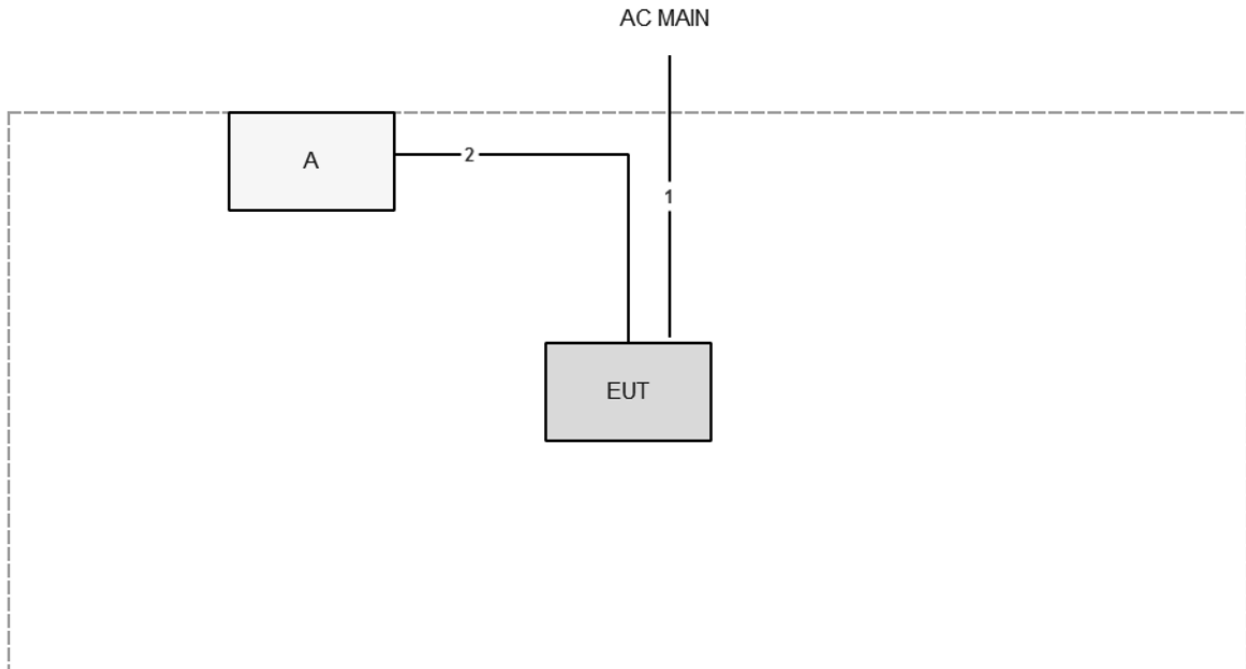Test Setup Diagram - Radiated Above 1GHz Test


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	1.5m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

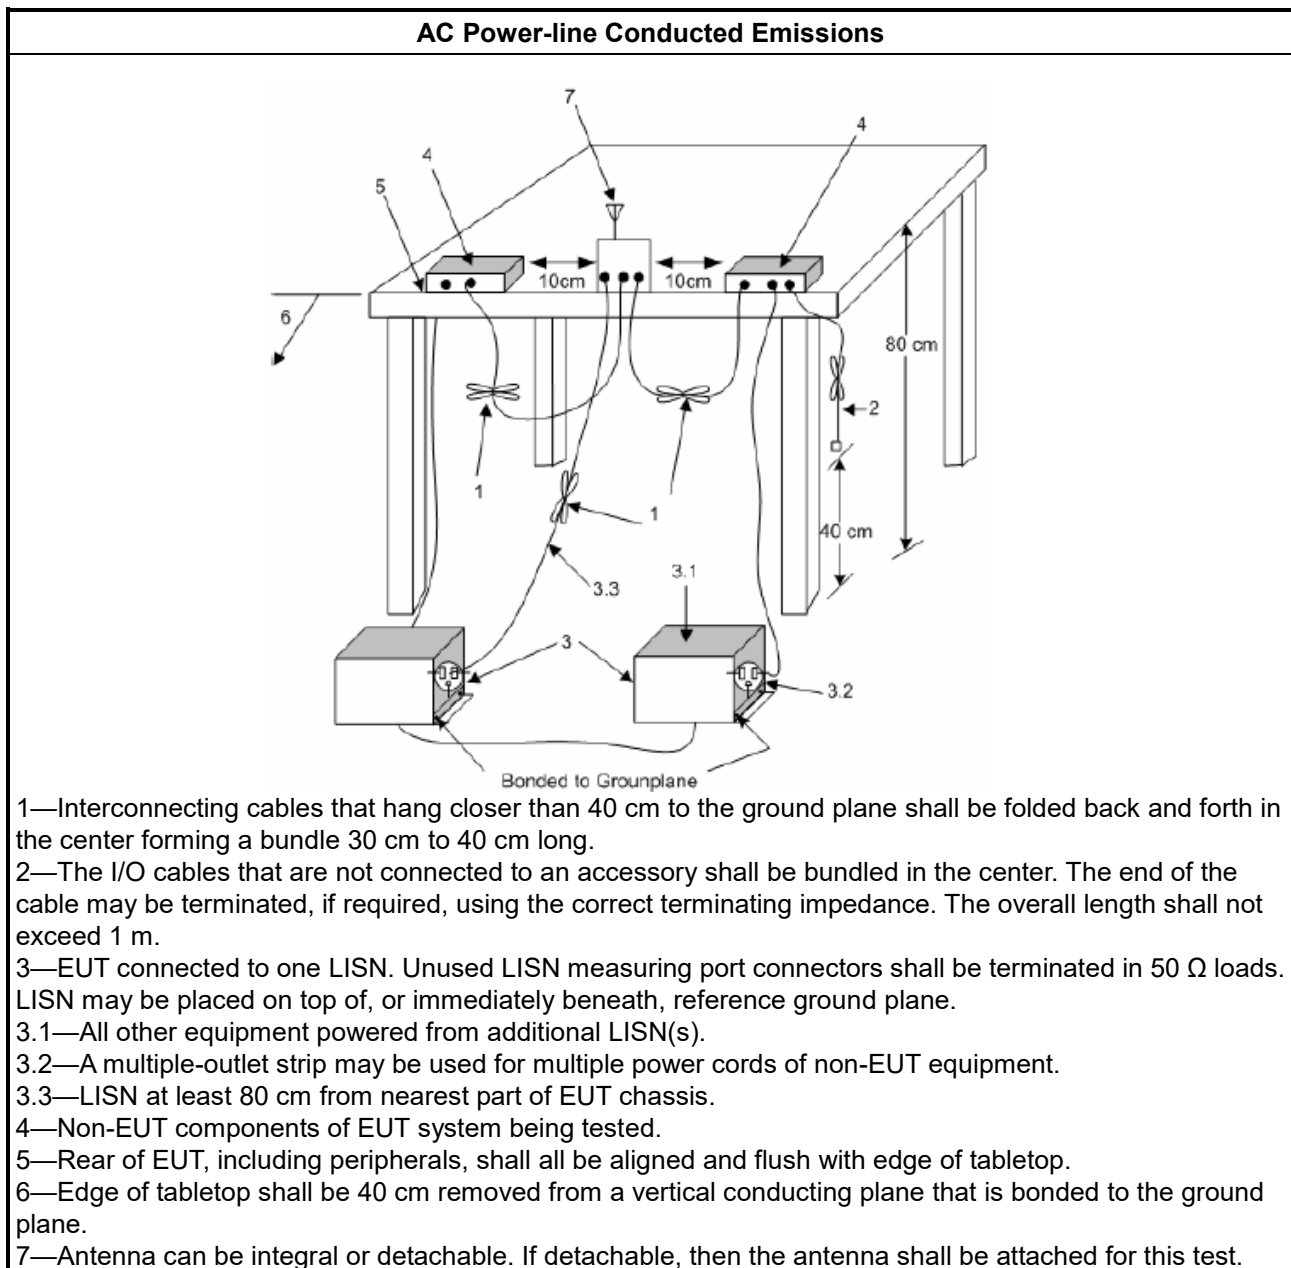

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☒	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☒	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

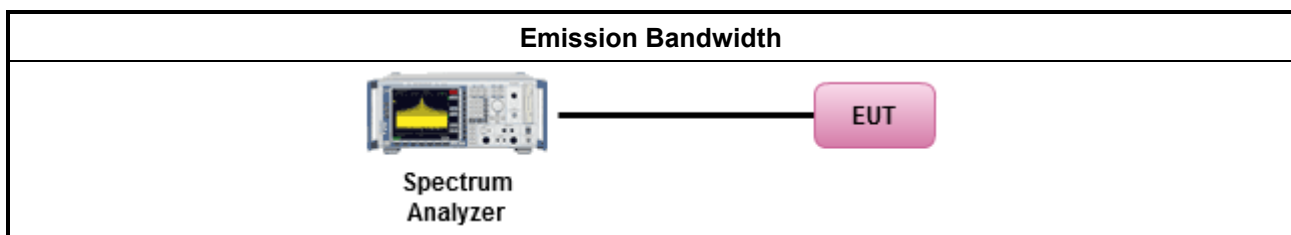

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	

For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
Average over on/off periods with duty factor ☐ Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.	
☐ Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
Wideband RF power meter and average over on/off periods with duty factor	
☒ Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).	
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	
☐ For radiated measurement.	
Refer as FCC KDB 789033 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.4 Test Setup

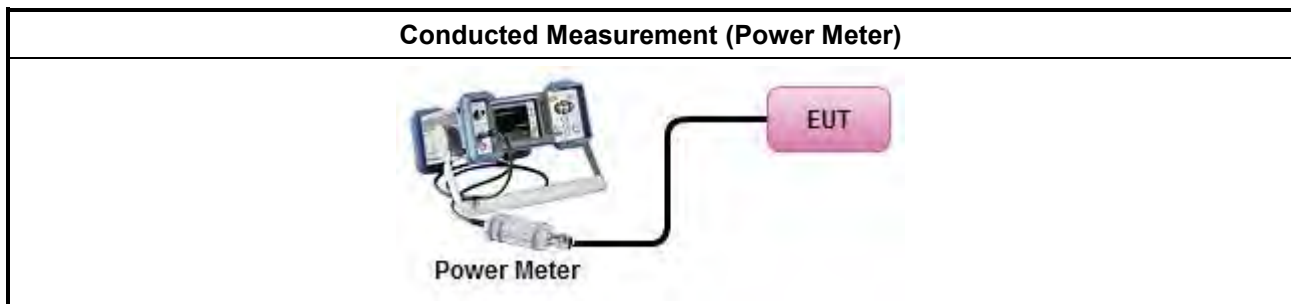

3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C

3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

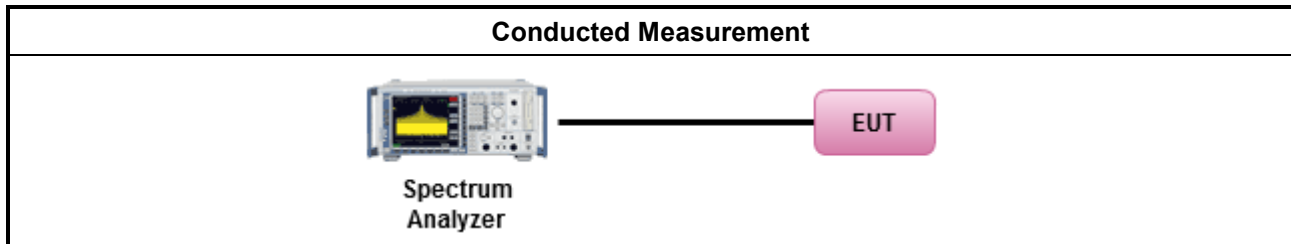

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D

3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

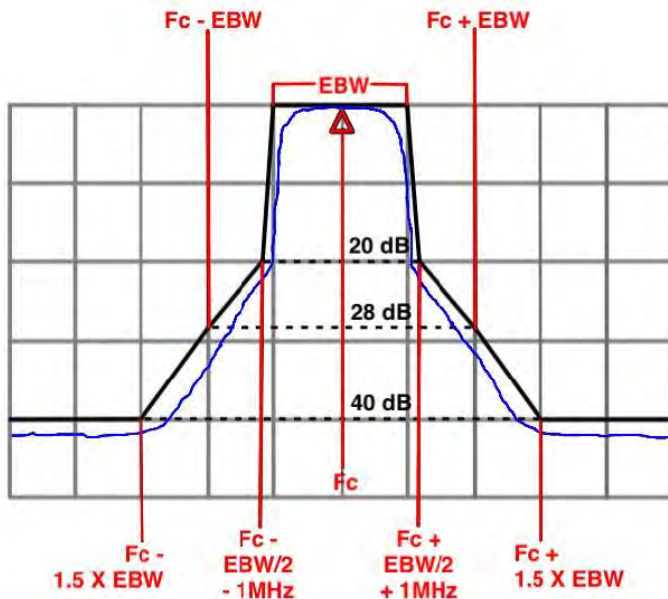Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 



3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4


Test Setup



Transmitter Radiated Unwanted Emissions

9kHz ~30MHz

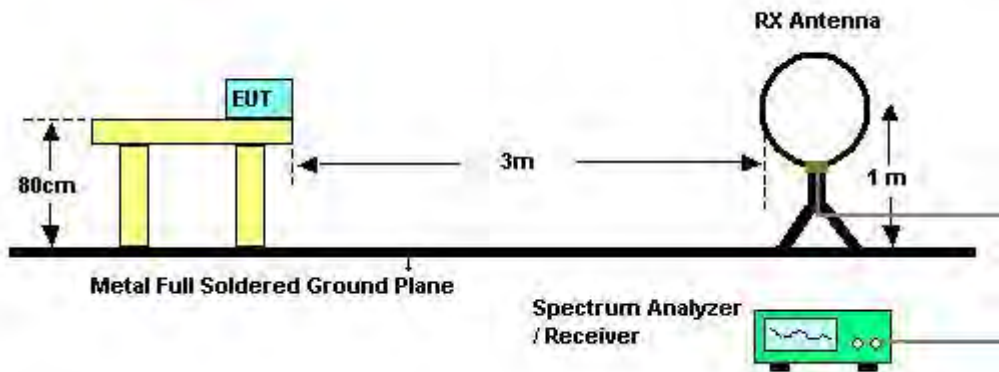

30MHz~1GHz

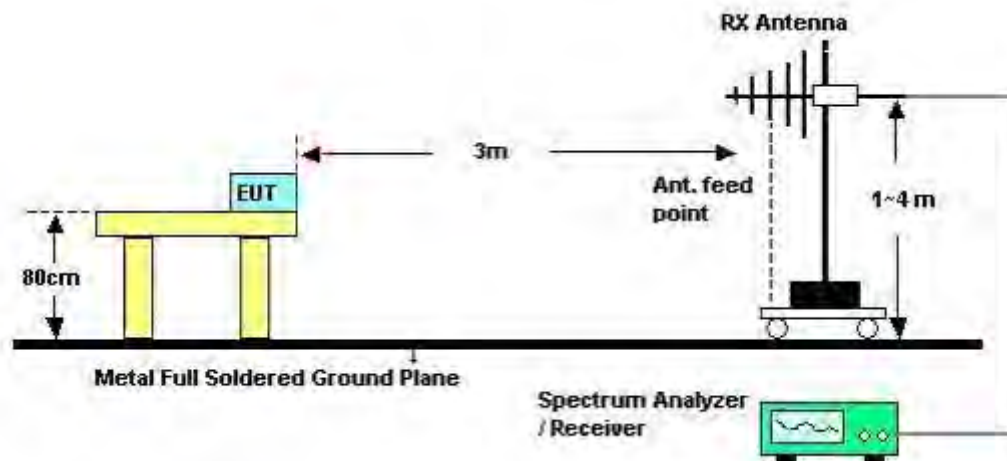

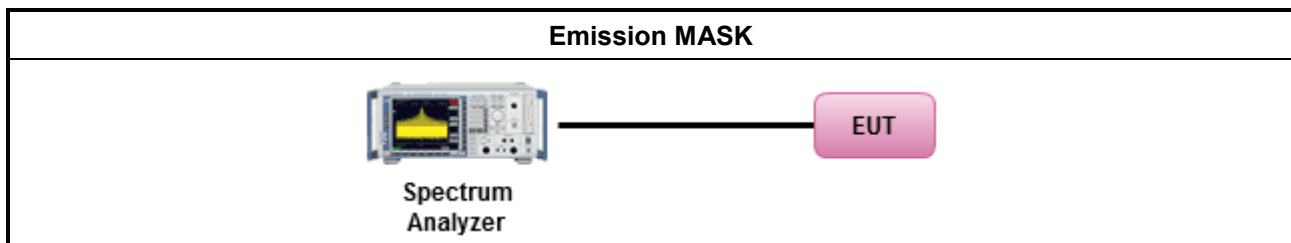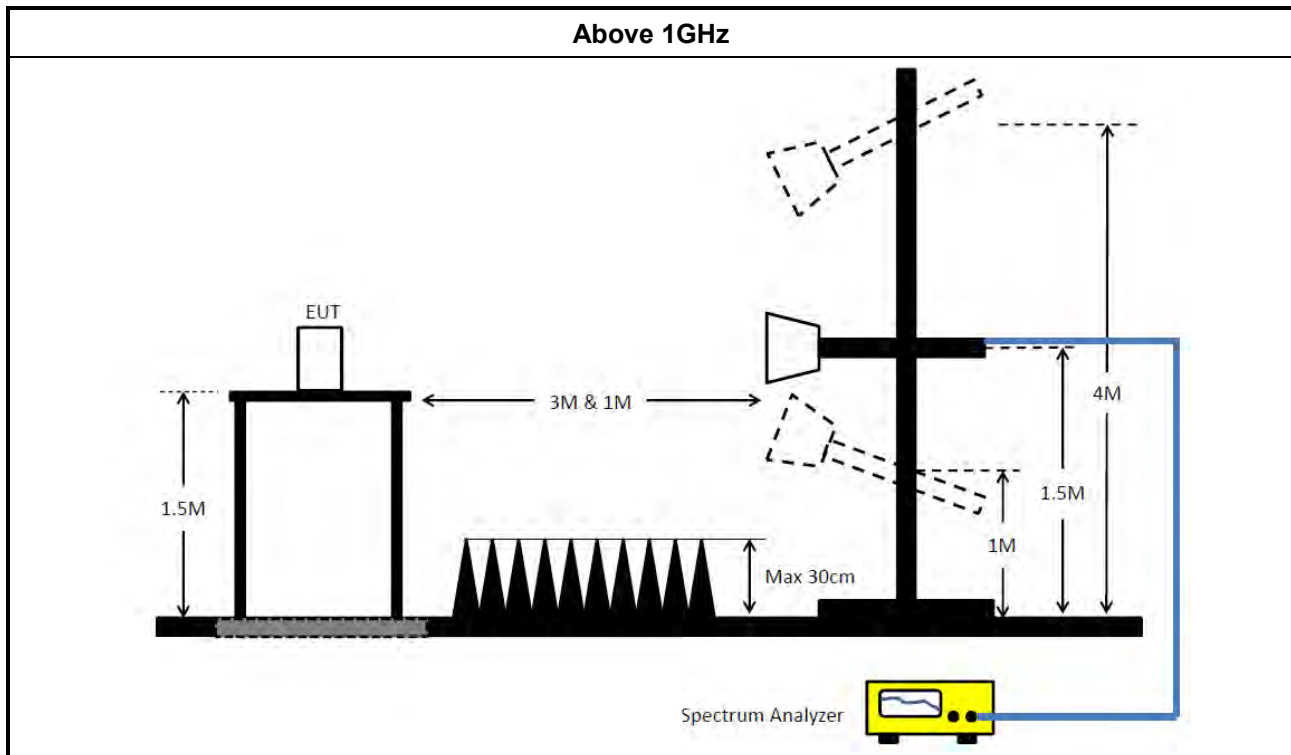

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

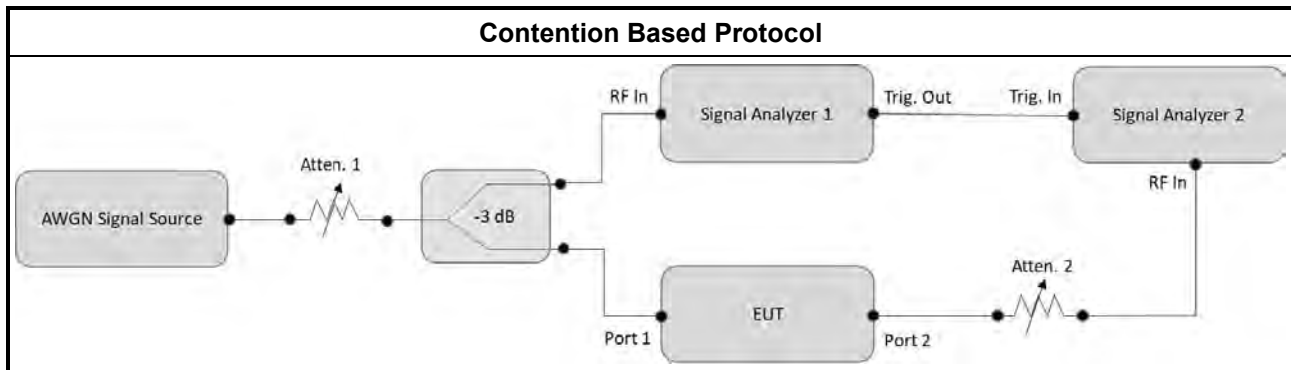

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
COND Cable	Woken	Cable	CO02	0.15MHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO02-CB)
EMI Test Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jun. 06, 2026	Jun. 05, 2027	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jan. 29, 2026	Jan. 28, 2027	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Feb. 25, 2026	Feb. 24, 2027	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Jul. 30, 2026	Jul. 29, 2027	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 27, 2025	Sep. 26, 2026	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Feb. 11, 2026	Feb. 10, 2027	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 30, 2026	Apr. 29, 2027	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz ~ 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH5265	20240911-1	1~ 26.5GHz	Sep. 18, 2025	Sep. 17, 2026	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 21, 2026	Mar. 20, 2027	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 15, 2026	Jun. 14, 2027	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH05-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 29, 2025	Oct. 28, 2026	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Signal Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	May 08, 2026	May 07, 2027	Radiation (03CH05-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH05-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~ 18GHz	Mar. 21, 2026	Mar. 20, 2027	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 18, 2026	Jun. 17, 2027	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 18, 2026	Jun. 17, 2027	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Feb. 11, 2026	Feb. 10, 2027	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH02-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 10, 2026	Mar. 09, 2027	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH02-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	Jun. 04, 2026	Jun. 03, 2027	Radiation (03CH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH02-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~ 18GHz 3m	May 01, 2026	Apr. 30, 2027	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Feb. 11, 2026	Feb. 10, 2027	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 06, 2026	Feb. 05, 2027	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH03-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 29, 2025	Oct. 28, 2026	Radiation (03CH03-CB)
Signal Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 21, 2026	Jul. 20, 2027	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH03-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Feb. 11, 2026	Feb. 10, 2027	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 31, 2025	Dec. 30, 2026	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Signal Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 30, 2026	Mar. 29, 2027	Radiation (03CH04-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH04-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 28, 2025	Oct. 27, 2026	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 28, 2025	Oct. 27, 2026	Conducted (TH02-CB)
Signal Analyzer	R&S	FSV3044	101321	9kHz ~ 44GHz	Jul. 23, 2026	Jul. 22, 2027	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1~18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Conducted (TH02-CB)
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 12, 2025	Nov. 11, 2026	Conducted (DF02-CB)
Signal generator	R&S	SMB100A	181239	1MHz-40GHz	Jan. 21, 2026	Jan. 20, 2027	Conducted (DF02-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Nov. 04, 2025	Nov. 03, 2026	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (DF02-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	514.5k	39.79	46.00	-6.21	Neutral

Mode 1

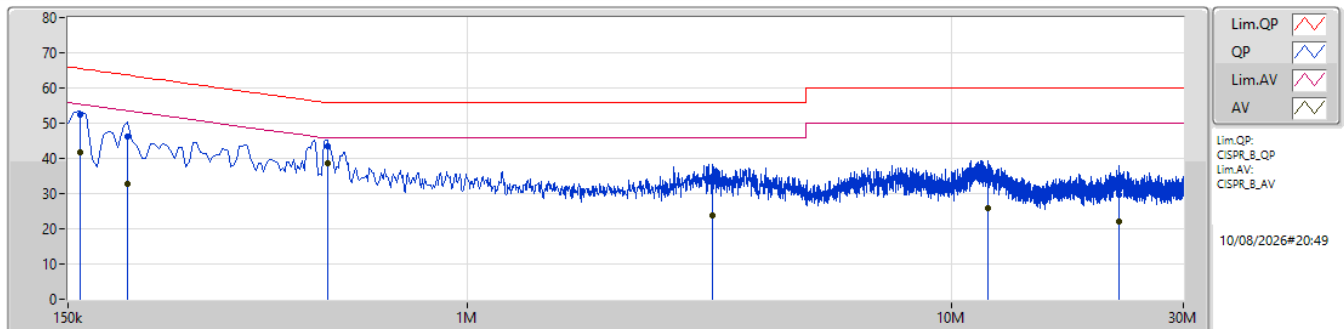

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	52.46	65.52	-13.06	10.45	Line	-	42.01	0.12	0.26	10.07						
AV	159k	41.57	55.52	-13.95	10.45	Line	-	31.12	0.12	0.26	10.07						
QP	199.5k	46.31	63.63	-17.32	10.30	Line	-	36.01	0.12	0.21	9.97						
AV	199.5k	32.87	53.63	-20.76	10.30	Line	-	22.57	0.12	0.21	9.97						
QP	514.5k	43.32	56.00	-12.68	10.50	Line	-	32.82	0.13	0.27	10.10						
AV	514.5k	38.63	46.00	-7.37	10.50	Line	"Worst"	28.13	0.13	0.27	10.10						
QP	3.21M	34.46	56.00	-21.54	10.56	Line	-	23.90	0.31	0.27	9.98						
AV	3.21M	23.70	46.00	-22.30	10.56	Line	-	13.14	0.31	0.27	9.98						
QP	11.886M	34.52	60.00	-25.48	11.51	Line	-	23.01	0.74	0.37	10.40						
AV	11.886M	26.00	50.00	-24.00	11.51	Line	-	14.49	0.74	0.37	10.40						
QP	22.106M	29.55	60.00	-30.45	12.00	Line	-	17.55	1.14	0.36	10.50						
AV	22.106M	22.01	50.00	-27.99	12.00	Line	-	10.01	1.14	0.36	10.50						

Mode 1

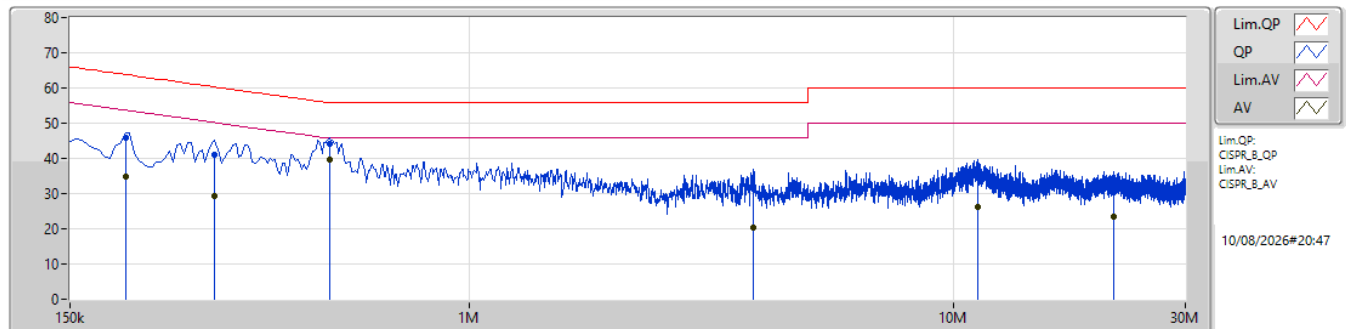

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	195k	45.86	63.82	-17.96	10.32	Neutral	-	35.54	0.12	0.22	9.98						
AV	195k	34.99	53.82	-18.83	10.32	Neutral	-	24.67	0.12	0.22	9.98						
QP	298.5k	40.97	60.28	-19.31	10.42	Neutral	-	30.55	0.13	0.25	10.04						
AV	298.5k	29.36	50.28	-20.92	10.42	Neutral	-	18.94	0.13	0.25	10.04						
QP	514.5k	44.31	56.00	-11.69	10.51	Neutral	-	33.80	0.14	0.27	10.10						
AV	514.5k	39.79	46.00	-6.21	10.51	Neutral	"Worst"	29.28	0.14	0.27	10.10						
QP	3.849M	31.82	56.00	-24.18	10.55	Neutral	-	21.27	0.29	0.28	9.98						
AV	3.849M	20.26	46.00	-25.74	10.55	Neutral	-	9.71	0.29	0.28	9.98						
QP	11.175M	35.15	60.00	-24.85	11.37	Neutral	-	23.78	0.63	0.37	10.37						
AV	11.175M	26.25	50.00	-23.75	11.37	Neutral	-	14.88	0.63	0.37	10.37						
QP	21.345M	30.28	60.00	-29.72	11.90	Neutral	-	18.38	1.03	0.35	10.52						
AV	21.345M	23.29	50.00	-26.71	11.90	Neutral	-	11.39	1.03	0.35	10.52						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	23.925M	19.095M	19M1D1D	22M	19M
802.11be EHT40_Nss1,(MCS0)_4TX	43.01M	38.004M	38M0D1D	41.36M	37.834M
802.11be EHT80_Nss1,(MCS0)_4TX	84.48M	77.587M	77M6D1D	83.38M	77.439M
802.11be EHT160_Nss1,(MCS0)_4TX	165.44M	156.686M	157MD1D	162.8M	156.129M
802.11be EHT320_Nss1,(MCS0)_4TX	328.24M	314.214M	314MD1D	325.6M	313.568M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	23.76M	19.113M	19M1D1D	22.11M	19.005M
802.11be EHT40_Nss1,(MCS0)_4TX	43.01M	38.019M	38M0D1D	41.36M	37.793M
802.11be EHT80_Nss1,(MCS0)_4TX	84.7M	77.63M	77M6D1D	82.72M	77.525M
802.11be EHT160_Nss1,(MCS0)_4TX	165.44M	156.713M	157MD1D	163.24M	156.454M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	24.97M	19.112M	19M1D1D	22M	19.01M
802.11be EHT40_Nss1,(MCS0)_4TX	43.12M	38.027M	38M0D1D	41.47M	37.816M
802.11be EHT80_Nss1,(MCS0)_4TX	84.92M	77.608M	77M6D1D	82.5M	77.416M
802.11be EHT160_Nss1,(MCS0)_4TX	165.44M	156.501M	157MD1D	162.8M	156.177M
802.11be EHT320_Nss1,(MCS0)_4TX	329.12M	314.097M	314MD1D	325.6M	313.442M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	23.76M	19.098M	19M1D1D	22.275M	19.005M
802.11be EHT40_Nss1,(MCS0)_4TX	43.01M	38.034M	38M0D1D	41.8M	37.841M
802.11be EHT80_Nss1,(MCS0)_4TX	85.14M	77.594M	77M6D1D	82.94M	77.445M
802.11be EHT160_Nss1,(MCS0)_4TX	164.56M	156.451M	156MD1D	163.24M	156.346M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	320M	23.705M	19.081M	23.76M	19.081M	22.385M	19.025M	22M	19M
6195MHz	Pass	320M	23.925M	19.092M	22.55M	19.095M	22.385M	19.041M	22M	19.015M
6415MHz	Pass	320M	22.605M	19.087M	23.595M	19.065M	22.385M	19.034M	22.055M	19.02M
6435MHz	Pass	320M	23.76M	19.096M	22.77M	19.082M	22.495M	19.026M	22.11M	19.006M
6475MHz	Pass	320M	22.55M	19.113M	22.605M	19.099M	22.44M	19.023M	22.22M	19.018M
6515MHz	Pass	320M	22.55M	19.094M	22.55M	19.092M	22.55M	19.024M	22.22M	19.005M
6535MHz	Pass	320M	23.815M	19.107M	24.97M	19.099M	22.275M	19.033M	22.275M	19.016M
6695MHz	Pass	320M	23.76M	19.095M	22.605M	19.112M	22.33M	19.012M	22.22M	19.012M
6855MHz	Pass	320M	22.605M	19.084M	23.65M	19.083M	22.385M	19.013M	22.275M	19.01M
6875MHz	Pass	320M	23.87M	19.093M	22.495M	19.082M	22.44M	19.015M	22M	19.021M
6995MHz	Pass	320M	23.595M	19.096M	22.495M	19.077M	22.605M	19.013M	22.66M	19.005M
7095MHz	Pass	320M	23.705M	19.092M	23.76M	19.098M	22.935M	19.008M	22.275M	19.016M
7115MHz	Pass	320M	23.595M	19.088M	22.66M	19.086M	22.44M	19.02M	22.605M	19.025M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	320M	42.13M	37.876M	41.36M	37.834M	42.35M	37.933M	42.02M	37.954M
6205MHz	Pass	320M	43.01M	37.865M	41.8M	37.835M	42.46M	37.953M	42.79M	38.004M
6405MHz	Pass	320M	43.01M	37.873M	41.69M	37.865M	42.13M	37.989M	42.46M	37.961M
6445MHz	Pass	320M	42.68M	37.879M	41.8M	37.793M	42.46M	37.923M	42.79M	37.977M
6485MHz	Pass	320M	42.35M	37.889M	42.57M	37.882M	42.35M	37.994M	42.79M	38.019M
6525MHz	Pass	320M	43.01M	37.876M	41.36M	37.834M	42.13M	37.949M	42.57M	37.993M
6565MHz	Pass	320M	42.57M	37.883M	41.47M	37.861M	42.46M	37.98M	42.9M	37.979M
6685MHz	Pass	320M	43.12M	37.848M	41.58M	37.817M	42.68M	37.954M	43.01M	37.982M
6845MHz	Pass	320M	42.79M	37.836M	41.8M	37.816M	42.35M	37.984M	42.35M	38.027M
6885MHz	Pass	320M	42.35M	37.86M	41.69M	37.856M	42.57M	37.998M	42.79M	38.017M
7005MHz	Pass	320M	43.01M	37.895M	42.79M	37.864M	42.79M	37.986M	42.46M	38.026M
7085MHz	Pass	320M	42.79M	37.875M	41.8M	37.841M	43.01M	37.994M	42.57M	38.034M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	320M	83.6M	77.442M	84.48M	77.587M	84.26M	77.521M	83.82M	77.519M
6225MHz	Pass	320M	83.38M	77.469M	84.26M	77.561M	83.6M	77.506M	83.38M	77.545M
6385MHz	Pass	320M	83.38M	77.439M	84.48M	77.573M	83.82M	77.564M	83.82M	77.578M
6465MHz	Pass	320M	82.72M	77.63M	84.7M	77.59M	83.82M	77.55M	84.26M	77.623M
6545MHz	Pass	320M	82.94M	77.525M	84.04M	77.57M	83.82M	77.543M	84.48M	77.594M
6625MHz	Pass	320M	82.94M	77.441M	84.92M	77.416M	84.26M	77.512M	83.38M	77.557M
6705MHz	Pass	320M	82.5M	77.434M	84.48M	77.513M	84.04M	77.589M	83.38M	77.537M
6785MHz	Pass	320M	83.6M	77.494M	84.7M	77.547M	84.04M	77.608M	83.82M	77.562M
6865MHz	Pass	320M	83.16M	77.51M	84.92M	77.563M	84.04M	77.576M	83.38M	77.549M
6945MHz	Pass	320M	82.94M	77.445M	85.14M	77.51M	83.82M	77.594M	83.6M	77.564M
7025MHz	Pass	320M	83.38M	77.528M	84.92M	77.57M	84.04M	77.582M	83.82M	77.528M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	320M	165M	156.194M	163.24M	156.18M	163.24M	156.14M	162.8M	156.129M
6185MHz	Pass	320M	165M	156.384M	163.68M	156.214M	163.68M	156.13M	163.24M	156.207M
6345MHz	Pass	320M	165.44M	156.686M	163.24M	156.52M	163.68M	156.606M	163.24M	156.548M
6505MHz	Pass	320M	165.44M	156.713M	163.24M	156.502M	164.12M	156.454M	163.24M	156.493M
6665MHz	Pass	320M	165.44M	156.454M	162.8M	156.177M	163.68M	156.235M	163.24M	156.392M
6825MHz	Pass	320M	165.44M	156.467M	163.24M	156.356M	162.8M	156.501M	163.24M	156.352M
6985MHz	Pass	320M	164.56M	156.397M	163.24M	156.346M	163.24M	156.451M	163.24M	156.366M
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	320M	327.36M	313.568M	326.48M	313.845M	326.48M	313.727M	325.6M	313.862M
6425MHz	Pass	320M	328.24M	314.066M	327.36M	314.088M	326.48M	314.214M	325.6M	314.086M
6745MHz	Pass	320M	329.12M	314.097M	327.36M	313.442M	326.48M	313.781M	325.6M	313.771M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
5955MHz

05/08/2026

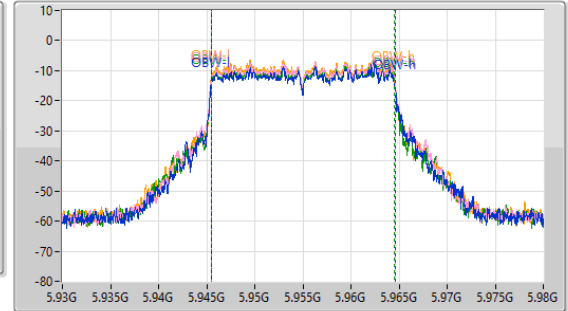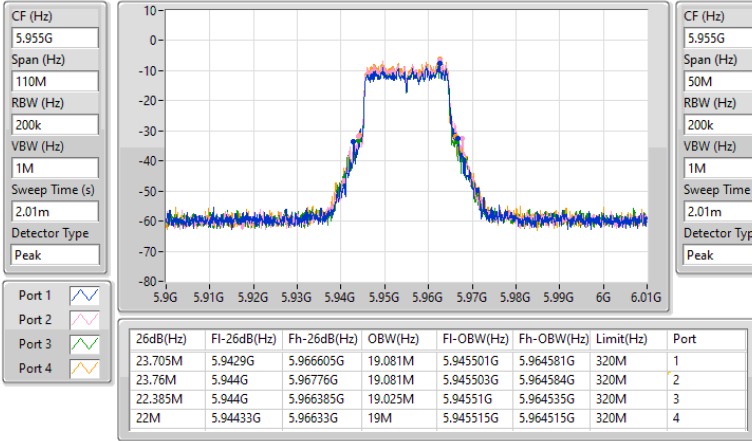

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
6195MHz

05/08/2026

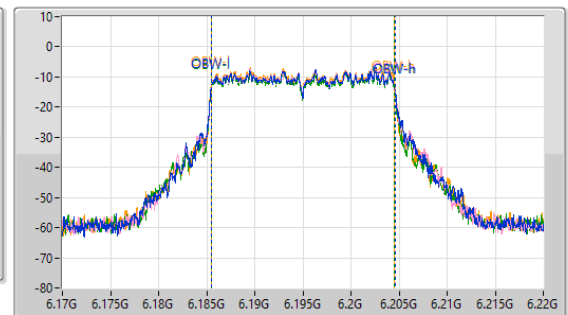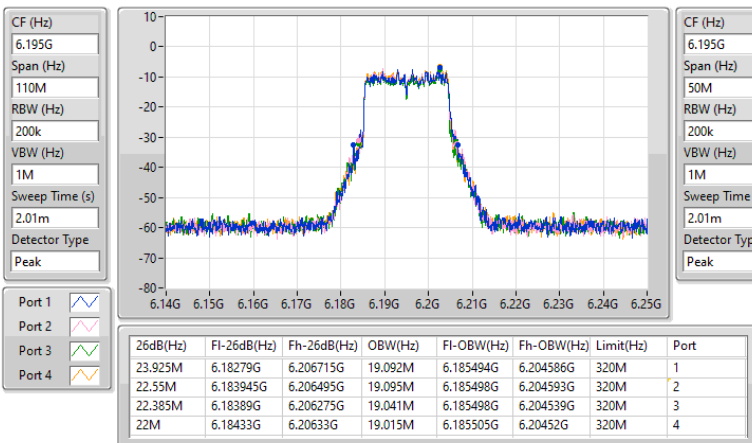


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
6415MHz

05/08/2026

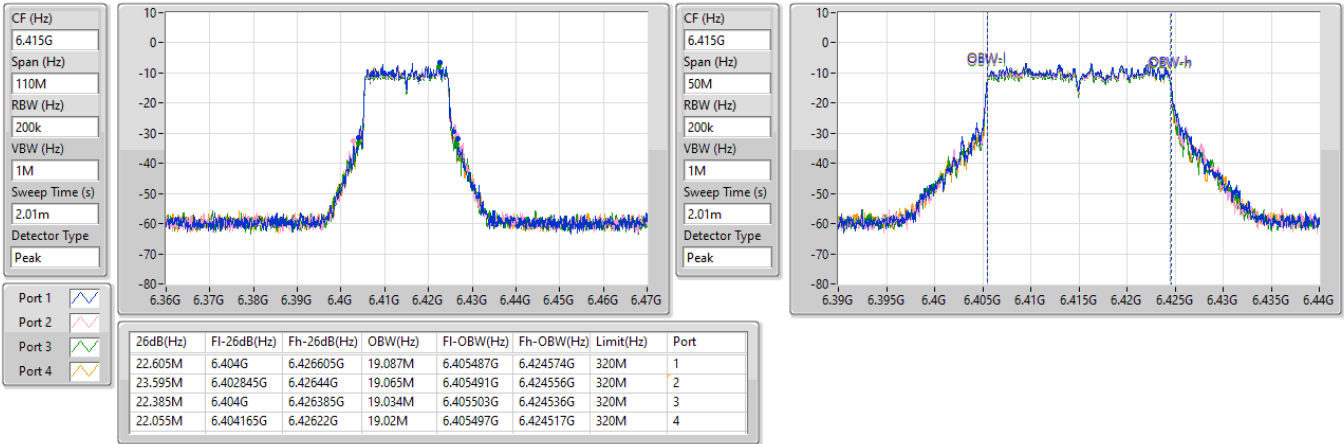
6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
6435MHz

05/08/2026


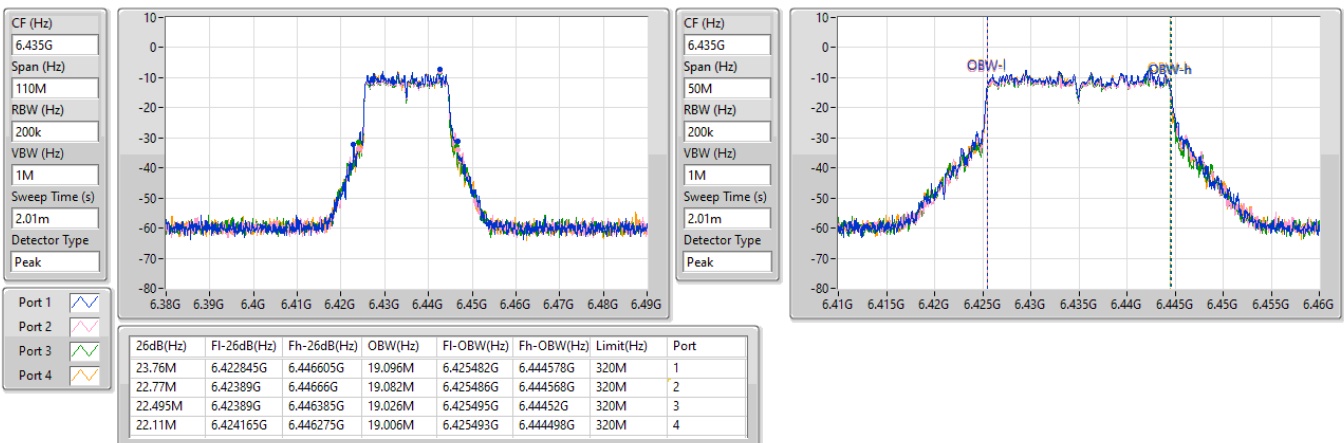


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6475MHz

05/08/2026

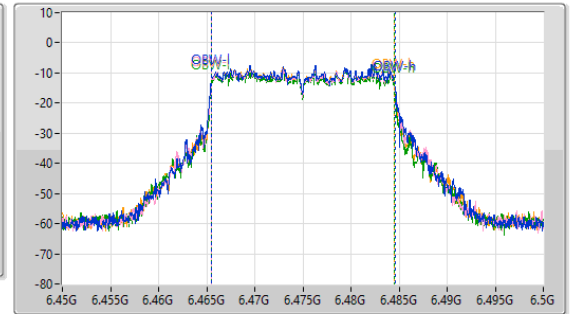
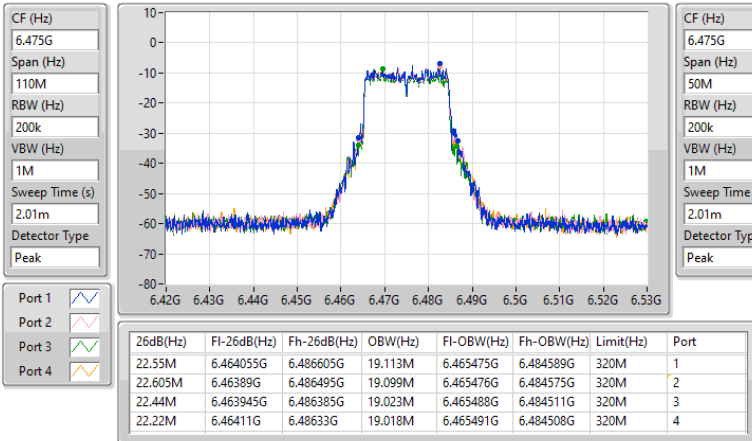


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6515MHz

05/08/2026

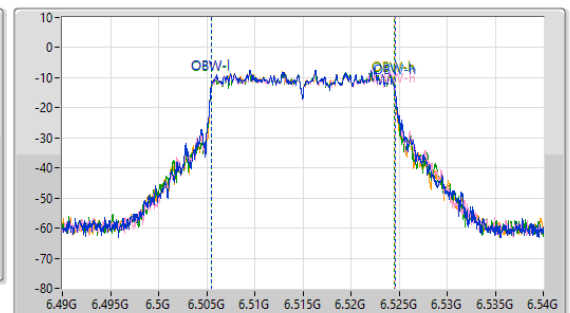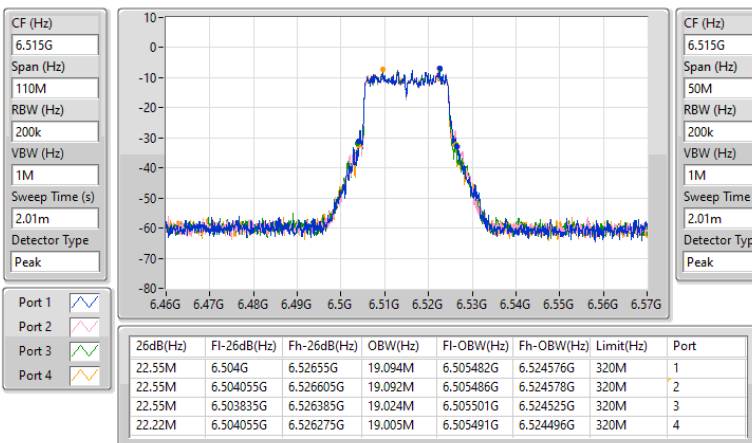


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6535MHz

05/08/2026

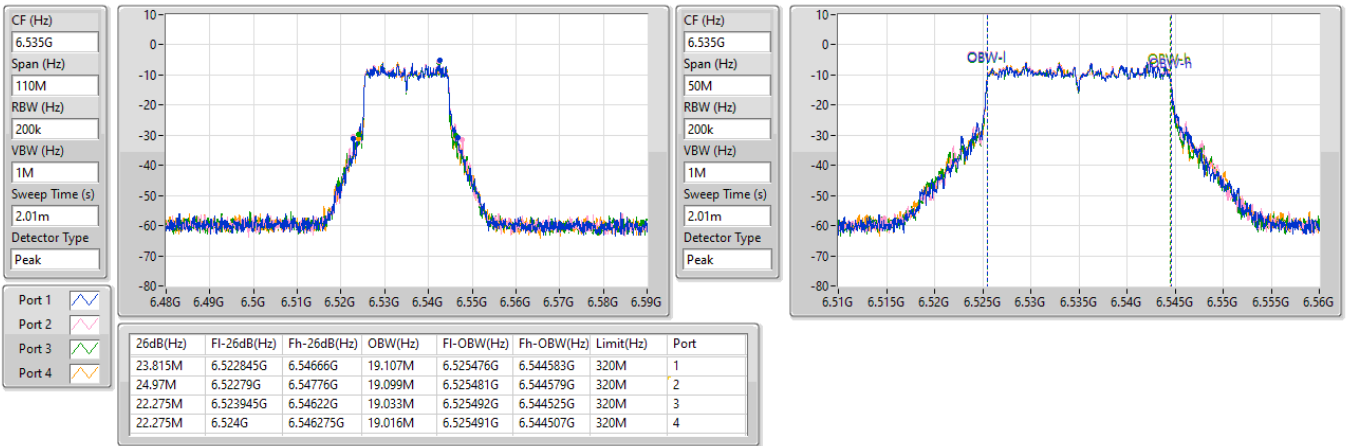


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6695MHz

05/08/2026

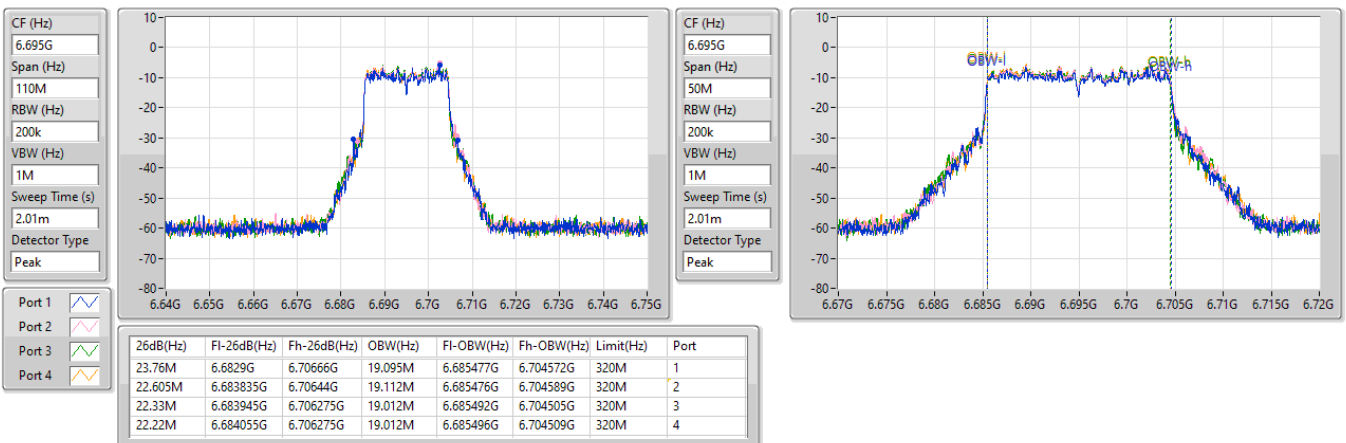


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6855MHz

05/08/2026

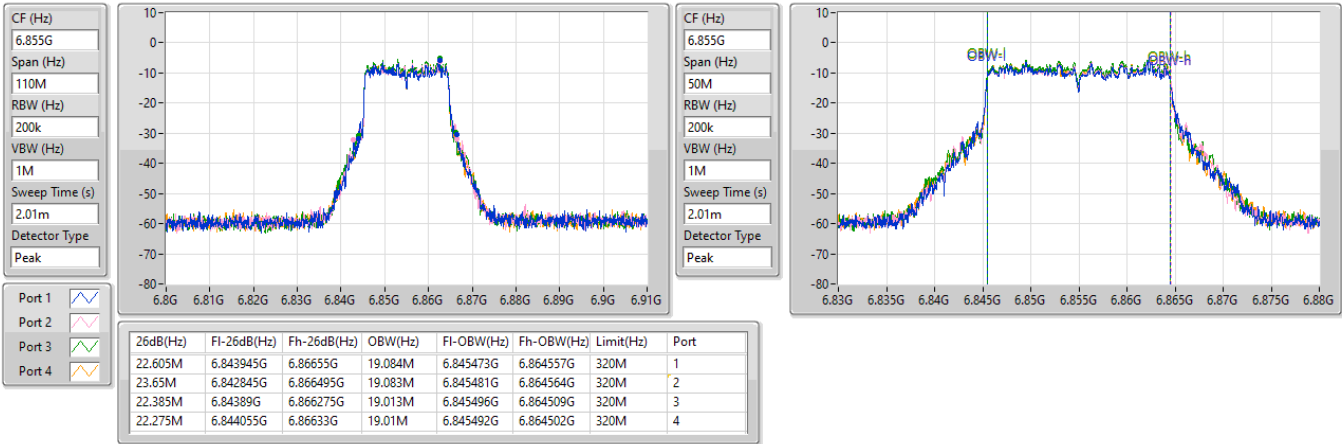


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6875MHz

05/08/2026


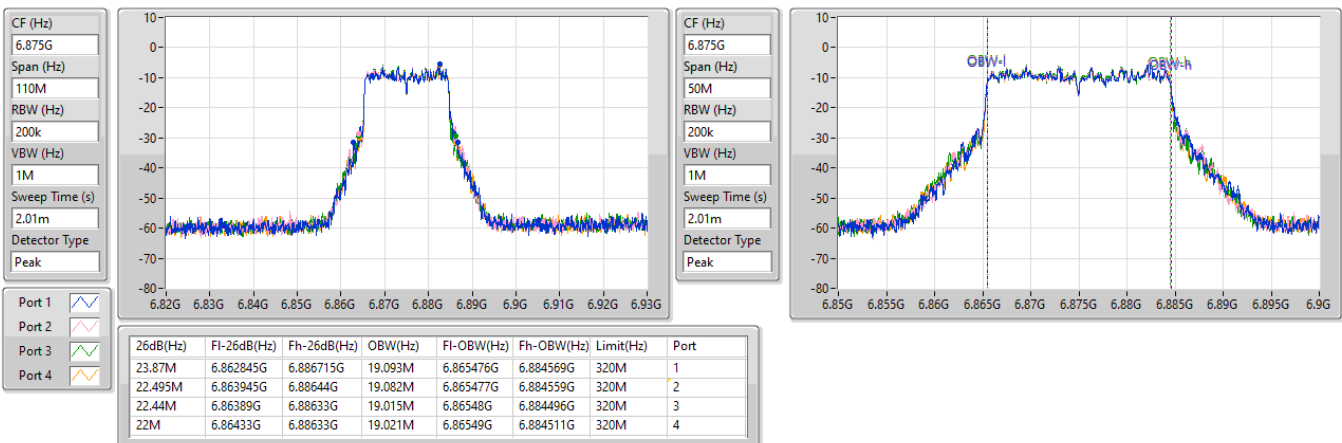


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6995MHz

05/08/2026

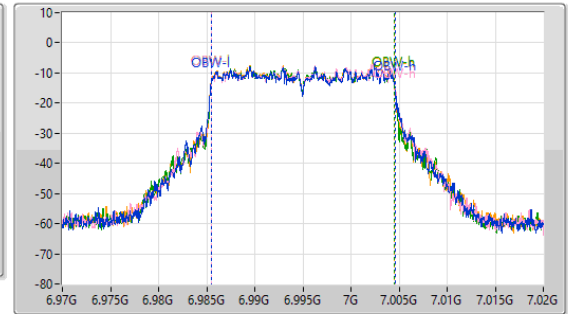
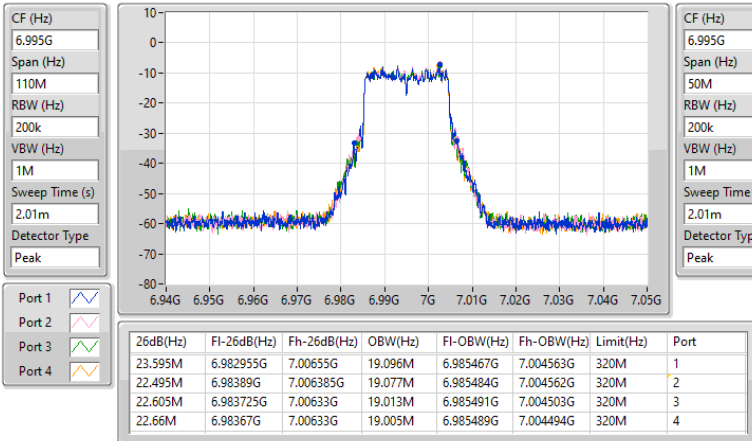


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


7095MHz

05/08/2026

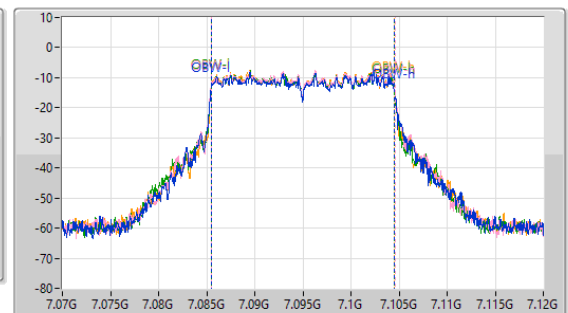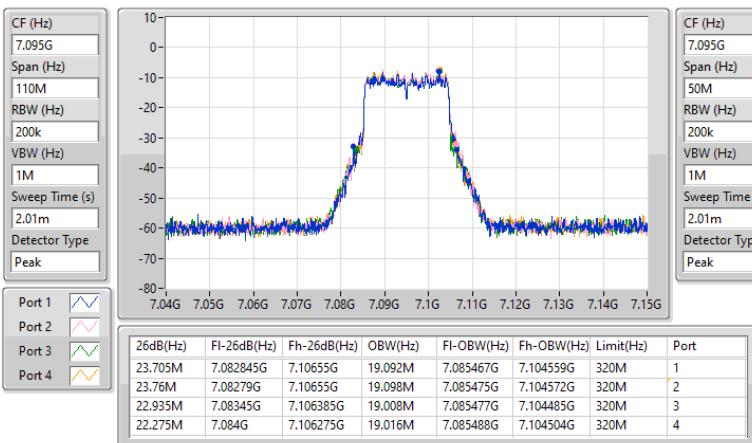


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
7115MHz

05/08/2026

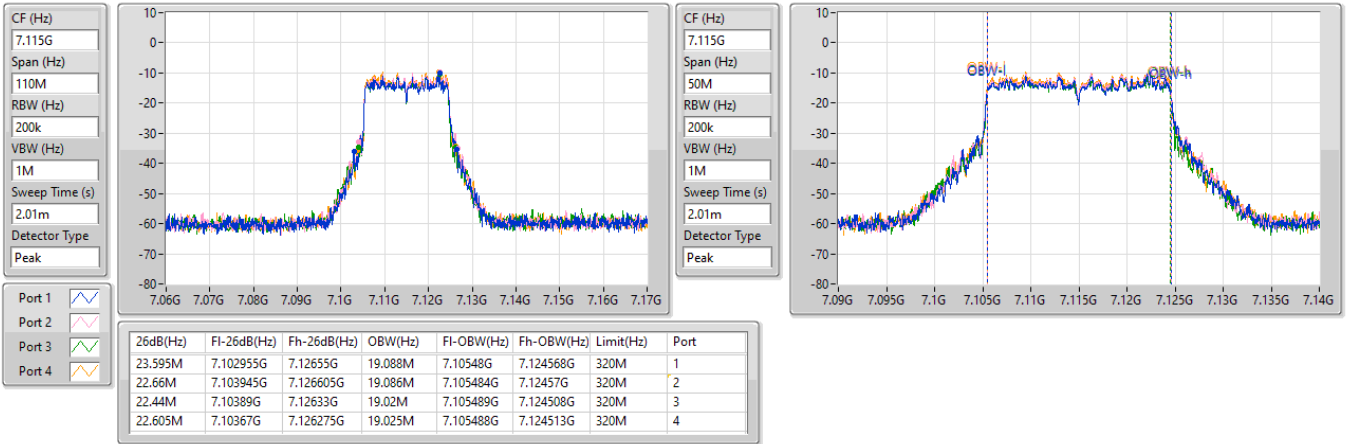
5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
5965MHz

05/08/2026


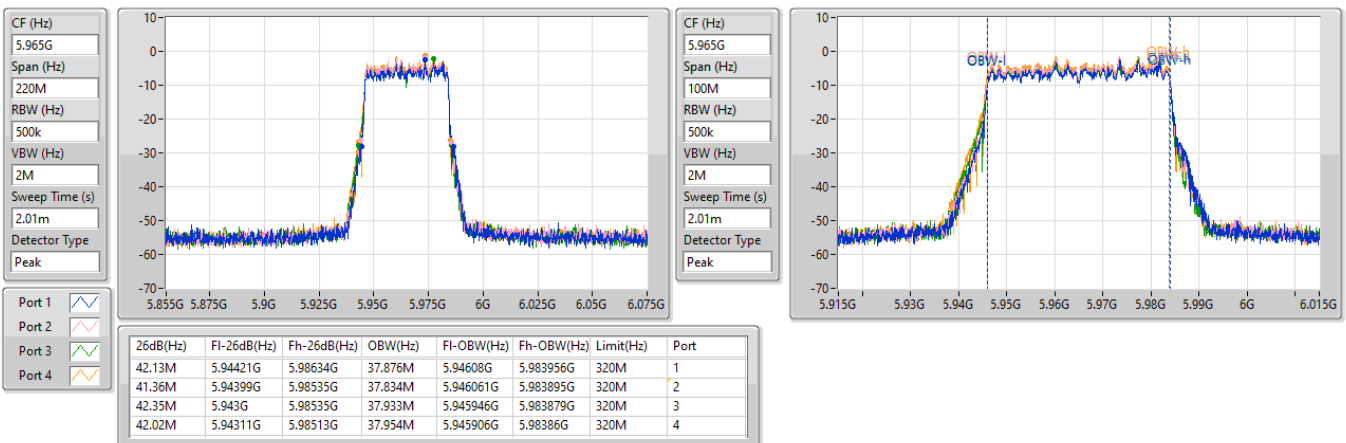


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6205MHz

05/08/2026

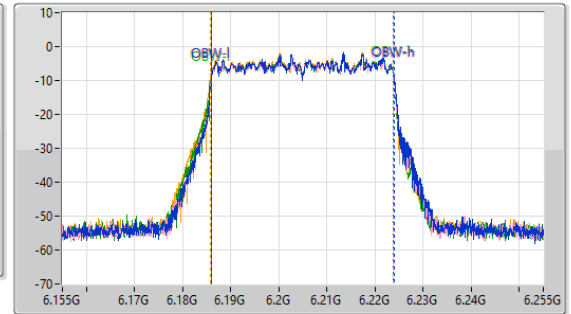
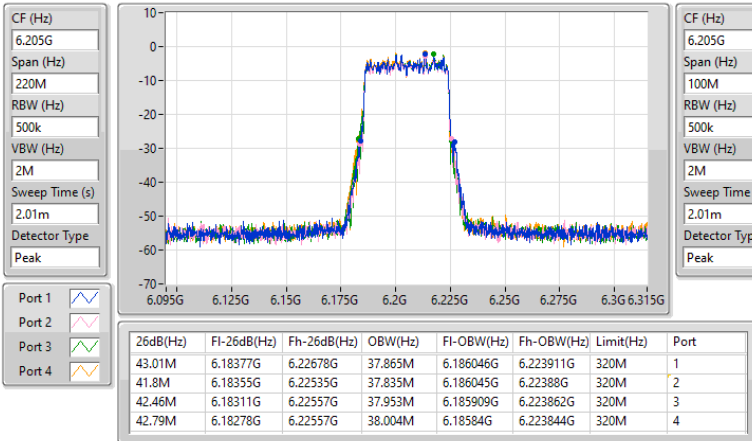


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6405MHz

05/08/2026

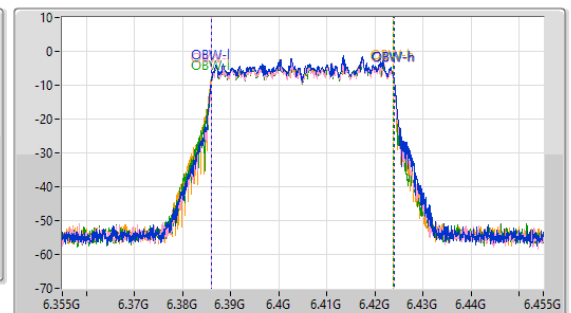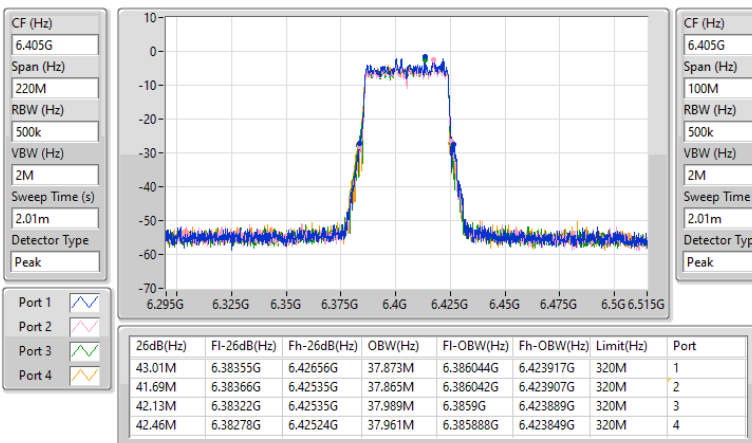


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6445MHz

05/08/2026

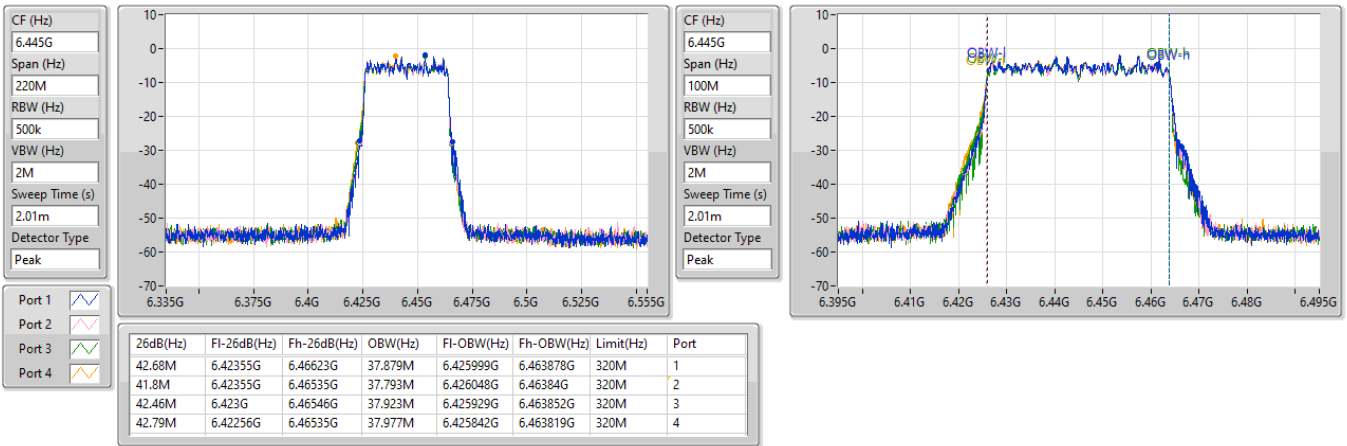


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6485MHz

05/08/2026


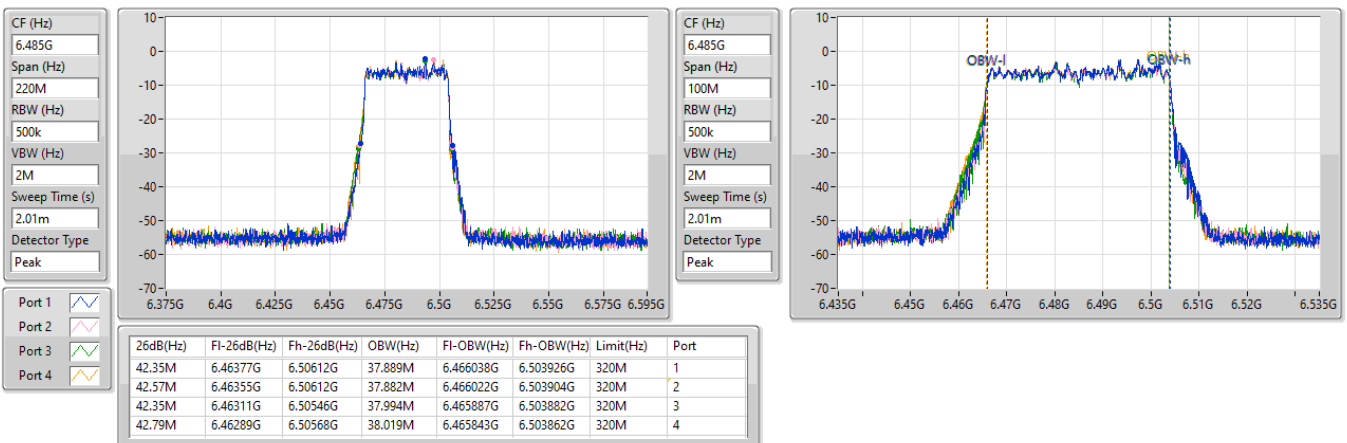


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6525MHz

05/08/2026

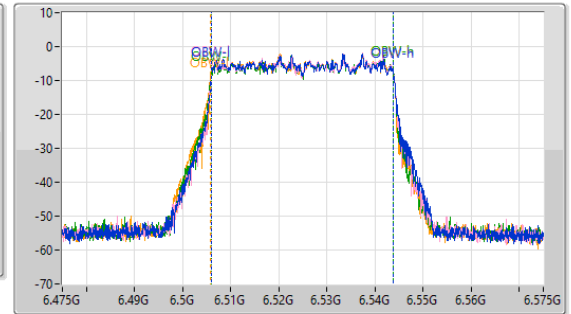
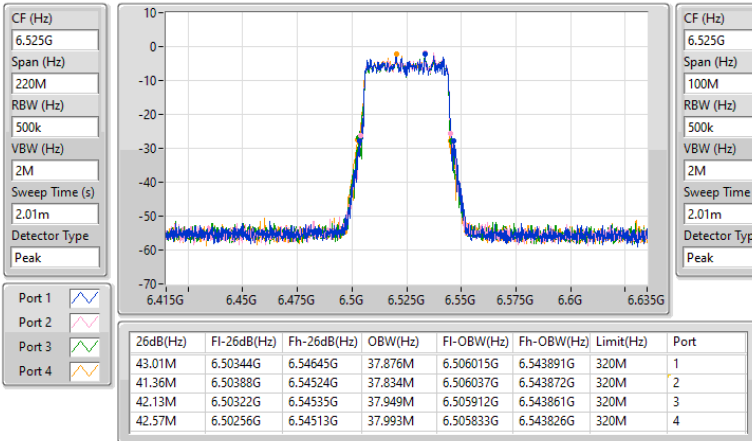


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6565MHz

05/08/2026

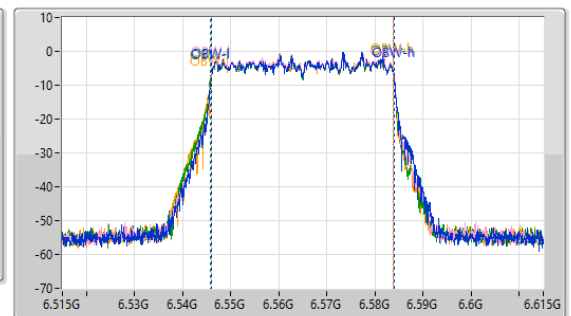
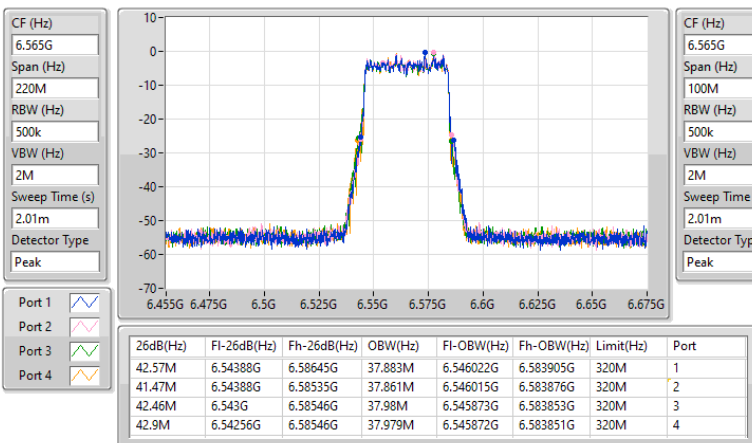


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6685MHz

05/08/2026

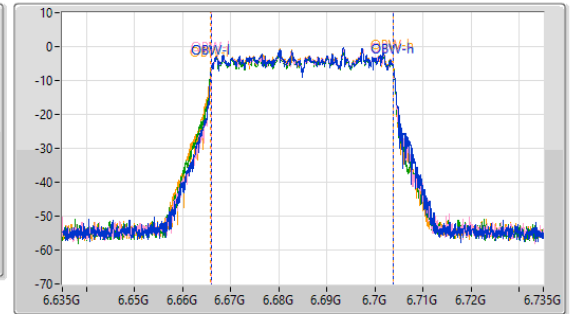
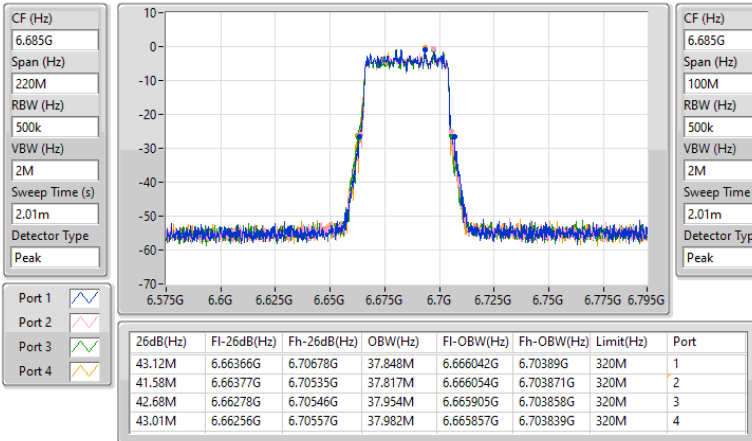


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6845MHz

05/08/2026

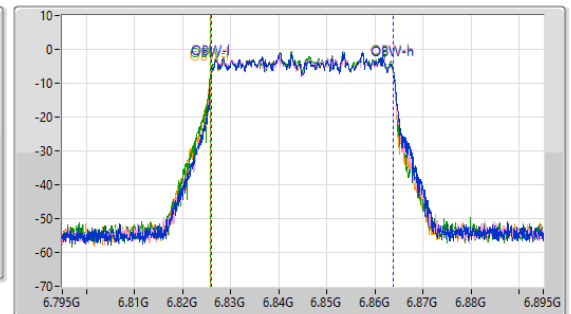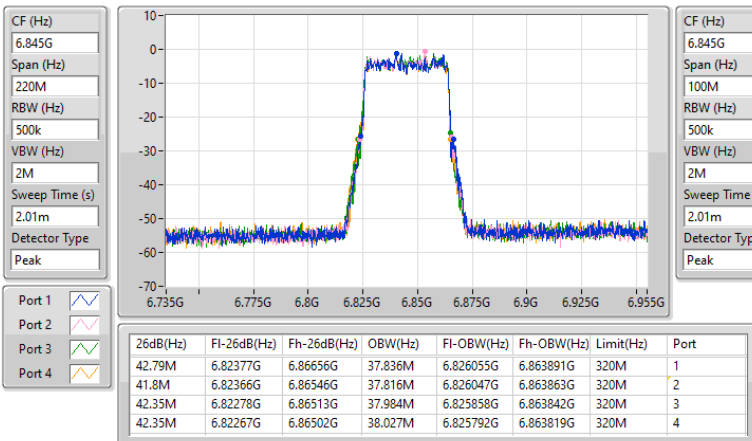


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
6885MHz

05/08/2026

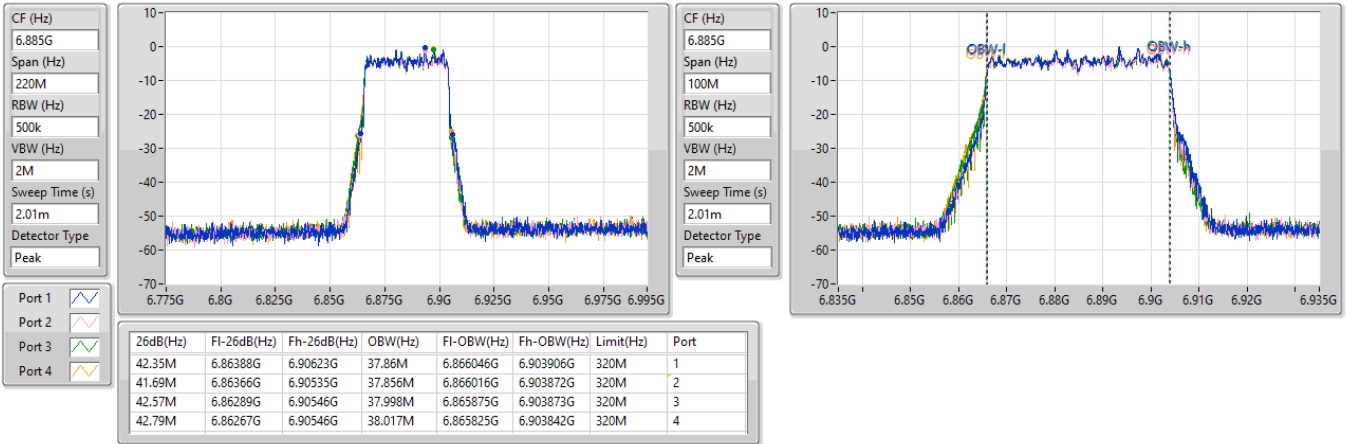

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
7005MHz

05/08/2026

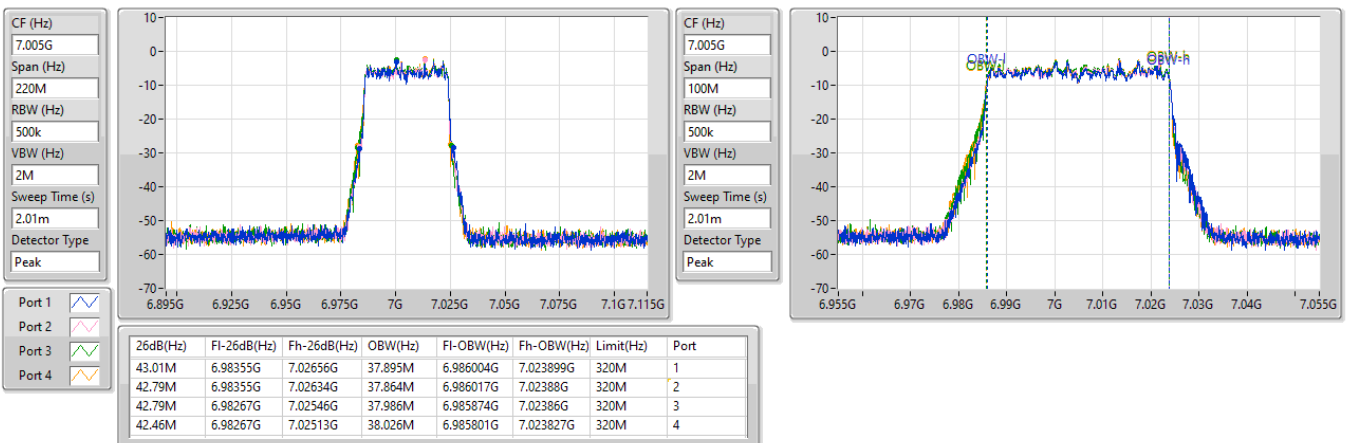


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
7085MHz

05/08/2026

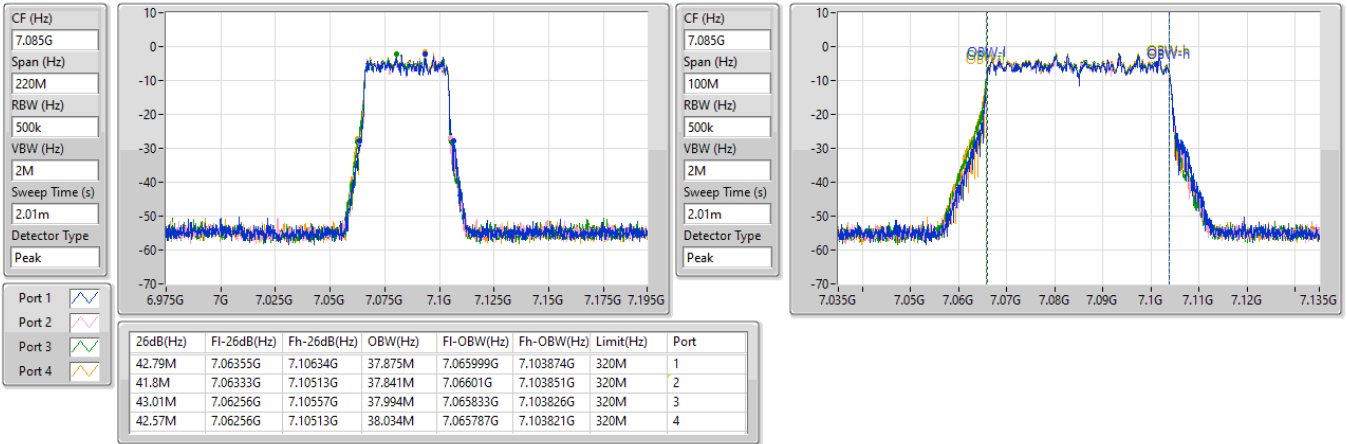
5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX
EBW
5985MHz

05/08/2026


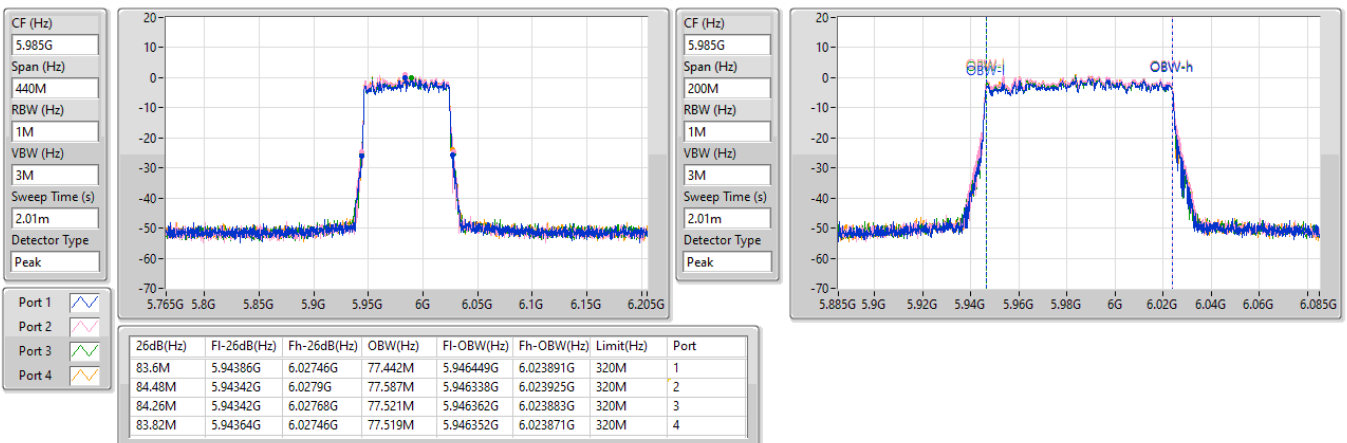


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6225MHz

05/08/2026

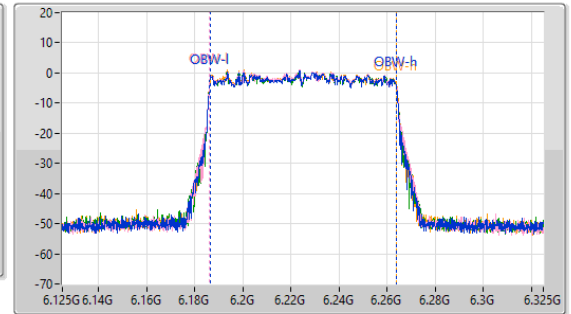
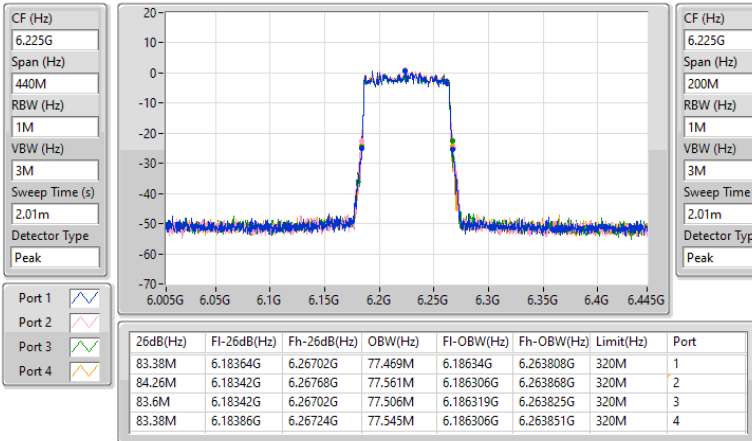


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6385MHz

05/08/2026

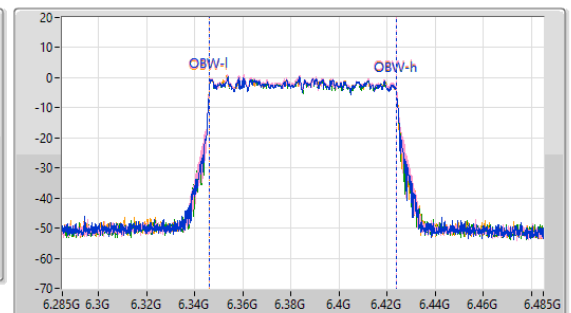
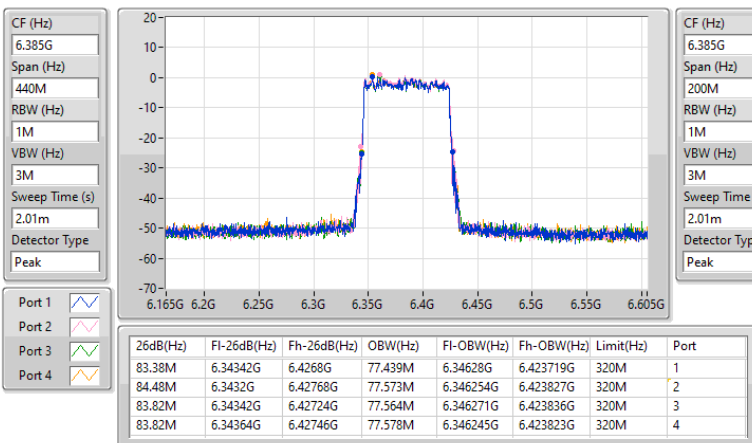


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6465MHz

05/08/2026

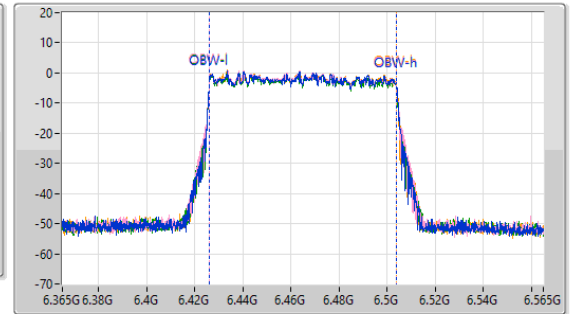
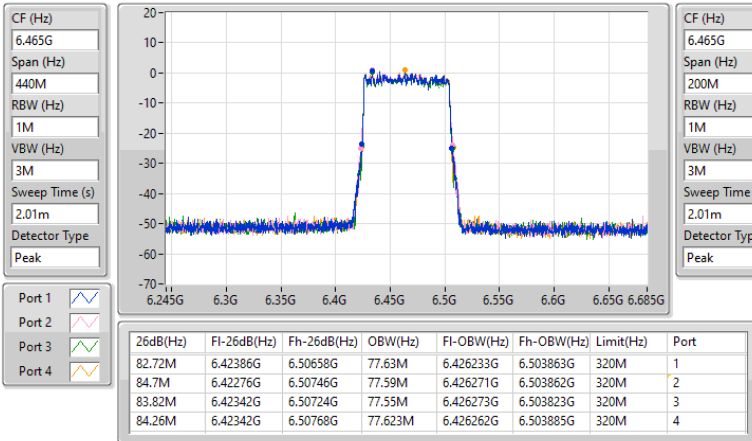


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6545MHz

05/08/2026

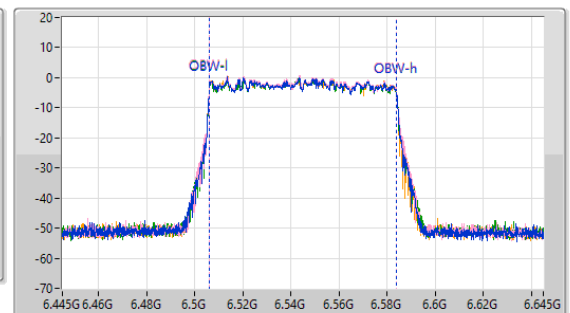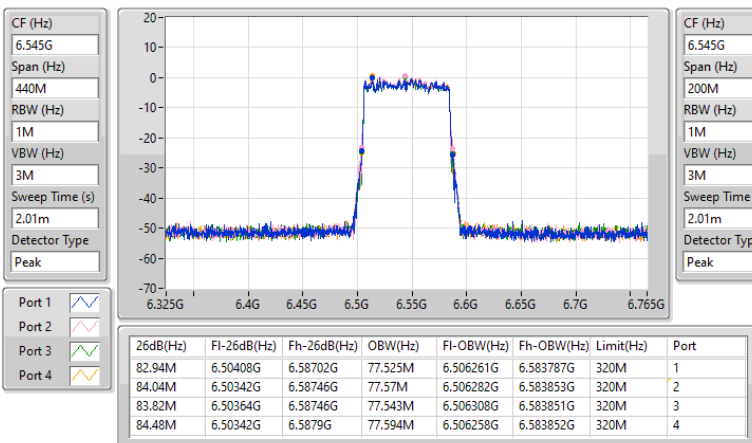


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6625MHz

05/08/2026

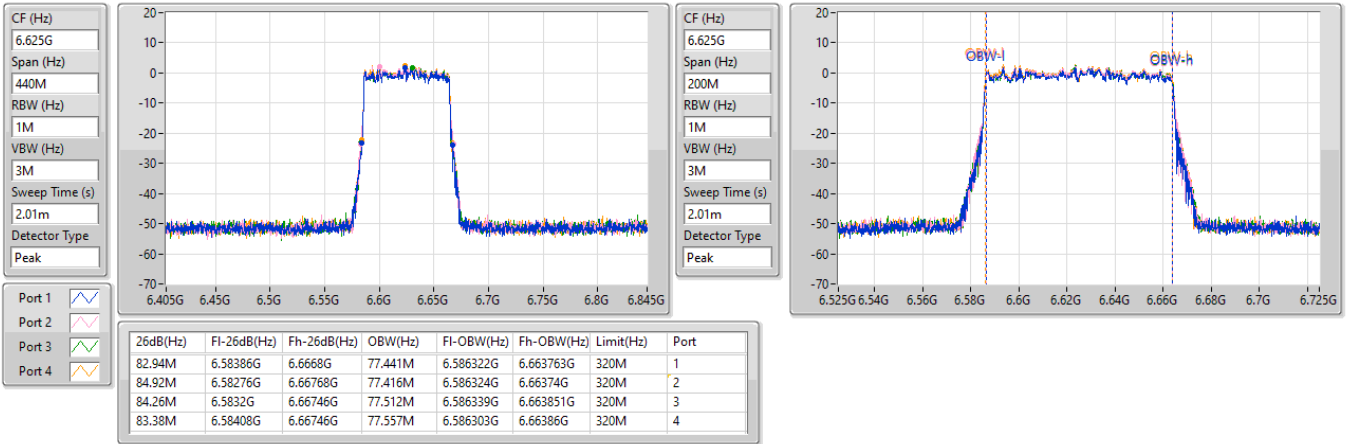


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6705MHz

05/08/2026


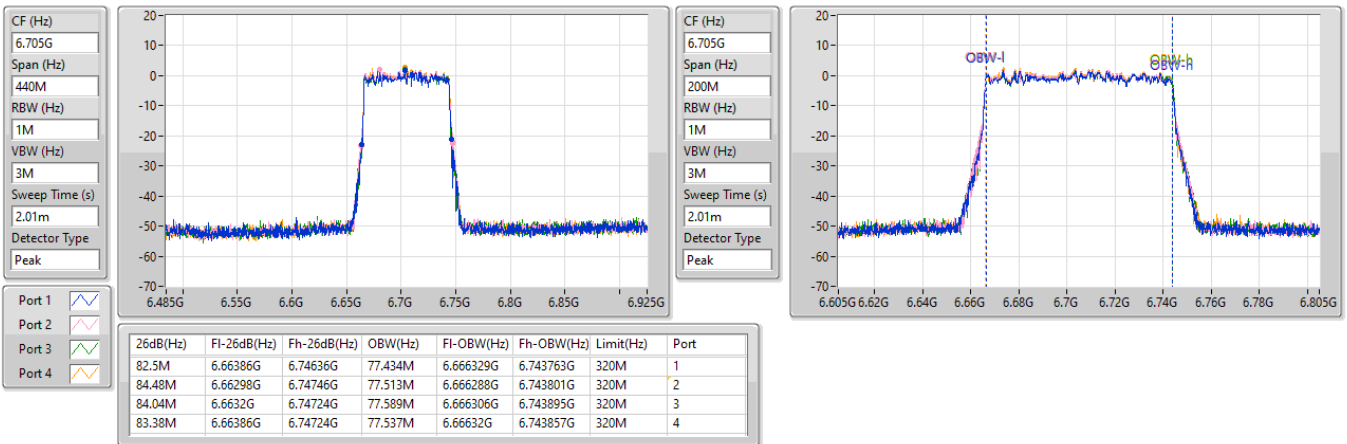


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX
EBW
6785MHz

05/08/2026

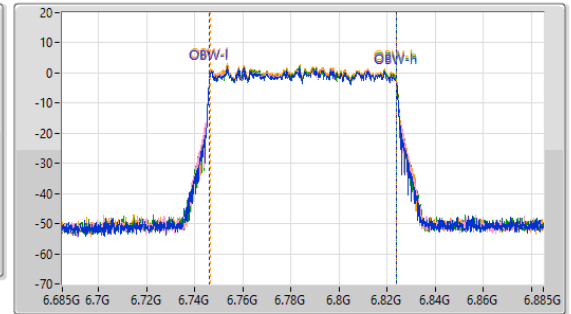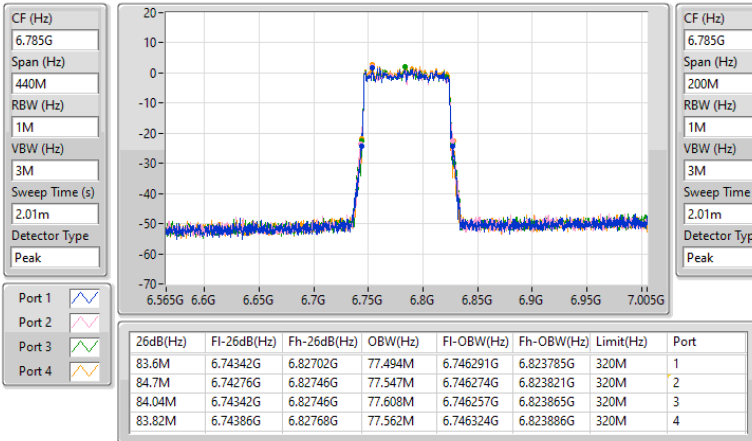
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX
EBW
6865MHz

05/08/2026

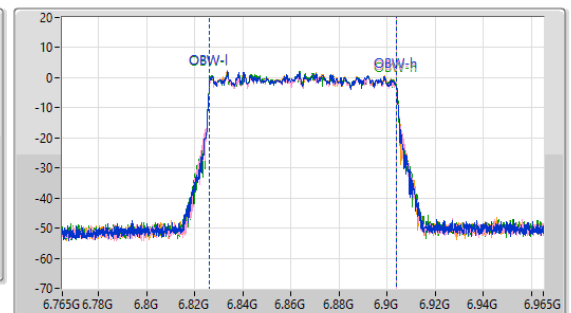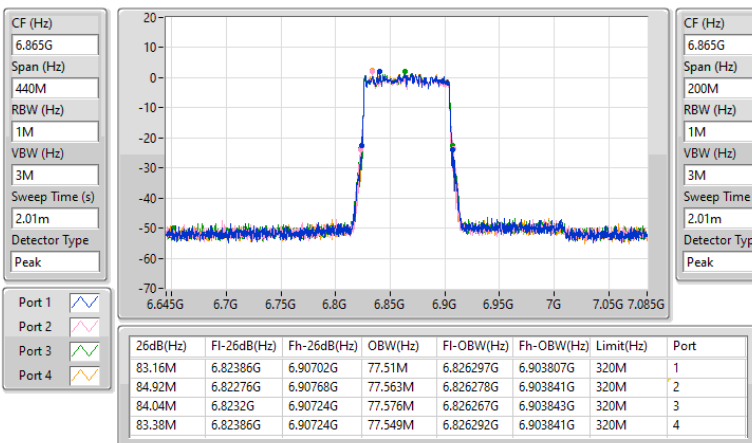


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6945MHz

05/08/2026

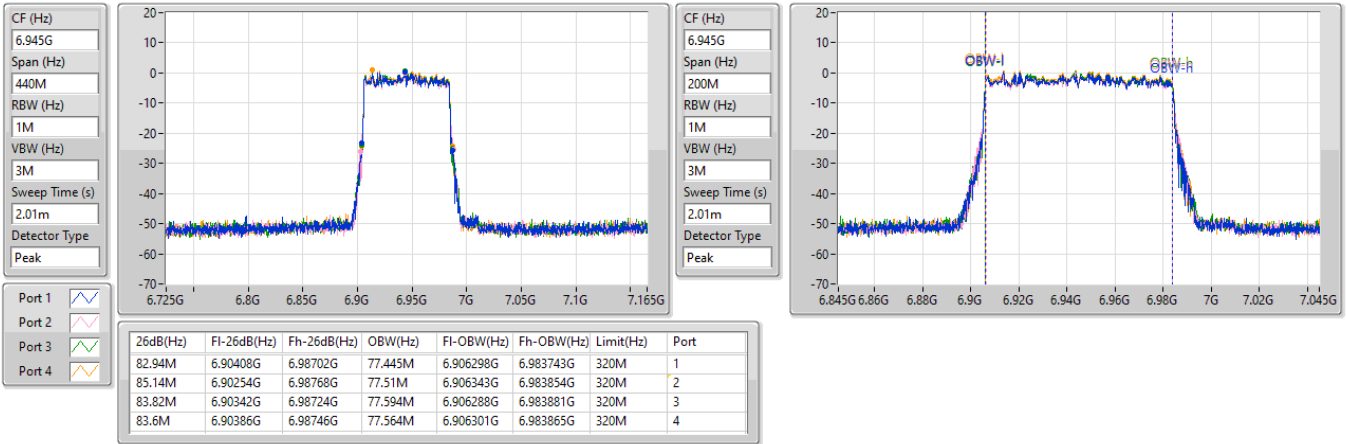


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

7025MHz

05/08/2026


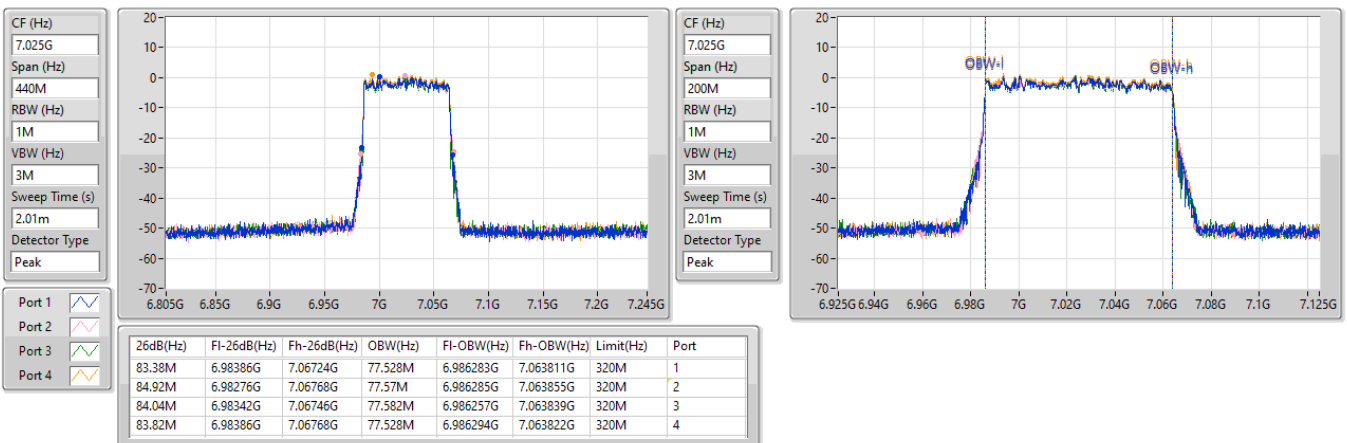


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6025MHz

05/08/2026

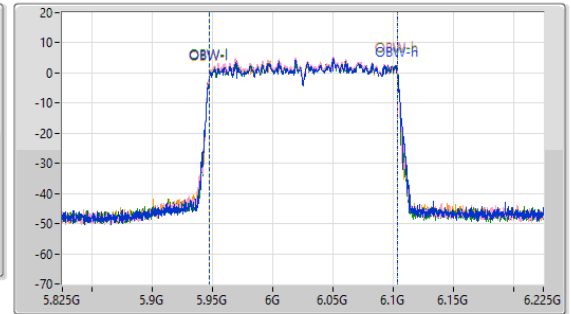
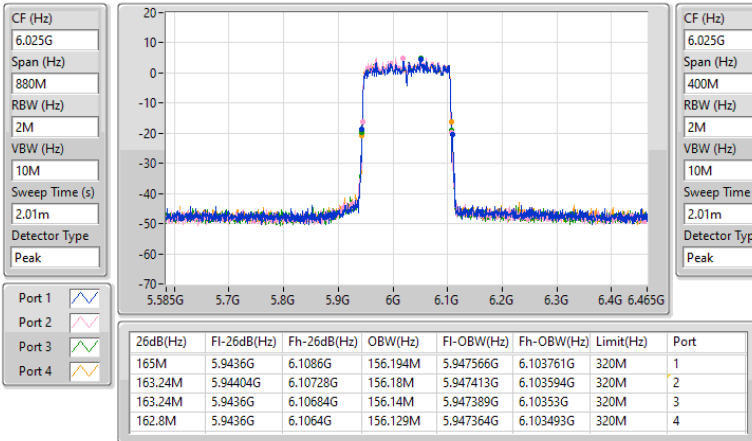


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6185MHz

05/08/2026

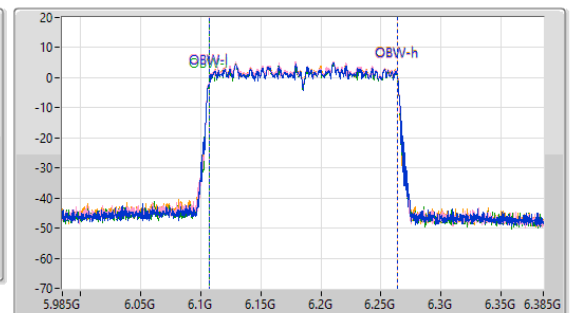
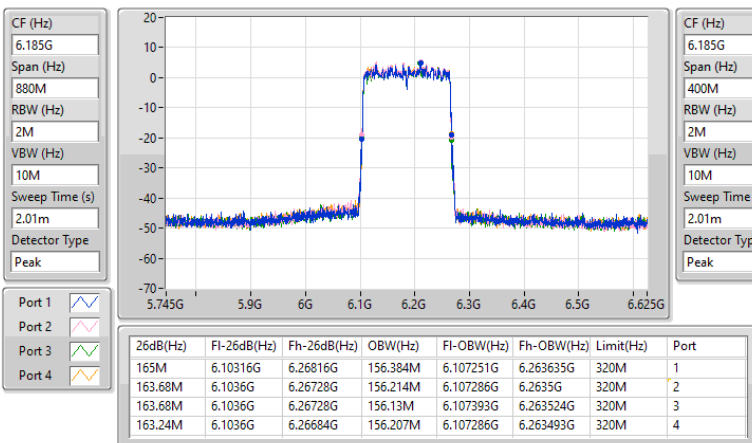


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6345MHz

05/08/2026

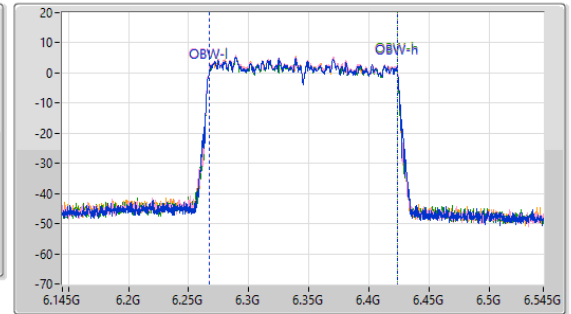
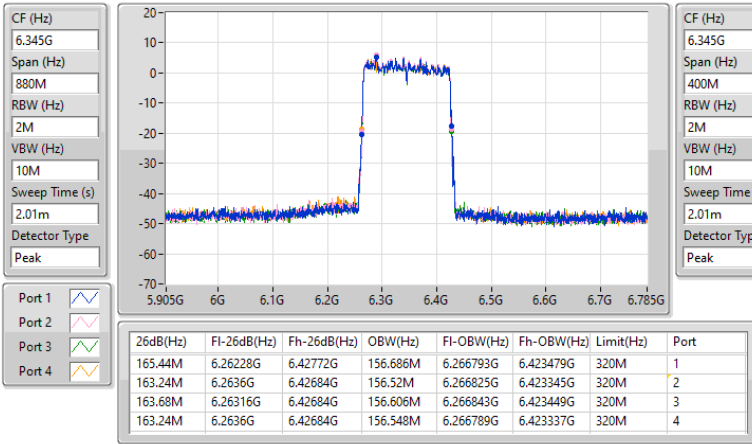


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6505MHz

05/08/2026

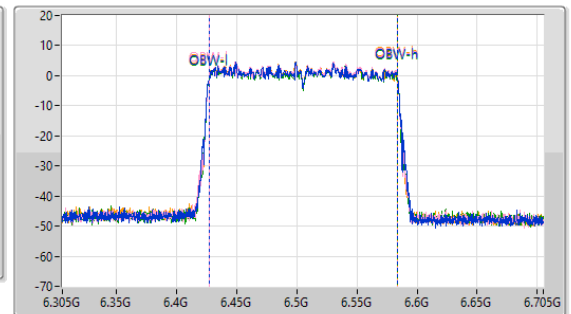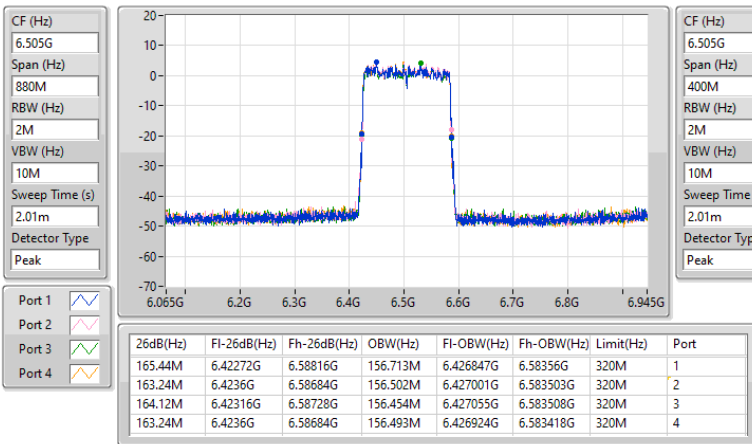


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6665MHz

05/08/2026

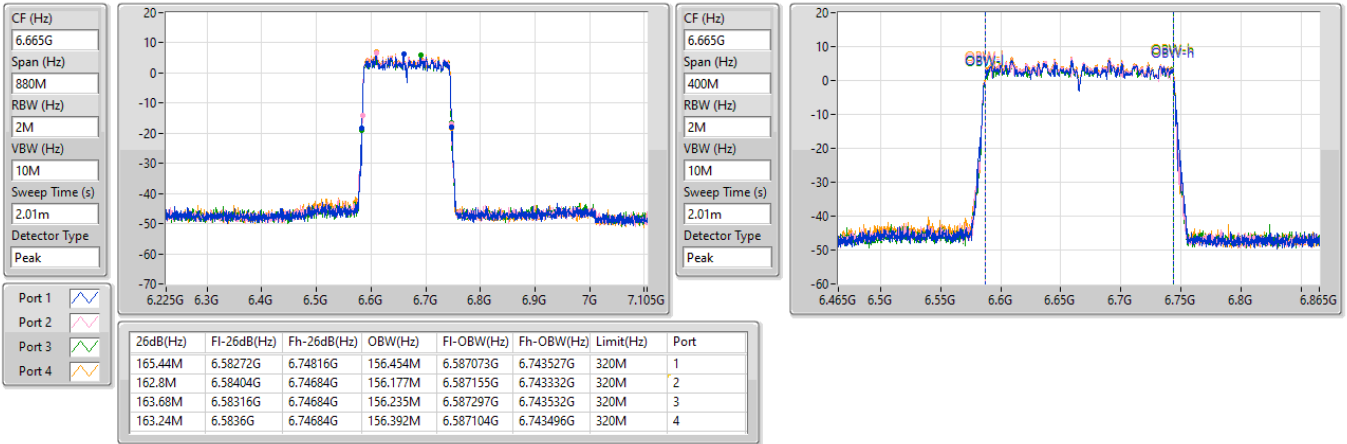


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6825MHz

05/08/2026

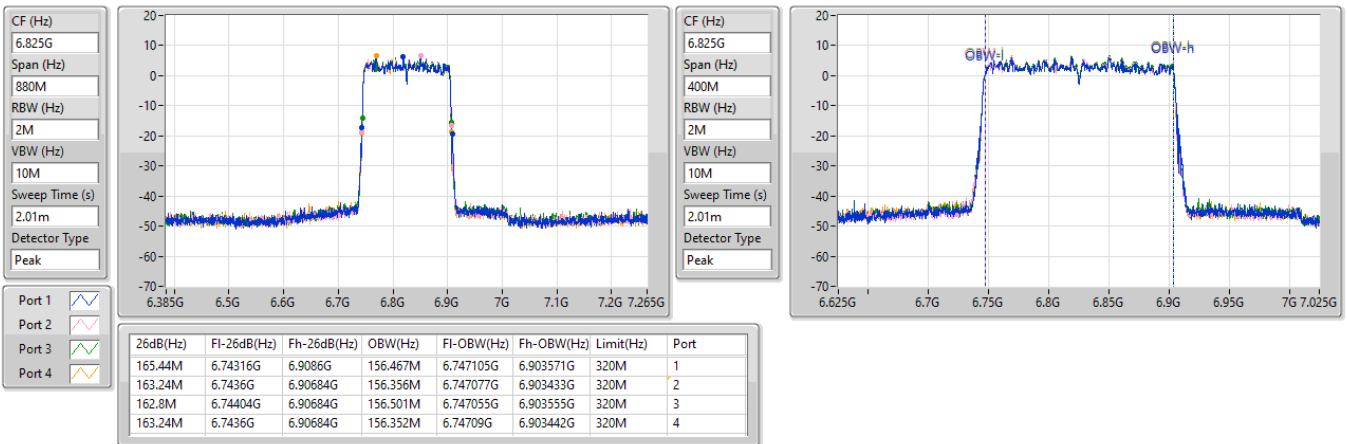


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX
EBW
6985MHz

05/08/2026

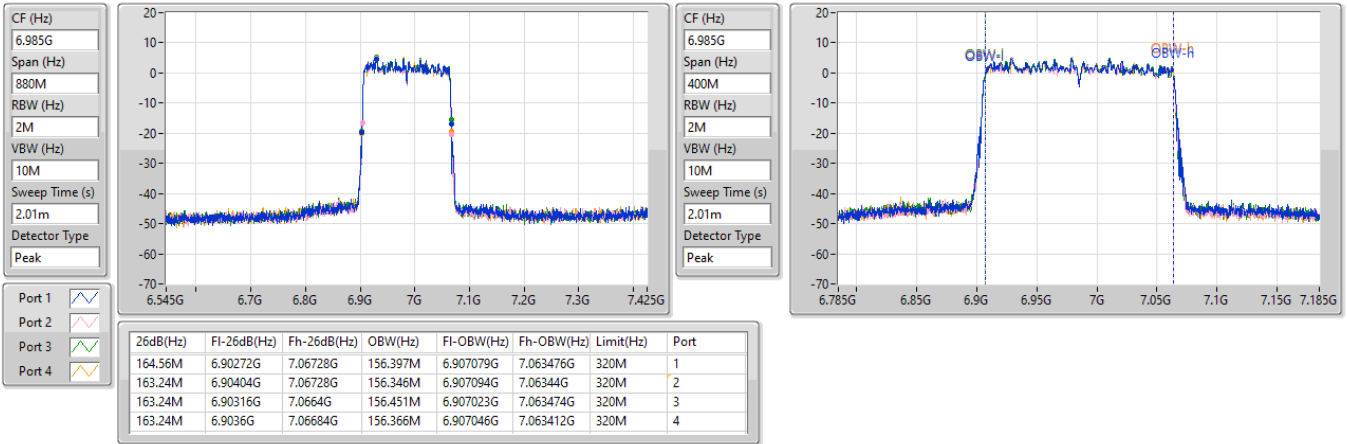

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX
EBW
6105MHz

05/08/2026

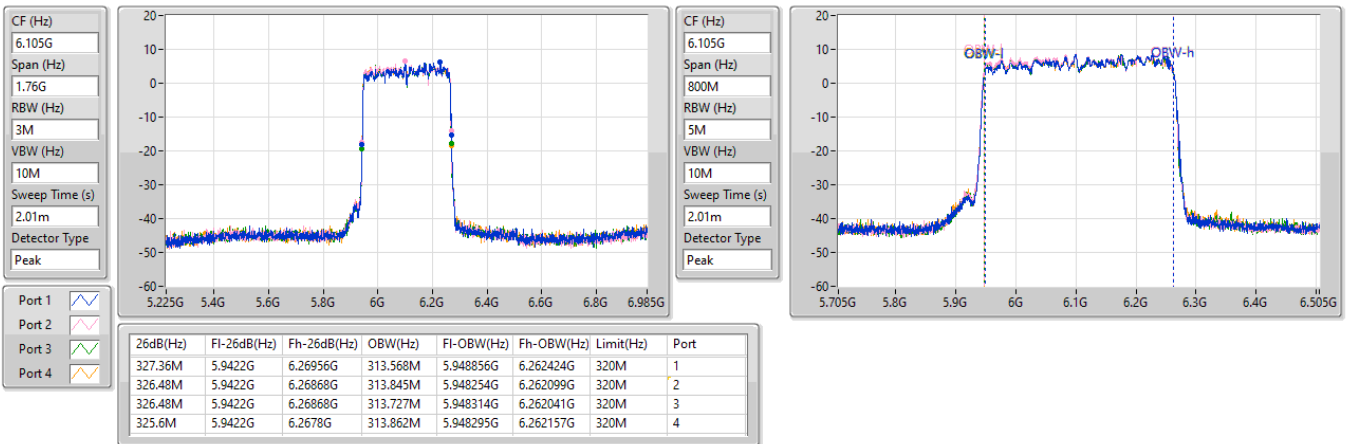


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX
EBW
6425MHz

05/08/2026

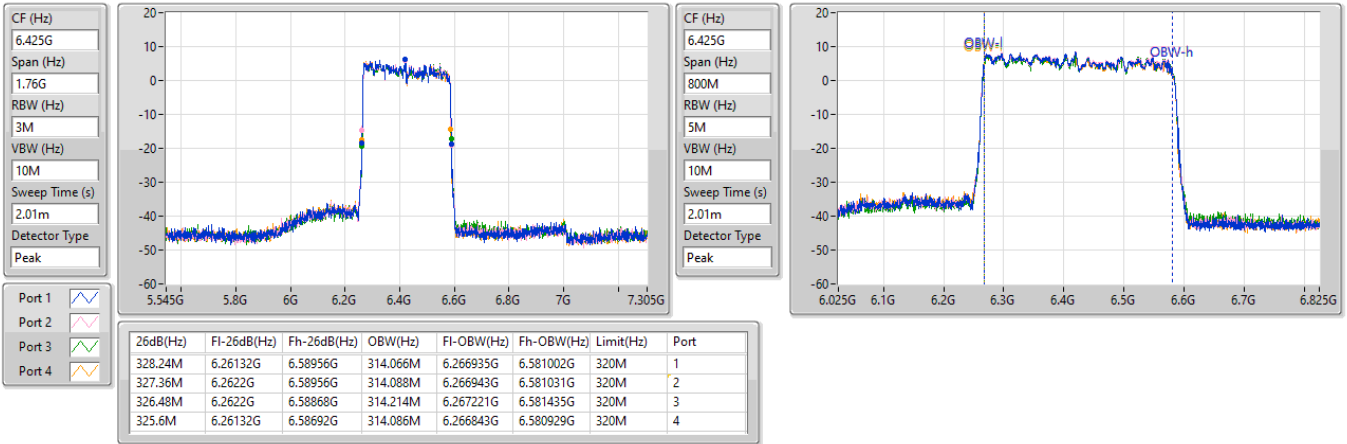
6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX
EBW
6745MHz

05/08/2026

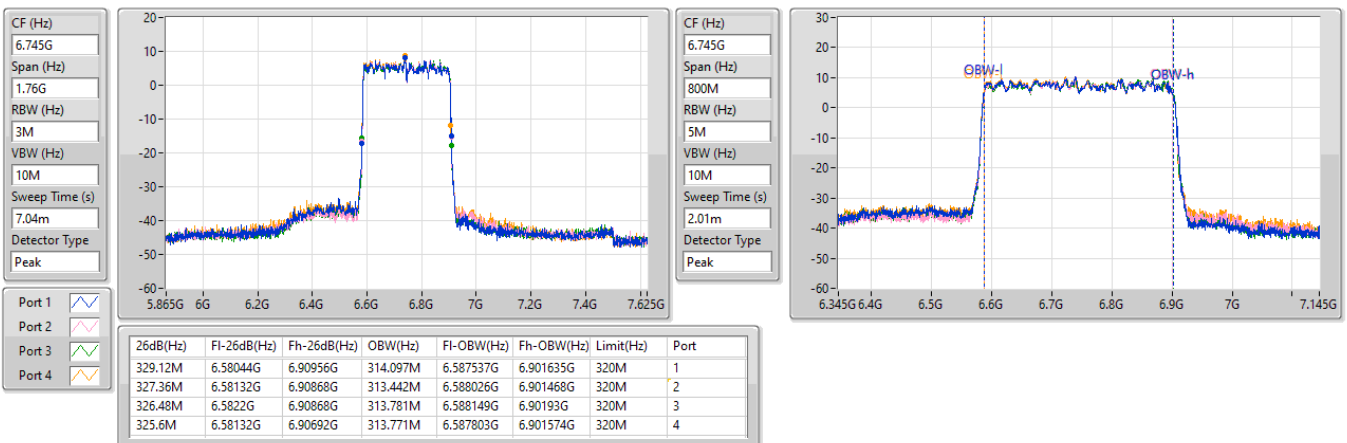

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	10.54	0.01132	15.44	0.03499
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.54	0.01132	18.02	0.06339
802.11be EHT40_Nss1,(MCS0)_4TX	13.30	0.02138	18.20	0.06607
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.30	0.02138	20.78	0.11967
802.11be EHT80_Nss1,(MCS0)_4TX	16.67	0.04645	21.57	0.14355
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.67	0.04645	24.15	0.26002
802.11be EHT160_Nss1,(MCS0)_4TX	19.48	0.08872	24.38	0.27416
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.48	0.08872	26.96	0.49659
802.11be EHT320_Nss1,(MCS0)_4TX	22.20	0.16596	27.10	0.51286
802.11be EHT320-BF_Nss1,(MCS0)_4TX	22.20	0.16596	29.68	0.92897
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	10.25	0.01059	15.19	0.03304
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.25	0.01059	18.13	0.06501
802.11be EHT40_Nss1,(MCS0)_4TX	13.28	0.02128	18.22	0.06637
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.28	0.02128	21.16	0.13062
802.11be EHT80_Nss1,(MCS0)_4TX	16.42	0.04385	21.36	0.13677
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.42	0.04385	24.30	0.26915
802.11be EHT160_Nss1,(MCS0)_4TX	18.72	0.07447	23.66	0.23227
802.11be EHT160-BF_Nss1,(MCS0)_4TX	18.72	0.07447	26.60	0.45709
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	11.93	0.01560	16.78	0.04764
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.93	0.01560	18.05	0.06383
802.11be EHT40_Nss1,(MCS0)_4TX	14.80	0.03020	19.65	0.09226
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.80	0.03020	20.92	0.12359
802.11be EHT80_Nss1,(MCS0)_4TX	18.10	0.06457	22.95	0.19724
802.11be EHT80-BF_Nss1,(MCS0)_4TX	18.10	0.06457	24.22	0.26424
802.11be EHT160_Nss1,(MCS0)_4TX	20.71	0.11776	25.56	0.35975
802.11be EHT160-BF_Nss1,(MCS0)_4TX	20.71	0.11776	26.83	0.48195
802.11be EHT320_Nss1,(MCS0)_4TX	23.56	0.22699	28.41	0.69343
802.11be EHT320-BF_Nss1,(MCS0)_4TX	23.56	0.22699	29.68	0.92897
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	10.19	0.01045	15.11	0.03243
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.19	0.01045	18.05	0.06383
802.11be EHT40_Nss1,(MCS0)_4TX	13.28	0.02128	18.20	0.06607
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.28	0.02128	21.14	0.13002
802.11be EHT80_Nss1,(MCS0)_4TX	16.50	0.04467	21.42	0.13868
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.50	0.04467	24.36	0.27290
802.11be EHT160_Nss1,(MCS0)_4TX	19.22	0.08356	24.14	0.25942
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.22	0.08356	27.08	0.51050

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	4.90	3.44	4.69	3.76	5.35	10.40	Inf	15.30	30.00
6195MHz	Pass	4.90	4.30	4.54	3.74	4.96	10.43	Inf	15.33	30.00
6415MHz	Pass	4.90	4.90	4.41	3.95	4.76	10.54	Inf	15.44	30.00
6435MHz	Pass	4.94	4.15	3.50	3.27	4.02	9.77	Inf	14.71	30.00
6475MHz	Pass	4.94	4.20	3.75	3.16	4.10	9.84	Inf	14.78	30.00
6515MHz	Pass	4.94	4.26	4.08	4.21	4.38	10.25	Inf	15.19	30.00
6535MHz	Pass	4.85	5.73	5.99	5.75	6.09	11.91	Inf	16.76	30.00
6695MHz	Pass	4.85	5.23	5.90	6.14	6.29	11.93	Inf	16.78	30.00
6855MHz	Pass	4.85	5.27	5.52	6.39	6.08	11.86	Inf	16.71	30.00
6875MHz	Pass	4.85	5.55	5.81	6.11	5.85	11.86	Inf	16.71	30.00
6995MHz	Pass	4.92	3.87	4.15	4.23	4.40	10.19	Inf	15.11	30.00
7095MHz	Pass	4.92	3.45	4.18	4.05	4.36	10.04	Inf	14.96	30.00
7115MHz	Pass	4.92	0.80	1.57	0.94	2.16	7.42	Inf	12.34	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	4.90	6.25	7.40	6.76	7.98	13.17	Inf	18.07	30.00
6205MHz	Pass	4.90	7.22	6.94	7.24	7.68	13.30	Inf	18.20	30.00
6405MHz	Pass	4.90	7.56	6.71	6.75	7.30	13.12	Inf	18.02	30.00
6445MHz	Pass	4.94	7.28	7.21	7.10	7.43	13.28	Inf	18.22	30.00
6485MHz	Pass	4.94	6.75	6.60	6.46	6.91	12.70	Inf	17.64	30.00
6525MHz	Pass	4.94	7.06	7.35	7.06	7.40	13.24	Inf	18.18	30.00
6565MHz	Pass	4.85	8.59	9.03	8.60	8.87	14.80	Inf	19.65	30.00
6685MHz	Pass	4.85	8.71	8.75	8.35	8.93	14.71	Inf	19.56	30.00
6845MHz	Pass	4.85	8.35	8.57	8.89	8.54	14.61	Inf	19.46	30.00
6885MHz	Pass	4.85	8.65	8.21	8.57	8.88	14.60	Inf	19.45	30.00
7005MHz	Pass	4.92	6.59	6.75	7.20	7.18	12.96	Inf	17.88	30.00
7085MHz	Pass	4.92	6.96	7.00	7.36	7.66	13.28	Inf	18.20	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	4.90	9.66	10.82	10.23	10.74	16.41	Inf	21.31	30.00
6225MHz	Pass	4.90	10.36	10.72	10.67	10.84	16.67	Inf	21.57	30.00
6385MHz	Pass	4.90	10.21	10.74	10.35	10.56	16.49	Inf	21.39	30.00
6465MHz	Pass	4.94	10.36	10.60	9.96	10.66	16.42	Inf	21.36	30.00
6545MHz	Pass	4.94	9.93	10.39	9.96	10.27	16.16	Inf	21.10	30.00
6625MHz	Pass	4.85	11.60	12.14	12.02	12.40	18.07	Inf	22.92	30.00
6705MHz	Pass	4.85	11.73	12.20	11.91	12.43	18.10	Inf	22.95	30.00
6785MHz	Pass	4.85	11.61	11.72	11.90	12.49	17.96	Inf	22.81	30.00
6865MHz	Pass	4.85	11.74	11.43	11.79	11.98	17.76	Inf	22.61	30.00
6945MHz	Pass	4.92	10.02	9.80	10.21	10.66	16.20	Inf	21.12	30.00
7025MHz	Pass	4.92	10.38	10.31	10.14	11.05	16.50	Inf	21.42	30.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	4.90	12.70	13.53	13.22	13.29	19.22	Inf	24.12	30.00
6185MHz	Pass	4.90	13.04	13.61	13.09	13.56	19.35	Inf	24.25	30.00
6345MHz	Pass	4.90	13.23	13.70	13.31	13.58	19.48	Inf	24.38	30.00
6505MHz	Pass	4.94	12.58	12.92	12.42	12.87	18.72	Inf	23.66	30.00
6665MHz	Pass	4.85	14.36	14.86	14.40	15.10	20.71	Inf	25.56	30.00
6825MHz	Pass	4.85	14.36	14.49	14.74	14.67	20.59	Inf	25.44	30.00
6985MHz	Pass	4.92	13.14	13.01	13.35	13.30	19.22	Inf	24.14	30.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	4.90	15.92	16.36	16.21	16.21	22.20	Inf	27.10	30.00
6425MHz	Pass	4.90	15.68	15.81	15.57	15.53	21.67	Inf	26.57	30.00
6745MHz	Pass	4.85	17.39	17.48	17.50	17.77	23.56	Inf	28.41	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	7.48	3.44	4.69	3.76	5.35	10.40	Inf	17.88	30.00
6195MHz	Pass	7.48	4.30	4.54	3.74	4.96	10.43	Inf	17.91	30.00
6415MHz	Pass	7.48	4.90	4.41	3.95	4.76	10.54	Inf	18.02	30.00



Average Power

Appendix C

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6435MHz	Pass	7.88	4.15	3.50	3.27	4.02	9.77	Inf	17.65	30.00
6475MHz	Pass	7.88	4.20	3.75	3.16	4.10	9.84	Inf	17.72	30.00
6515MHz	Pass	7.88	4.26	4.08	4.21	4.38	10.25	Inf	18.13	30.00
6535MHz	Pass	6.12	5.73	5.99	5.75	6.09	11.91	Inf	18.03	30.00
6695MHz	Pass	6.12	5.23	5.90	6.14	6.29	11.93	Inf	18.05	30.00
6855MHz	Pass	6.12	5.27	5.52	6.39	6.08	11.86	Inf	17.98	30.00
6875MHz	Pass	6.12	5.55	5.81	6.11	5.85	11.86	Inf	17.98	30.00
6995MHz	Pass	7.86	3.87	4.15	4.23	4.40	10.19	Inf	18.05	30.00
7095MHz	Pass	7.86	3.45	4.18	4.05	4.36	10.04	Inf	17.90	30.00
7115MHz	Pass	7.86	0.80	1.57	0.94	2.16	7.42	Inf	15.28	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	7.48	6.25	7.40	6.76	7.98	13.17	Inf	20.65	30.00
6205MHz	Pass	7.48	7.22	6.94	7.24	7.68	13.30	Inf	20.78	30.00
6405MHz	Pass	7.48	7.56	6.71	6.75	7.30	13.12	Inf	20.60	30.00
6445MHz	Pass	7.88	7.28	7.21	7.10	7.43	13.28	Inf	21.16	30.00
6485MHz	Pass	7.88	6.75	6.60	6.46	6.91	12.70	Inf	20.58	30.00
6525MHz	Pass	7.88	7.06	7.35	7.06	7.40	13.24	Inf	21.12	30.00
6565MHz	Pass	6.12	8.59	9.03	8.60	8.87	14.80	Inf	20.92	30.00
6685MHz	Pass	6.12	8.71	8.75	8.35	8.93	14.71	Inf	20.83	30.00
6845MHz	Pass	6.12	8.35	8.57	8.89	8.54	14.61	Inf	20.73	30.00
6885MHz	Pass	6.12	8.65	8.21	8.57	8.88	14.60	Inf	20.72	30.00
7005MHz	Pass	7.86	6.59	6.75	7.20	7.18	12.96	Inf	20.82	30.00
7085MHz	Pass	7.86	6.96	7.00	7.36	7.66	13.28	Inf	21.14	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.48	9.66	10.82	10.23	10.74	16.41	Inf	23.89	30.00
6225MHz	Pass	7.48	10.36	10.72	10.67	10.84	16.67	Inf	24.15	30.00
6385MHz	Pass	7.48	10.21	10.74	10.35	10.56	16.49	Inf	23.97	30.00
6465MHz	Pass	7.88	10.36	10.60	9.96	10.66	16.42	Inf	24.30	30.00
6545MHz	Pass	7.88	9.93	10.39	9.96	10.27	16.16	Inf	24.04	30.00
6625MHz	Pass	6.12	11.60	12.14	12.02	12.40	18.07	Inf	24.19	30.00
6705MHz	Pass	6.12	11.73	12.20	11.91	12.43	18.10	Inf	24.22	30.00
6785MHz	Pass	6.12	11.61	11.72	11.90	12.49	17.96	Inf	24.08	30.00
6865MHz	Pass	6.12	11.74	11.43	11.79	11.98	17.76	Inf	23.88	30.00
6945MHz	Pass	7.86	10.02	9.80	10.21	10.66	16.20	Inf	24.06	30.00
7025MHz	Pass	7.86	10.38	10.31	10.14	11.05	16.50	Inf	24.36	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.48	12.70	13.53	13.22	13.29	19.22	Inf	26.70	30.00
6185MHz	Pass	7.48	13.04	13.61	13.09	13.56	19.35	Inf	26.83	30.00
6345MHz	Pass	7.48	13.23	13.70	13.31	13.58	19.48	Inf	26.96	30.00
6505MHz	Pass	7.88	12.58	12.92	12.42	12.87	18.72	Inf	26.60	30.00
6665MHz	Pass	6.12	14.36	14.86	14.40	15.10	20.71	Inf	26.83	30.00
6825MHz	Pass	6.12	14.36	14.49	14.74	14.67	20.59	Inf	26.71	30.00
6985MHz	Pass	7.86	13.14	13.01	13.35	13.30	19.22	Inf	27.08	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.48	15.92	16.36	16.21	16.21	22.20	Inf	29.68	30.00
6425MHz	Pass	7.48	15.68	15.81	15.57	15.53	21.67	Inf	29.15	30.00
6745MHz	Pass	6.12	17.39	17.48	17.50	17.77	23.56	Inf	29.68	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-2.66	4.82
802.11be EHT40_Nss1,(MCS0)_4TX	-2.66	4.82
802.11be EHT80_Nss1,(MCS0)_4TX	-2.75	4.73
802.11be EHT160_Nss1,(MCS0)_4TX	-2.53	4.95
802.11be EHT320_Nss1,(MCS0)_4TX	-2.87	4.61
6.425-6.525GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-2.93	4.95
802.11be EHT40_Nss1,(MCS0)_4TX	-2.90	4.98
802.11be EHT80_Nss1,(MCS0)_4TX	-2.92	4.96
802.11be EHT160_Nss1,(MCS0)_4TX	-3.14	4.74
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-1.17	4.95
802.11be EHT40_Nss1,(MCS0)_4TX	-1.16	4.96
802.11be EHT80_Nss1,(MCS0)_4TX	-1.33	4.79
802.11be EHT160_Nss1,(MCS0)_4TX	-1.28	4.84
802.11be EHT320_Nss1,(MCS0)_4TX	-1.45	4.67
6.875-7.125GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-2.95	4.91
802.11be EHT40_Nss1,(MCS0)_4TX	-3.02	4.84
802.11be EHT80_Nss1,(MCS0)_4TX	-2.91	4.95
802.11be EHT160_Nss1,(MCS0)_4TX	-2.88	4.98

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	7.48	-10.01	-8.52	-9.42	-7.80	-2.88	4.60	5.00
6195MHz	Pass	7.48	-9.08	-8.80	-9.56	-8.25	-2.88	4.60	5.00
6415MHz	Pass	7.48	-8.27	-8.85	-9.37	-8.33	-2.66	4.82	5.00
6435MHz	Pass	7.88	-8.94	-9.55	-9.77	-8.93	-3.27	4.61	5.00
6475MHz	Pass	7.88	-8.95	-9.31	-9.79	-8.90	-3.20	4.68	5.00
6515MHz	Pass	7.88	-8.88	-9.18	-9.09	-8.65	-2.93	4.95	5.00
6535MHz	Pass	6.12	-7.47	-7.10	-7.26	-6.87	-1.17	4.95	5.00
6695MHz	Pass	6.12	-7.83	-7.28	-7.12	-6.83	-1.23	4.89	5.00
6855MHz	Pass	6.12	-7.55	-7.65	-6.91	-6.85	-1.21	4.91	5.00
6875MHz	Pass	6.12	-7.65	-7.46	-7.12	-7.35	-1.38	4.74	5.00
6995MHz	Pass	7.86	-9.08	-9.11	-9.00	-8.60	-2.95	4.91	5.00
7095MHz	Pass	7.86	-9.57	-8.96	-9.03	-8.67	-3.04	4.82	5.00
7115MHz	Pass	7.86	-12.97	-12.24	-12.97	-11.64	-6.45	1.41	5.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5965MHz	Pass	7.48	-9.34	-8.40	-9.08	-7.93	-2.66	4.82	5.00
6205MHz	Pass	7.48	-8.80	-9.02	-8.72	-8.45	-2.74	4.74	5.00
6405MHz	Pass	7.48	-8.25	-9.09	-9.00	-8.56	-2.69	4.79	5.00
6445MHz	Pass	7.88	-8.96	-8.88	-9.02	-8.80	-2.92	4.96	5.00
6485MHz	Pass	7.88	-9.03	-9.31	-9.49	-8.66	-3.10	4.78	5.00
6525MHz	Pass	7.88	-9.19	-8.73	-8.81	-8.73	-2.90	4.98	5.00
6565MHz	Pass	6.12	-7.18	-6.86	-7.33	-7.03	-1.16	4.96	5.00
6685MHz	Pass	6.12	-7.34	-7.22	-7.57	-7.15	-1.32	4.80	5.00
6845MHz	Pass	6.12	-7.58	-7.43	-7.21	-7.54	-1.52	4.60	5.00
6885MHz	Pass	6.12	-7.13	-7.73	-7.43	-7.06	-1.33	4.79	5.00
7005MHz	Pass	7.86	-9.33	-9.47	-9.02	-8.92	-3.21	4.65	5.00
7085MHz	Pass	7.86	-9.22	-9.17	-8.94	-8.56	-3.02	4.84	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.48	-9.68	-8.58	-9.03	-8.60	-2.94	4.54	5.00
6225MHz	Pass	7.48	-9.05	-8.62	-8.74	-8.58	-2.75	4.73	5.00
6385MHz	Pass	7.48	-9.21	-8.44	-8.88	-8.80	-2.85	4.63	5.00
6465MHz	Pass	7.88	-8.96	-8.63	-9.30	-8.70	-2.92	4.96	5.00
6545MHz	Pass	7.88	-9.47	-8.91	-9.36	-9.10	-3.25	4.63	5.00
6625MHz	Pass	6.12	-7.80	-7.22	-7.29	-6.92	-1.33	4.79	5.00
6705MHz	Pass	6.12	-7.74	-7.12	-7.48	-6.98	-1.34	4.78	5.00
6785MHz	Pass	6.12	-7.87	-7.42	-7.46	-6.95	-1.43	4.69	5.00
6865MHz	Pass	6.12	-7.66	-7.67	-7.48	-7.38	-1.59	4.53	5.00
6945MHz	Pass	7.86	-9.27	-9.30	-9.08	-8.75	-3.18	4.68	5.00
7025MHz	Pass	7.86	-8.99	-8.85	-9.19	-8.35	-2.91	4.95	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.48	-9.11	-8.31	-8.73	-8.48	-2.64	4.84	5.00
6185MHz	Pass	7.48	-8.98	-8.37	-8.82	-8.10	-2.53	4.95	5.00
6345MHz	Pass	7.48	-8.93	-8.35	-8.59	-8.22	-2.60	4.88	5.00
6505MHz	Pass	7.88	-9.54	-8.91	-9.30	-8.92	-3.14	4.74	5.00
6665MHz	Pass	6.12	-7.57	-7.13	-7.59	-6.89	-1.28	4.84	5.00
6825MHz	Pass	6.12	-7.32	-7.44	-7.18	-7.18	-1.31	4.81	5.00
6985MHz	Pass	7.86	-8.86	-9.28	-8.81	-8.67	-2.88	4.98	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.48	-8.87	-8.75	-8.74	-8.74	-2.87	4.61	5.00
6425MHz	Pass	7.48	-8.76	-8.76	-9.16	-8.89	-2.89	4.59	5.00
6745MHz	Pass	6.12	-7.59	-7.53	-7.40	-6.93	-1.45	4.67	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz 802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5955MHz

05/08/2026

CF (Hz)
5.955G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.01
Detector Type
RMS

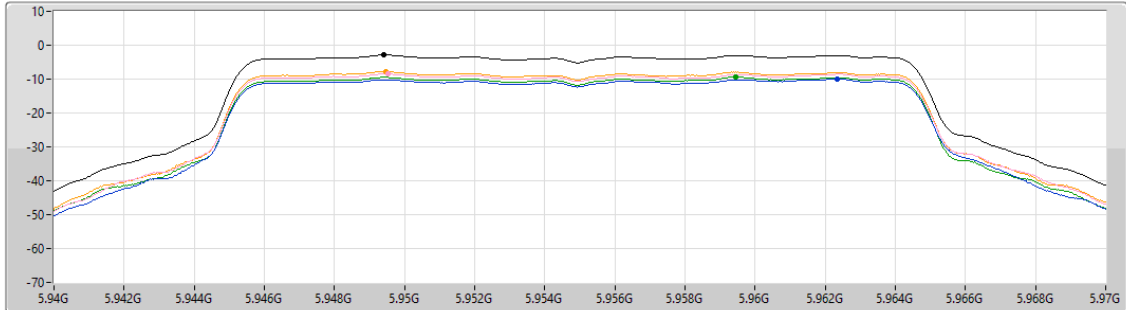

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.88	-2.88	-10.01	-8.52	-9.42	-7.80


5.925-6.425GHz 802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6195MHz

05/08/2026

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.01
Detector Type
RMS

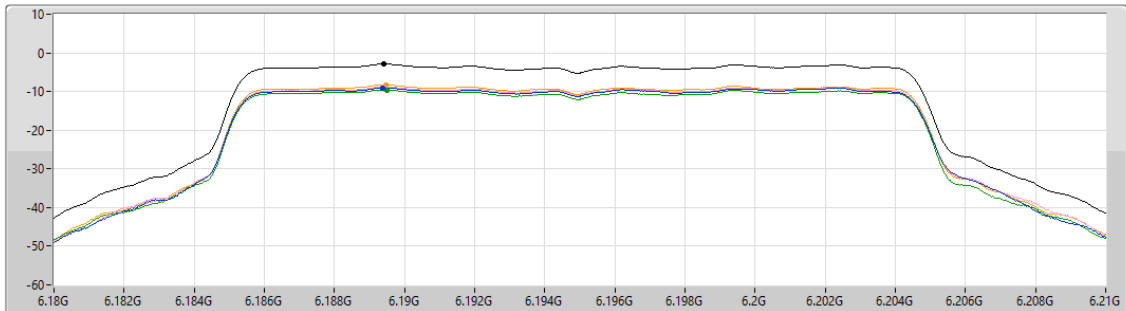

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.88	-2.88	-9.08	-8.80	-9.56	-8.25


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6415MHz

05/08/2026

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.01
Detector Type
RMS

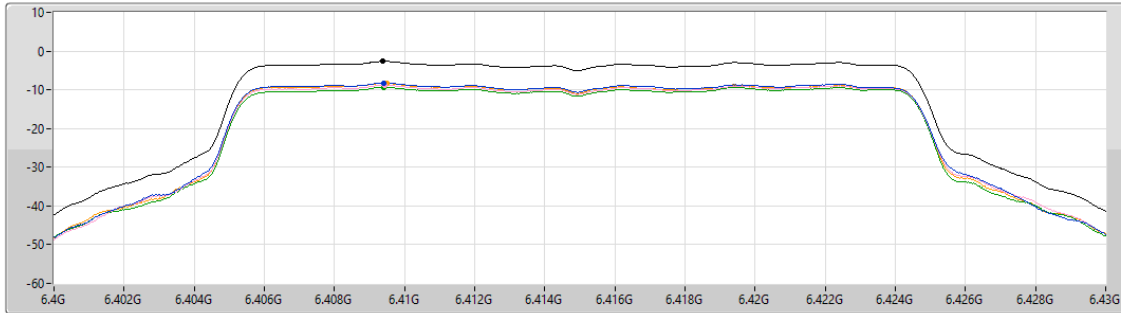

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.66	-2.66	-8.27	-8.85	-9.37	-8.33


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6435MHz

05/08/2026

CF (Hz)
6.435G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
10.01
Detector Type
RMS

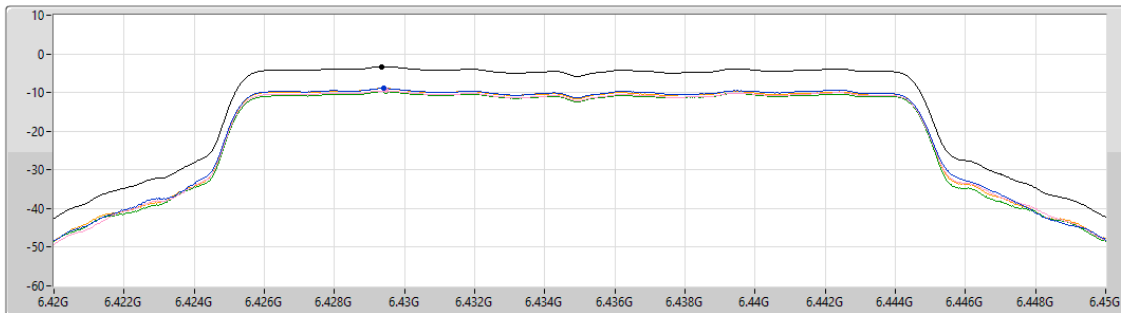


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.27	-3.27	-8.94	-9.55	-9.77	-8.93

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6475MHz

05/08/2026

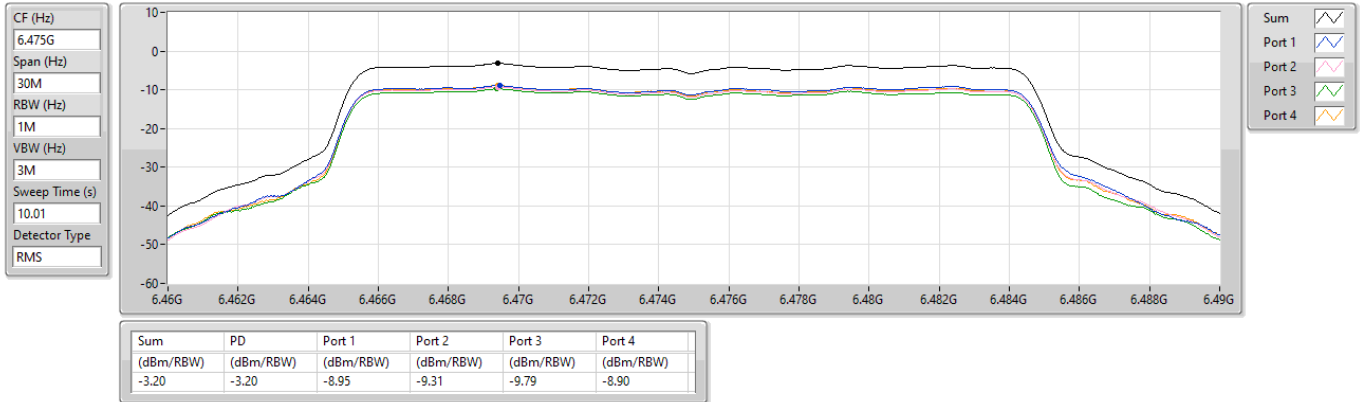


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6515MHz

05/08/2026

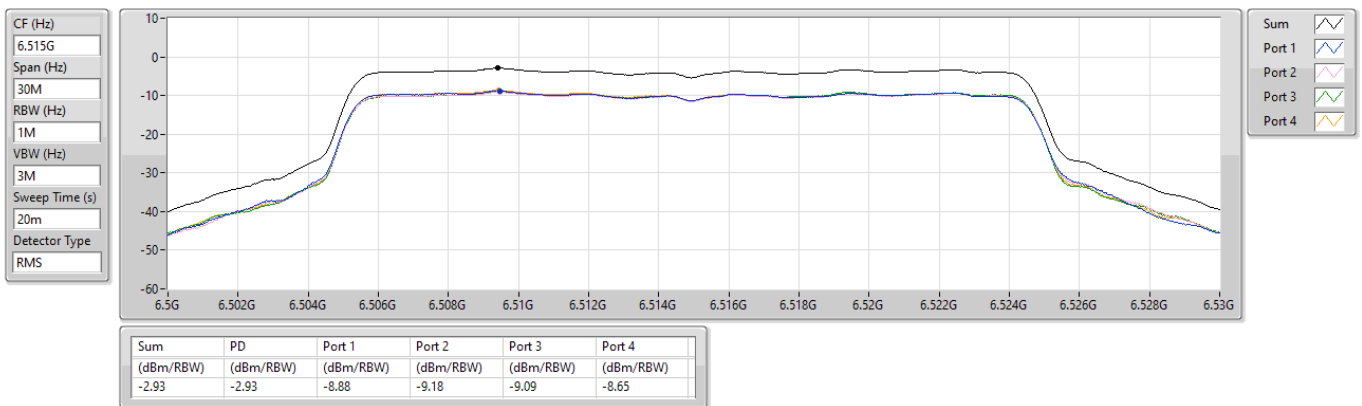


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6535MHz

05/08/2026

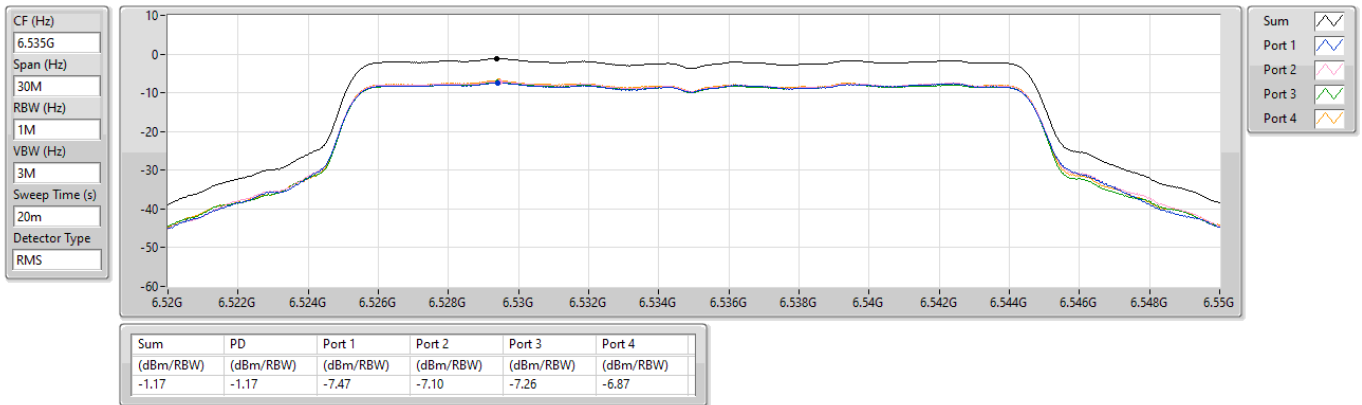


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6695MHz

05/08/2026

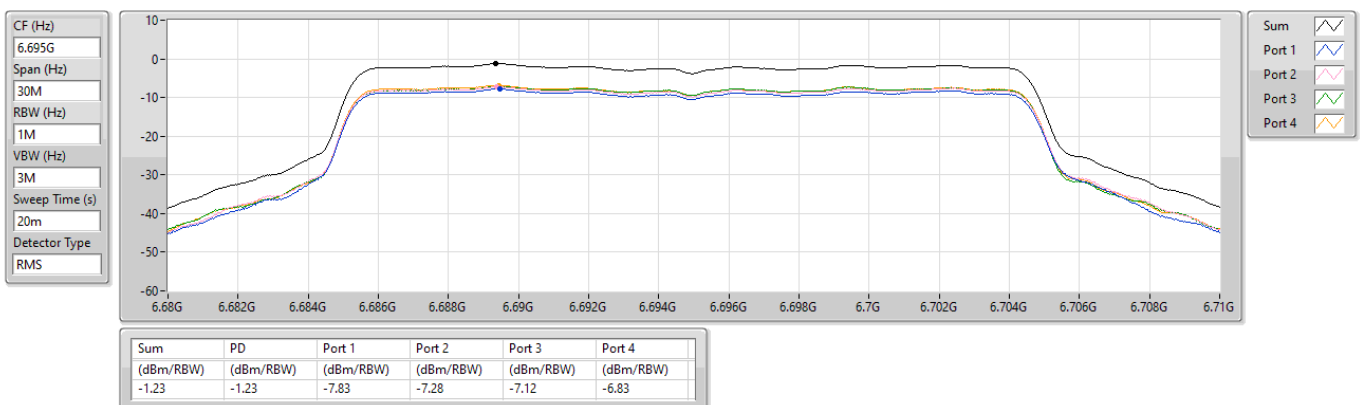


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6855MHz

05/08/2026

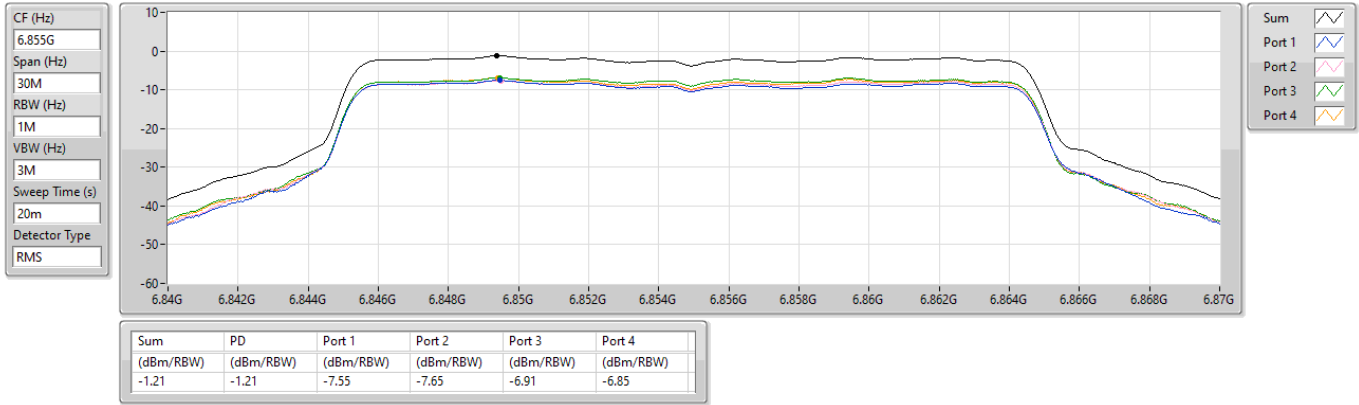


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6875MHz

05/08/2026

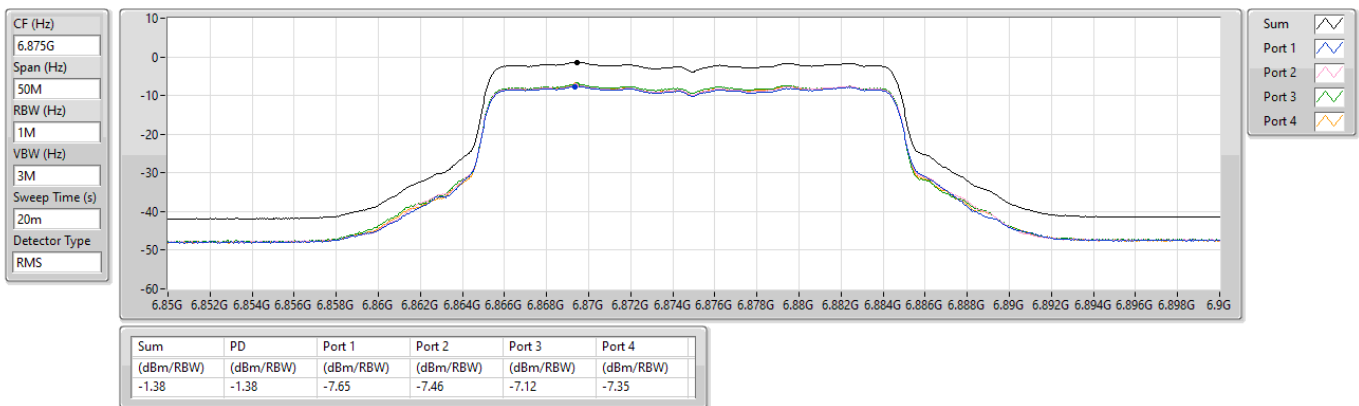


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6995MHz

05/08/2026

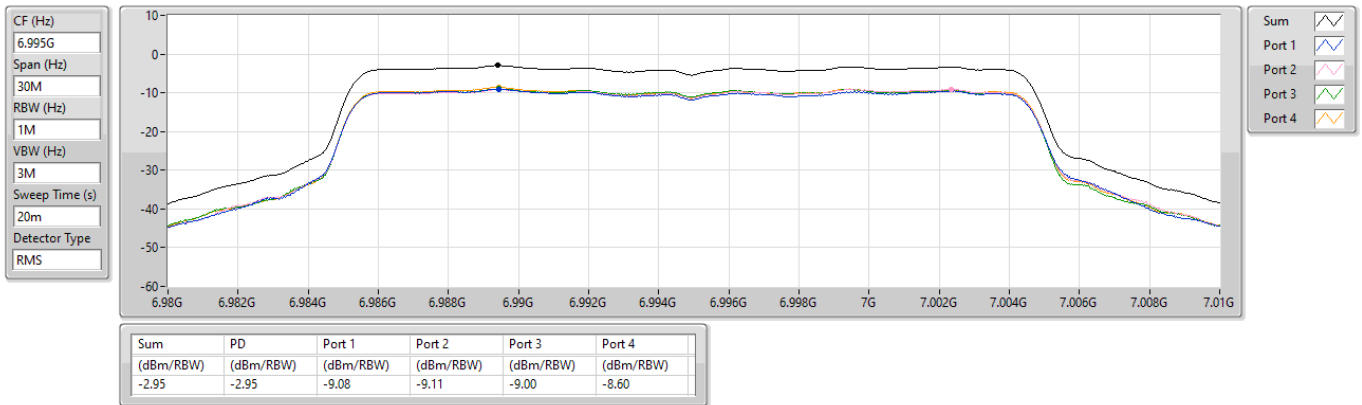


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7095MHz

05/08/2026

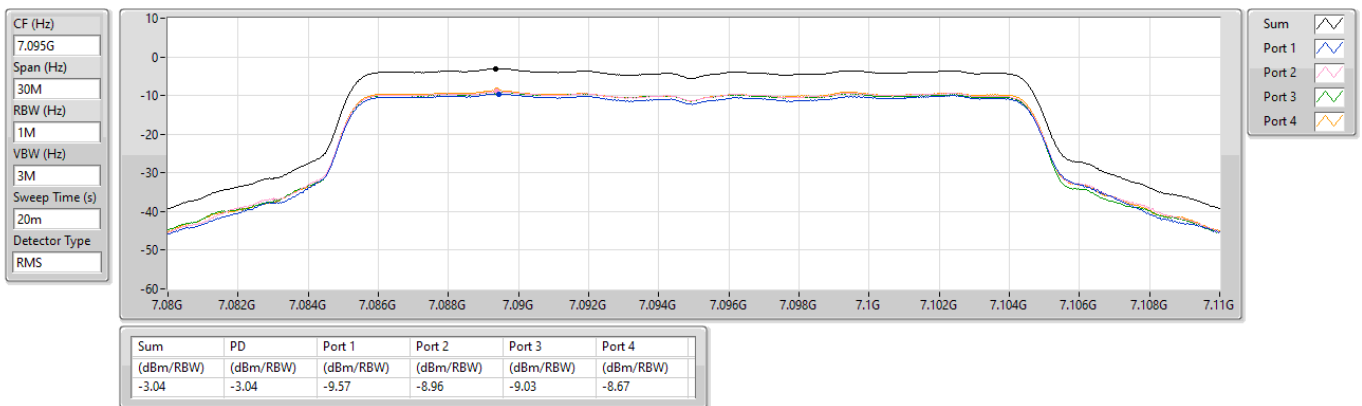


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7115MHz

05/08/2026

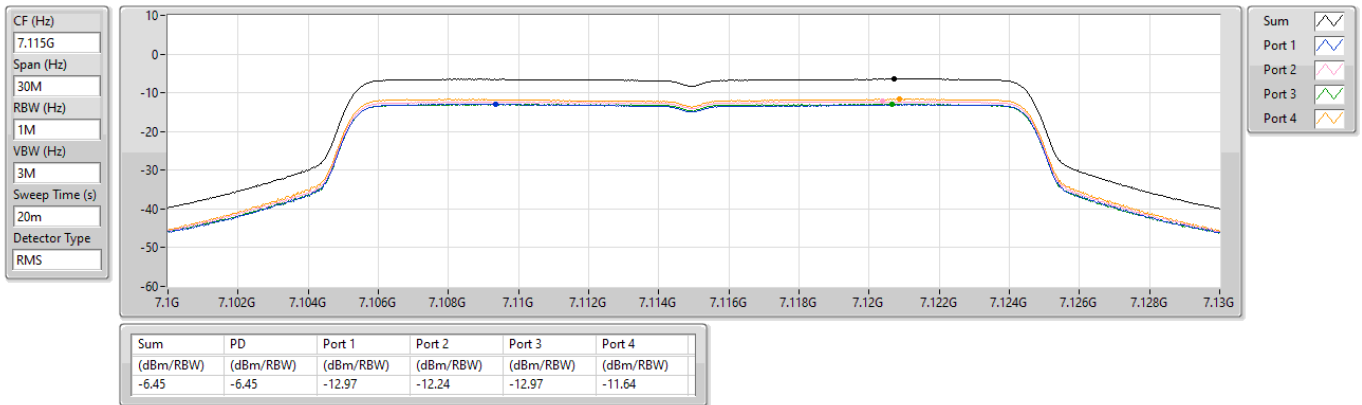


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5965MHz

05/08/2026

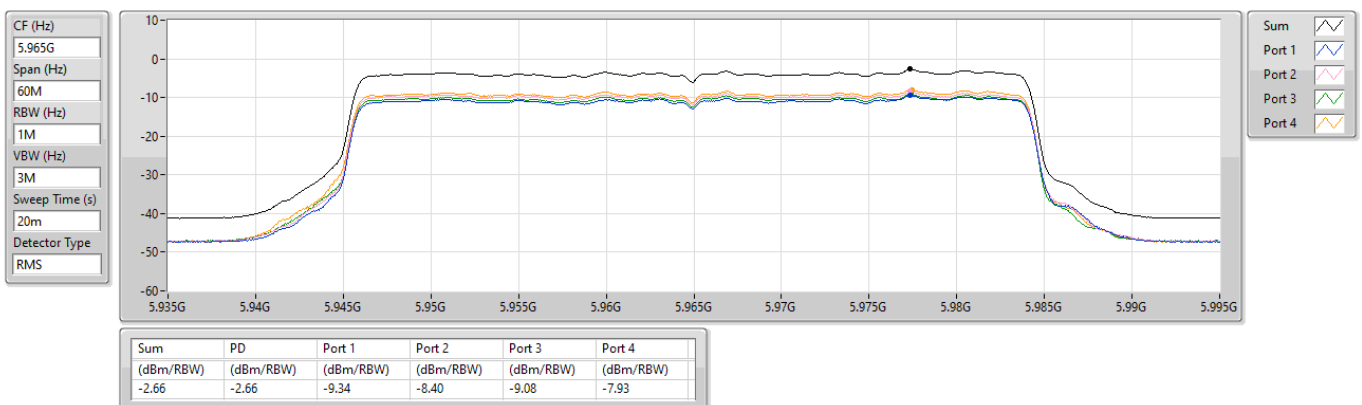


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6205MHz

05/08/2026

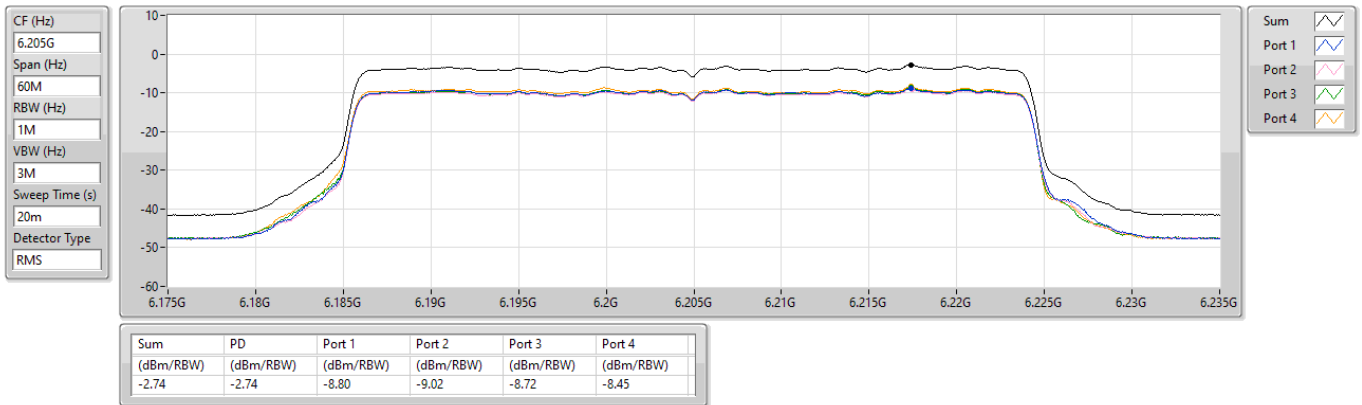


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6405MHz

05/08/2026

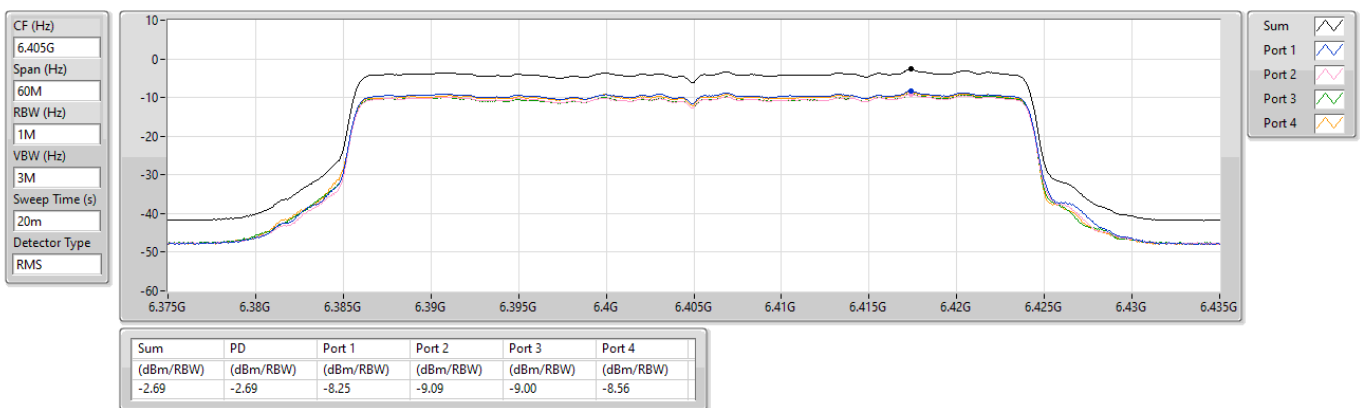


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6445MHz

05/08/2026

CF (Hz)
6.445G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

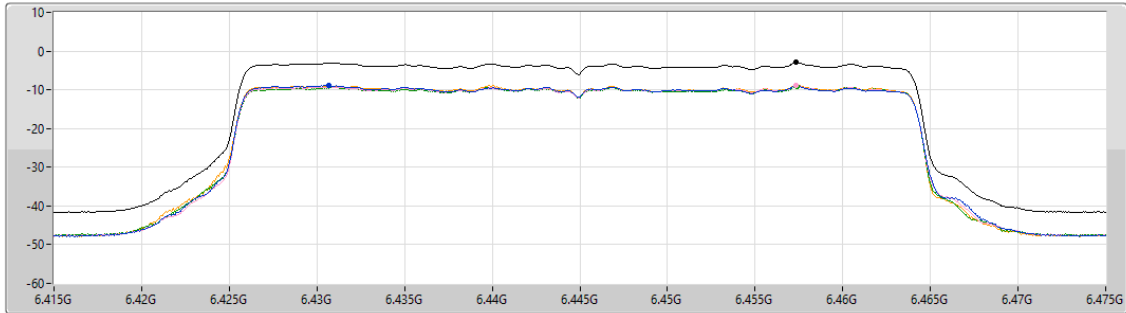

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.92	-2.92	-8.96	-8.88	-9.02	-8.80


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6485MHz

05/08/2026

CF (Hz)
6.485G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

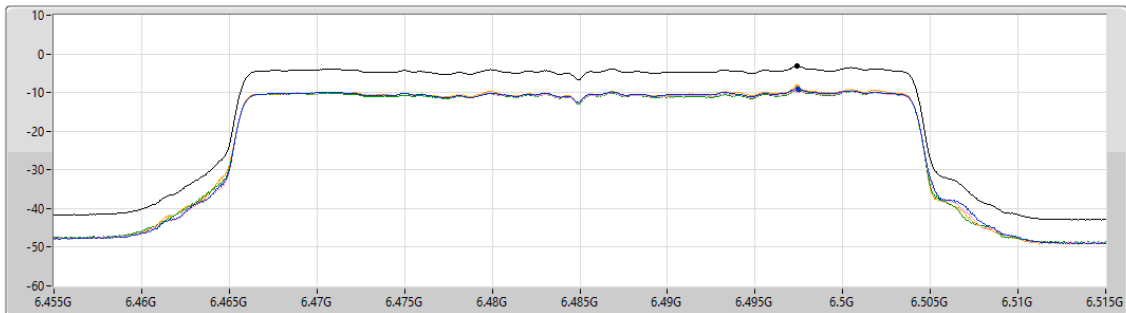


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.10	-3.10	-9.03	-9.31	-9.49	-8.66

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6525MHz

05/08/2026

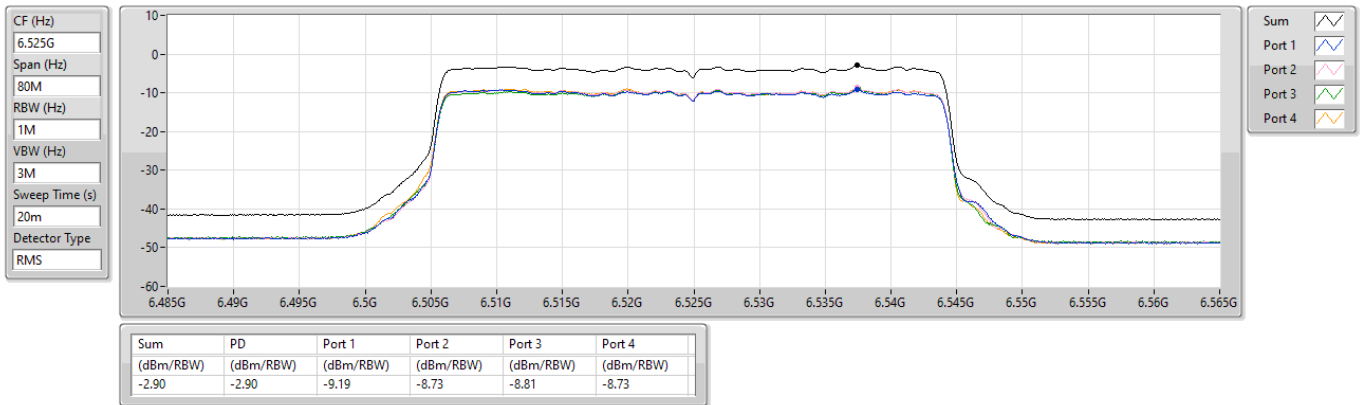


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6565MHz

05/08/2026

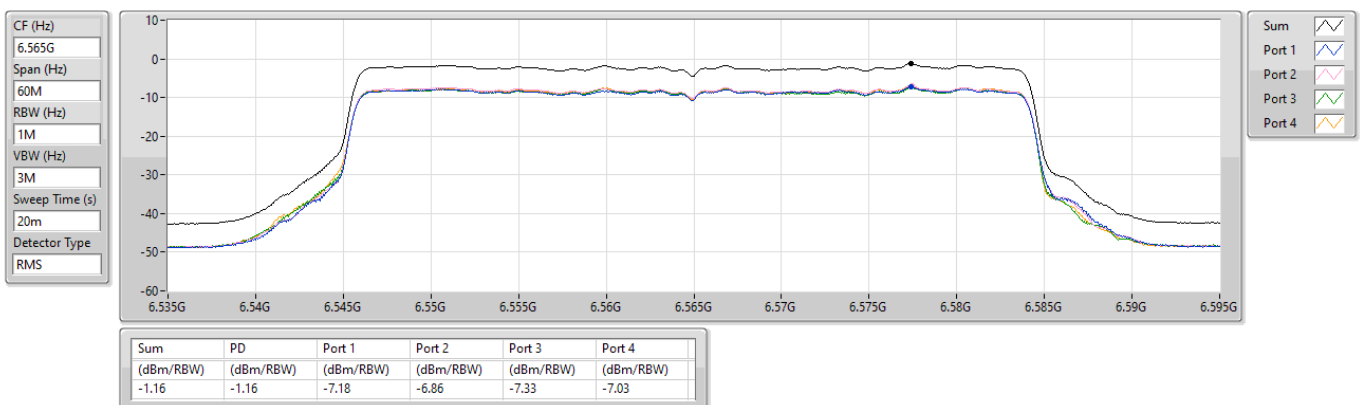


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6685MHz

05/08/2026

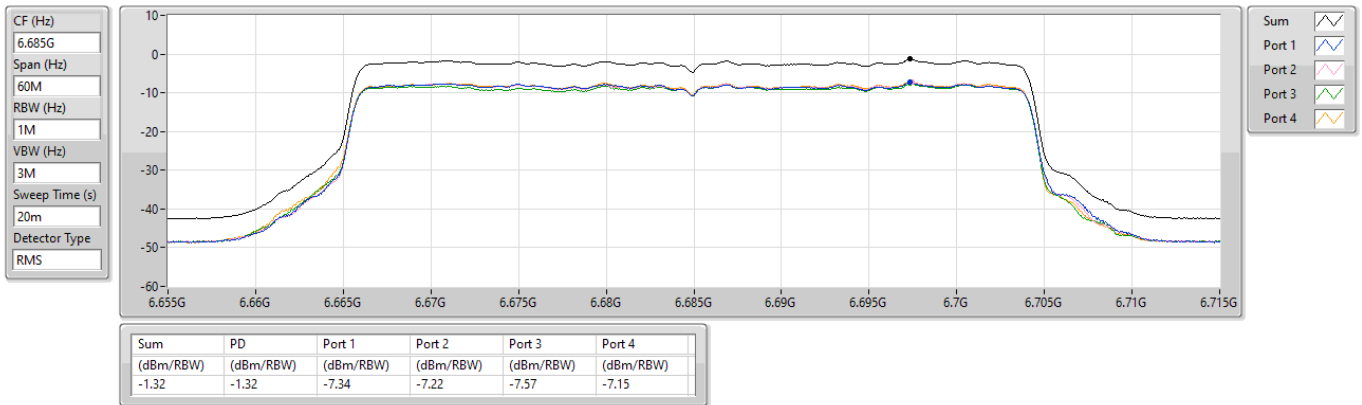


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6845MHz

05/08/2026

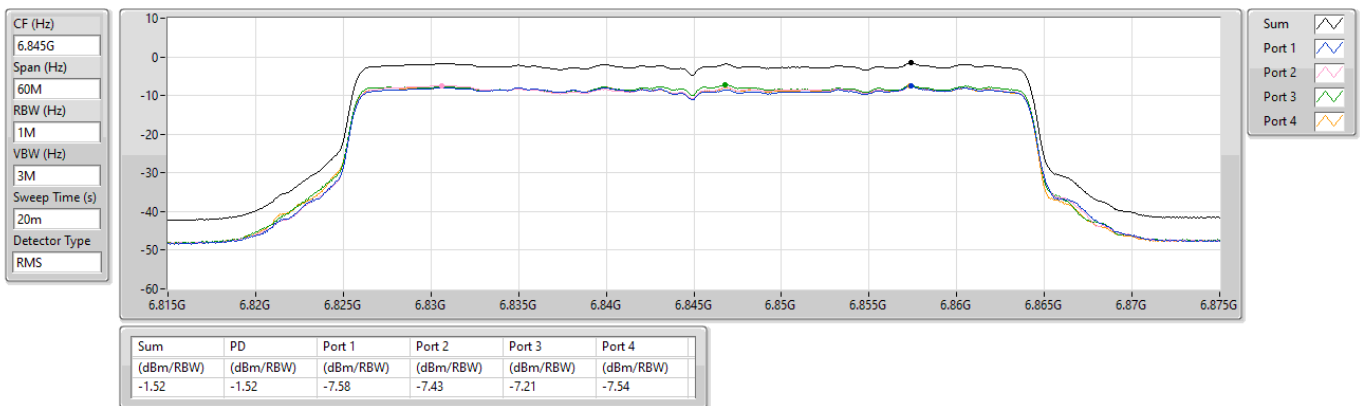


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6885MHz

05/08/2026

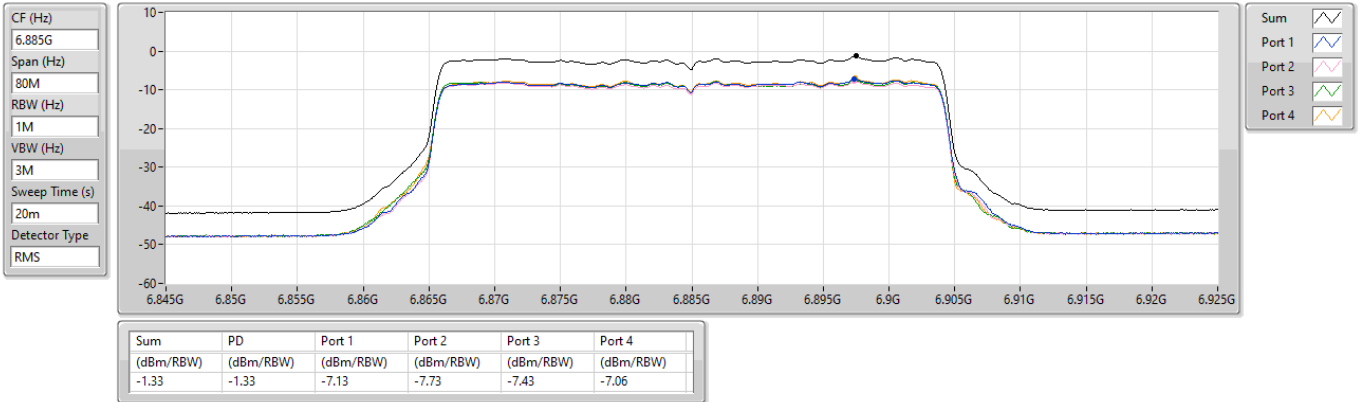


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

7005MHz

05/08/2026

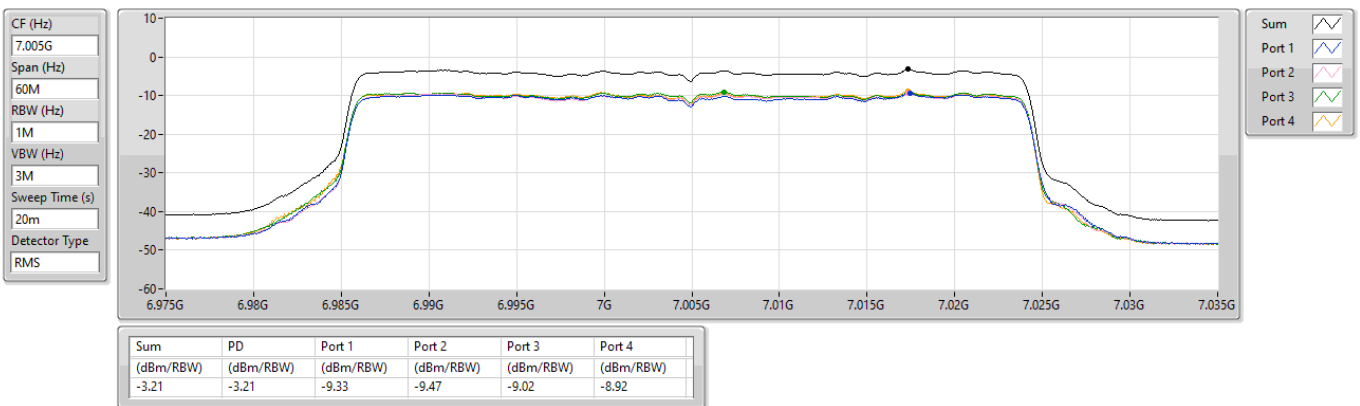


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

7085MHz

05/08/2026

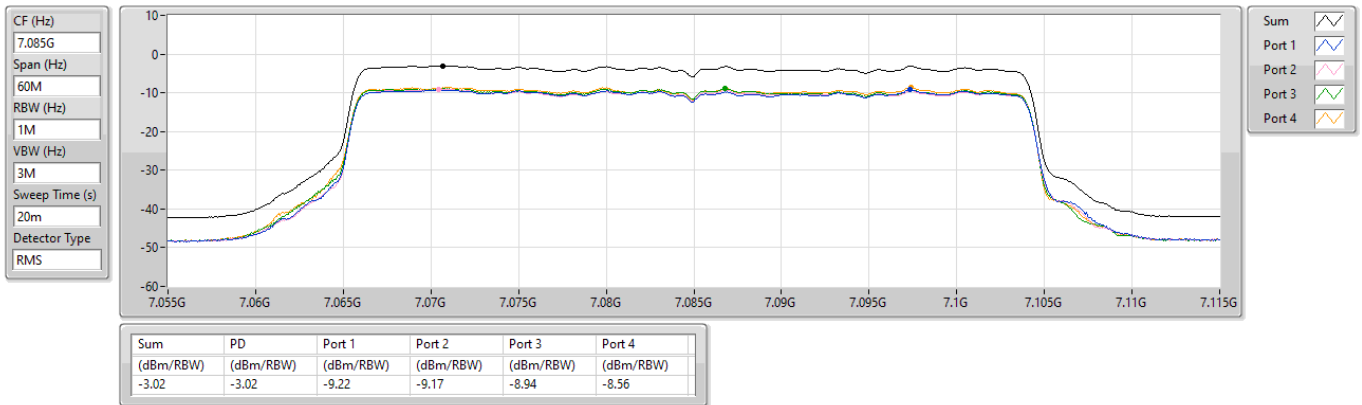


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5985MHz

05/08/2026

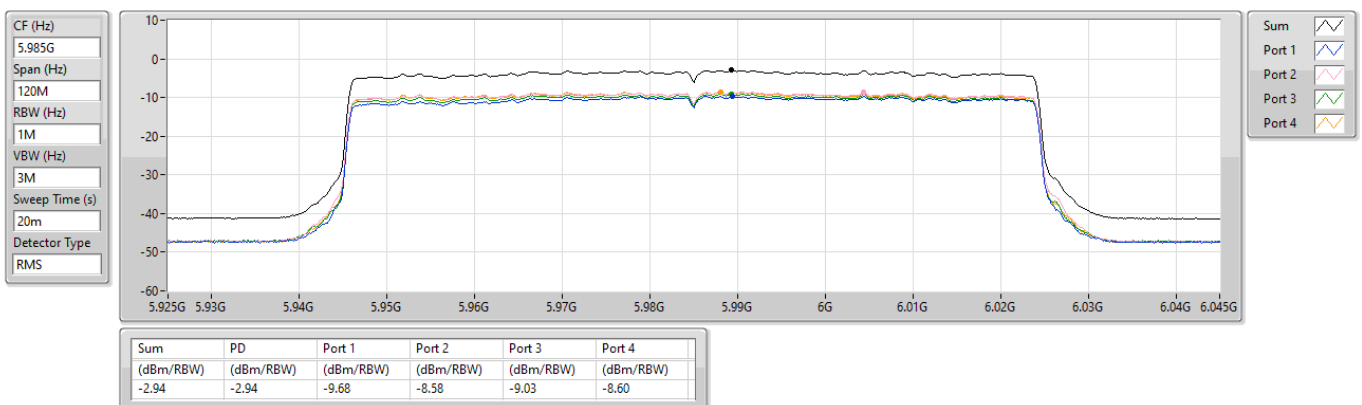


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6225MHz

05/08/2026

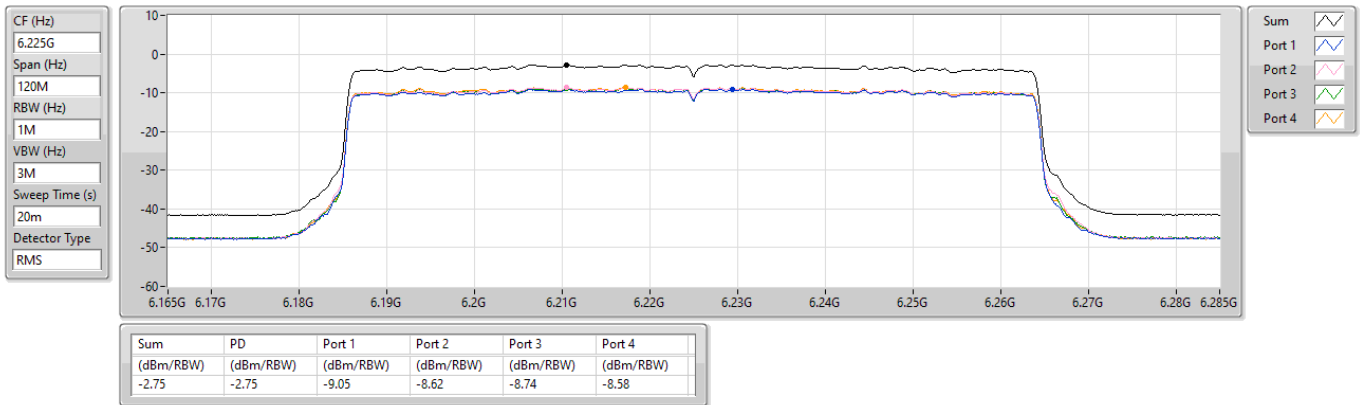


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6385MHz

05/08/2026

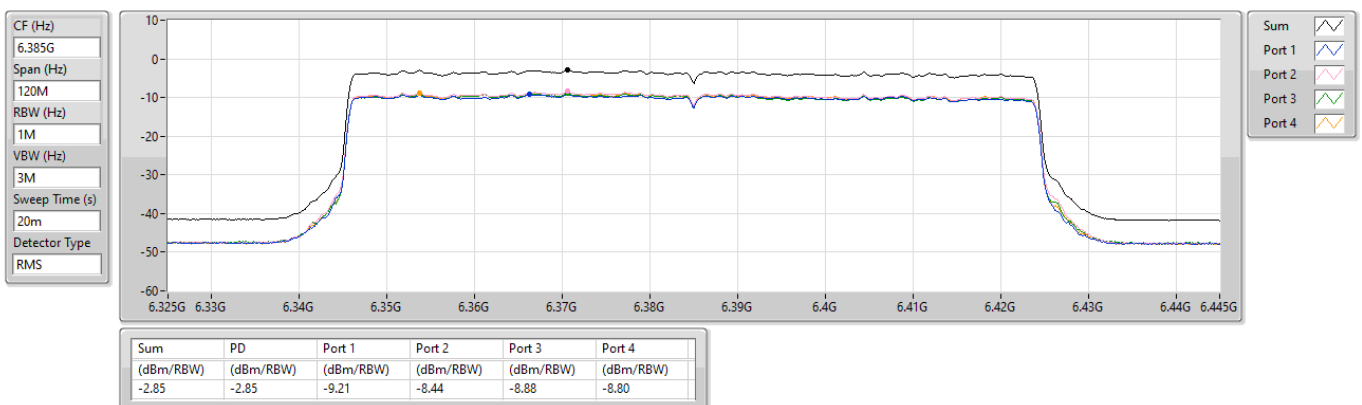


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6465MHz

05/08/2026

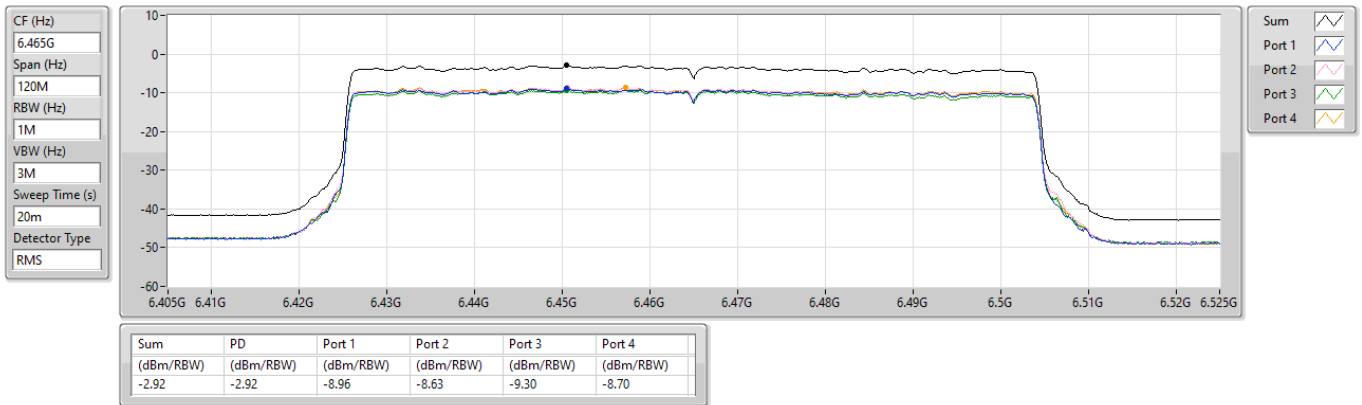


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6545MHz

05/08/2026

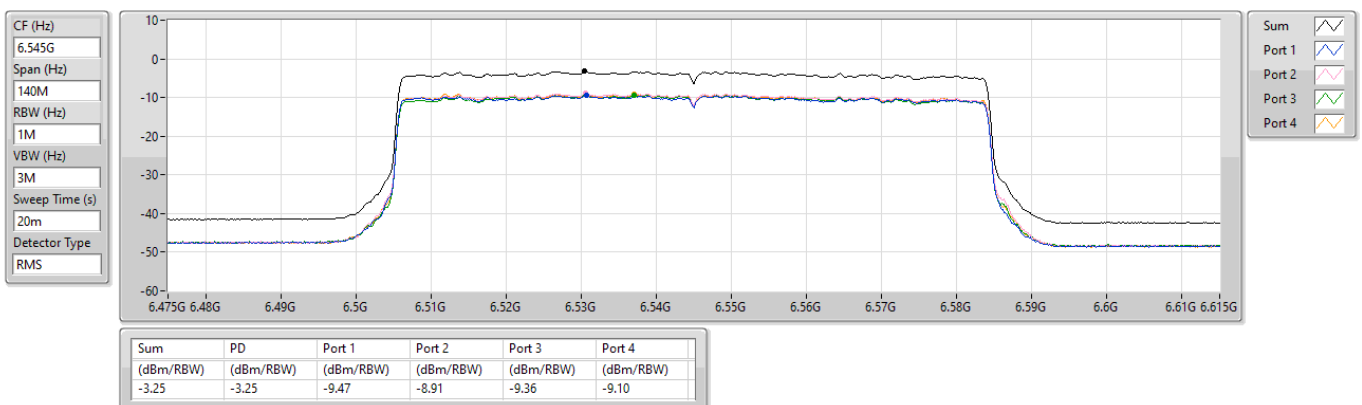


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6625MHz

05/08/2026

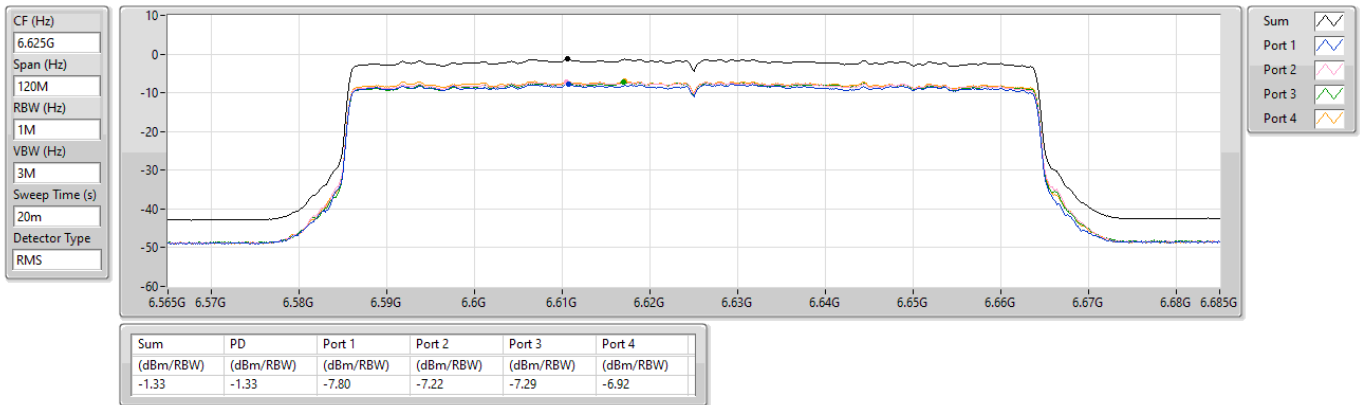


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6705MHz

05/08/2026

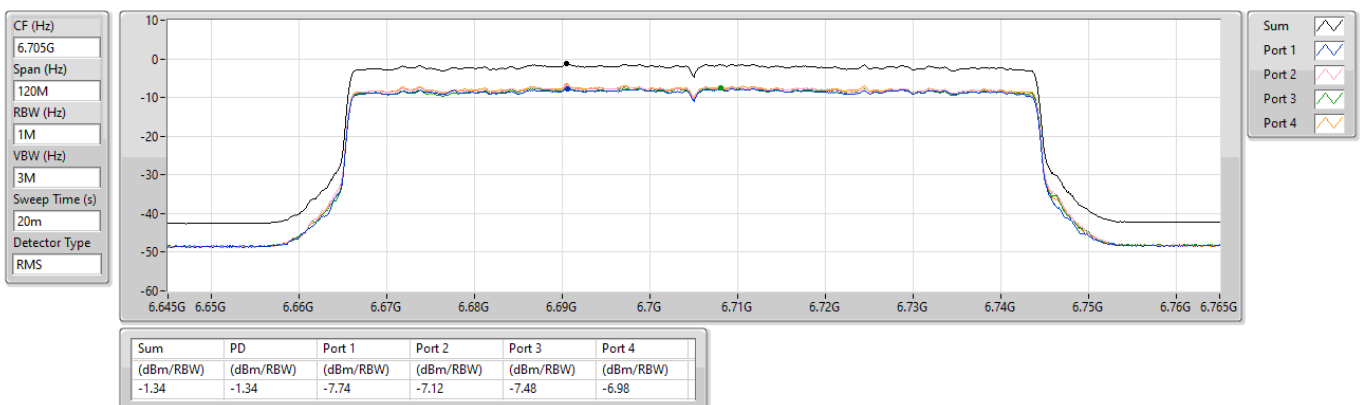


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6785MHz

05/08/2026

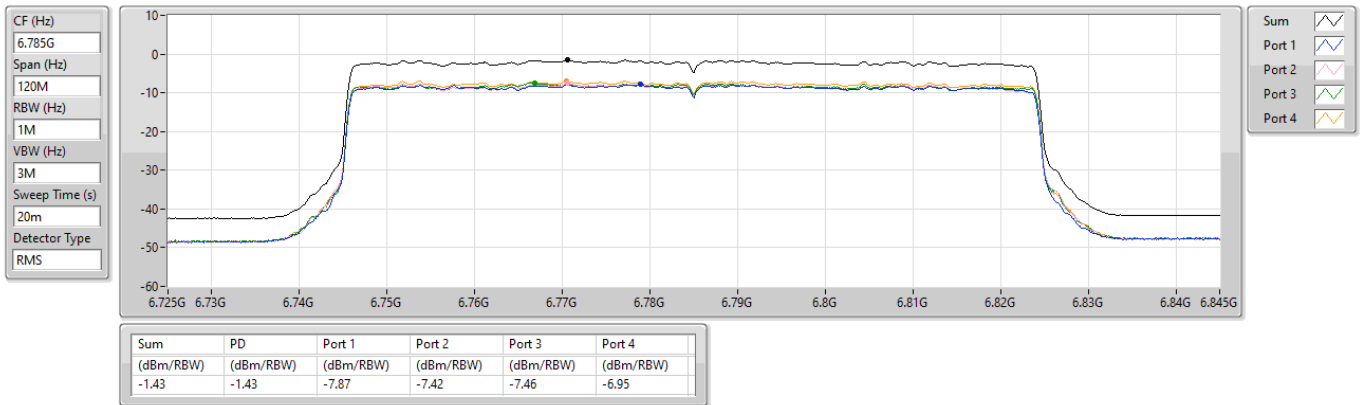


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6865MHz

05/08/2026

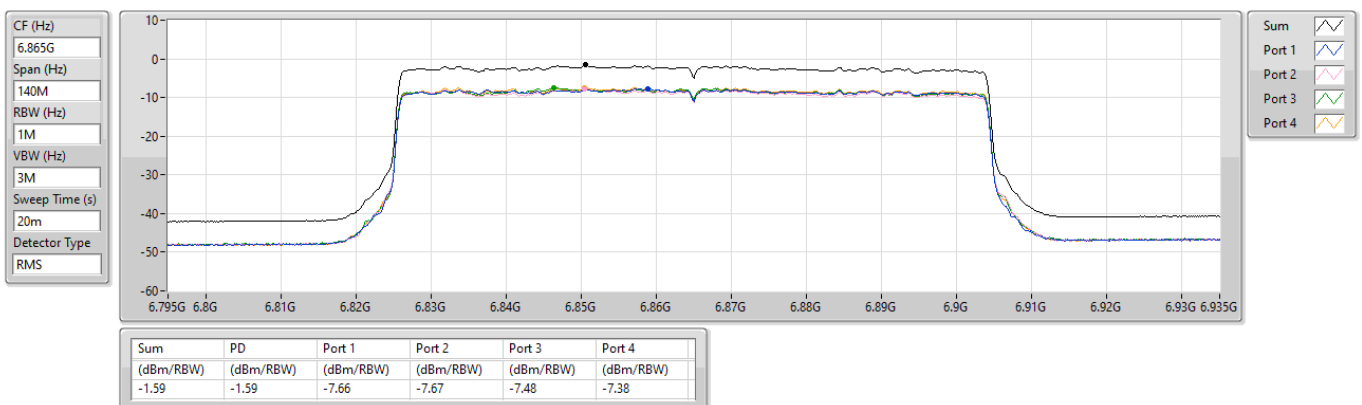


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6945MHz

05/08/2026

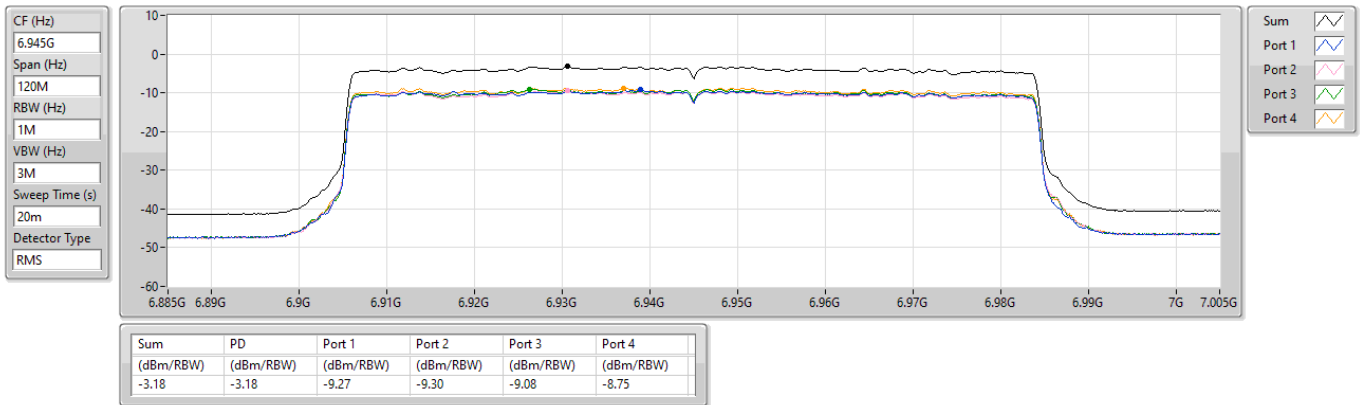


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

7025MHz

05/08/2026

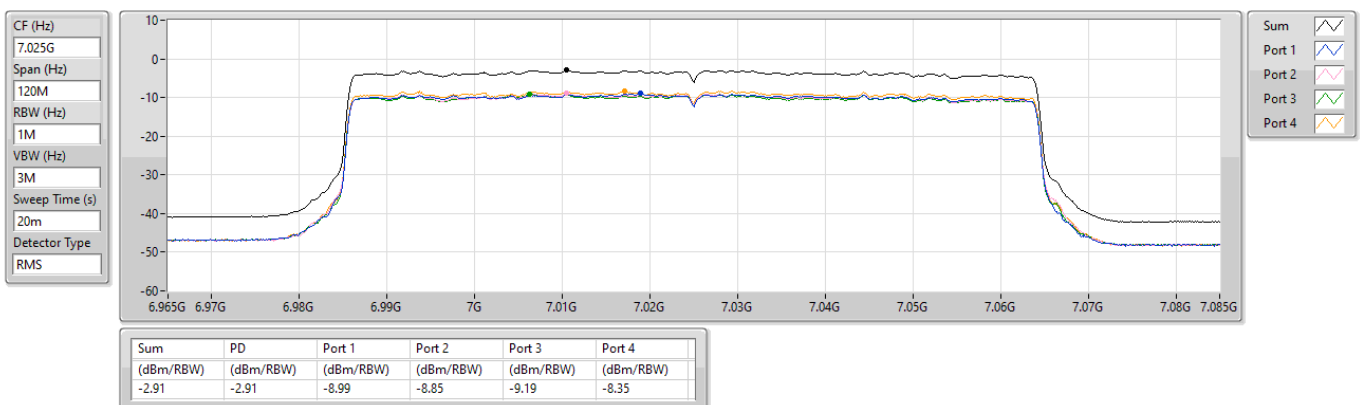


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6025MHz

05/08/2026

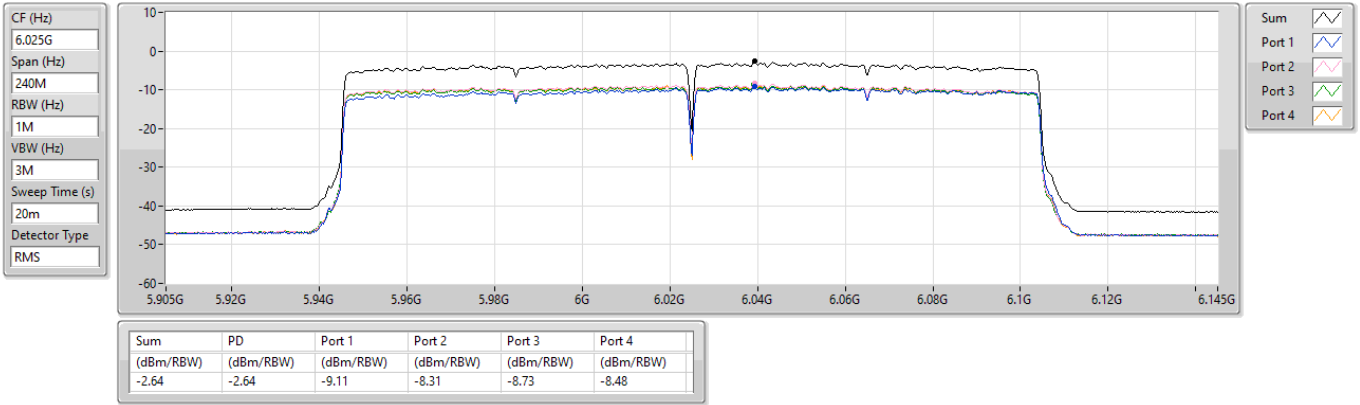


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6185MHz

05/08/2026

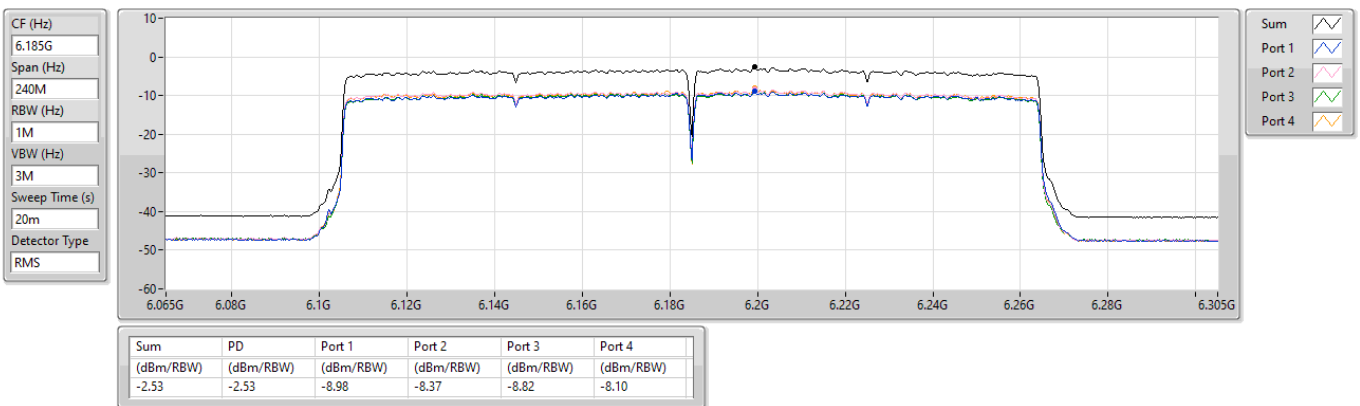


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6345MHz

05/08/2026

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

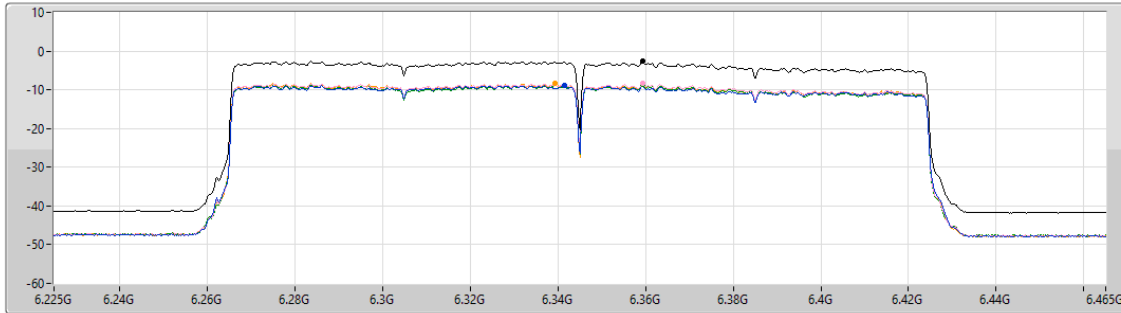

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.60	-2.60	-8.93	-8.35	-8.59	-8.22


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6505MHz

05/08/2026

CF (Hz)
6.505G
Span (Hz)
260M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

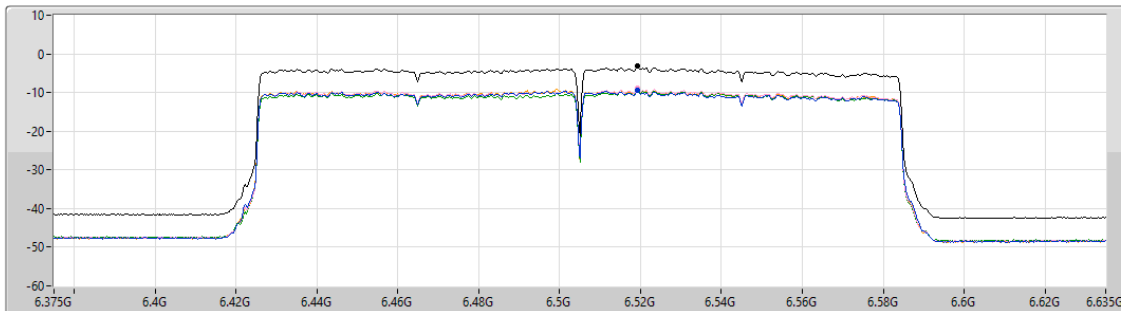

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.14	-3.14	-9.54	-8.91	-9.30	-8.92

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6665MHz

05/08/2026

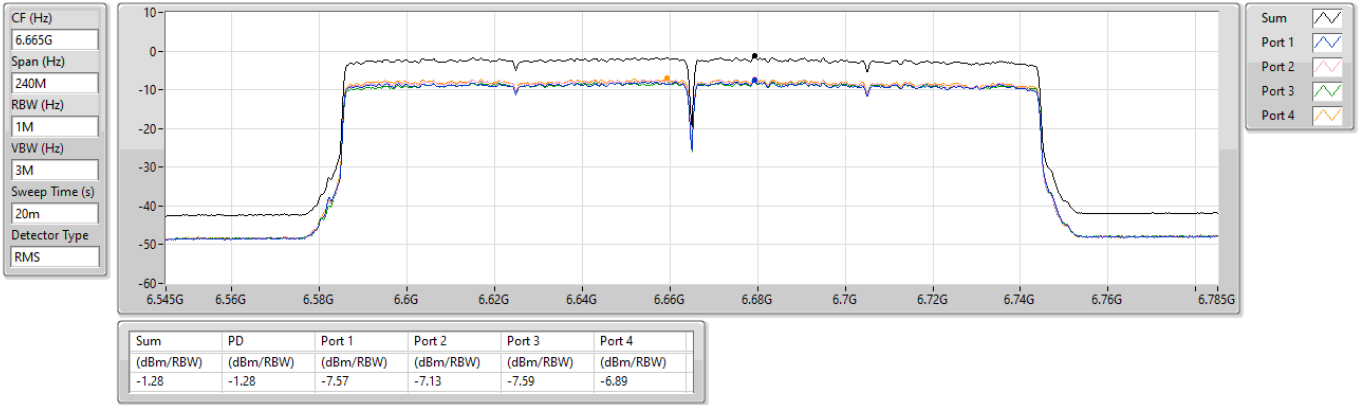


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6825MHz

05/08/2026

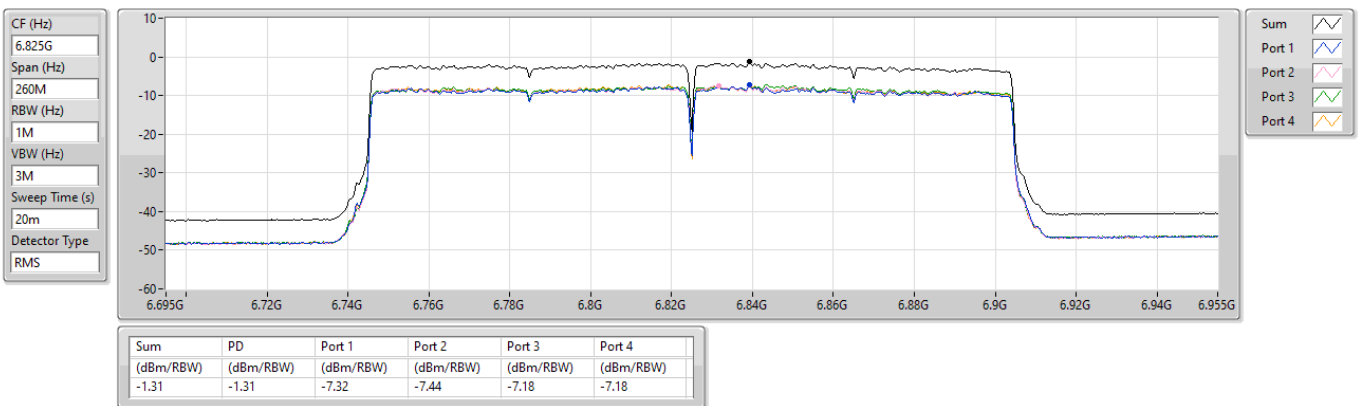


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6985MHz

05/08/2026

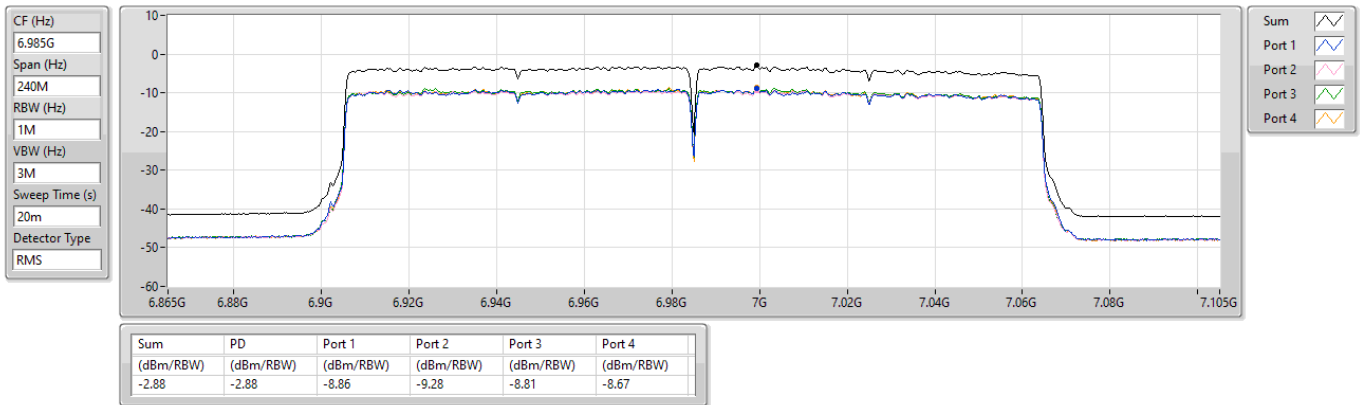


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6105MHz

05/08/2026

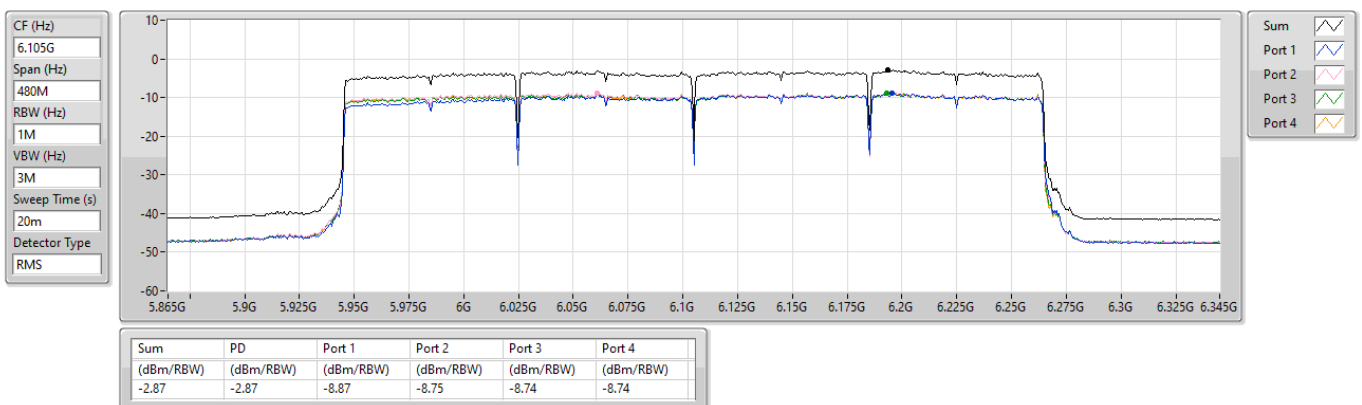


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6425MHz

05/08/2026

CF (Hz)
6.425G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

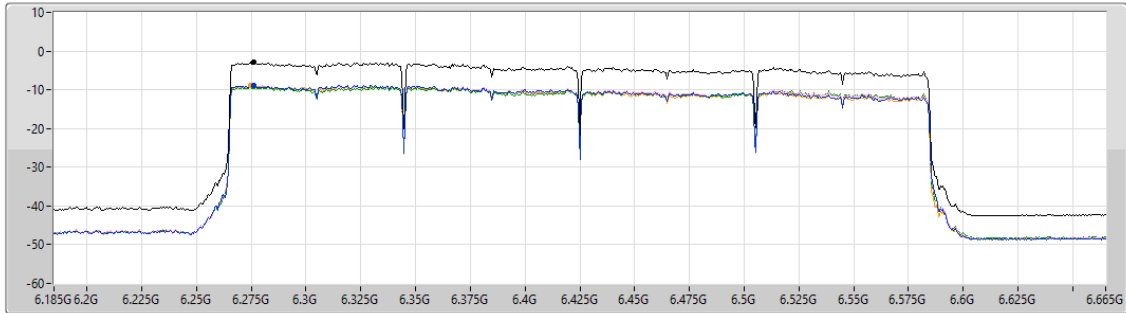

Sum
Port 1
Port 2
Port 3
Port 4


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6745MHz

05/08/2026

CF (Hz)
6.745G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

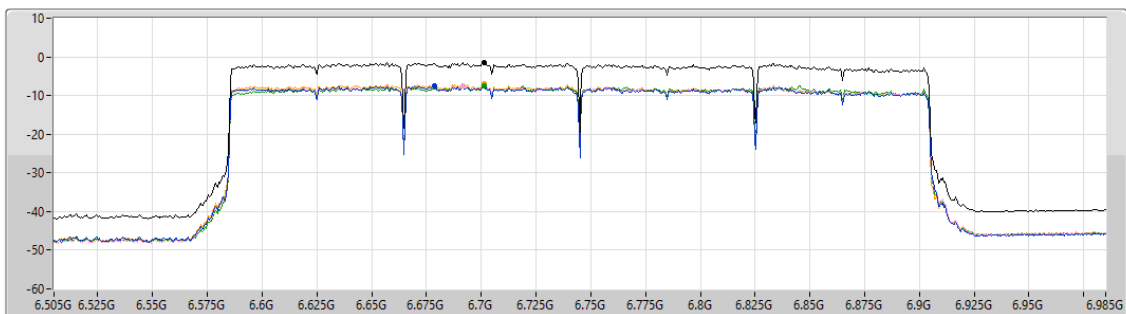

Sum
Port 1
Port 2
Port 3
Port 4




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	71.71M	36.86	40.00	-3.14	Vertical

Mode 1

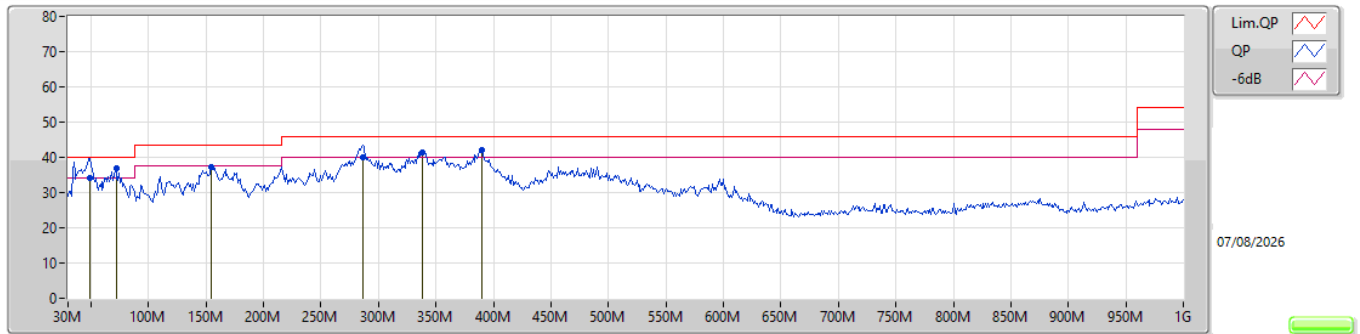

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	49.4M	34.01	40.00	-5.99	-16.76	3	Vertical	108	1.00	-	50.77	14.27	0.67	31.70		
PK	71.71M	36.86	40.00	-3.14	-18.91	3	Vertical	228	1.50	"Worst"	55.77	12.15	0.81	31.87		
PK	154.16M	37.25	43.50	-6.25	-14.71	3	Vertical	172	1.25	-	51.96	16.06	1.20	31.97		
QP	286.08M	40.04	46.00	-5.96	-11.48	3	Vertical	180	1.00	-	51.52	18.91	1.67	32.06		
PK	338.46M	41.38	46.00	-4.62	-10.26	3	Vertical	252	1.00	-	51.64	19.91	1.83	32.00		
PK	389.87M	42.12	46.00	-3.88	-8.79	3	Vertical	256	1.25	-	50.91	21.19	1.97	31.95		

Mode 1

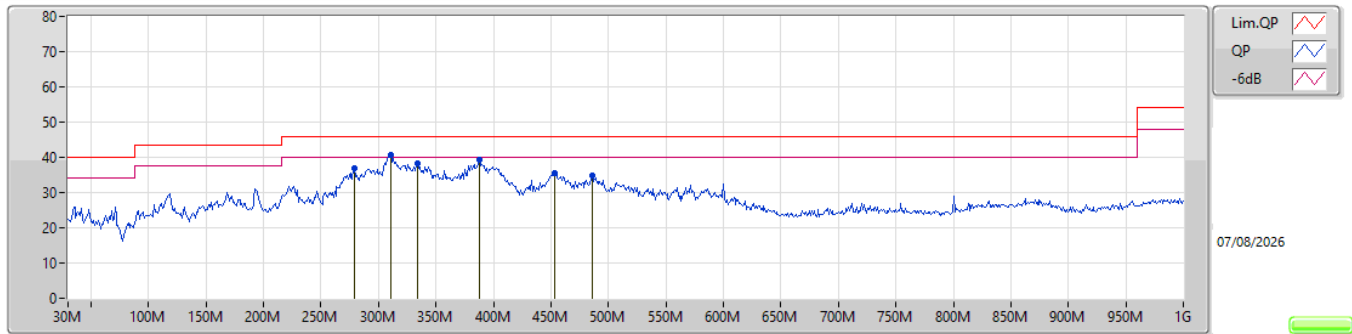

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	279.29M	36.74	46.00	-9.26	-11.67	3	Horizontal	70	1.25	-	48.41	18.74	1.64	32.05		
PK	310.33M	40.55	46.00	-5.45	-10.82	3	Horizontal	144	1.25	"Worst"	51.37	19.50	1.74	32.06		
PK	333.61M	38.13	46.00	-7.87	-10.33	3	Horizontal	96	1.25	-	48.46	19.87	1.81	32.01		
PK	387.93M	39.32	46.00	-6.68	-8.86	3	Horizontal	161	1.00	-	48.18	21.12	1.97	31.95		
PK	452.92M	35.60	46.00	-10.40	-7.59	3	Horizontal	129	3.00	-	43.19	22.33	2.13	32.05		
PK	485.9M	34.84	46.00	-11.16	-7.25	3	Horizontal	247	1.00	-	42.09	22.82	2.22	32.29		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1.(MCS0)_4TX	Pass	RMS	7.142G	68.01	68.20	-0.19	3	Horizontal	184	1.80	-

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

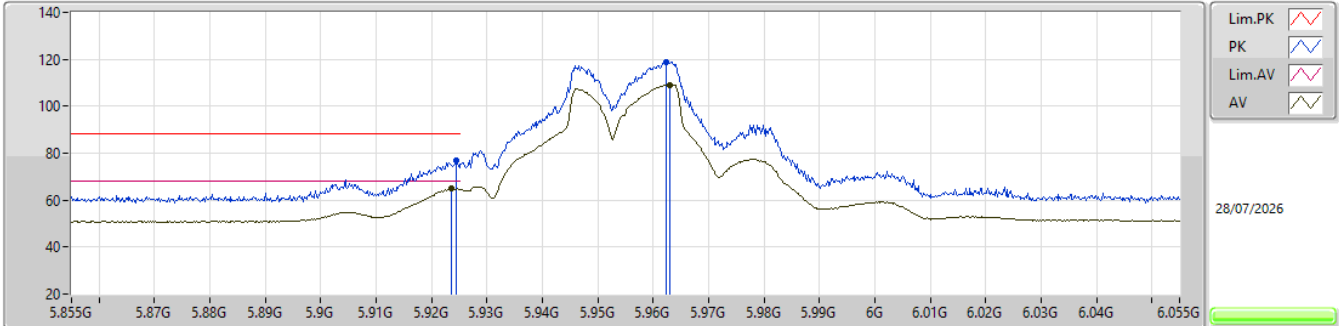


EUT_Y_4TX
Setting 44
03-P-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9244G	77.07	88.20	-11.13	69.76	3	Vertical	-0	2.51	-	34.65	7.52	34.86			
RMS	5.9236G	64.80	68.20	-3.40	57.49	3	Vertical	-0	2.51	-	34.65	7.52	34.86			
PK	5.9624G	119.00	Inf	-Inf	111.62	3	Vertical	-0	2.51	-	34.72	7.53	34.87			
RMS	5.963G	109.18	Inf	-Inf	101.79	3	Vertical	-0	2.51	-	34.73	7.53	34.87			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

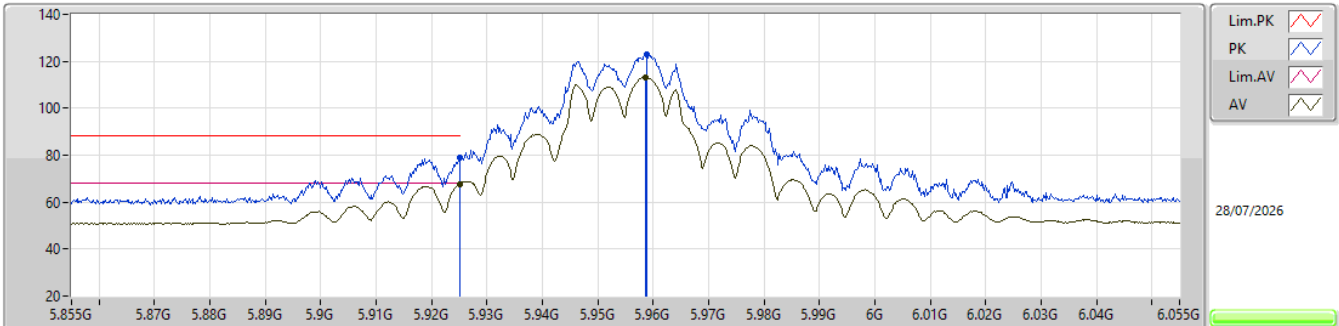EUT_Y_4TX
Setting 44
03-P-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	78.92	88.20	-9.28	71.62	3	Horizontal	20	1.45	-	34.65	7.52	34.87			
RMS	5.925G	67.82	68.20	-0.38	60.52	3	Horizontal	20	1.45	-	34.65	7.52	34.87			
PK	5.9588G	122.89	Inf	-Inf	115.51	3	Horizontal	20	1.45	-	34.72	7.53	34.87			
RMS	5.9586G	113.14	Inf	-Inf	105.76	3	Horizontal	20	1.45	-	34.72	7.53	34.87			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

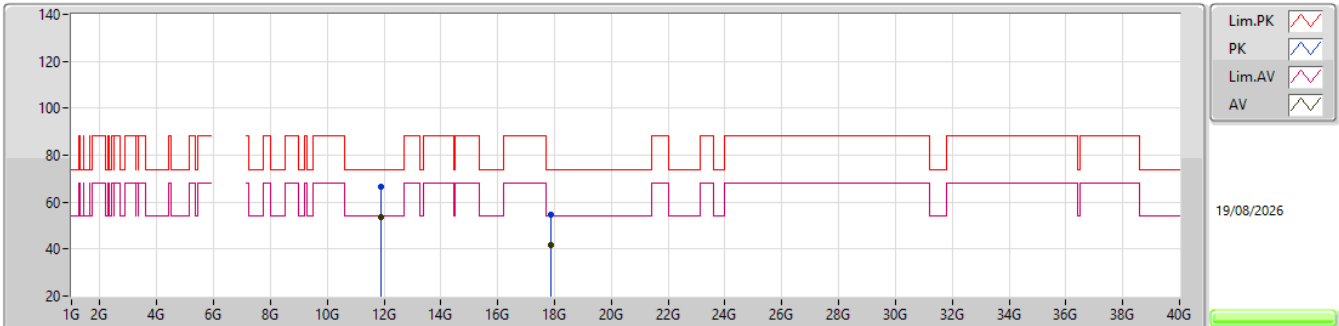EUT_Y_4TX
Setting 29
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.90982G	66.81	74.00	-7.19	60.77	3	Vertical	76	1.95	-	39.36	12.62	45.94			
AV	11.90976G	53.51	54.00	-0.49	47.47	3	Vertical	76	1.95	-	39.36	12.62	45.94			
PK	17.8579G	54.86	74.00	-19.14	39.34	3	Vertical	264	1.80	-	45.86	14.94	45.28			
AV	17.87274G	41.71	54.00	-12.29	26.06	3	Vertical	264	1.80	-	45.98	14.95	45.28			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

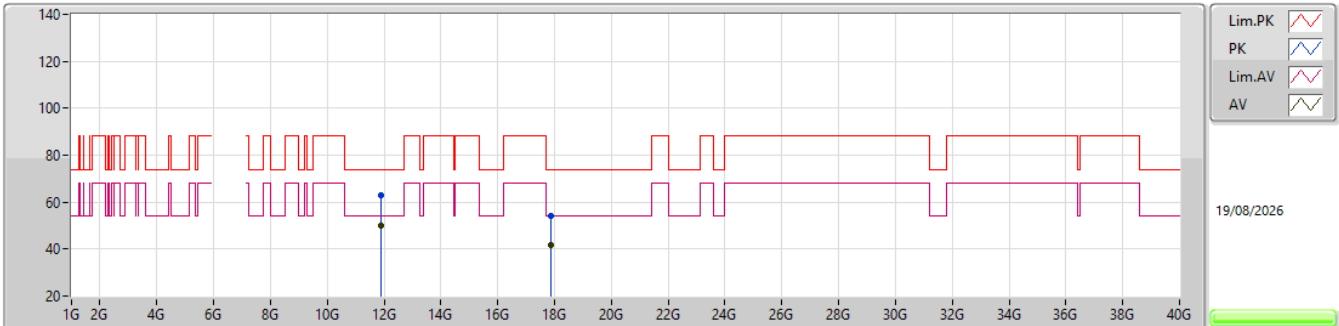EUT_Y_4TX
Setting 29
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.90056G	63.15	74.00	-10.85	57.07	3	Horizontal	138	1.65	-	39.40	12.62	45.94			
AV	11.90076G	49.82	54.00	-4.18	43.74	3	Horizontal	138	1.65	-	39.40	12.62	45.94			
PK	17.86992G	54.03	74.00	-19.97	38.40	3	Horizontal	121	1.42	-	45.96	14.95	45.28			
AV	17.87296G	41.63	54.00	-12.37	25.98	3	Horizontal	121	1.42	-	45.98	14.95	45.28			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

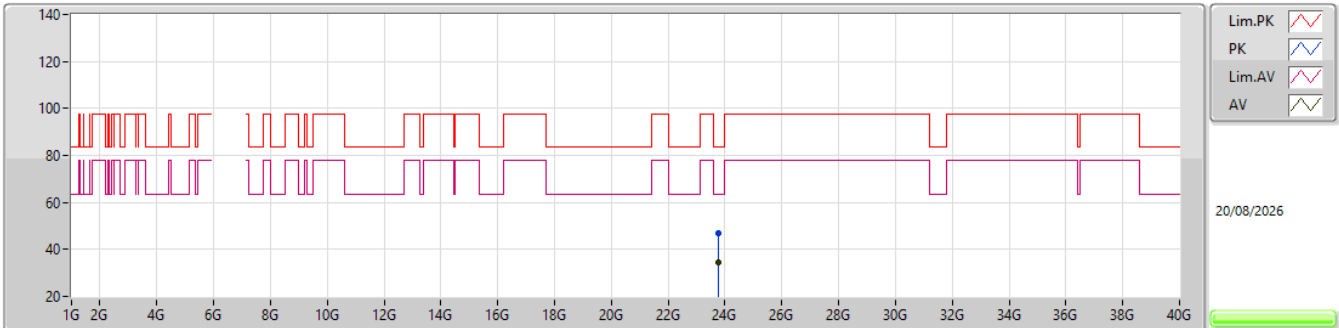EUT Y_4TX
Setting 29
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.75891G	47.13	83.54	-36.41	38.05	1	Vertical	113	1.50	-	38.90	18.08	47.90			
AV	23.7567G	34.42	63.54	-29.12	25.34	1	Vertical	113	1.50	-	38.90	18.08	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5955MHz_TX

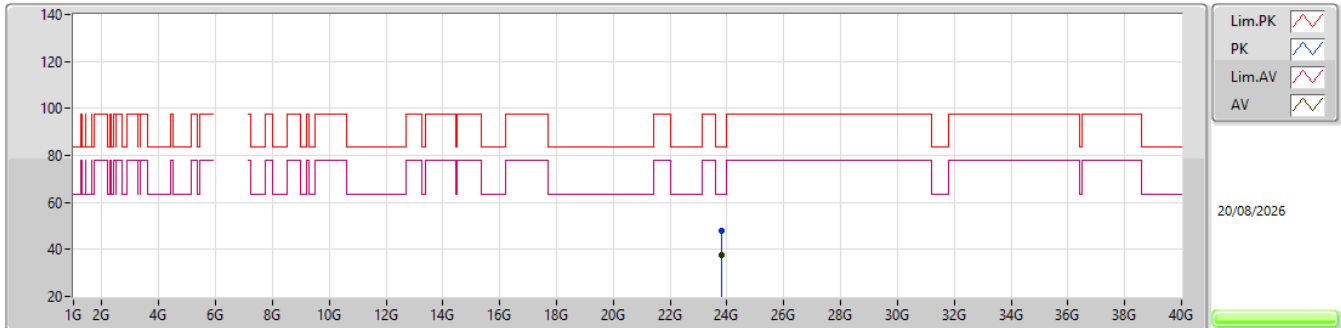


EUT Y_4TX
Setting 29
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81976G	47.70	83.54	-35.84	38.58	1	Horizontal	327	1.50	-	38.90	18.12	47.90			
AV	23.81976G	37.34	63.54	-26.20	28.22	1	Horizontal	327	1.50	-	38.90	18.12	47.90			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6195MHz_TX

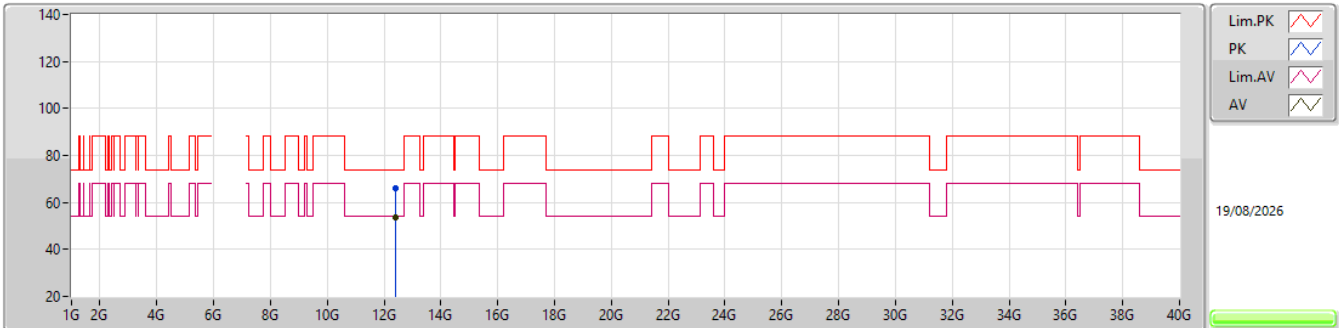


EUT Y_4TX
Setting 40
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38638G	66.28	74.00	-7.72	60.37	3	Vertical	48	1.80	-	38.70	12.79	45.58			
AV	12.38752G	53.61	54.00	-0.39	47.69	3	Vertical	48	1.80	-	38.70	12.79	45.57			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6195MHz_TX

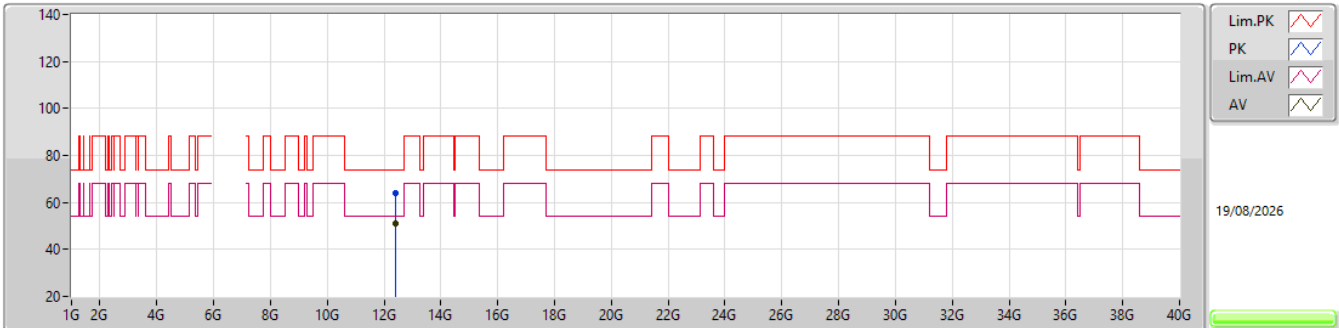EUT_Y_4TX
Setting 40
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39418G	63.90	74.00	-10.10	57.98	3	Horizontal	142	1.80	-	38.70	12.79	45.57			
AV	12.3935G	51.19	54.00	-2.81	45.27	3	Horizontal	142	1.80	-	38.70	12.79	45.57			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6195MHz_TX

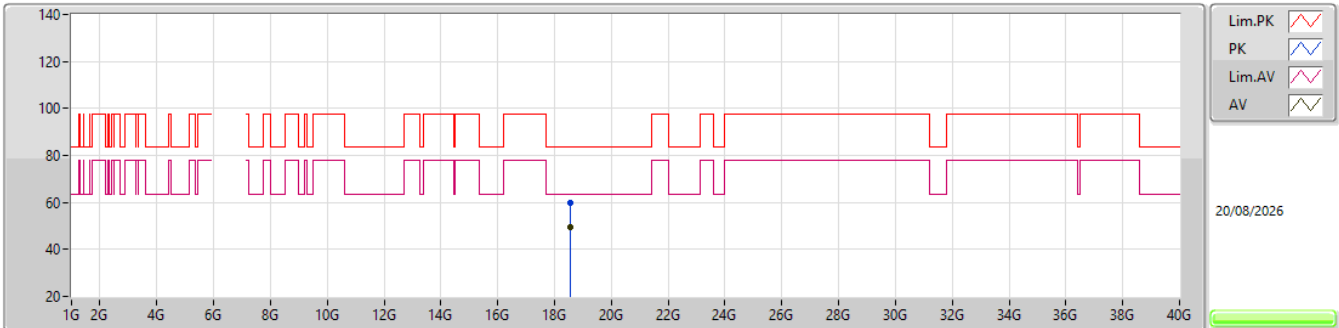EUT Y_4TX
Setting 40
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57672G	59.65	83.54	-23.89	54.95	1	Vertical	65	1.50	-	37.61	15.74	48.65			
AV	18.57546G	49.58	63.54	-13.96	44.89	1	Vertical	65	1.50	-	37.60	15.74	48.65			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6195MHz_TX

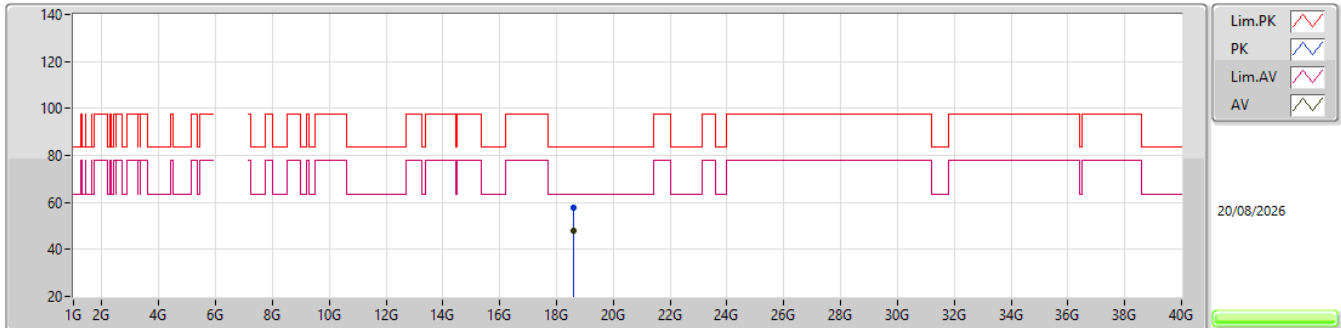EUT Y_4TX
Setting 40
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59292G	57.86	83.54	-25.68	53.11	1	Horizontal	33	1.48	-	37.67	15.74	48.66			
AV	18.5931G	47.81	63.54	-15.73	43.06	1	Horizontal	33	1.48	-	37.67	15.74	48.66			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6415MHz_TX

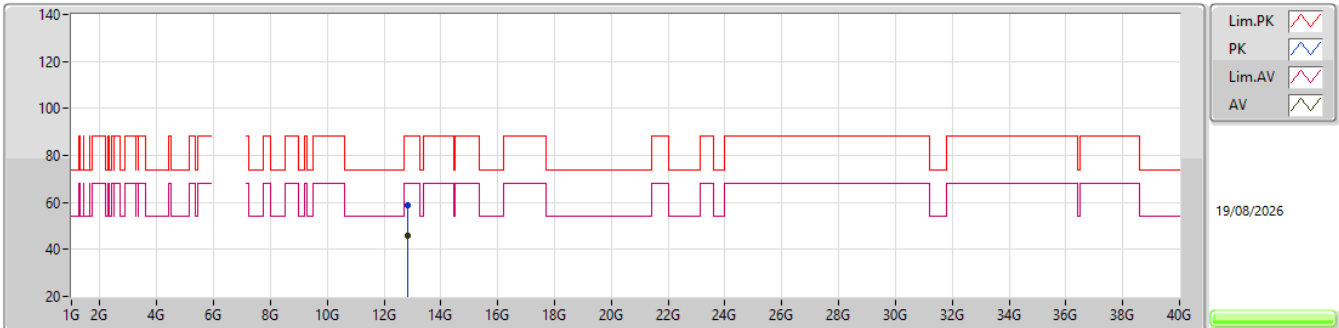EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82156G	58.71	88.20	-29.49	52.51	3	Vertical	82	1.80	-	39.04	12.92	45.76			
RMS	12.82226G	45.88	68.20	-22.32	39.68	3	Vertical	82	1.80	-	39.04	12.92	45.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6415MHz_TX

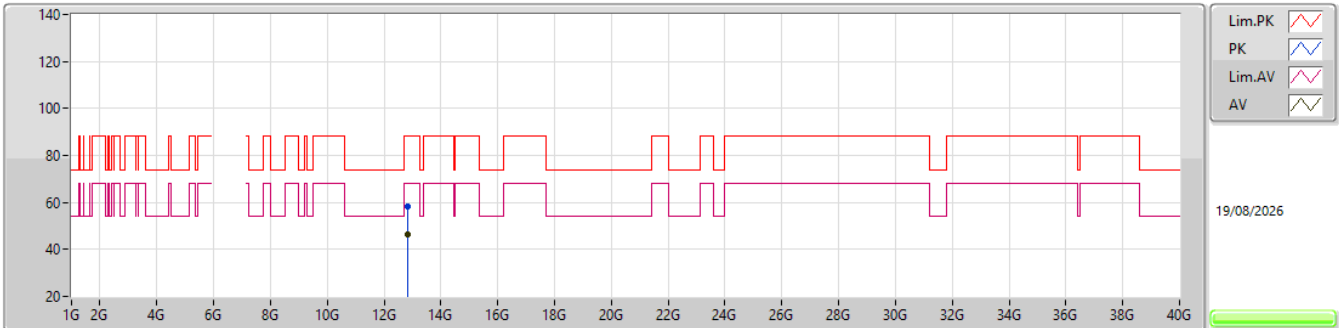EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8266G	58.32	88.20	-29.88	52.11	3	Horizontal	83	1.86	-	39.05	12.92	45.76			
RMS	12.82768G	46.14	68.20	-22.06	39.92	3	Horizontal	83	1.86	-	39.06	12.92	45.76			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6415MHz_TX

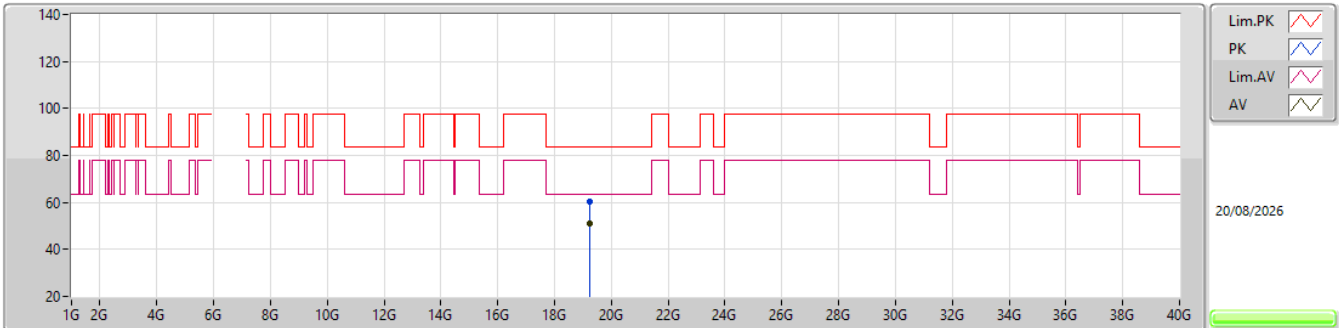EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2369G	60.36	83.54	-23.18	55.35	1	Vertical	46	1.51	-	37.82	16.04	48.85			
AV	19.23726G	51.29	63.54	-12.25	46.28	1	Vertical	46	1.51	-	37.82	16.04	48.85			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6415MHz_TX

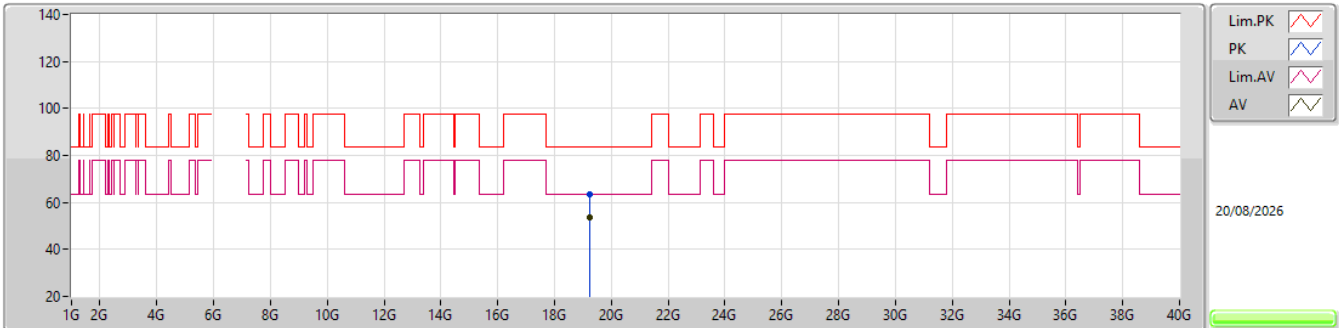EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.23672G	63.19	83.54	-20.35	58.18	1	Horizontal	49	1.48	-	37.82	16.04	48.85			
AV	19.23726G	53.60	63.54	-9.94	48.59	1	Horizontal	49	1.48	-	37.82	16.04	48.85			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6435MHz_TX

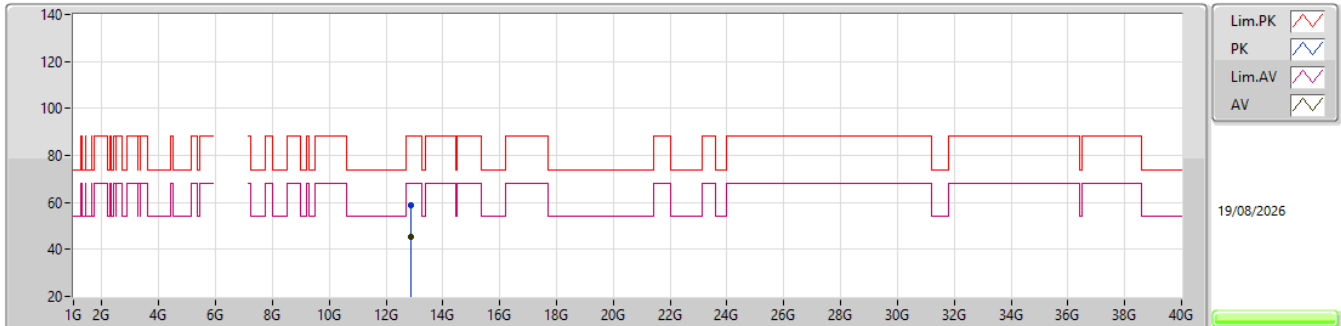EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8613G	58.92	88.20	-29.28	52.66	3	Vertical	82	1.80	-	39.12	12.93	45.79			
RMS	12.86222G	45.36	68.20	-22.84	39.10	3	Vertical	82	1.80	-	39.12	12.93	45.79			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6435MHz_TX

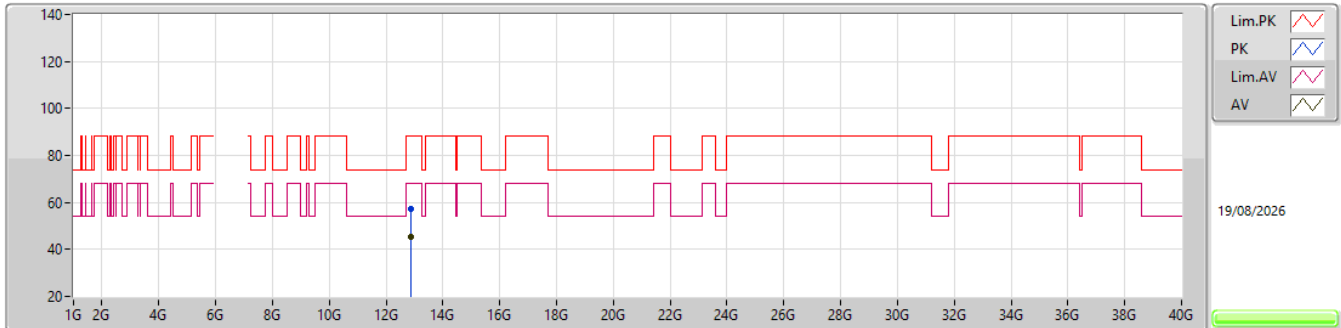EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.8672G	57.19	88.20	-31.01	50.93	3	Horizontal	36	1.85	-	39.13	12.93	45.80			
RMS	12.86988G	45.27	68.20	-22.93	38.99	3	Horizontal	36	1.85	-	39.14	12.94	45.80			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6435MHz_TX

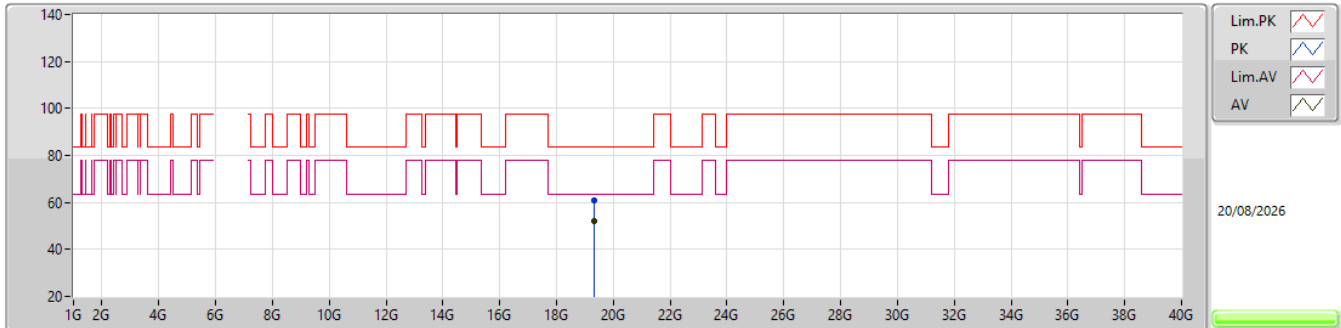EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30932G	60.92	83.54	-22.62	56.07	1	Vertical	75	1.50	-	37.62	16.07	48.84			
AV	19.30932G	51.97	63.54	-11.57	47.12	1	Vertical	75	1.50	-	37.62	16.07	48.84			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6435MHz_TX

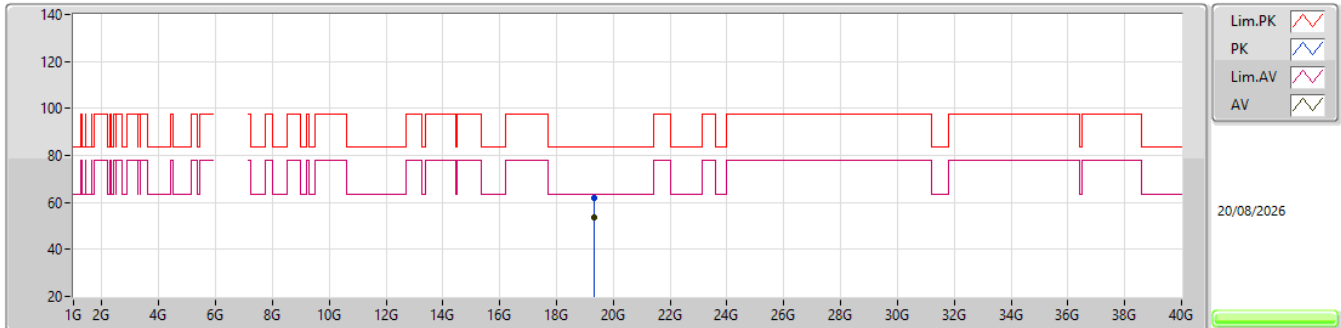EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3095G	61.92	83.54	-21.62	57.07	1	Horizontal	47	1.53	-	37.62	16.07	48.84			
AV	19.30932G	53.72	63.54	-9.82	48.87	1	Horizontal	47	1.53	-	37.62	16.07	48.84			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6475MHz_TX

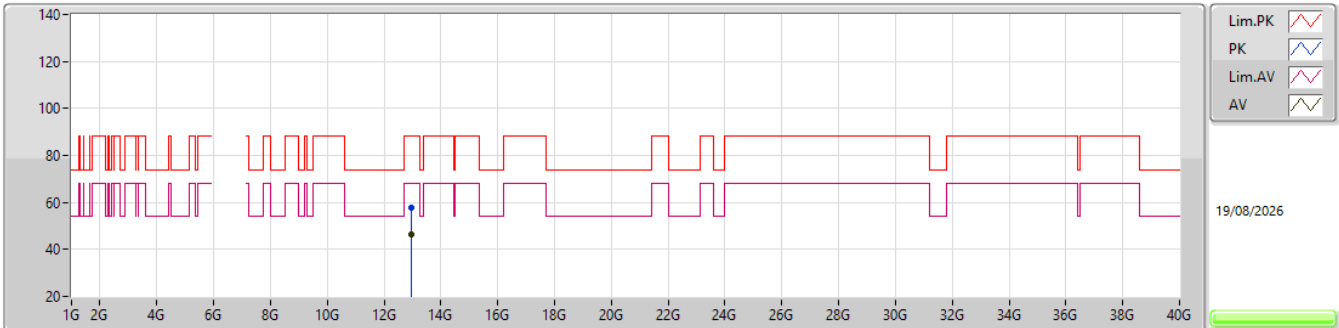EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95124G	57.88	88.20	-30.32	51.50	3	Vertical	63	1.80	-	39.30	12.96	45.88			
RMS	12.94934G	46.41	68.20	-21.79	40.02	3	Vertical	63	1.80	-	39.30	12.96	45.87			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6475MHz_TX

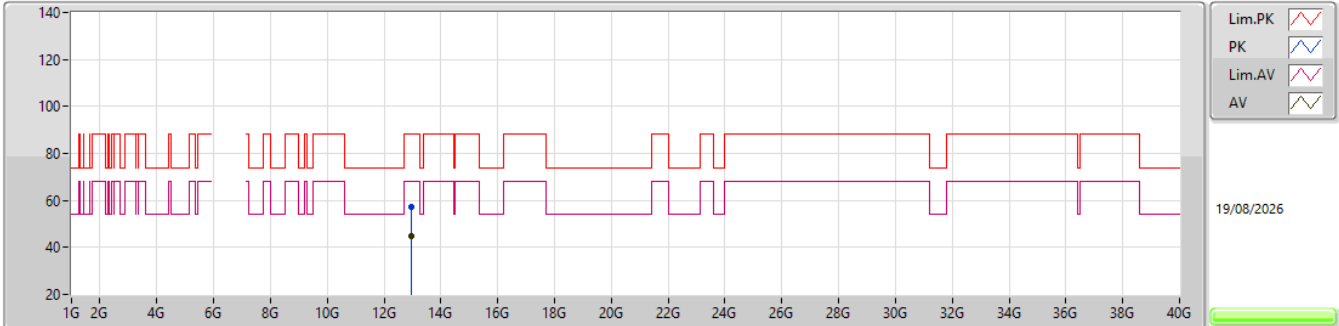EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.95038G	57.28	88.20	-30.92	50.89	3	Horizontal	81	1.85	-	39.30	12.96	45.87			
RMS	12.9499G	45.08	68.20	-23.12	38.69	3	Horizontal	81	1.85	-	39.30	12.96	45.87			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6475MHz_TX

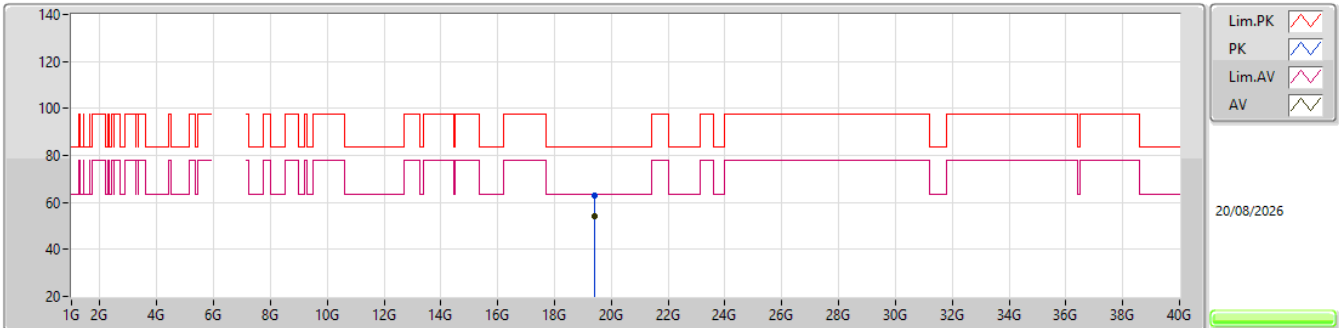


EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42932G	62.81	83.54	-20.73	57.86	1	Vertical	75	1.48	-	37.64	16.12	48.81			
AV	19.42932G	54.26	63.54	-9.28	49.31	1	Vertical	75	1.48	-	37.64	16.12	48.81			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6475MHz_TX

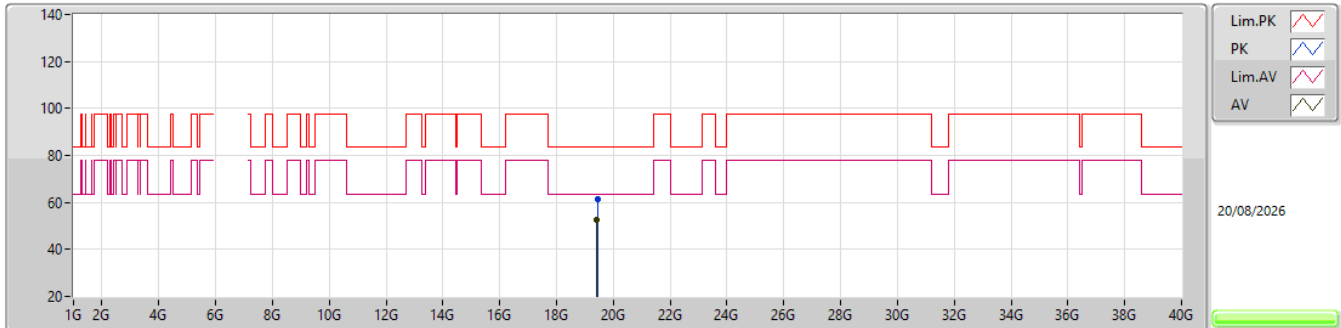EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.44282G	61.16	83.54	-22.38	56.23	1	Horizontal	13	1.52	-	37.61	16.13	48.81			
AV	19.4295G	52.36	63.54	-11.18	47.41	1	Horizontal	13	1.52	-	37.64	16.12	48.81			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6515MHz_TX

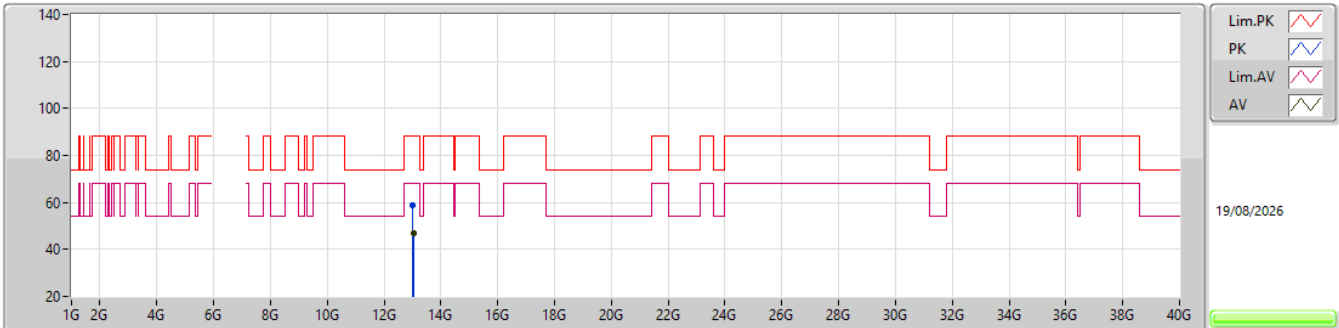EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.02264G	58.60	88.20	-29.60	52.10	3	Vertical	92	1.88	-	39.40	12.98	45.88			
RMS	13.0304G	46.77	68.20	-21.43	40.25	3	Vertical	92	1.88	-	39.40	12.98	45.86			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6515MHz_TX

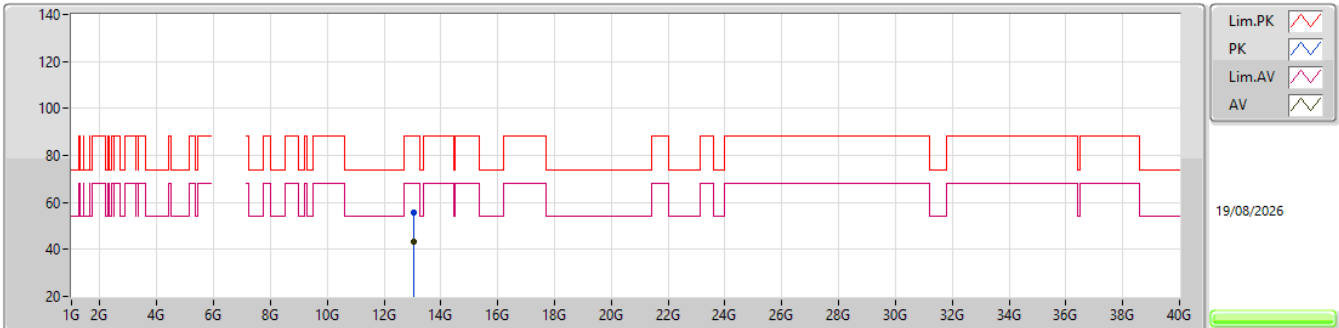EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0353G	55.75	88.20	-32.45	49.22	3	Horizontal	80	1.80	-	39.40	12.99	45.86			
RMS	13.02974G	43.03	68.20	-25.17	36.52	3	Horizontal	80	1.80	-	39.40	12.98	45.87			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6515MHz_TX

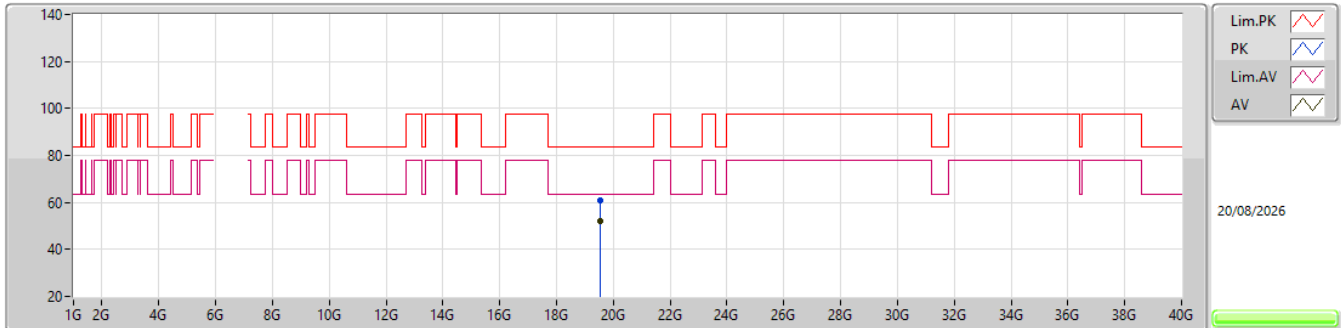EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.5494G	60.87	83.54	-22.67	55.91	1	Vertical	76	1.65	-	37.60	16.18	48.82			
AV	19.5492G	52.00	63.54	-11.54	47.04	1	Vertical	76	1.65	-	37.60	16.18	48.82			

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6515MHz_TX

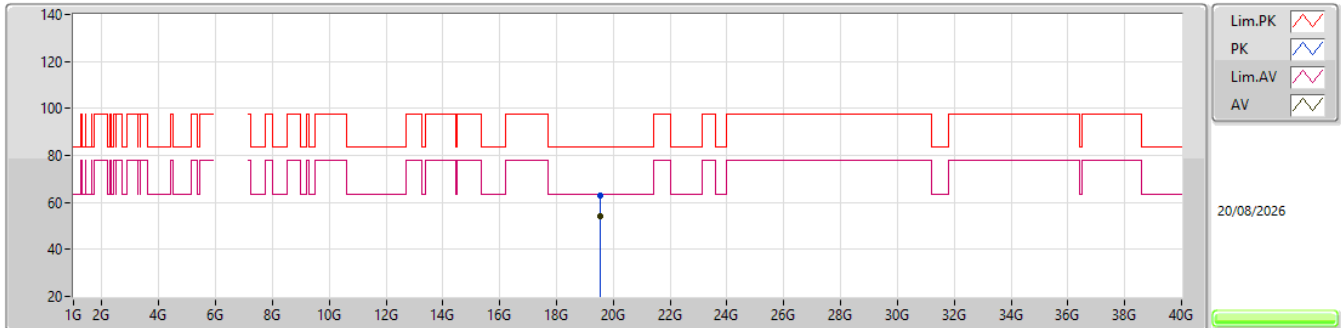EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.5494G	62.77	83.54	-20.77	57.81	1	Horizontal	19	1.51	-	37.60	16.18	48.82			
AV	19.5494G	54.18	63.54	-9.36	49.22	1	Horizontal	19	1.51	-	37.60	16.18	48.82			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6535MHz_TX

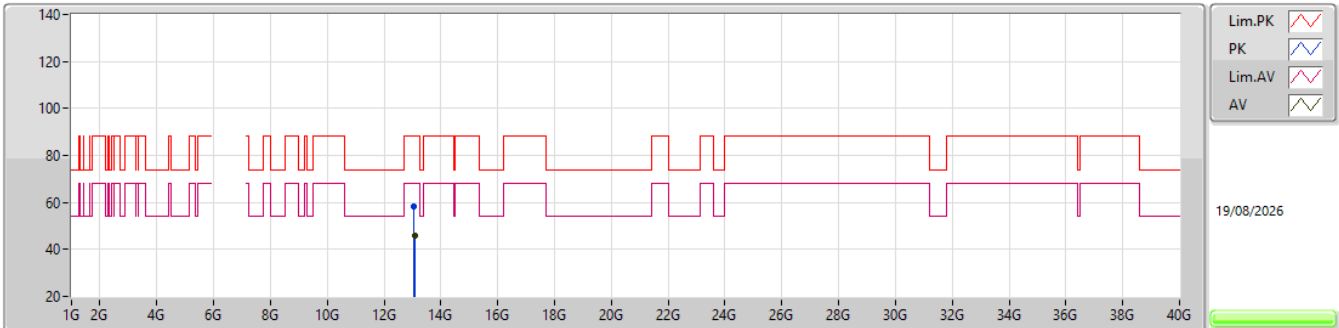EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0627G	58.27	88.20	-29.93	51.61	3	Vertical	92	1.84	-	39.48	12.99	45.81			
RMS	13.07004G	46.02	68.20	-22.18	39.29	3	Vertical	92	1.84	-	39.52	13.00	45.79			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6535MHz_TX

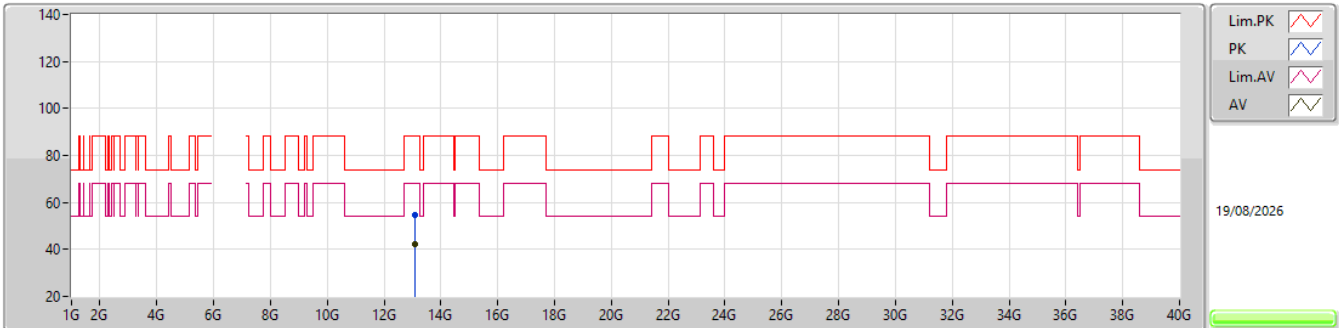EUT_V_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.07198G	54.46	88.20	-33.74	47.72	3	Horizontal	80	1.86	-	39.53	13.00	45.79			
RMS	13.06986G	42.38	68.20	-25.82	35.65	3	Horizontal	80	1.86	-	39.52	13.00	45.79			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6535MHz_TX

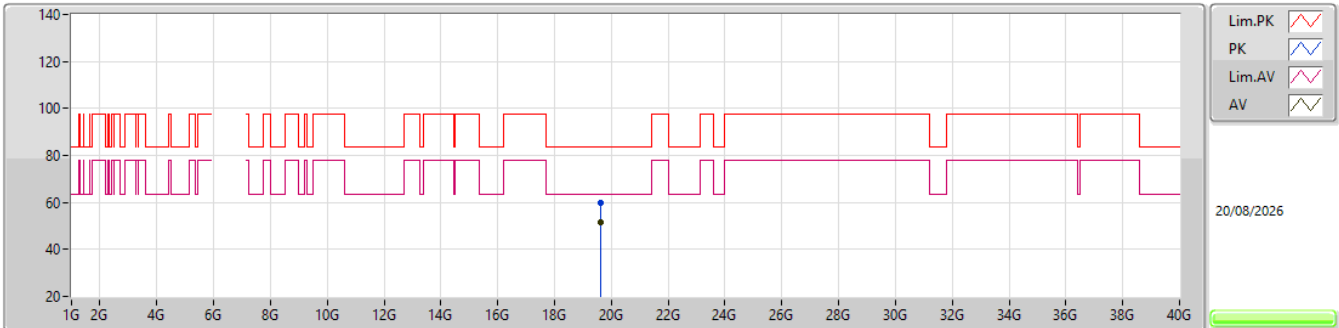EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6092G	59.86	83.54	-23.68	54.92	1	Vertical	74	1.51	-	37.58	16.20	48.84			
AV	19.6096G	51.32	63.54	-12.22	46.38	1	Vertical	74	1.51	-	37.58	16.20	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6535MHz_TX

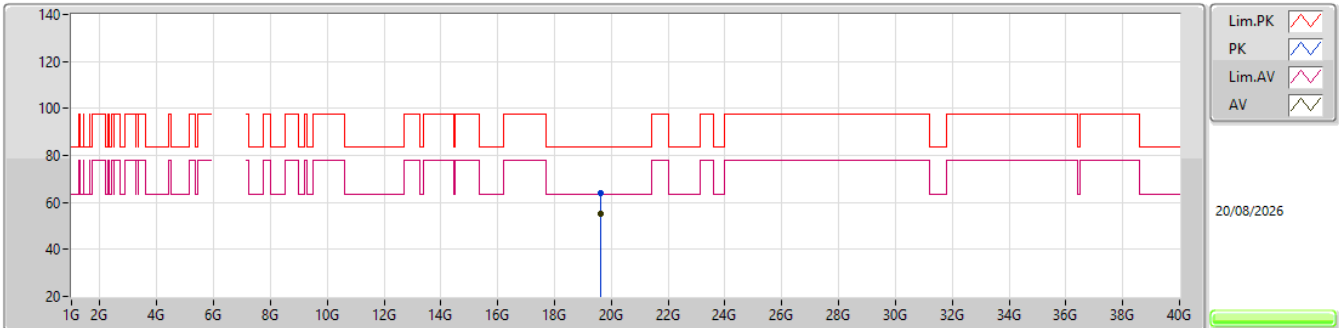EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6094G	63.96	83.54	-19.58	59.02	1	Horizontal	18	1.51	-	37.58	16.20	48.84			
AV	19.6094G	55.01	63.54	-8.53	50.07	1	Horizontal	18	1.51	-	37.58	16.20	48.84			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6695MHz_TX

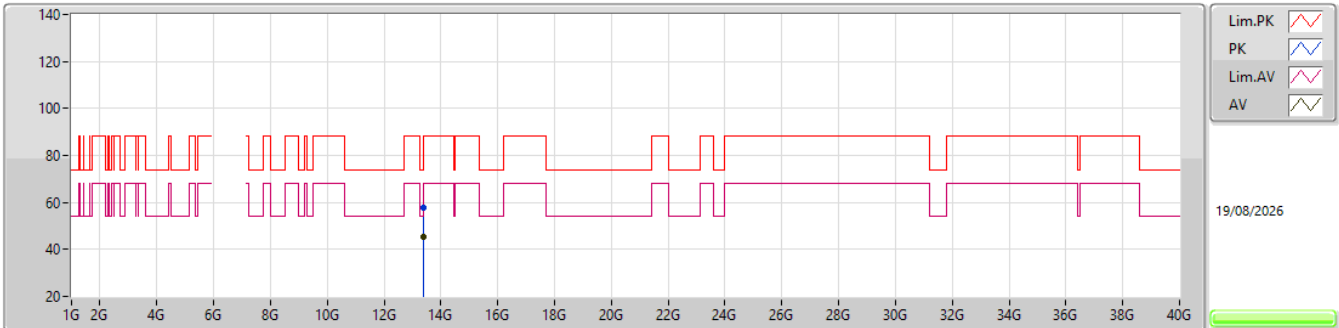EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38508G	57.72	74.00	-16.28	49.68	3	Vertical	77	1.82	-	40.17	13.09	45.22			
AV	13.38562G	45.46	54.00	-8.54	37.42	3	Vertical	77	1.82	-	40.17	13.09	45.22			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6695MHz_TX

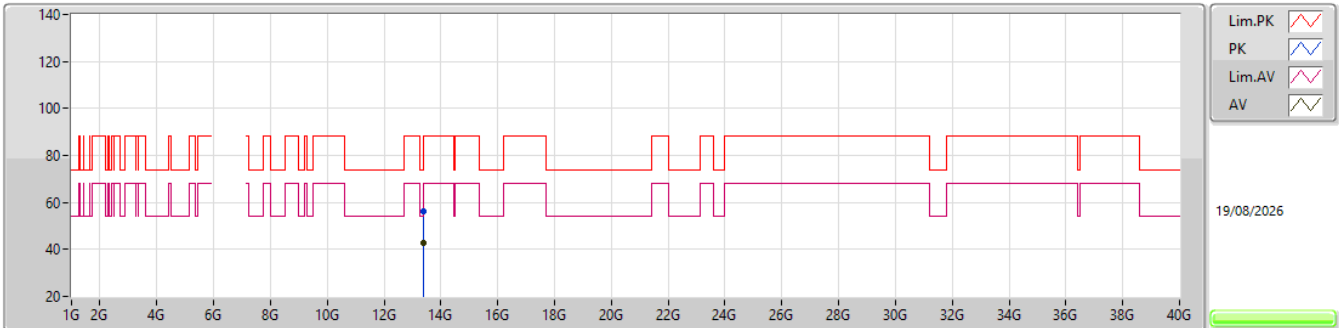EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39786G	55.99	74.00	-18.01	47.89	3	Horizontal	45	1.80	-	40.20	13.10	45.20			
AV	13.38986G	42.99	54.00	-11.01	34.93	3	Horizontal	45	1.80	-	40.18	13.09	45.21			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6695MHz_TX

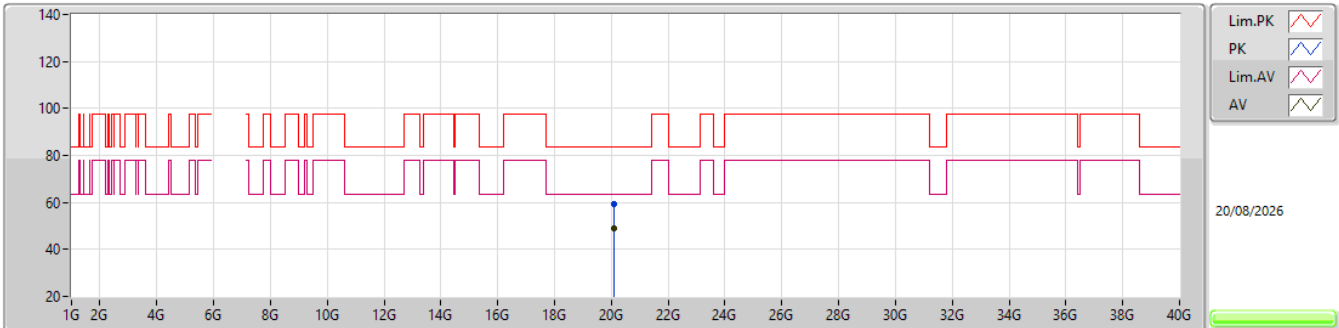EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0788G	59.42	83.54	-24.12	54.73	1	Vertical	64	1.50	-	37.26	16.41	48.98			
AV	20.086G	48.99	63.54	-14.55	44.29	1	Vertical	64	1.50	-	37.27	16.41	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6695MHz_TX

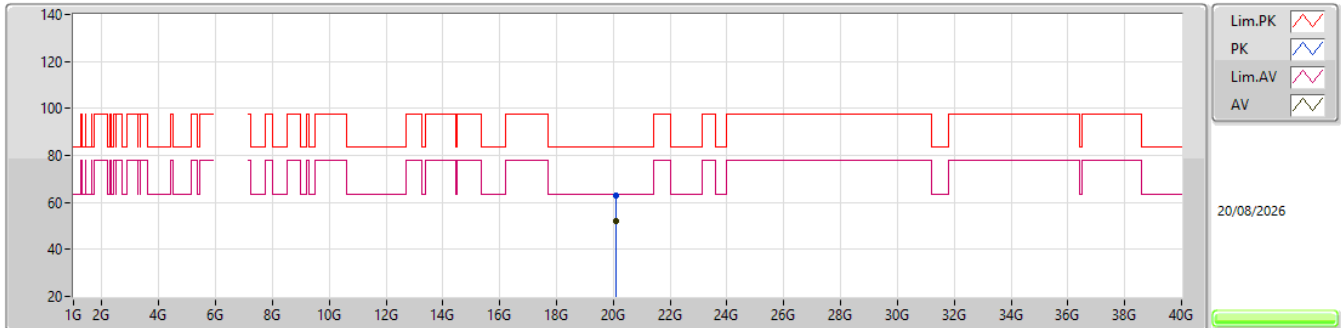EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.0786G	63.10	83.54	-20.44	58.41	1	Horizontal	102	1.52	-	37.26	16.41	48.98			
AV	20.0786G	52.24	63.54	-11.30	47.55	1	Horizontal	102	1.52	-	37.26	16.41	48.98			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

6855MHz_TX

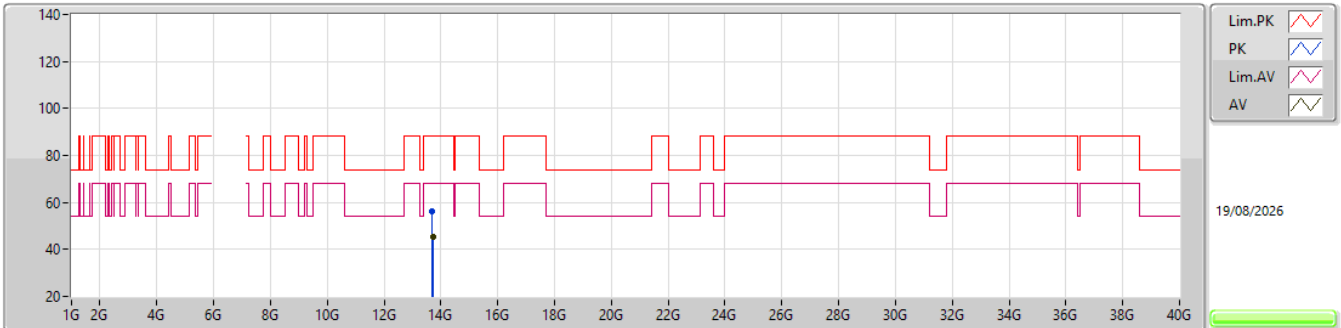


EUT Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70546G	56.04	88.20	-32.16	47.10	3	Vertical	98	1.91	-	40.81	13.19	45.06			
RMS	13.7098G	45.47	68.20	-22.73	36.52	3	Vertical	98	1.91	-	40.82	13.19	45.06			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6855MHz_TX

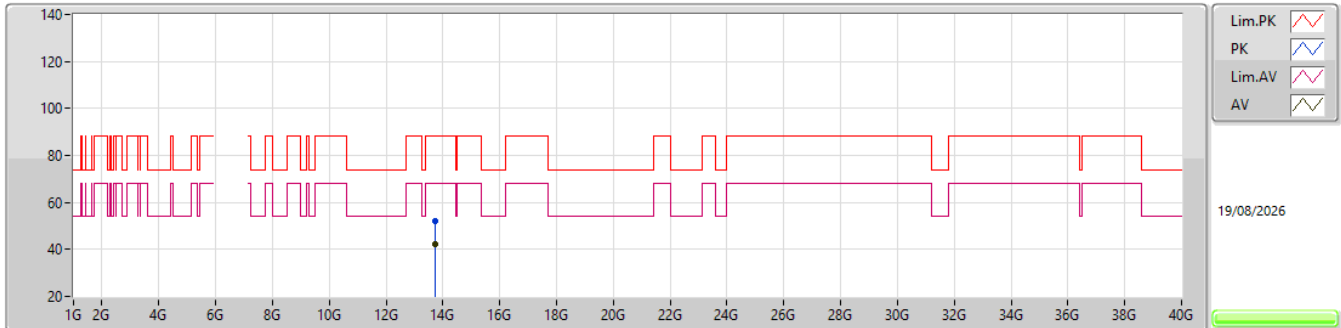EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.71002G	52.04	88.20	-36.16	43.09	3	Horizontal	46	1.80	-	40.82	13.19	45.06			
RMS	13.70984G	42.19	68.20	-26.01	33.24	3	Horizontal	46	1.80	-	40.82	13.19	45.06			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6855MHz_TX

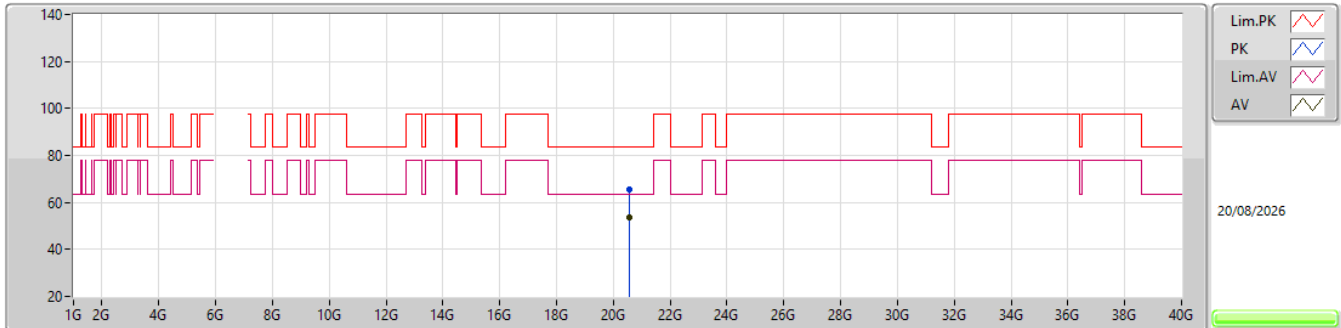EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5632G	65.46	83.54	-18.08	60.18	1	Vertical	31	1.61	-	37.55	16.63	48.90			
AV	20.5628G	53.50	63.54	-10.04	48.22	1	Vertical	31	1.61	-	37.55	16.63	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6855MHz_TX

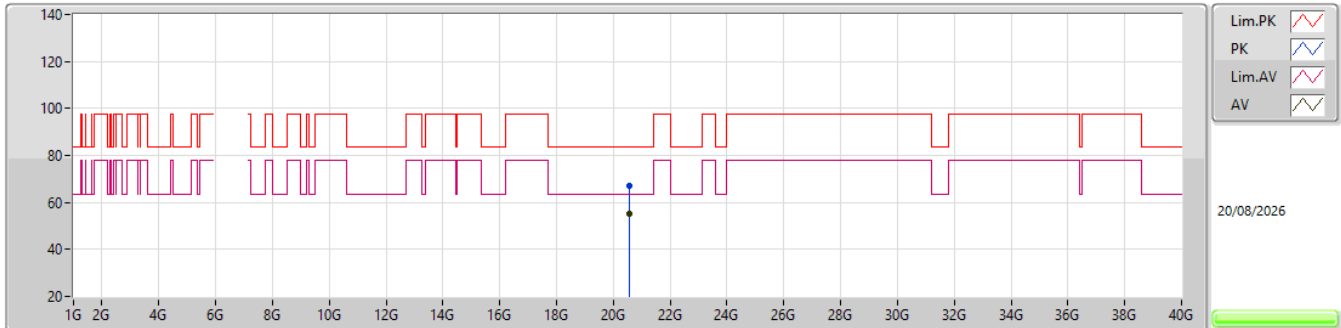EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5692G	67.02	83.54	-16.52	61.70	1	Horizontal	44	1.53	-	37.58	16.64	48.90			
AV	20.5626G	55.00	63.54	-8.54	49.72	1	Horizontal	44	1.53	-	37.55	16.63	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6875MHz_TX

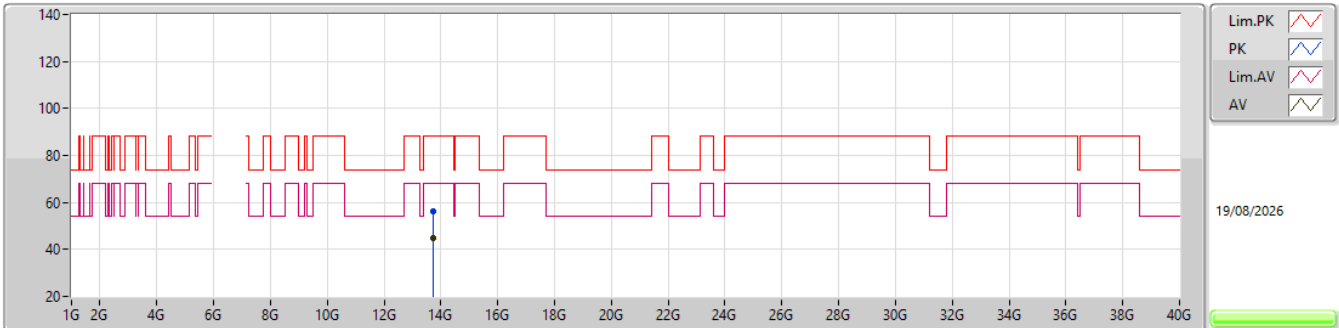EUT Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.74584G	56.33	88.20	-31.87	47.30	3	Vertical	97	1.94	-	40.89	13.20	45.06			
RMS	13.74988G	44.77	68.20	-23.43	35.73	3	Vertical	97	1.94	-	40.90	13.20	45.06			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6875MHz_TX

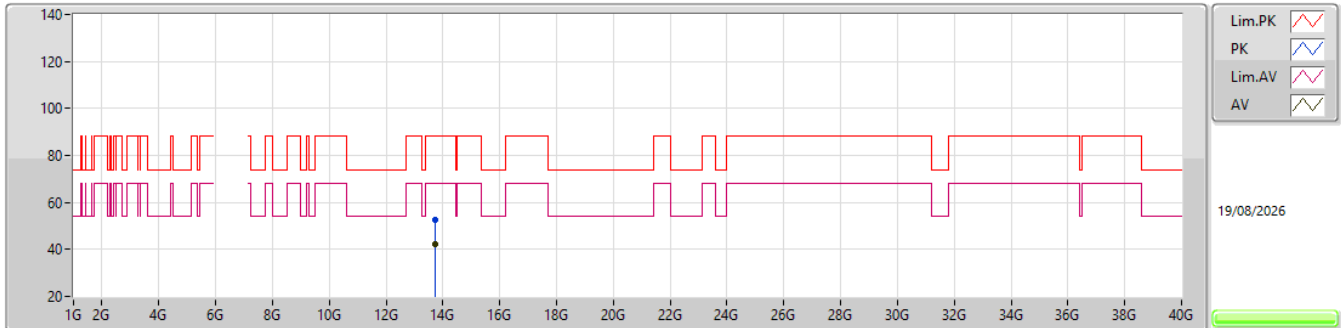EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.75008G	52.62	88.20	-35.58	43.59	3	Horizontal	48	1.80	-	40.90	13.20	45.07			
RMS	13.74984G	42.29	68.20	-25.91	33.25	3	Horizontal	48	1.80	-	40.90	13.20	45.06			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6875MHz_TX

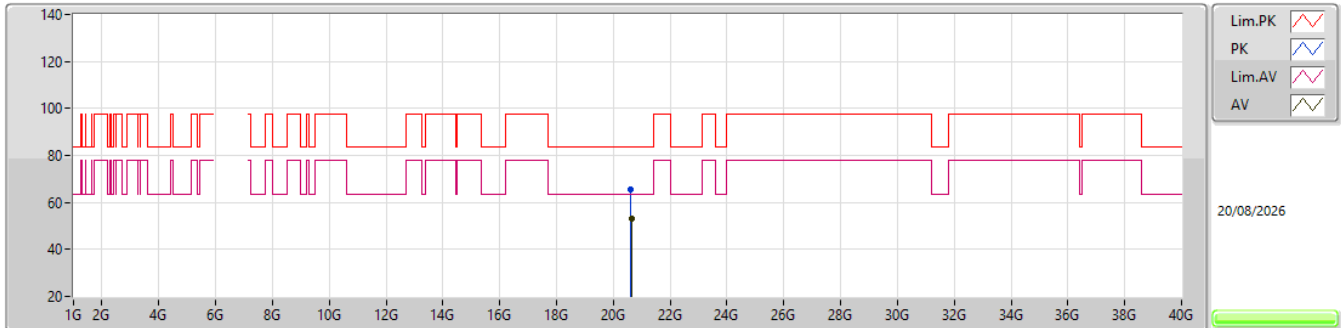EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.6274G	65.26	83.54	-18.28	59.85	1	Vertical	30	1.74	-	37.65	16.66	48.90			
AV	20.633G	53.00	63.54	-10.54	47.60	1	Vertical	30	1.74	-	37.63	16.67	48.90			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6875MHz_TX

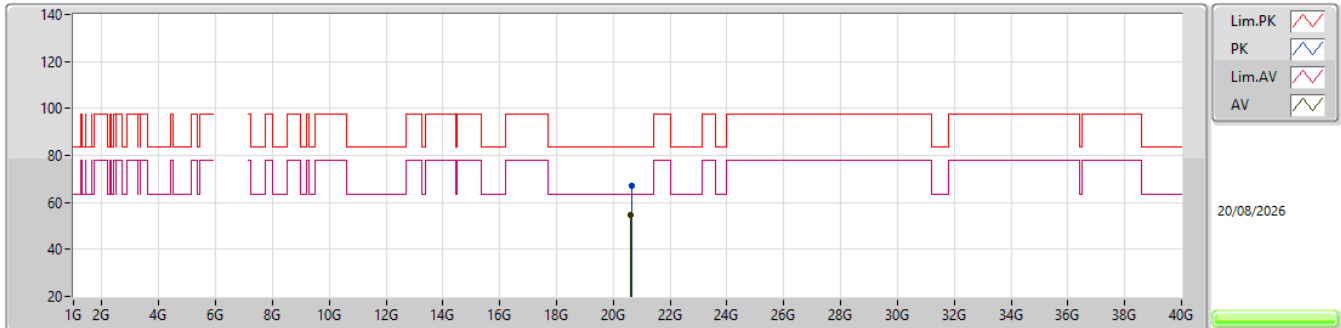EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.643G	67.26	83.54	-16.28	61.88	1	Horizontal	44	1.54	-	37.61	16.67	48.90			
AV	20.6224G	54.65	63.54	-8.89	49.23	1	Horizontal	44	1.54	-	37.66	16.66	48.90			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6995MHz_TX

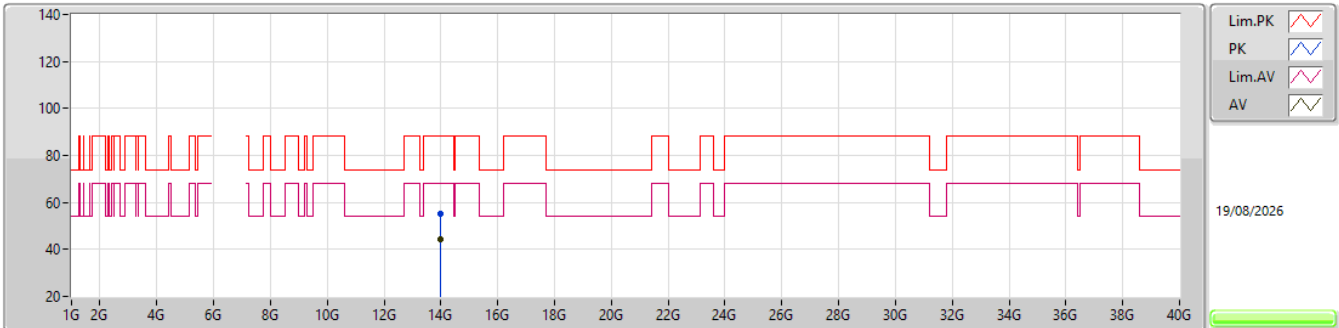EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.99228G	54.92	88.20	-33.28	45.29	3	Vertical	101	1.80	-	41.47	13.28	45.12			
RMS	13.9899G	44.29	68.20	-23.91	34.67	3	Vertical	101	1.80	-	41.46	13.28	45.12			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6995MHz_TX

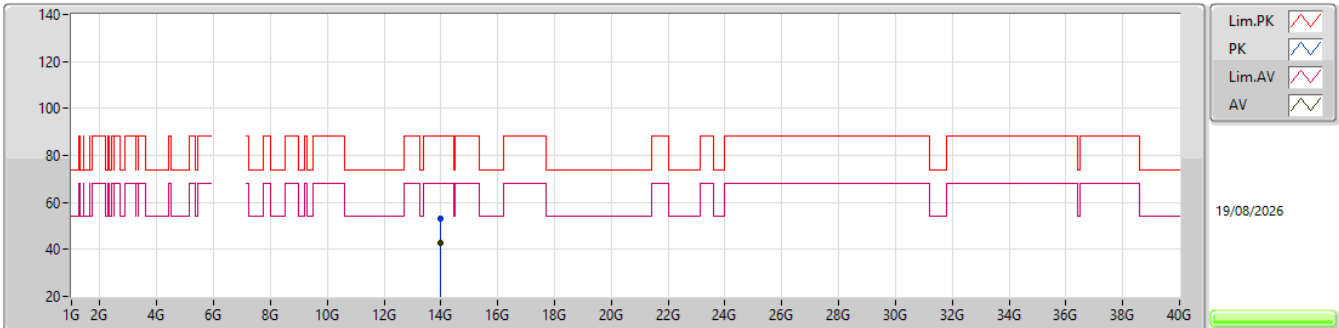EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.99022G	53.21	88.20	-34.99	43.59	3	Horizontal	52	1.80	-	41.46	13.28	45.12			
RMS	13.98984G	42.90	68.20	-25.30	33.28	3	Horizontal	52	1.80	-	41.46	13.28	45.12			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6995MHz_TX

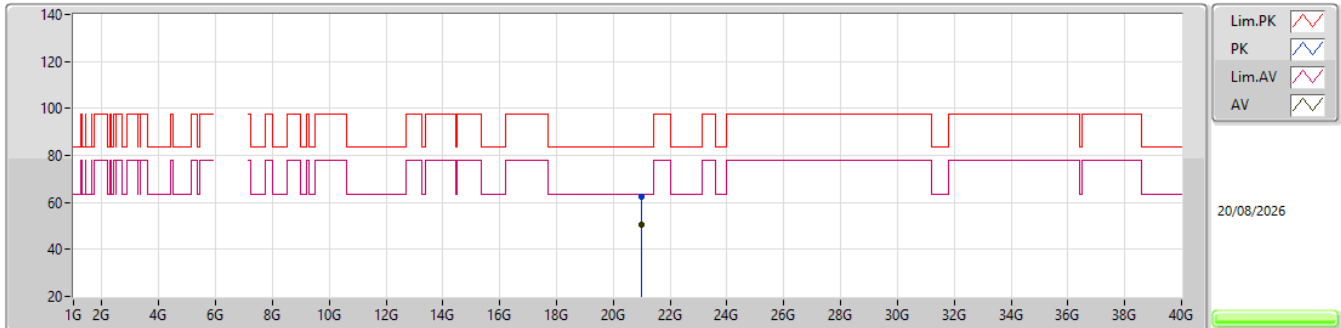EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.9836G	62.24	83.54	-21.30	56.58	1	Vertical	38	1.67	-	37.73	16.83	48.90			
AV	20.9828G	50.63	63.54	-12.91	44.97	1	Vertical	38	1.67	-	37.73	16.83	48.90			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6995MHz_TX

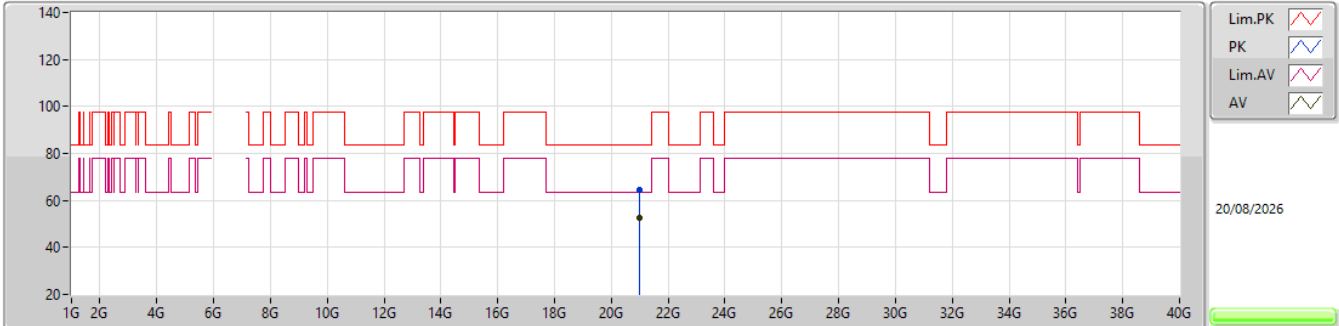EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.9864G	64.51	83.54	-19.03	58.85	1	Horizontal	35	1.52	-	37.73	16.83	48.90			
AV	20.9856G	52.77	63.54	-10.77	47.11	1	Horizontal	35	1.52	-	37.73	16.83	48.90			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7095MHz_TX

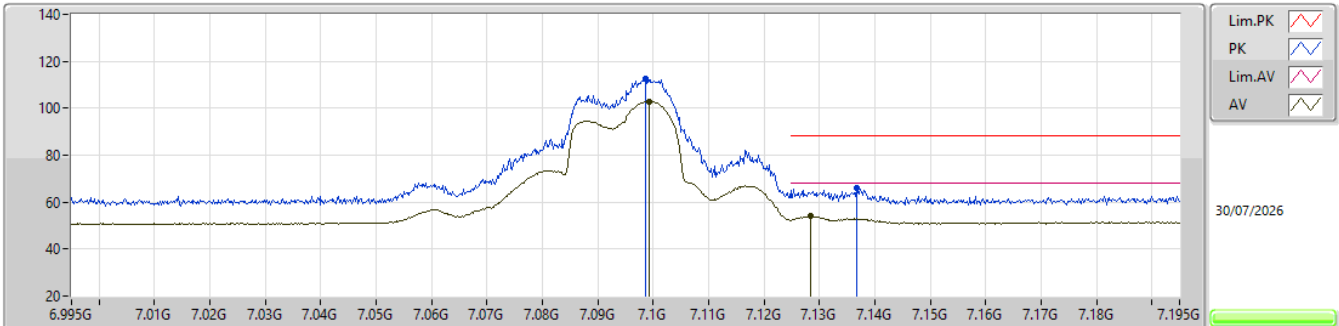EUT_Y_4TX
Setting 44
03-P-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	7.0986G	112.70	Inf	-Inf	103.42	3	Vertical	242	1.80	-	35.90	8.39	35.01				
AV	7.0992G	102.90	Inf	-Inf	93.62	3	Vertical	242	1.80	-	35.90	8.39	35.01				
PK	7.1368G	65.84	88.20	-22.36	56.40	3	Vertical	242	1.80	-	36.05	8.41	35.02				
AV	7.1284G	53.88	68.20	-14.32	44.49	3	Vertical	242	1.80	-	36.01	8.40	35.02				

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7095MHz_TX

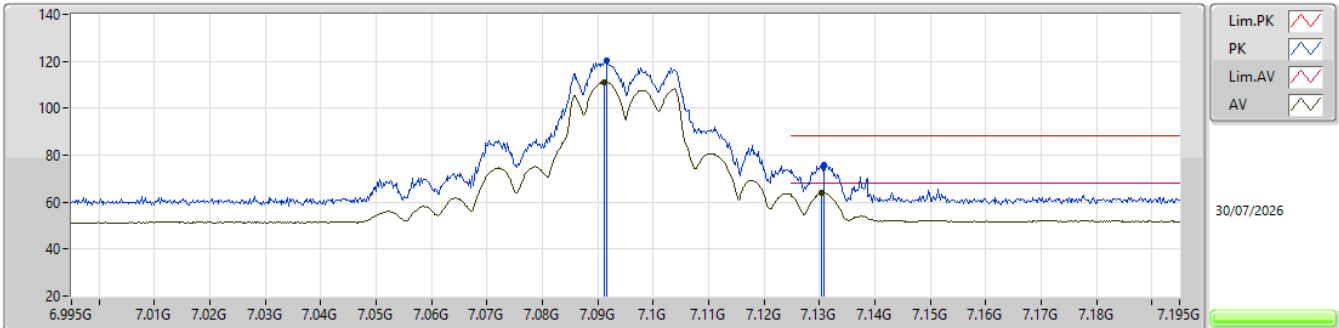EUT_Y_4TX
Setting 44
03-P-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0916G	120.42	Inf	-Inf	111.14	3	Horizontal	179	1.72	-	35.90	8.39	35.01			
RMS	7.0912G	111.23	Inf	-Inf	101.95	3	Horizontal	179	1.72	-	35.90	8.39	35.01			
PK	7.1308G	76.01	88.20	-12.19	66.60	3	Horizontal	179	1.72	-	36.02	8.41	35.02			
RMS	7.1304G	63.96	68.20	-4.24	54.55	3	Horizontal	179	1.72	-	36.02	8.41	35.02			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

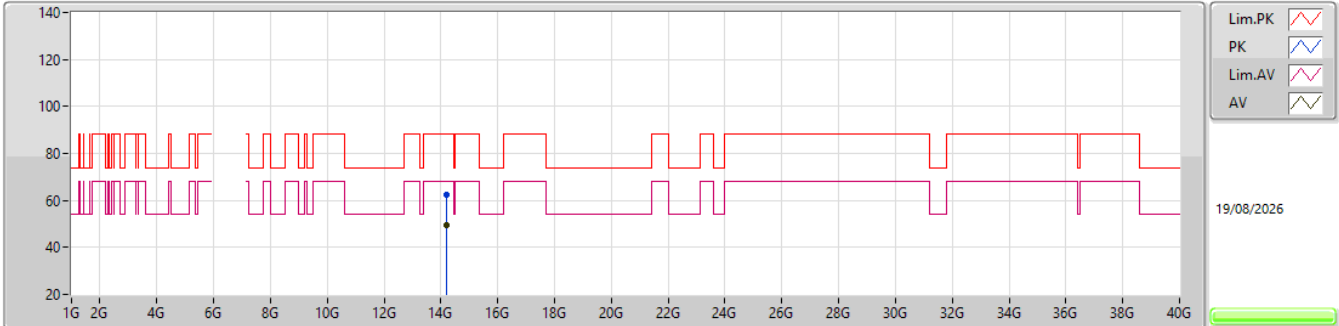


EUT Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.18326G	62.18	88.20	-26.02	51.80	3	Vertical	81	1.86	-	42.03	13.35	45.00			
RMS	14.1849G	49.69	68.20	-18.51	39.30	3	Vertical	81	1.86	-	42.04	13.35	45.00			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7095MHz_TX

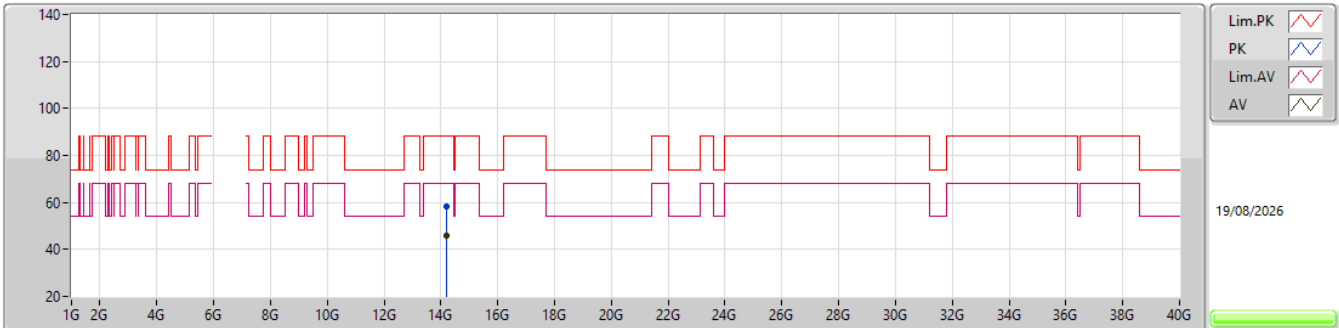EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.19498G	58.32	88.20	-29.88	47.88	3	Horizontal	50	1.74	-	42.08	13.36	45.00			
RMS	14.1952G	46.07	68.20	-22.13	35.63	3	Horizontal	50	1.74	-	42.08	13.36	45.00			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7095MHz_TX

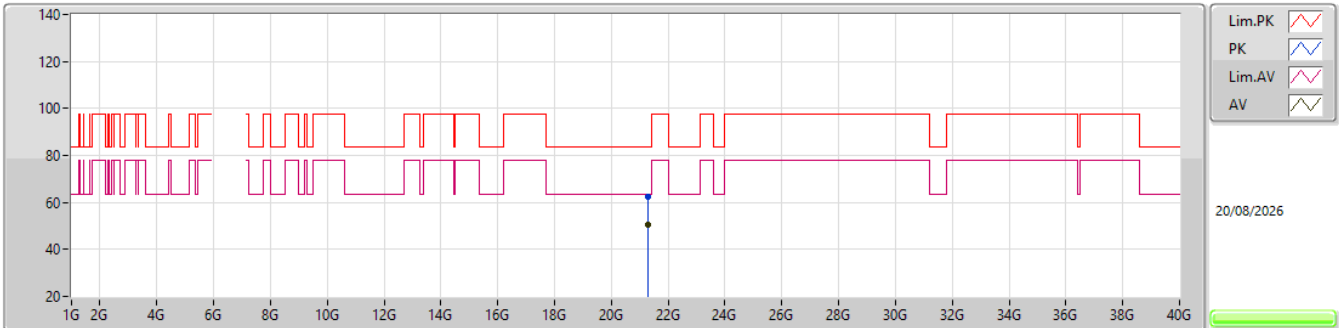EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.283G	62.54	83.54	-21.00	56.69	1	Vertical	106	1.50	-	37.70	16.94	48.79			
AV	21.2844G	50.37	63.54	-13.17	44.53	1	Vertical	106	1.50	-	37.69	16.94	48.79			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7095MHz_TX

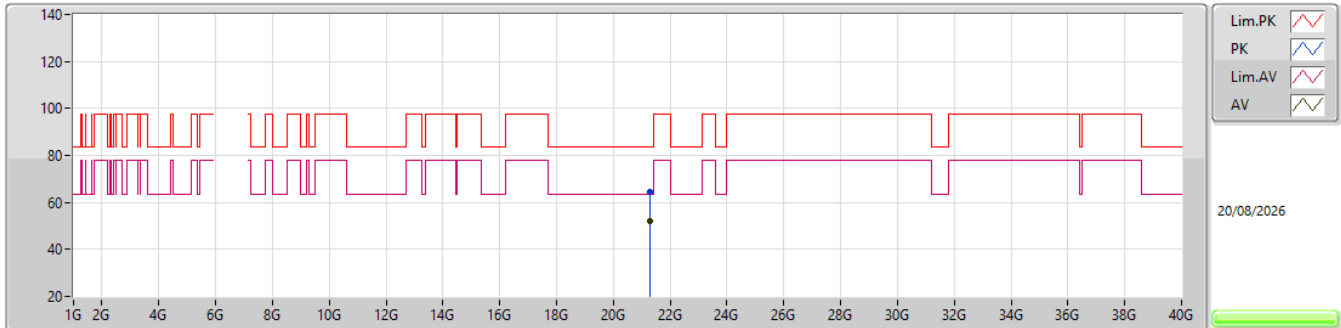


EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.2868G	64.70	83.54	-18.84	58.87	1	Horizontal	42	1.50	-	37.68	16.94	48.79			
AV	21.2856G	51.95	63.54	-11.59	46.11	1	Horizontal	42	1.50	-	37.69	16.94	48.79			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

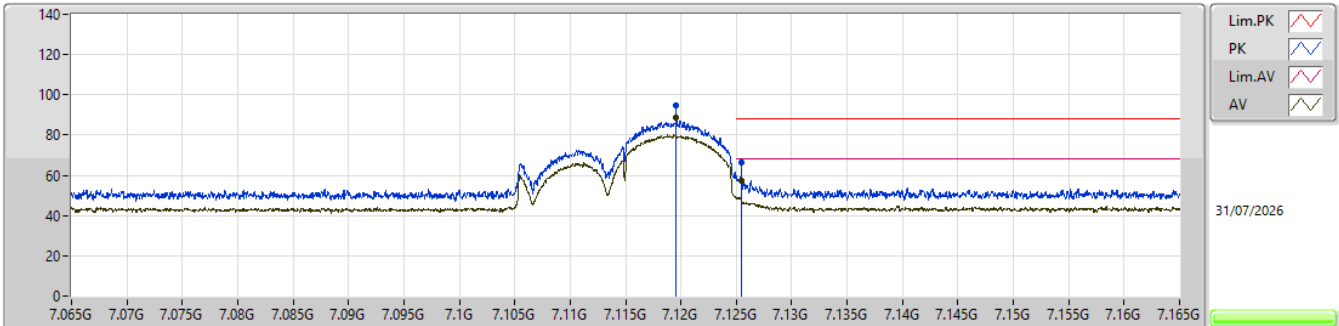


EUT_Y_4TX
Setting 3
03-P-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1195G	95.04	Inf	-Inf	85.68	3	Vertical	238	1.80	BP 1MHz	35.98	8.40	35.02			
AV	7.1195G	88.93	Inf	-Inf	79.57	3	Vertical	238	1.80	BP 1MHz	35.98	8.40	35.02			
PK	7.1255G	66.31	88.20	-21.89	56.93	3	Vertical	238	1.80	BP 1MHz	36.00	8.40	35.02			
AV	7.1255G	57.21	68.20	-10.99	47.83	3	Vertical	238	1.80	BP 1MHz	36.00	8.40	35.02			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

7115MHz_TX

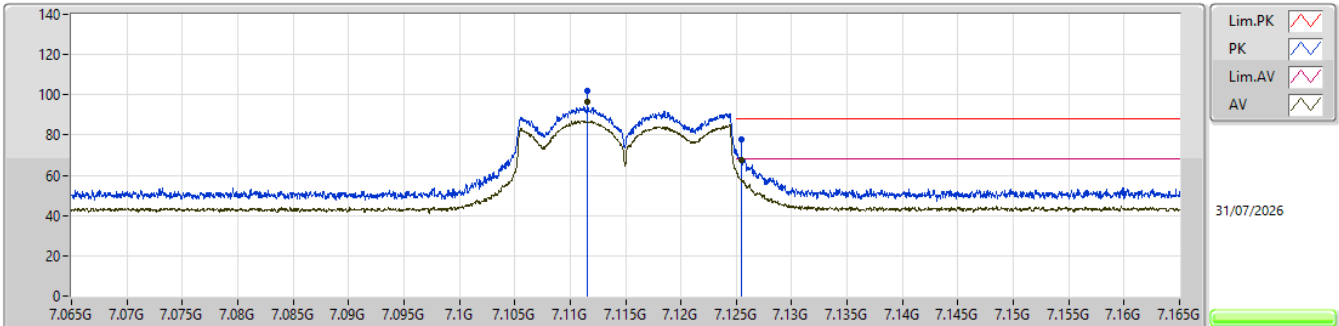


EUT_Y_4TX
Setting 3
03-P-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1115G	102.23	Inf	-Inf	92.89	3	Horizontal	180	1.68	BP 1MHz	35.95	8.40	35.01			
AV	7.1115G	96.26	Inf	-Inf	86.92	3	Horizontal	180	1.68	BP 1MHz	35.95	8.40	35.01			
PK	7.1255G	77.66	88.20	-10.54	68.28	3	Horizontal	180	1.68	BP 1MHz	36.00	8.40	35.02			
AV	7.1255G	67.68	68.20	-0.52	58.30	3	Horizontal	180	1.68	BP 1MHz	36.00	8.40	35.02			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7115MHz_TX

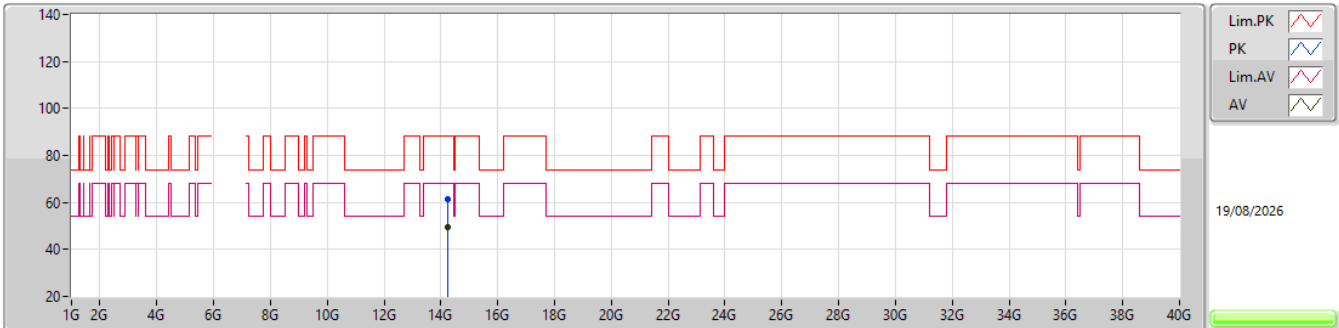EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.22558G	61.34	88.20	-26.86	50.80	3	Vertical	81	1.88	-	42.15	13.37	44.98			
RMS	14.22486G	49.71	68.20	-18.49	39.17	3	Vertical	81	1.88	-	42.15	13.37	44.98			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7115MHz_TX

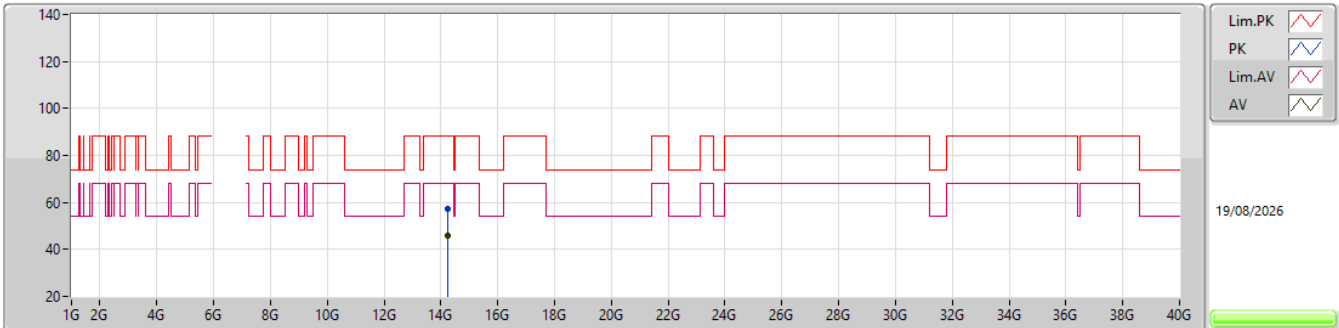EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.23574G	57.37	88.20	-30.83	46.80	3	Horizontal	50	1.72	-	42.17	13.37	44.97			
RMS	14.23508G	46.08	68.20	-22.12	35.51	3	Horizontal	50	1.72	-	42.17	13.37	44.97			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7115MHz_TX

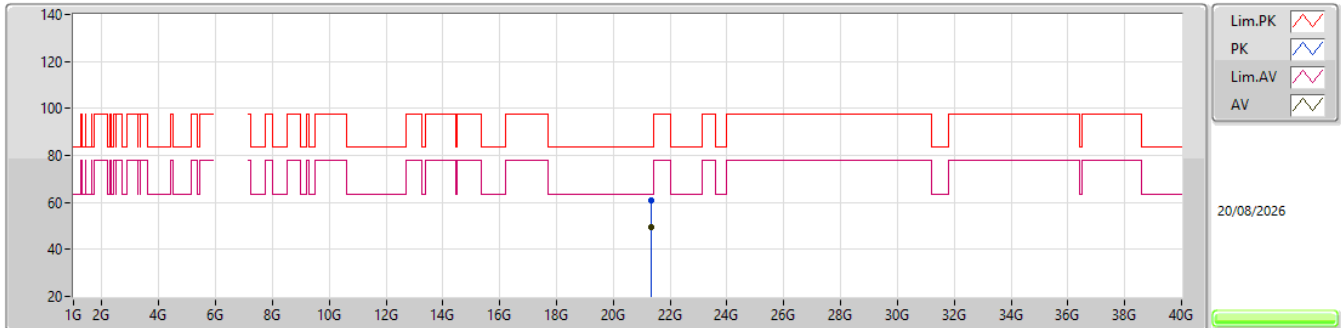EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.3418G	60.64	83.54	-22.90	54.76	1	Vertical	104	1.50	-	37.68	16.96	48.76			
AV	21.3422G	49.62	63.54	-13.92	43.74	1	Vertical	104	1.50	-	37.68	16.96	48.76			

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX


7115MHz_TX

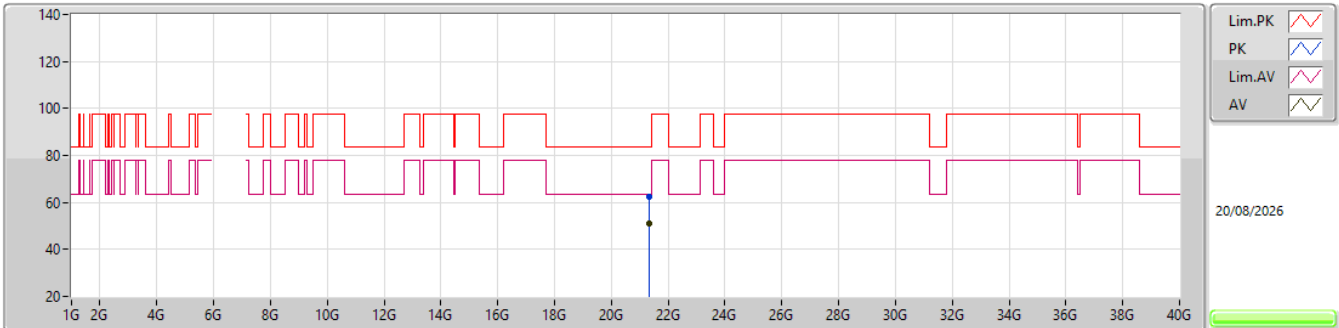EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.346G	62.53	83.54	-21.01	56.64	1	Horizontal	41	1.50	-	37.69	16.96	48.76			
AV	21.3454G	51.18	63.54	-12.36	45.29	1	Horizontal	41	1.50	-	37.69	16.96	48.76			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

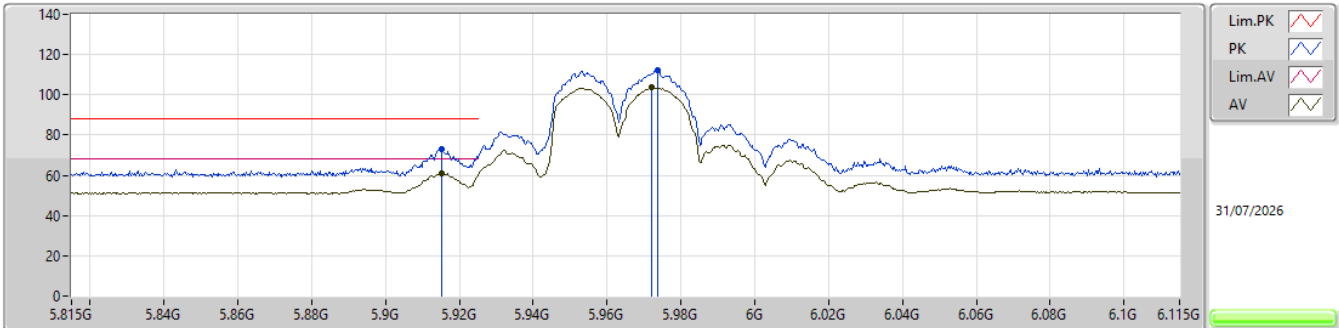EUT_Y_4TX
Setting 38
03-P-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9152G	72.77	88.20	-15.43	65.48	3	Vertical	0	2.53	-	34.63	7.52	34.86			
RMS	5.9152G	61.25	68.20	-6.95	53.96	3	Vertical	0	2.53	-	34.63	7.52	34.86			
PK	5.9737G	112.39	Inf	-Inf	104.98	3	Vertical	0	2.53	-	34.75	7.53	34.87			
RMS	5.9722G	103.57	Inf	-Inf	96.17	3	Vertical	0	2.53	-	34.74	7.53	34.87			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

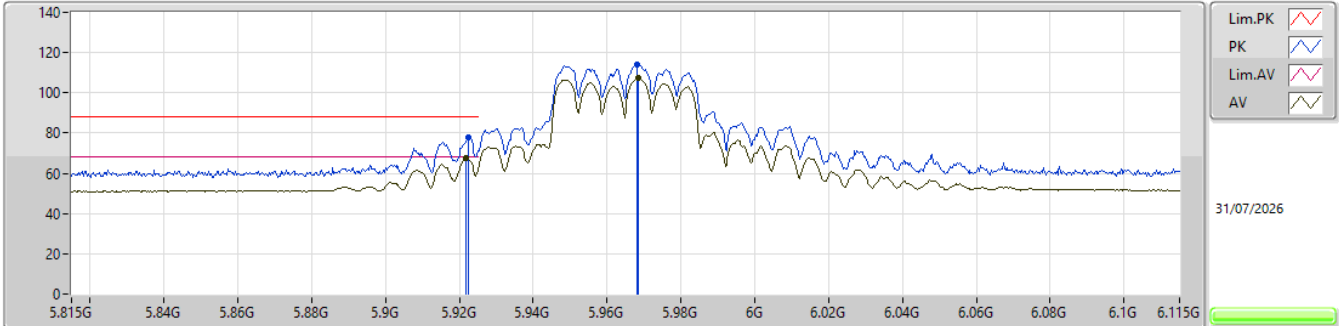


EUT_Y_4TX
Setting 38
03-P-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.9224G	77.75	88.20	-10.45	70.45	3	Horizontal	24	1.36	-	34.64	7.52	34.86				
RMS	5.9218G	67.34	68.20	-0.86	60.04	3	Horizontal	24	1.36	-	34.64	7.52	34.86				
PK	5.968G	113.84	Inf	-Inf	106.44	3	Horizontal	24	1.36	-	34.74	7.53	34.87				
RMS	5.9683G	107.42	Inf	-Inf	100.02	3	Horizontal	24	1.36	-	34.74	7.53	34.87				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

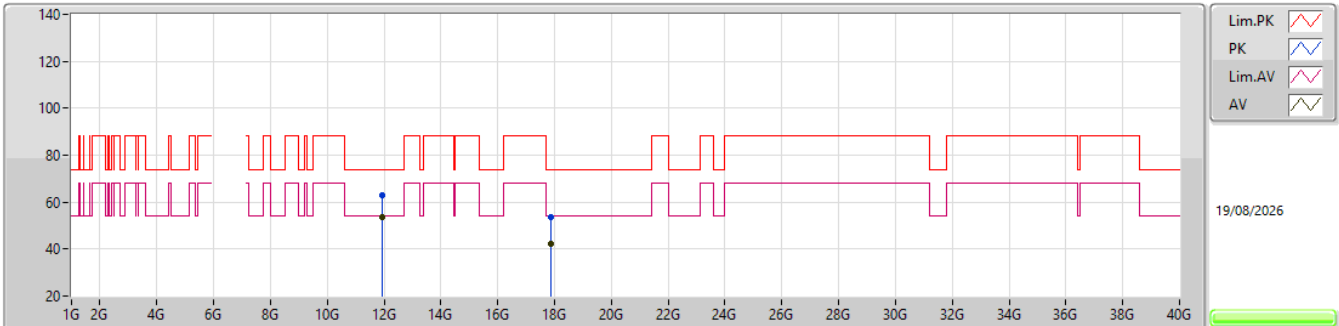EUT_Y_4TX
Setting 36
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.9223G	63.09	74.00	-10.91	57.09	3	Vertical	147	1.84	-	39.31	12.63	45.94			
AV	11.92132G	53.52	54.00	-0.48	47.52	3	Vertical	147	1.84	-	39.31	12.63	45.94			
PK	17.89362G	53.66	74.00	-20.34	37.83	3	Vertical	314	1.80	-	46.15	14.96	45.28			
AV	17.89066G	42.04	54.00	-11.96	26.23	3	Vertical	314	1.80	-	46.13	14.96	45.28			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

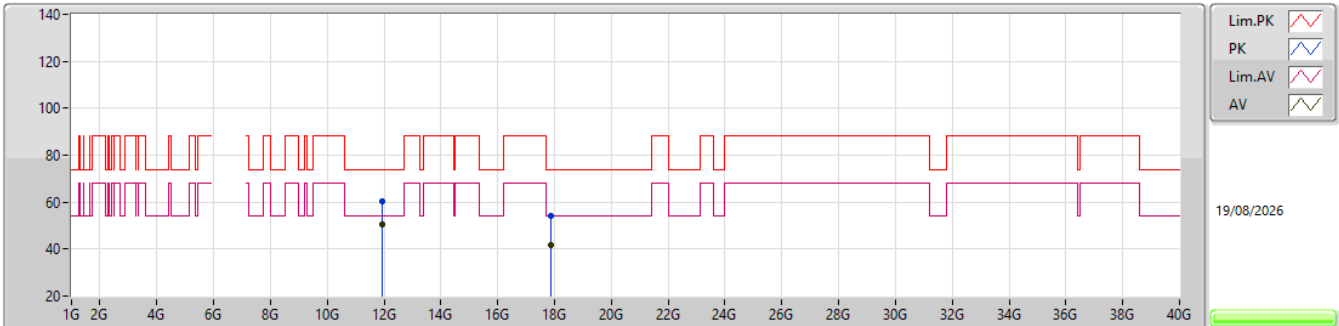EUT_Y_4TX
Setting 36
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92222G	60.25	74.00	-13.75	54.25	3	Horizontal	36	1.78	-	39.31	12.63	45.94			
AV	11.92252G	50.35	54.00	-3.65	44.35	3	Horizontal	36	1.78	-	39.31	12.63	45.94			
PK	17.89178G	54.01	74.00	-19.99	38.20	3	Horizontal	148	1.80	-	46.13	14.96	45.28			
AV	17.89202G	41.85	54.00	-12.15	26.03	3	Horizontal	148	1.80	-	46.14	14.96	45.28			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5965MHz_TX

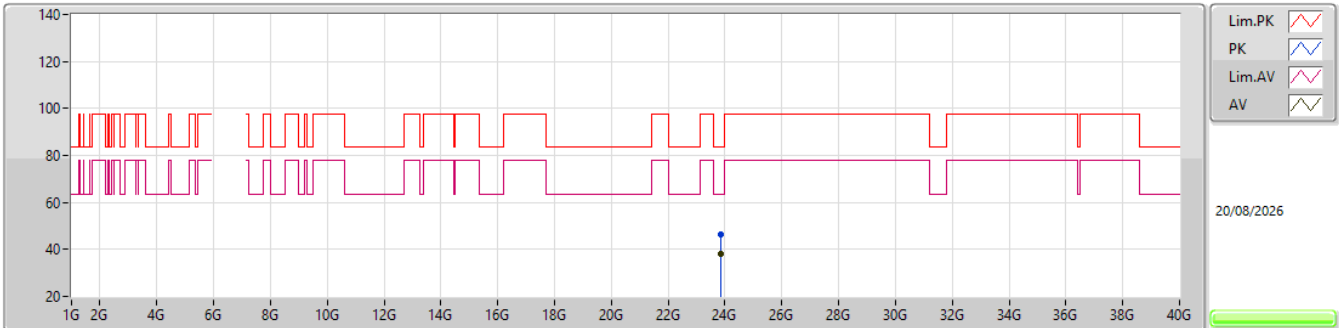


EUT Y_4TX
Setting 36
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	23.8587498G	46.51	83.54	-37.03	37.37	1	Vertical	292	1.72	-	38.90	18.14	47.90			
AV	23.8598G	38.10	63.54	-25.44	28.96	1	Vertical	292	1.72	-	38.90	18.14	47.90			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

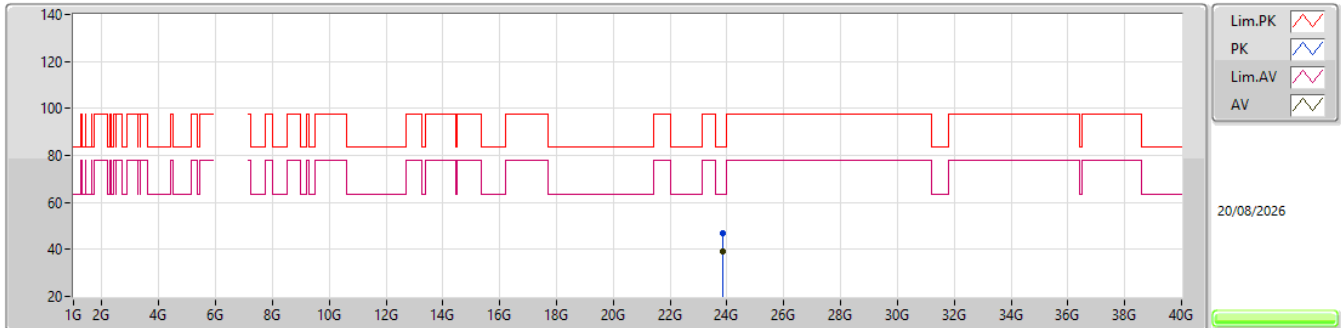EUT_Y_4TX
Setting 36
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85887G	46.74	83.54	-36.80	37.60	1	Horizontal	324	1.52	-	38.90	18.14	47.90			
AV	23.8598G	39.05	63.54	-24.49	29.91	1	Horizontal	324	1.52	-	38.90	18.14	47.90			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6205MHz_TX

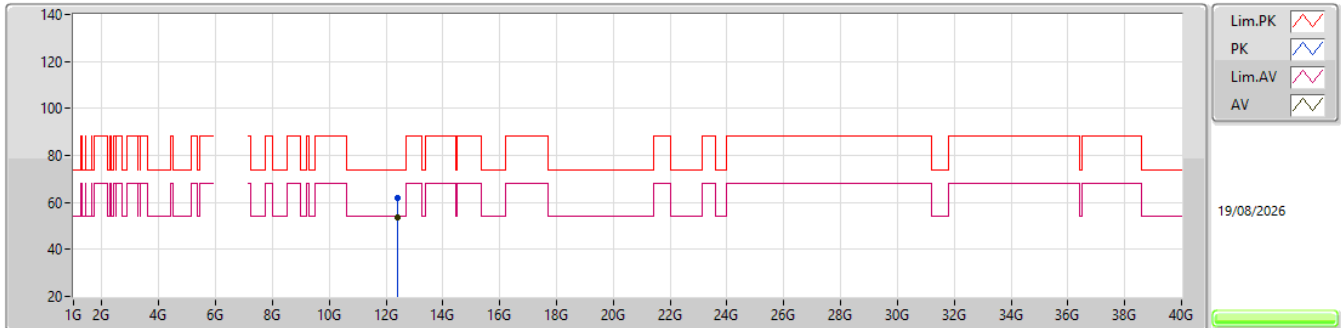


EUT_Y_4TX
Setting 42
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40748G	62.01	74.00	-11.99	56.08	3	Vertical	49	1.80	-	38.69	12.79	45.55			
AV	12.40748G	53.60	54.00	-0.40	47.67	3	Vertical	49	1.80	-	38.69	12.79	45.55			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6205MHz_TX

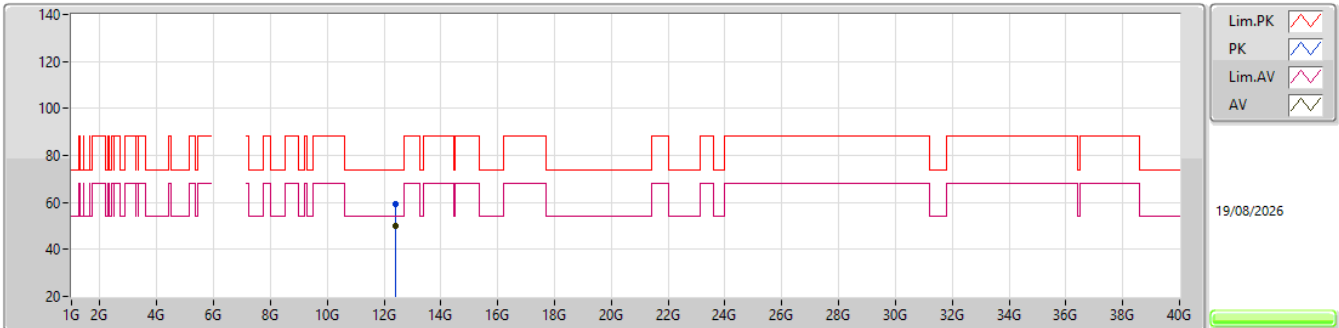


EUT_V_4TX
Setting 42
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.40728G	59.23	74.00	-14.77	53.30	3	Horizontal	59	1.92	-	38.69	12.79	45.55			
AV	12.40742G	49.89	54.00	-4.11	43.96	3	Horizontal	59	1.92	-	38.69	12.79	45.55			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6205MHz_TX

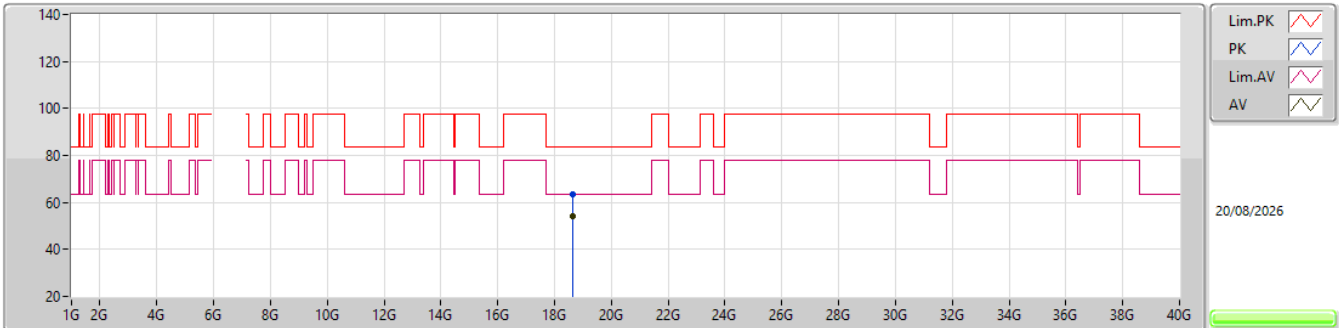


EUT Y_4TX
Setting 42
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6264G	63.30	83.54	-20.24	58.57	1	Vertical	64	1.50	-	37.65	15.76	48.68			
AV	18.6248G	54.39	63.54	-9.15	49.65	1	Vertical	64	1.50	-	37.65	15.76	48.67			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6205MHz_TX

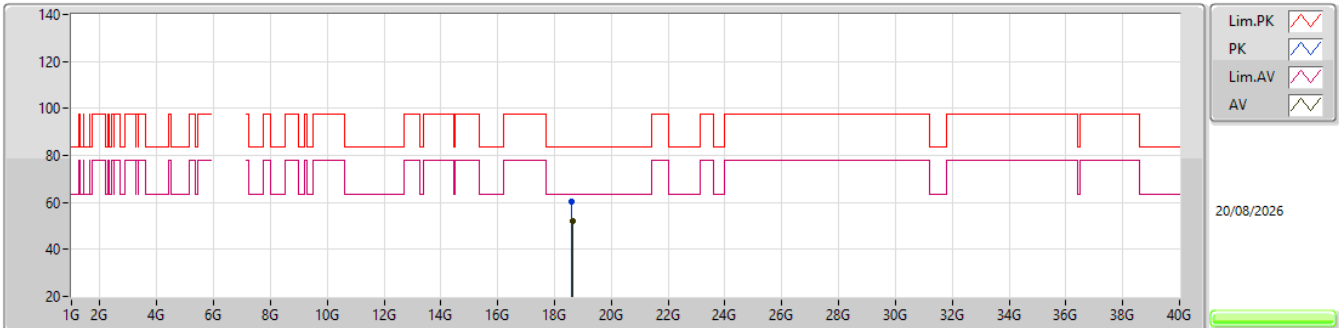EUT Y_4TX
Setting 42
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6048G	60.37	83.54	-23.17	55.59	1	Horizontal	37	1.60	-	37.69	15.75	48.66			
AV	18.6248G	52.29	63.54	-11.25	47.55	1	Horizontal	37	1.60	-	37.65	15.76	48.67			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6405MHz_TX

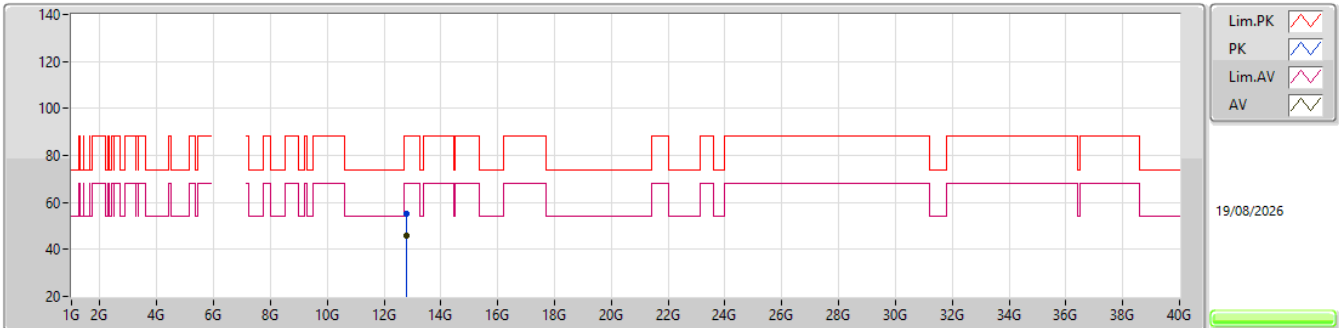EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80238G	55.41	88.20	-32.79	49.24	3	Vertical	92	1.95	-	39.00	12.91	45.74			
RMS	12.80266G	45.68	68.20	-22.52	39.50	3	Vertical	92	1.95	-	39.01	12.91	45.74			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6405MHz_TX

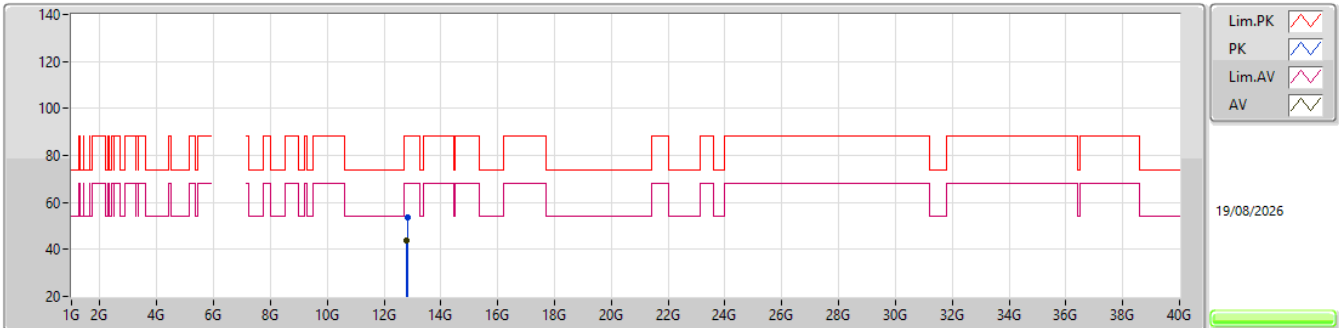EUT_V_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81124G	53.82	88.20	-34.38	47.63	3	Horizontal	83	1.88	-	39.02	12.92	45.75			
RMS	12.8099G	43.91	68.20	-24.29	37.72	3	Horizontal	83	1.88	-	39.02	12.92	45.75			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6405MHz_TX

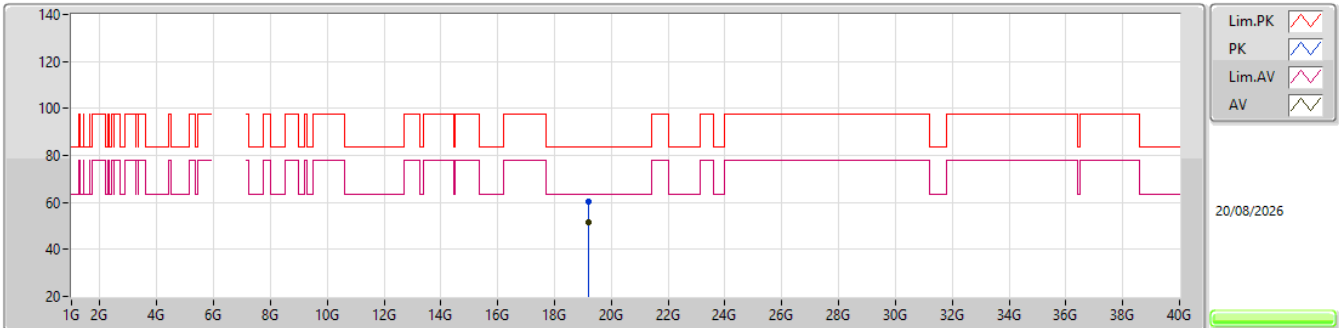EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.1998G	60.13	83.54	-23.41	55.36	1	Vertical	75	1.49	-	37.60	16.03	48.86			
AV	19.1994G	51.40	63.54	-12.14	46.63	1	Vertical	75	1.49	-	37.60	16.03	48.86			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6405MHz_TX

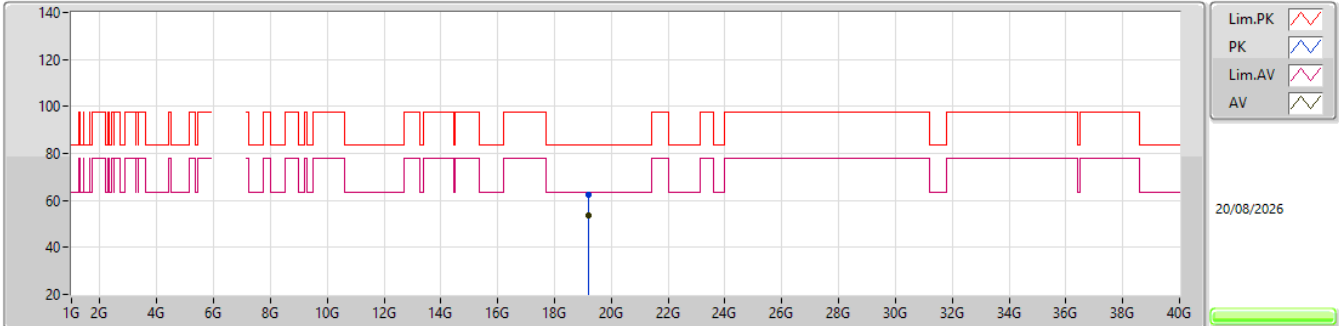EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.1998G	62.27	83.54	-21.27	57.50	1	Horizontal	46	1.56	-	37.60	16.03	48.86			
AV	19.1996G	53.60	63.54	-9.94	48.83	1	Horizontal	46	1.56	-	37.60	16.03	48.86			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6445MHz_TX

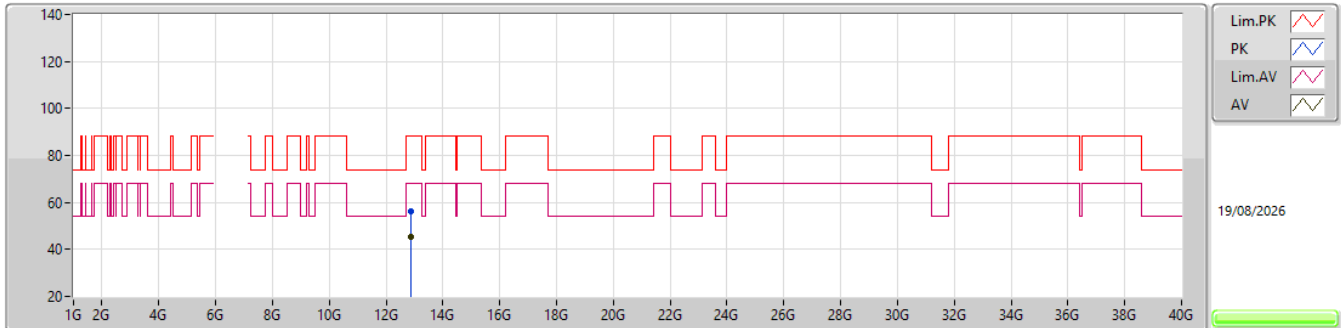EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88242G	56.20	88.20	-32.00	49.91	3	Vertical	118	1.93	-	39.16	12.94	45.81			
RMS	12.88124G	45.33	68.20	-22.87	39.04	3	Vertical	118	1.93	-	39.16	12.94	45.81			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6445MHz_TX

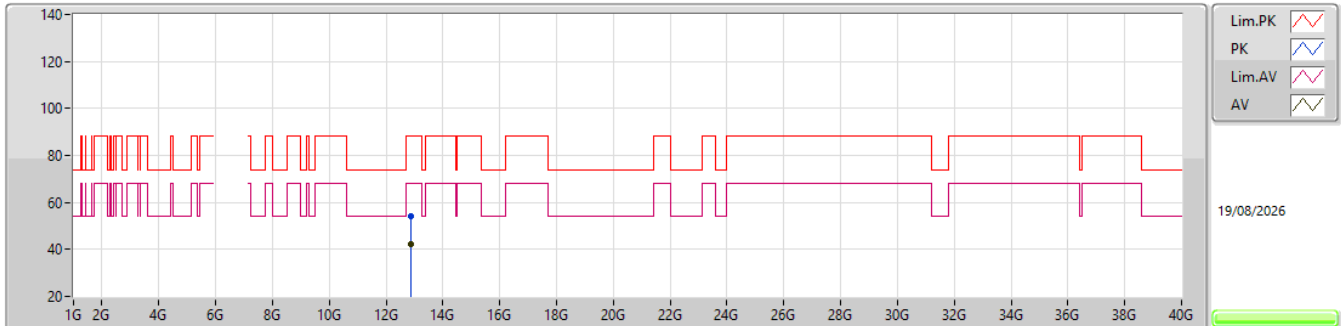


EUT_V_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.89124G	54.02	88.20	-34.18	47.72	3	Horizontal	80	1.87	-	39.18	12.94	45.82			
RMS	12.89006G	42.46	68.20	-25.74	36.16	3	Horizontal	80	1.87	-	39.18	12.94	45.82			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6445MHz_TX

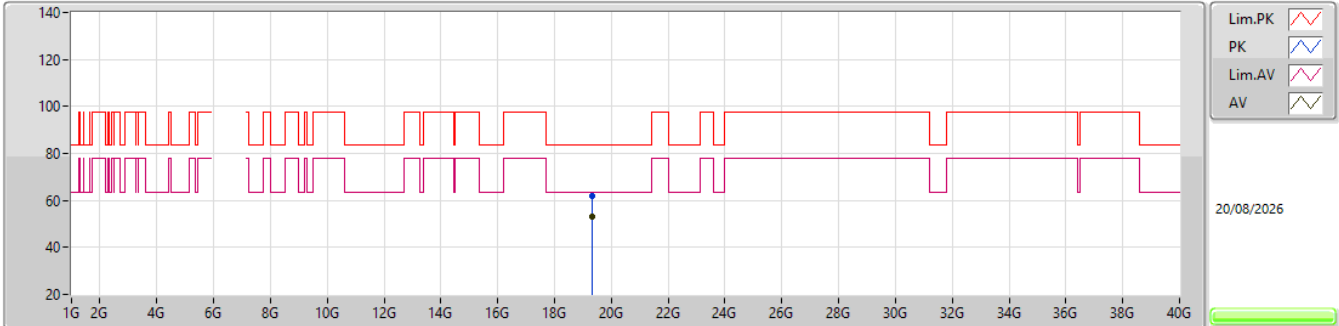EUT Y_4TX
Setting 44
02-Z-E-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.32G	61.70	83.54	-21.84	56.82	1	Vertical	75	1.48	-	37.64	16.08	48.84			
AV	19.3194G	53.32	63.54	-10.22	48.44	1	Vertical	75	1.48	-	37.64	16.08	48.84			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6445MHz_TX

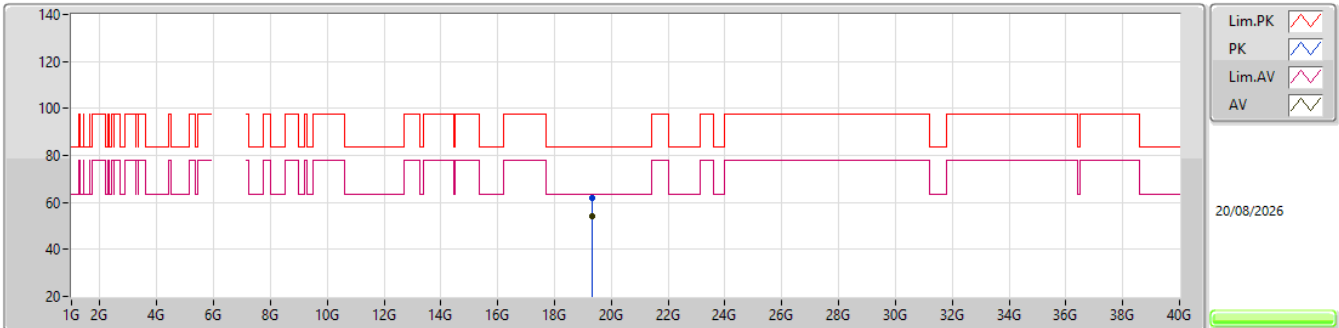EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3198G	61.89	83.54	-21.65	57.01	1	Horizontal	47	1.54	-	37.64	16.08	48.84			
AV	19.3194G	53.92	63.54	-9.62	49.04	1	Horizontal	47	1.54	-	37.64	16.08	48.84			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

6485MHz_TX

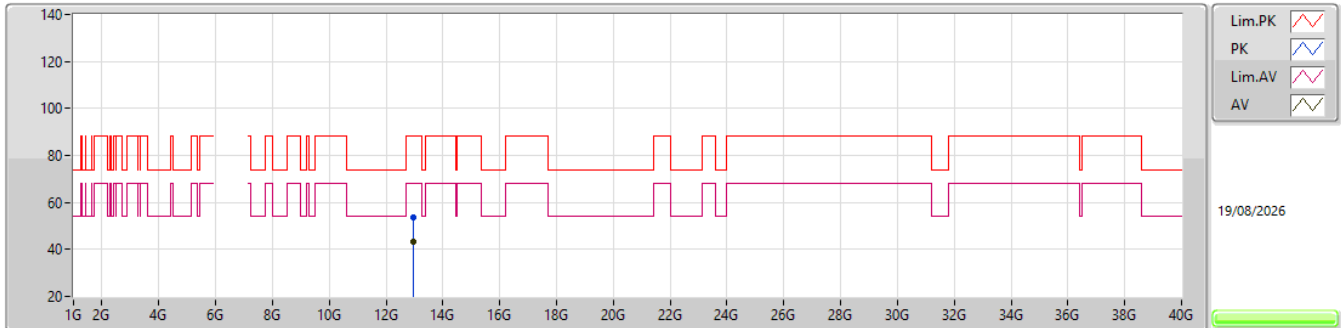


EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9716G	53.87	88.20	-34.33	47.45	3	Vertical	62	1.80	-	39.34	12.97	45.89			
RMS	12.97014G	43.42	68.20	-24.78	37.00	3	Vertical	62	1.80	-	39.34	12.97	45.89			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6485MHz_TX

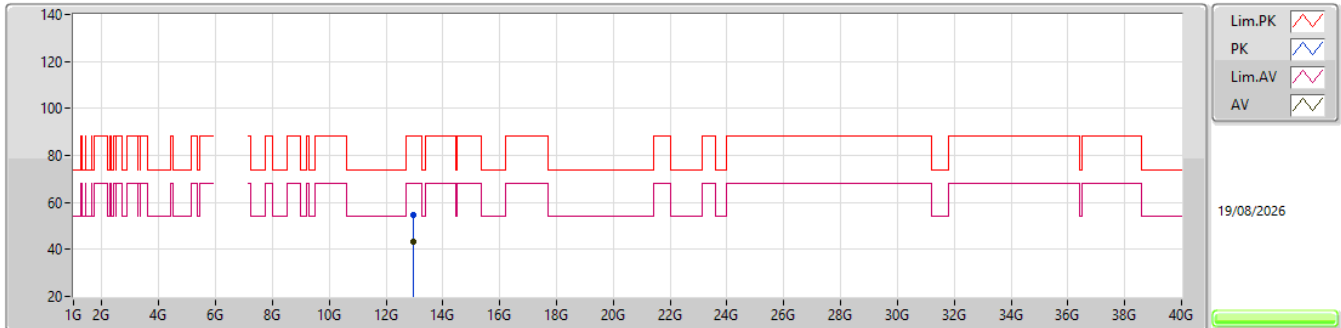EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9713G	54.47	88.20	-33.73	48.05	3	Horizontal	81	1.88	-	39.34	12.97	45.89			
RMS	12.96998G	43.23	68.20	-24.97	36.81	3	Horizontal	81	1.88	-	39.34	12.97	45.89			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6485MHz_TX

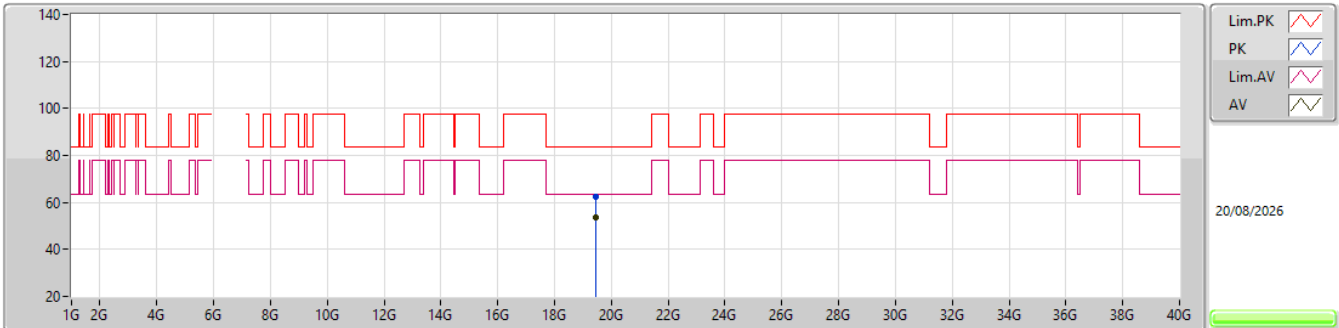EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.4664G	62.17	83.54	-21.37	57.27	1	Vertical	288	1.52	-	37.57	16.14	48.81			
AV	19.4534G	53.76	63.54	-9.78	48.85	1	Vertical	288	1.52	-	37.59	16.13	48.81			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6485MHz_TX

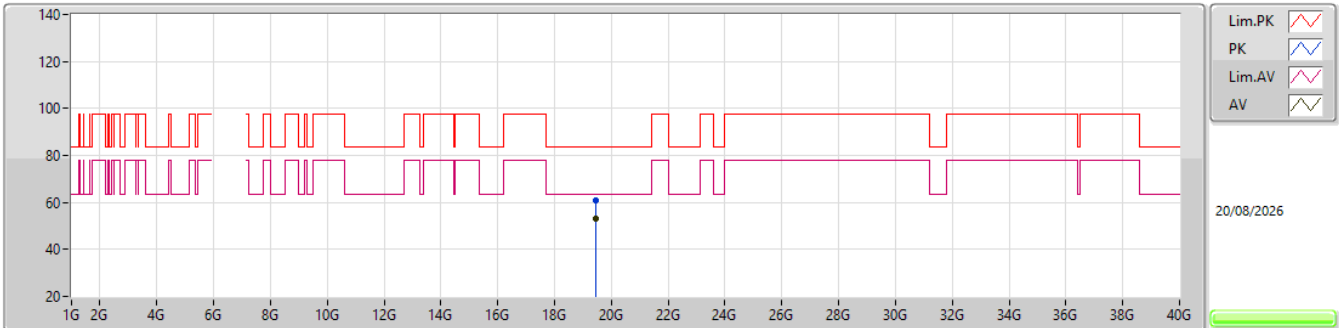EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.4594G	61.11	83.54	-22.43	56.20	1	Horizontal	10	1.50	-	37.58	16.14	48.81			
AV	19.4596G	52.86	63.54	-10.68	47.95	1	Horizontal	10	1.50	-	37.58	16.14	48.81			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6525MHz_TX

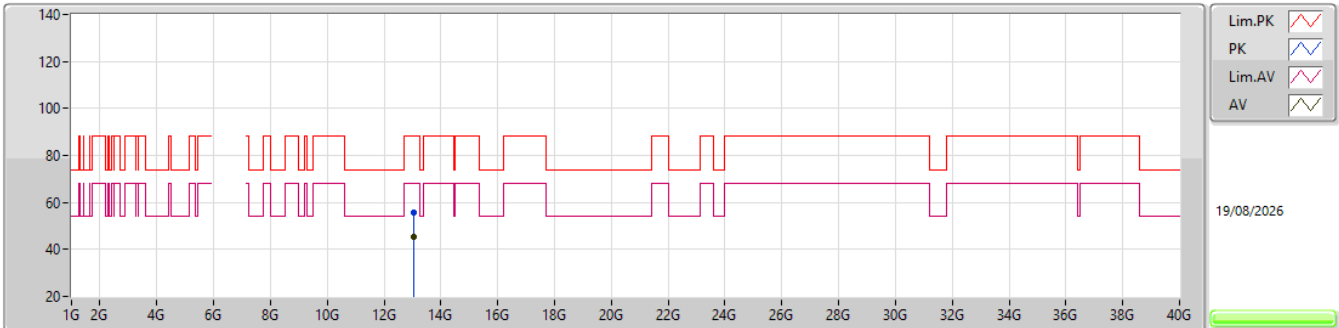EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.04968G	55.78	88.20	-32.42	49.22	3	Vertical	91	1.82	-	39.40	12.99	45.83			
RMS	13.05G	45.51	68.20	-22.69	38.95	3	Vertical	91	1.82	-	39.40	12.99	45.83			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6525MHz_TX

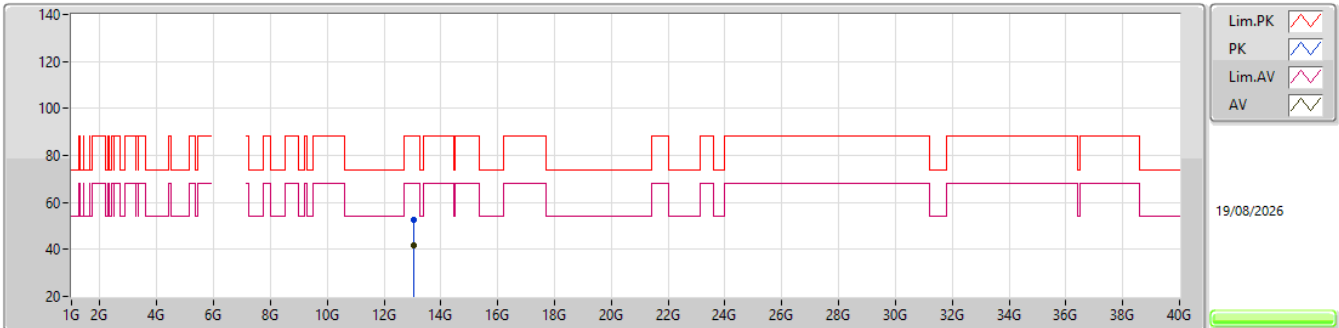EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.05152G	52.73	88.20	-35.47	46.16	3	Horizontal	80	1.87	-	39.41	12.99	45.83			
RMS	13.0499G	41.53	68.20	-26.67	34.97	3	Horizontal	80	1.87	-	39.40	12.99	45.83			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6525MHz_TX

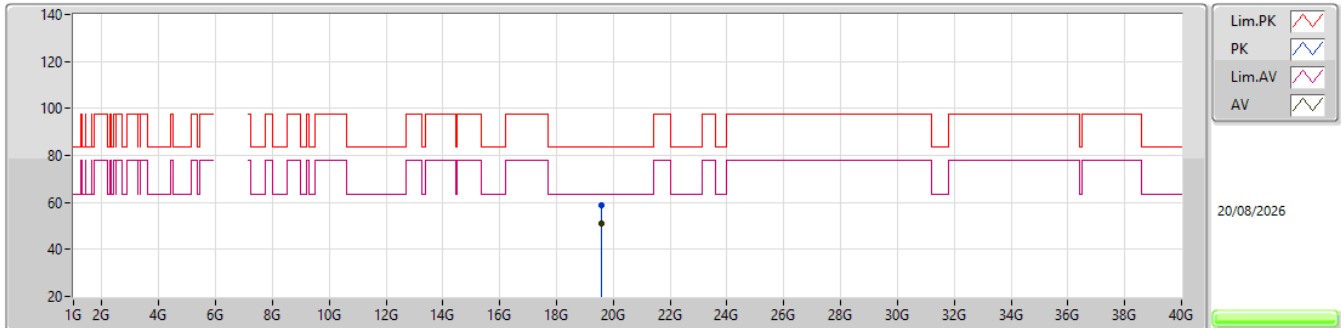EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.5672G	58.84	83.54	-24.70	53.89	1	Vertical	46	1.50	-	37.60	16.18	48.83			
AV	19.5674G	50.98	63.54	-12.56	46.03	1	Vertical	46	1.50	-	37.60	16.18	48.83			

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6525MHz_TX

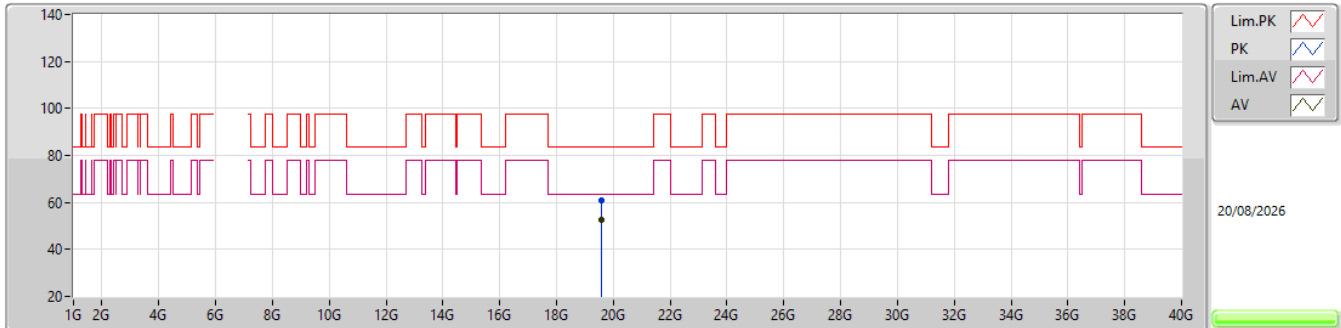EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5792G	60.72	83.54	-22.82	55.76	1	Horizontal	12	1.50	-	37.60	16.19	48.83			
AV	19.5796G	52.54	63.54	-11.00	47.58	1	Horizontal	12	1.50	-	37.60	16.19	48.83			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6565MHz_TX

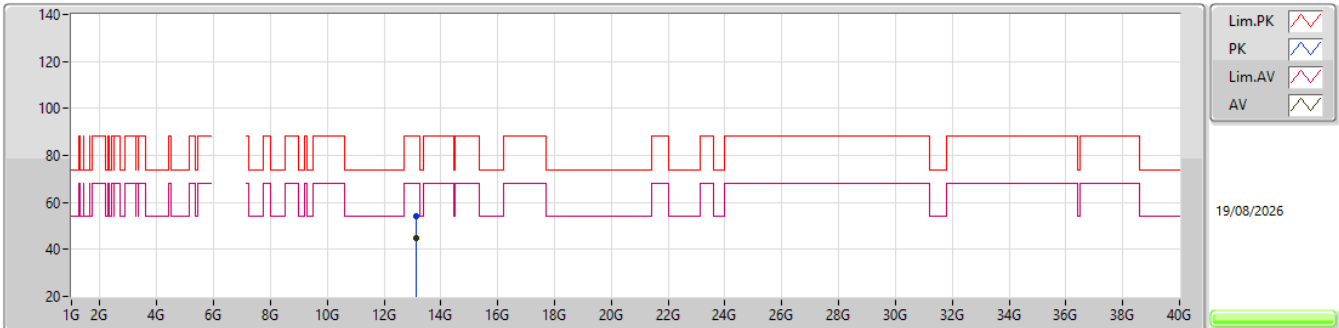EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.12938G	54.34	88.20	-33.86	47.31	3	Vertical	90	1.80	-	39.70	13.01	45.68			
RMS	13.12994G	44.84	68.20	-23.36	37.81	3	Vertical	90	1.80	-	39.70	13.01	45.68			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6565MHz_TX

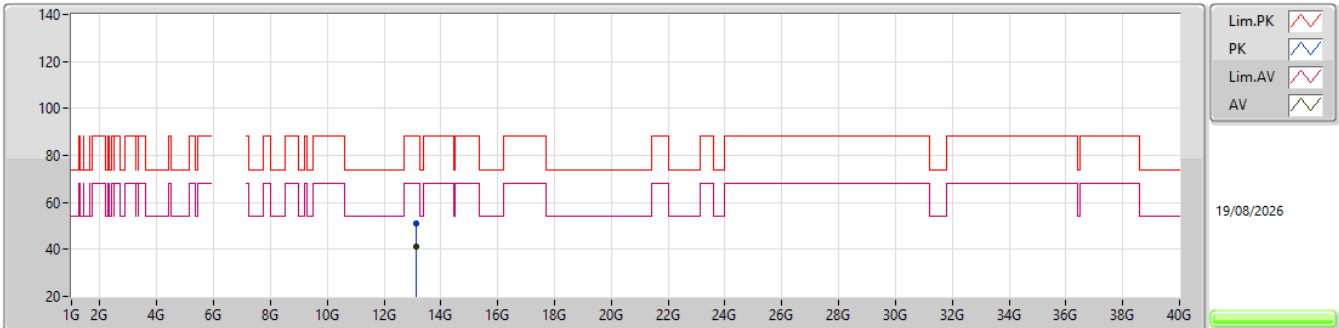EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.13916G	51.29	88.20	-36.91	44.24	3	Horizontal	33	1.84	-	39.70	13.02	45.67			
RMS	13.12986G	41.44	68.20	-26.76	34.41	3	Horizontal	33	1.84	-	39.70	13.01	45.68			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6565MHz_TX

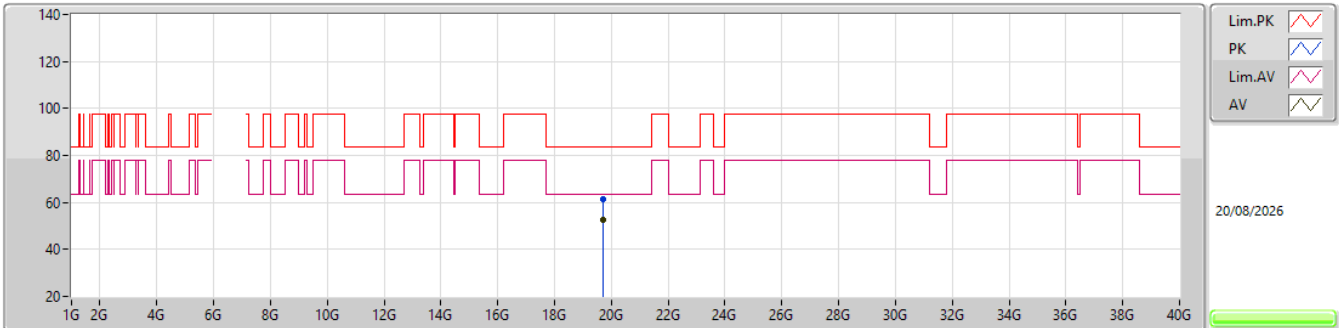EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.704G	61.40	83.54	-22.14	56.36	1	Vertical	314	1.60	-	37.68	16.24	48.88			
AV	19.7062G	52.34	63.54	-11.20	47.30	1	Vertical	314	1.60	-	37.68	16.24	48.88			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6565MHz_TX

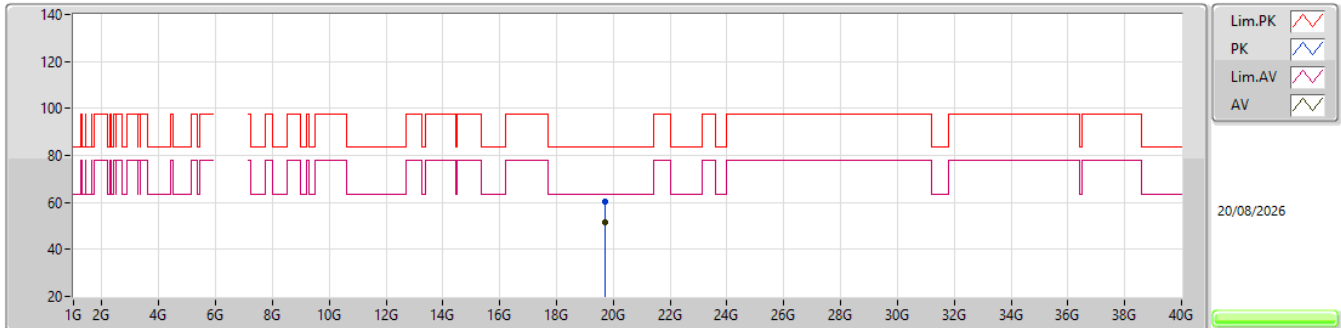EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6912G	60.20	83.54	-23.34	55.18	1	Horizontal	15	1.51	-	37.66	16.24	48.88			
AV	19.6994G	51.35	63.54	-12.19	46.29	1	Horizontal	15	1.51	-	37.70	16.24	48.88			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6685MHz_TX

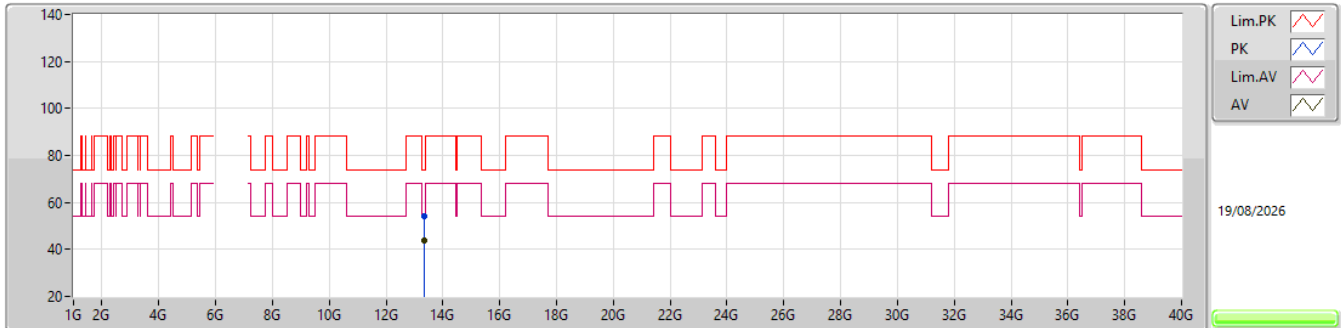EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.36434G	54.27	74.00	-19.73	46.31	3	Vertical	90	1.82	-	40.13	13.09	45.26			
AV	13.36428G	43.81	54.00	-10.19	35.85	3	Vertical	90	1.82	-	40.13	13.09	45.26			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6685MHz_TX

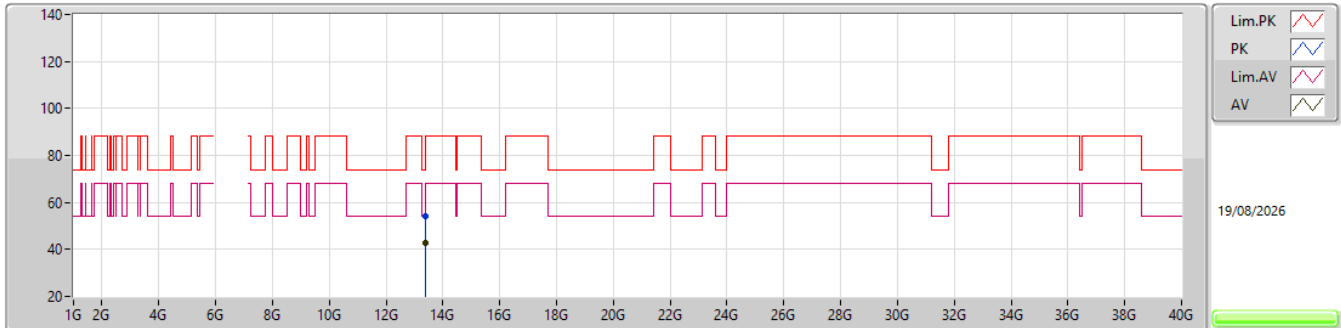EUT_Y_4TX
Setting 44
02-Z-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37128G	54.06	74.00	-19.94	46.07	3	Horizontal	29	1.57	-	40.14	13.09	45.24			
AV	13.37108G	42.63	54.00	-11.37	34.64	3	Horizontal	29	1.57	-	40.14	13.09	45.24			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6685MHz_TX

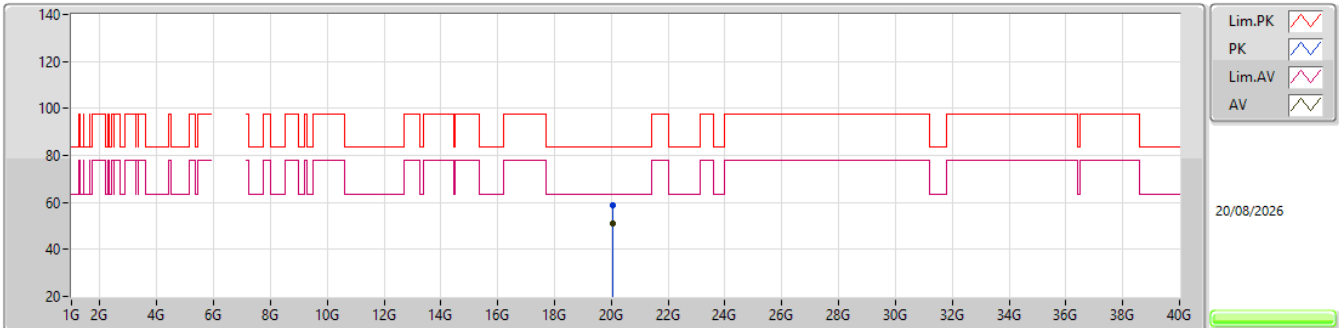EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0472G	58.78	83.54	-24.76	54.17	1	Vertical	96	1.49	-	37.21	16.39	48.99			
AV	20.047G	51.05	63.54	-12.49	46.44	1	Vertical	96	1.49	-	37.21	16.39	48.99			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6685MHz_TX

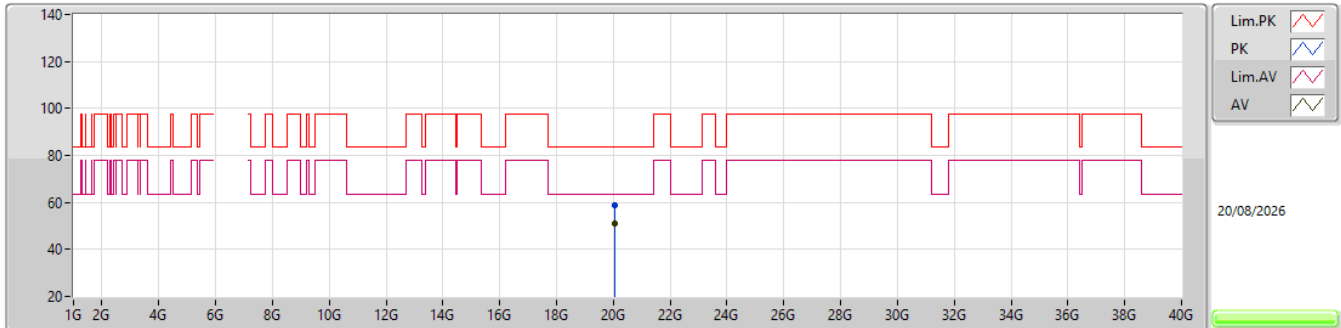EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.0472G	58.61	83.54	-24.93	54.00	1	Horizontal	119	1.51	-	37.21	16.39	48.99			
AV	20.0472G	50.90	63.54	-12.64	46.29	1	Horizontal	119	1.51	-	37.21	16.39	48.99			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6845MHz_TX

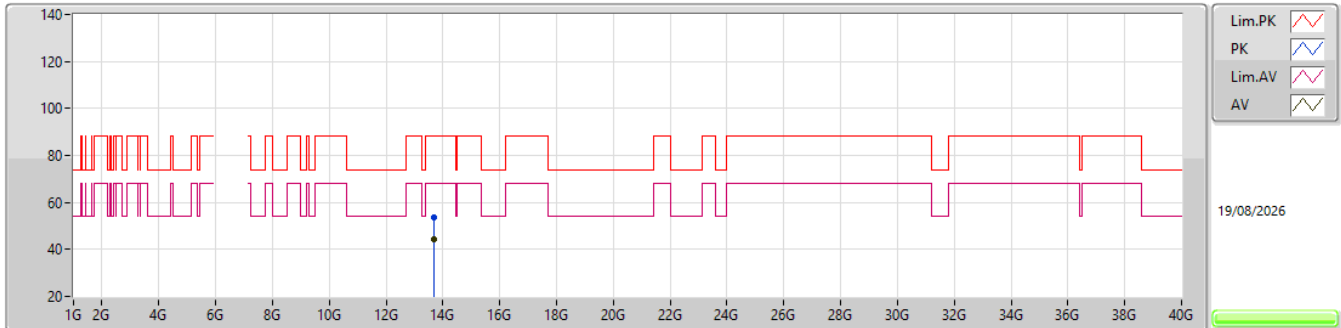EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.68968G	53.58	88.20	-34.62	44.66	3	Vertical	102	1.84	-	40.78	13.19	45.05			
RMS	13.68982G	44.54	68.20	-23.66	35.62	3	Vertical	102	1.84	-	40.78	13.19	45.05			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6845MHz_TX

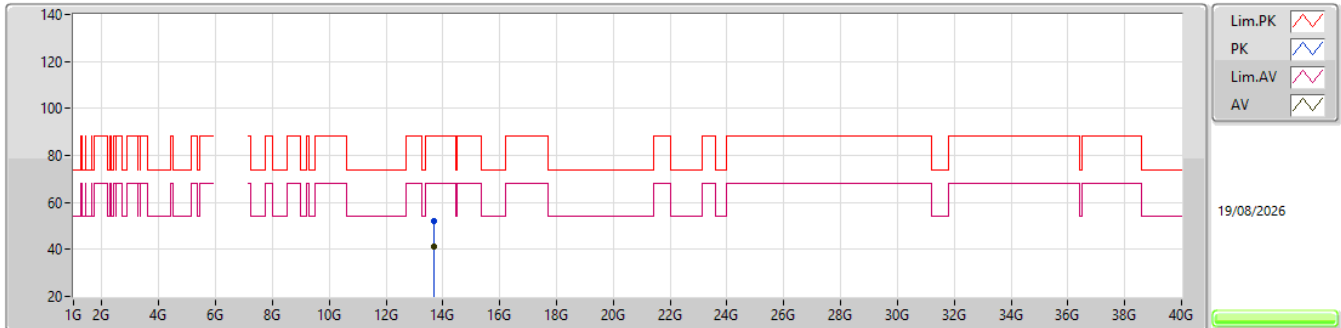EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.68994G	51.83	88.20	-36.37	42.91	3	Horizontal	48	1.80	-	40.78	13.19	45.05			
RMS	13.68982G	41.18	68.20	-27.02	32.26	3	Horizontal	48	1.80	-	40.78	13.19	45.05			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6845MHz_TX

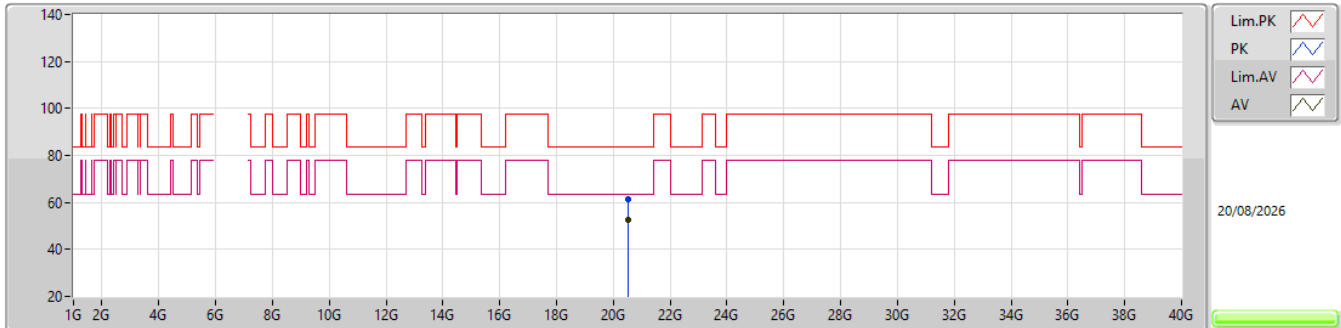EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.532G	61.60	83.54	-21.94	56.34	1	Vertical	27	1.61	-	37.54	16.62	48.90			
AV	20.5324G	52.51	63.54	-11.03	47.25	1	Vertical	27	1.61	-	37.54	16.62	48.90			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6845MHz_TX

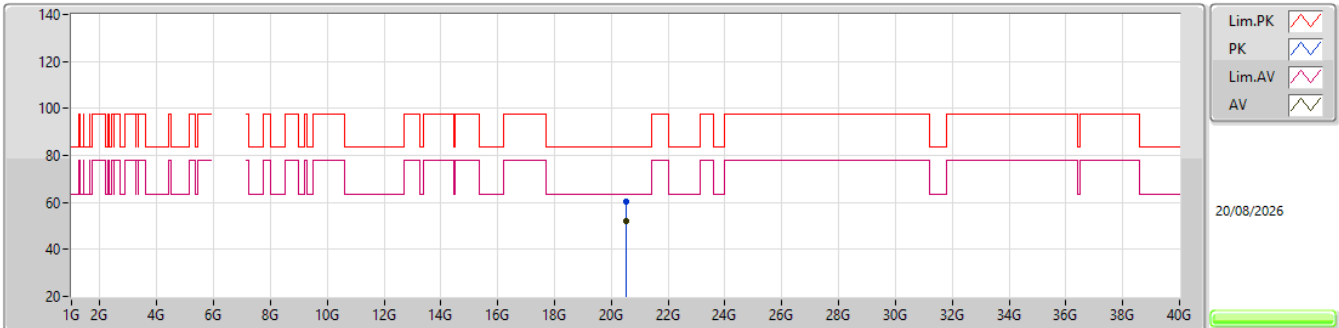EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.532G	60.14	83.54	-23.40	54.88	1	Horizontal	9	1.49	-	37.54	16.62	48.90			
AV	20.5336G	52.09	63.54	-11.45	46.84	1	Horizontal	9	1.49	-	37.53	16.62	48.90			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6885MHz_TX

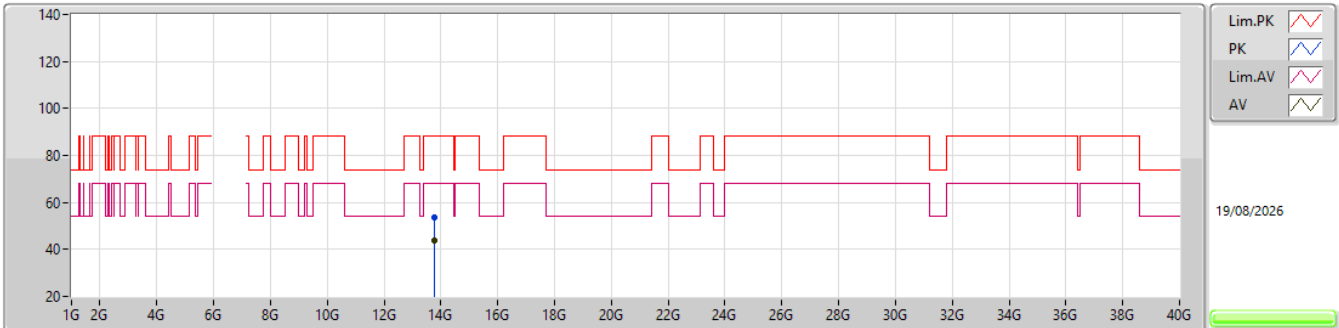EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76736G	53.78	88.20	-34.42	44.74	3	Vertical	103	1.83	-	40.90	13.21	45.07			
RMS	13.76984G	43.97	68.20	-24.23	34.93	3	Vertical	103	1.83	-	40.90	13.21	45.07			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6885MHz_TX

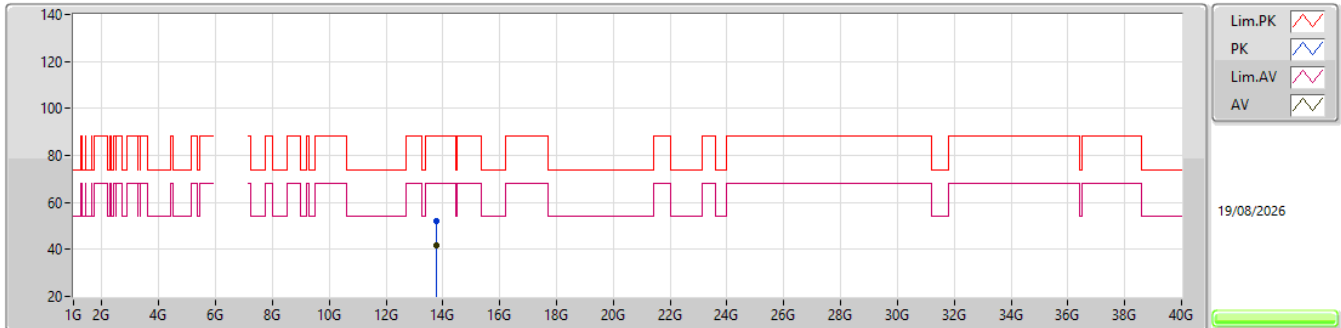EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76966G	51.99	88.20	-36.21	42.95	3	Horizontal	49	1.79	-	40.90	13.21	45.07			
RMS	13.76984G	41.95	68.20	-26.25	32.91	3	Horizontal	49	1.79	-	40.90	13.21	45.07			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6885MHz_TX

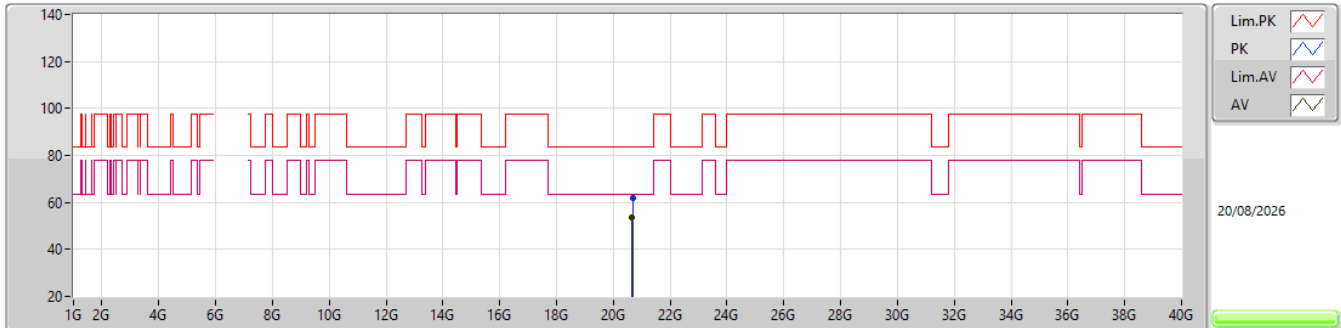EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.6762G	62.02	83.54	-21.52	56.68	1	Vertical	25	1.74	-	37.55	16.69	48.90			
AV	20.6636G	53.41	63.54	-10.13	48.06	1	Vertical	25	1.74	-	37.57	16.68	48.90			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6885MHz_TX

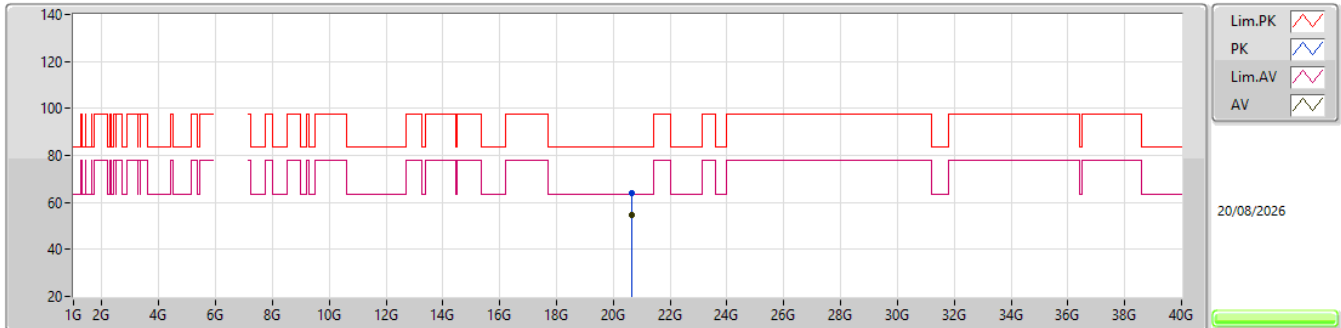EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.652G	64.15	83.54	-19.39	58.77	1	Horizontal	41	1.54	-	37.60	16.68	48.90			
AV	20.6522G	54.61	63.54	-8.93	49.23	1	Horizontal	41	1.54	-	37.60	16.68	48.90			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7005MHz_TX

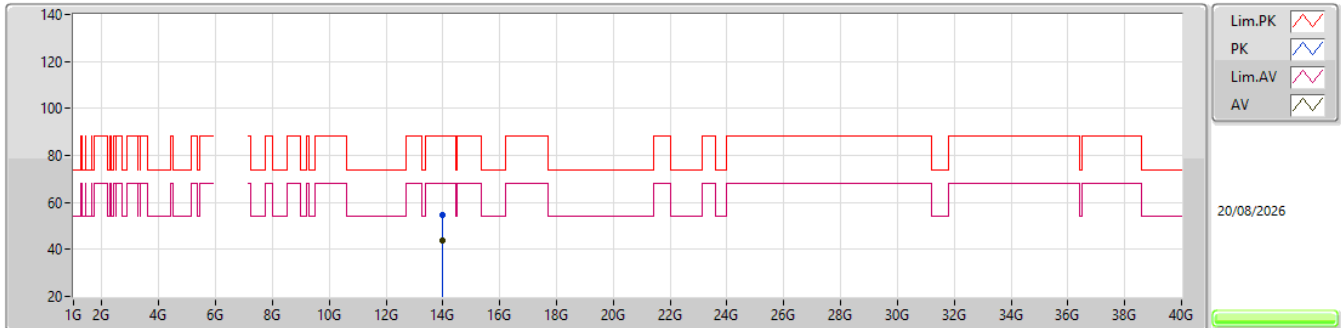EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.00396G	54.44	88.20	-33.76	44.76	3	Vertical	83	1.80	-	41.52	13.28	45.12			
RMS	14.00436G	43.60	68.20	-24.60	33.92	3	Vertical	83	1.80	-	41.52	13.28	45.12			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7005MHz_TX

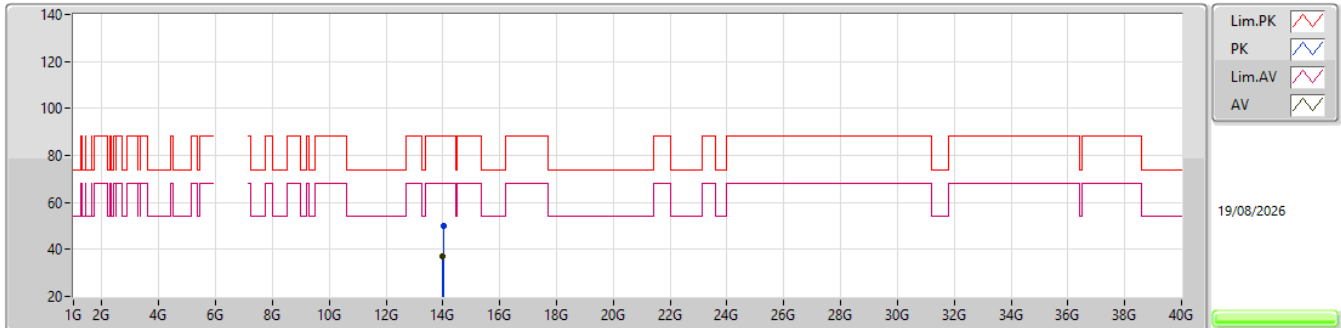EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.01954G	50.01	88.20	-38.19	40.25	3	Horizontal	31	1.80	-	41.58	13.29	45.11			
RMS	14.0021G	37.27	68.20	-30.93	27.60	3	Horizontal	31	1.80	-	41.51	13.28	45.12			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7005MHz_TX

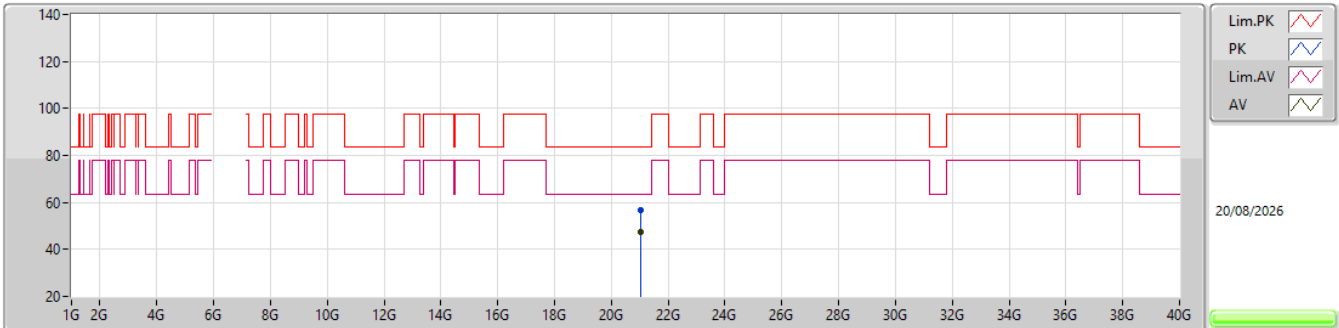EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.024G	56.73	83.54	-26.81	51.02	1	Vertical	96	1.50	-	37.75	16.85	48.89			
AV	21.0236G	47.43	63.54	-16.11	41.72	1	Vertical	96	1.50	-	37.75	16.85	48.89			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7005MHz_TX

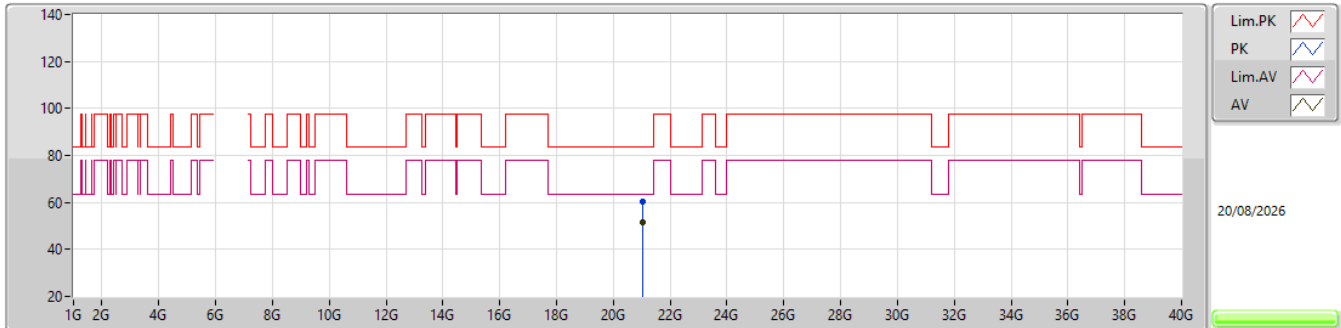EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.036G	60.56	83.54	-22.98	54.83	1	Horizontal	35	1.53	-	37.77	16.85	48.89			
AV	21.0236G	51.42	63.54	-12.12	45.71	1	Horizontal	35	1.53	-	37.75	16.85	48.89			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7085MHz_TX

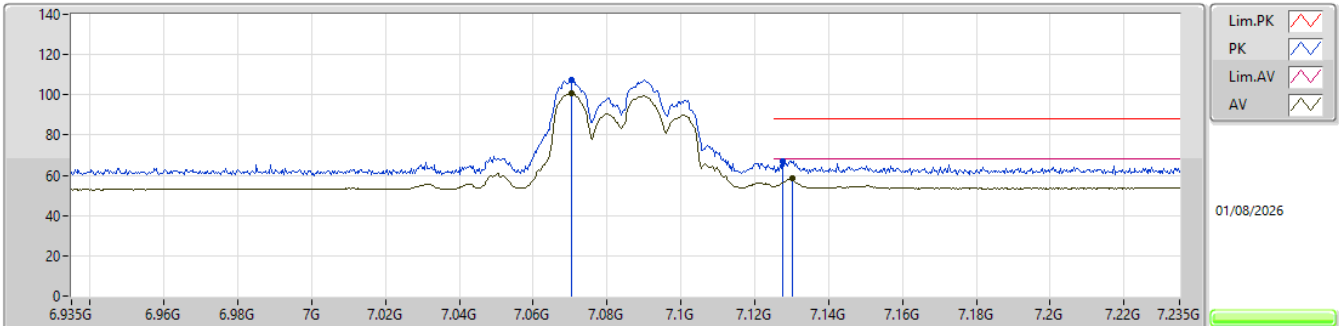EUT_Y_4TX
Setting 39
05-E-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0703G	107.41	Inf	-Inf	95.51	3	Vertical	240	1.80	-	36.28	9.52	33.90			
RMS	7.0703G	100.55	Inf	-Inf	88.65	3	Vertical	240	1.80	-	36.28	9.52	33.90			
PK	7.1276G	66.90	88.20	-21.30	54.67	3	Vertical	240	1.80	-	36.57	9.55	33.89			
RMS	7.1303G	58.37	68.20	-9.83	46.13	3	Vertical	240	1.80	-	36.58	9.55	33.89			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

7085MHz_TX

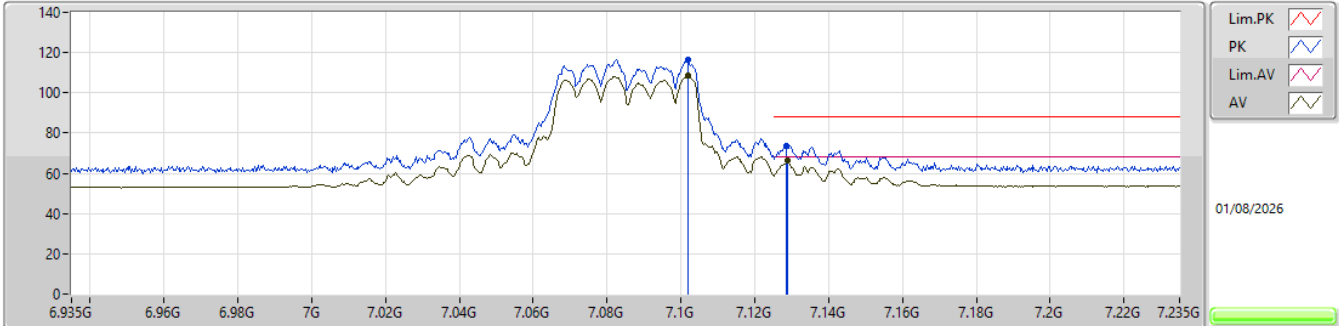


EUT_Y_4TX
Setting 39
05-E-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1018G	116.36	Inf	-Inf	104.31	3	Horizontal	188	1.80	-	36.41	9.54	33.90			
RMS	7.1018G	108.40	Inf	-Inf	96.35	3	Horizontal	188	1.80	-	36.41	9.54	33.90			
PK	7.1285G	73.67	88.20	-14.53	61.44	3	Horizontal	188	1.80	-	36.57	9.55	33.89			
RMS	7.1288G	66.08	68.20	-2.12	53.85	3	Horizontal	188	1.80	-	36.57	9.55	33.89			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7085MHz_TX

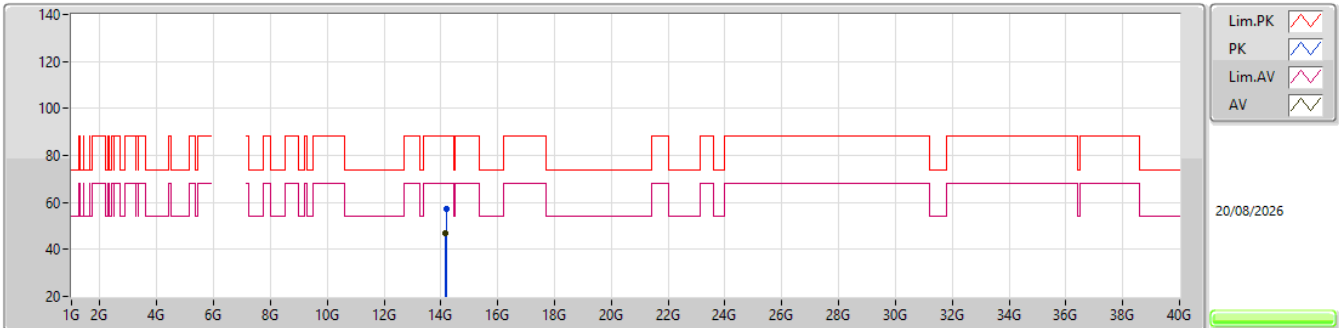EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.17916G	57.22	88.20	-30.98	46.86	3	Vertical	83	1.83	-	42.02	13.35	45.01			
RMS	14.16428G	47.08	68.20	-21.12	36.78	3	Vertical	83	1.83	-	41.96	13.35	45.01			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7085MHz_TX

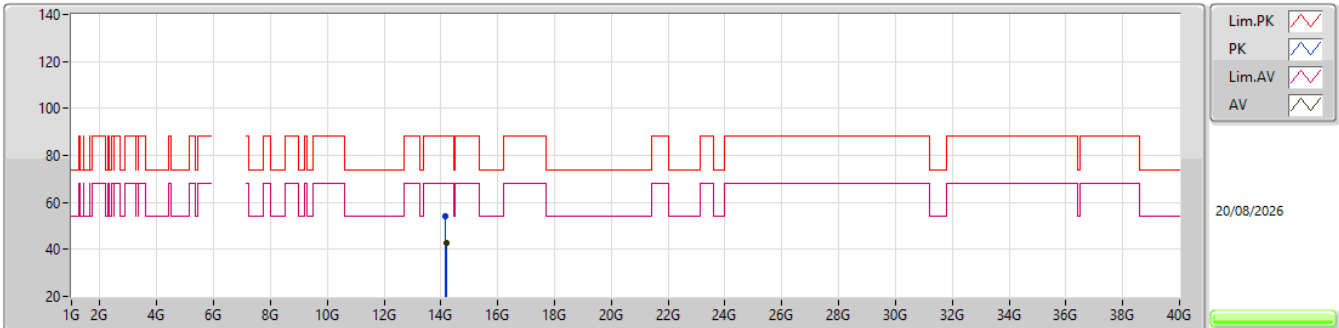EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.1696G	54.32	88.20	-33.88	44.00	3	Horizontal	23	1.89	-	41.98	13.35	45.01			
RMS	14.17816G	42.91	68.20	-25.29	32.56	3	Horizontal	23	1.89	-	42.01	13.35	45.01			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7085MHz_TX

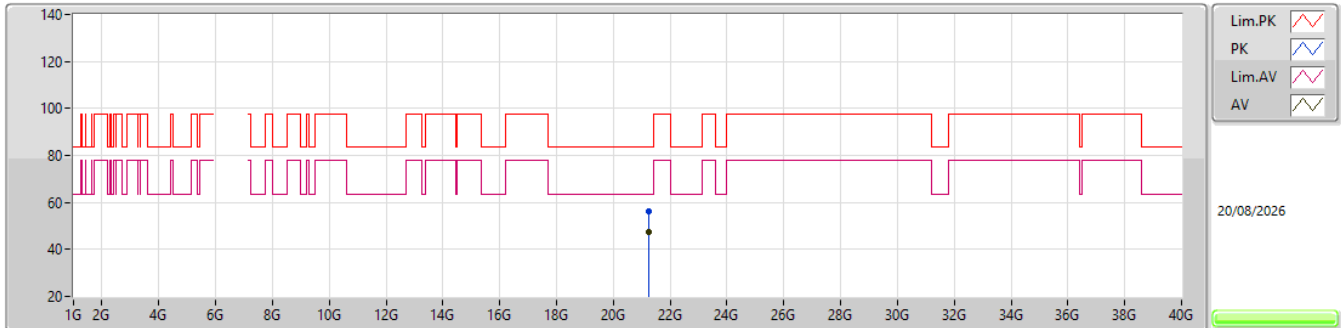EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.2518G	55.95	83.54	-27.59	49.93	1	Vertical	102	1.52	-	37.89	16.93	48.80			
AV	21.2536G	47.20	63.54	-16.34	41.19	1	Vertical	102	1.52	-	37.88	16.93	48.80			

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX


7085MHz_TX

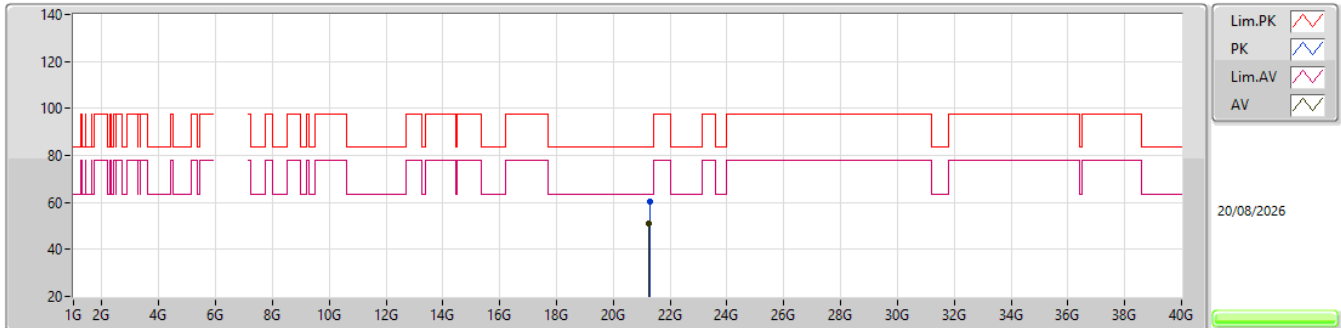EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.2762G	60.25	83.54	-23.29	54.37	1	Horizontal	38	1.52	-	37.74	16.93	48.79			
AV	21.2636G	51.00	63.54	-12.54	45.04	1	Horizontal	38	1.52	-	37.82	16.93	48.79			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

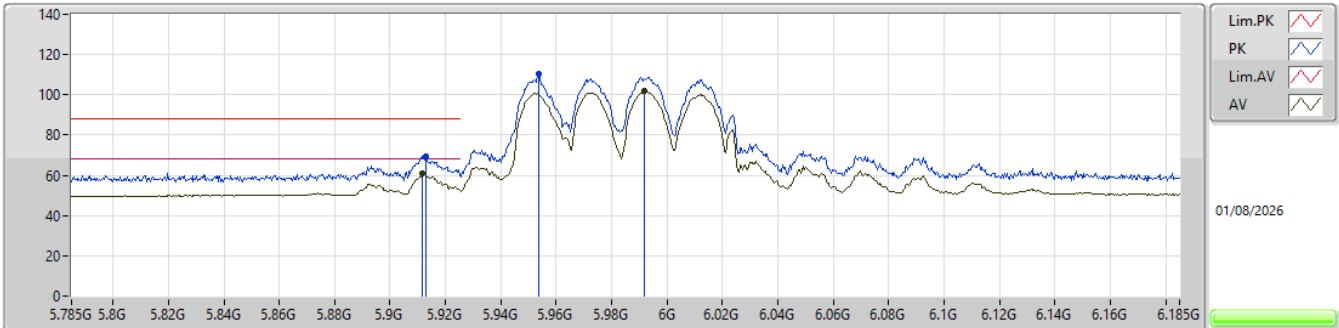EUT_Y_4TX
Setting 41
05-E-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.913G	69.41	88.20	-18.79	60.42	3	Vertical	6	1.80	-	34.15	8.93	34.09			
RMS	5.9118G	60.95	68.20	-7.25	51.96	3	Vertical	6	1.80	-	34.15	8.93	34.09			
PK	5.9538G	110.45	Inf	-Inf	101.24	3	Vertical	6	1.80	-	34.28	8.98	34.05			
RMS	5.9918G	101.80	Inf	-Inf	92.67	3	Vertical	6	1.80	-	34.13	9.02	34.02			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

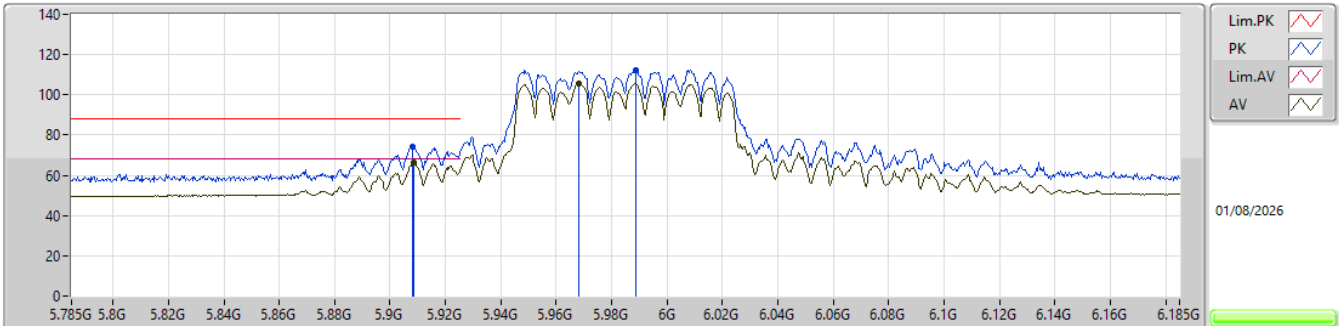


EUT_Y_4TX
Setting 41
05-E-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9082G	74.19	88.20	-14.01	65.24	3	Horizontal	26	1.80	-	34.13	8.92	34.10			
RMS	5.9086G	66.26	68.20	-1.94	57.31	3	Horizontal	26	1.80	-	34.13	8.92	34.10			
PK	5.9886G	112.50	Inf	-Inf	103.35	3	Horizontal	26	1.80	-	34.15	9.02	34.02			
RMS	5.9682G	105.45	Inf	-Inf	96.27	3	Horizontal	26	1.80	-	34.23	8.99	34.04			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5985MHz_TX

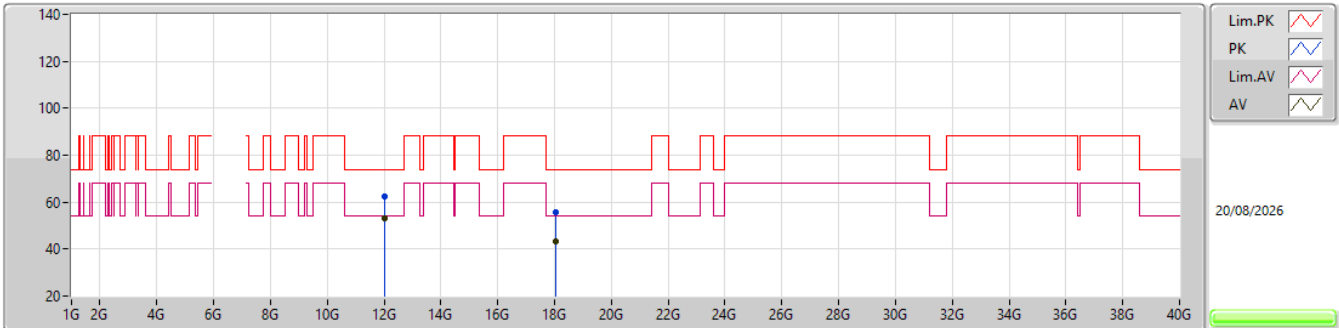


EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.0058G	62.23	74.00	-11.77	56.42	3	Vertical	32	1.80	-	39.10	12.67	45.96			
AV	12.0062G	53.13	54.00	-0.87	47.32	3	Vertical	32	1.80	-	39.10	12.67	45.96			
PK	18.0324G	55.46	74.00	-18.54	39.01	3	Vertical	72	1.80	-	46.69	15.03	45.27			
AV	18.0538G	43.10	54.00	-10.90	26.51	3	Vertical	72	1.80	-	46.82	15.04	45.27			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

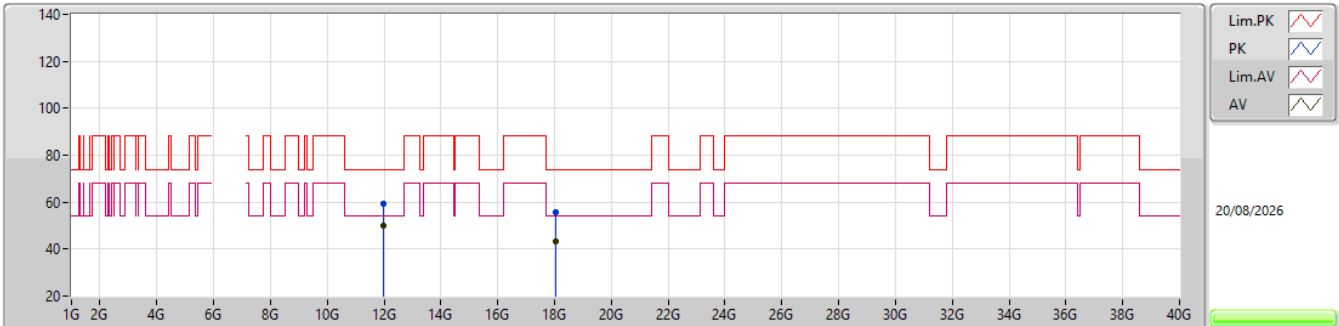EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.9612G	59.12	74.00	-14.88	53.25	3	Horizontal	36	1.75	-	39.18	12.65	45.96			
AV	11.961G	49.97	54.00	-4.03	44.10	3	Horizontal	36	1.75	-	39.18	12.65	45.96			
PK	18.05G	55.92	74.00	-18.08	39.36	3	Horizontal	188	1.80	-	46.80	15.03	45.27			
AV	18.0542G	43.06	54.00	-10.94	26.46	3	Horizontal	188	1.80	-	46.83	15.04	45.27			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

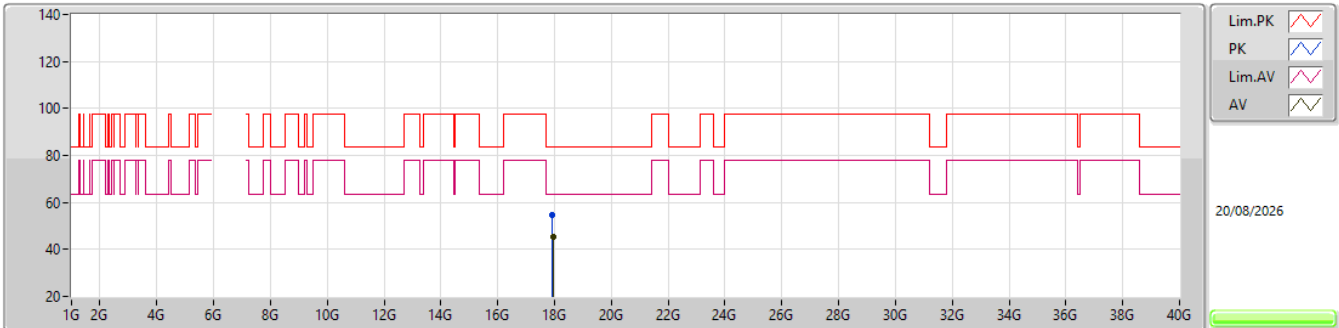EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	17.9282G	54.48	83.54	-29.06	50.04	1	Vertical	63	1.52	-	37.25	15.40	48.21			
AV	17.9478G	45.14	63.54	-18.40	40.69	1	Vertical	63	1.52	-	37.29	15.42	48.26			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

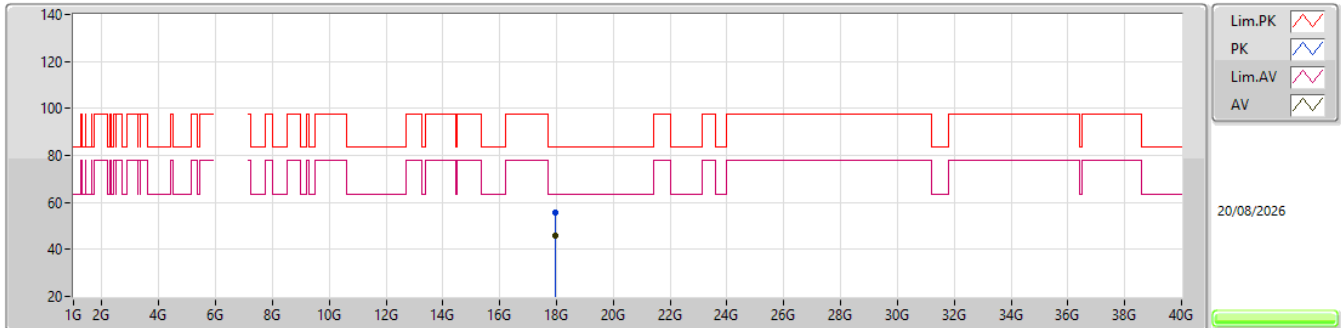EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	17.9478G	55.84	83.54	-27.70	51.39	1	Horizontal	36	1.53	-	37.29	15.42	48.26			
AV	17.9474G	46.12	63.54	-17.42	41.68	1	Horizontal	36	1.53	-	37.29	15.41	48.26			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6225MHz_TX

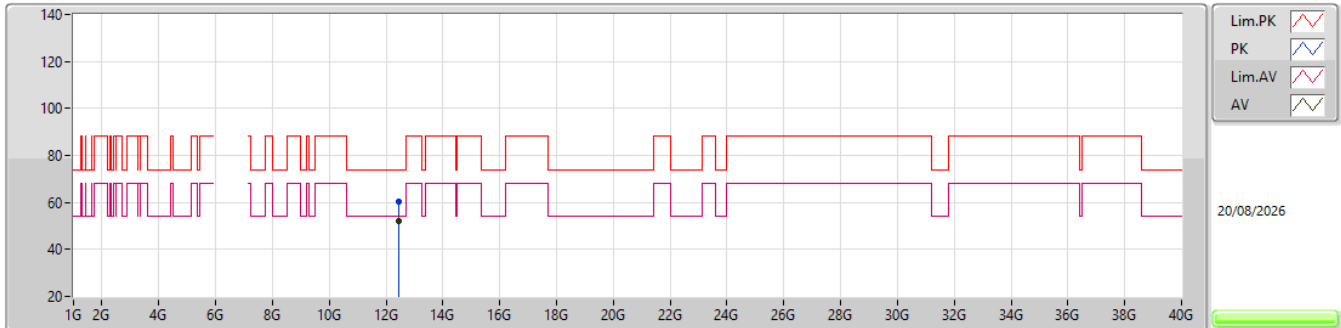


EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.453G	60.60	74.00	-13.40	54.69	3	Vertical	30	1.50	-	38.61	12.81	45.51			
AV	12.453G	52.24	54.00	-1.76	46.33	3	Vertical	30	1.50	-	38.61	12.81	45.51			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6225MHz_TX

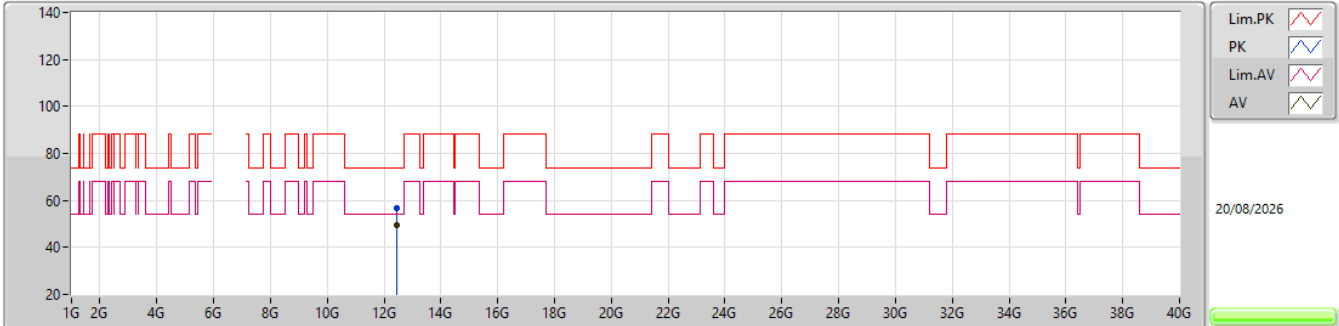


EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.453G	56.98	74.00	-17.02	51.07	3	Horizontal	69	1.69	-	38.61	12.81	45.51			
AV	12.453G	49.37	54.00	-4.63	43.46	3	Horizontal	69	1.69	-	38.61	12.81	45.51			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6225MHz_TX

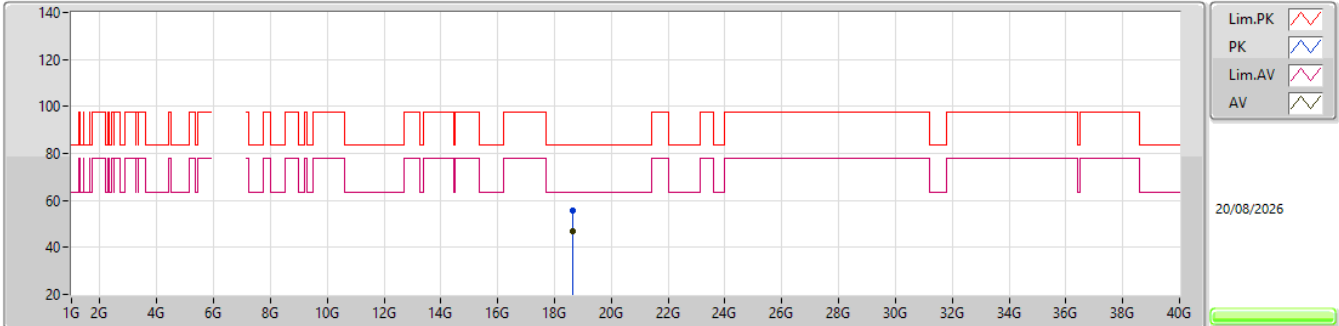EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.645G	55.75	83.54	-27.79	51.06	1	Vertical	58	1.71	-	37.61	15.77	48.69			
AV	18.6446G	47.12	63.54	-16.42	42.43	1	Vertical	58	1.71	-	37.61	15.77	48.69			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6225MHz_TX

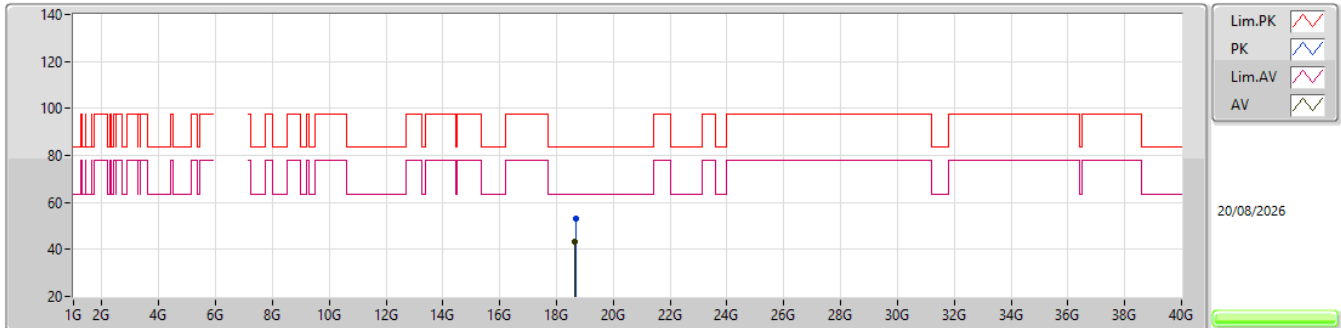EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.681G	53.26	83.54	-30.28	48.64	1	Horizontal	147	1.50	-	37.54	15.79	48.71			
AV	18.6614G	43.46	63.54	-20.08	38.80	1	Horizontal	147	1.50	-	37.58	15.78	48.70			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6385MHz_TX

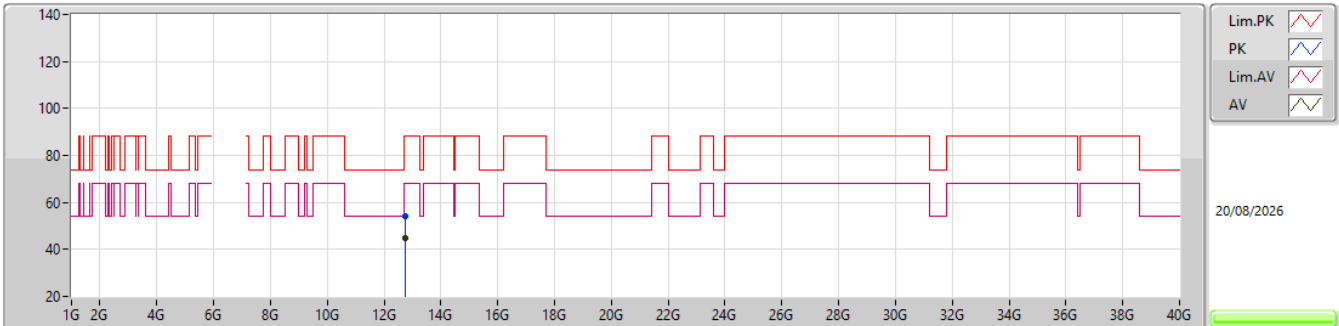


EUT_Y_4TX
Setting 44
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.7418G	54.38	88.20	-33.82	48.29	3	Vertical	29	1.80	-	38.87	12.90	45.68			
RMS	12.7418G	44.65	68.20	-23.55	38.56	3	Vertical	29	1.80	-	38.87	12.90	45.68			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6385MHz_TX

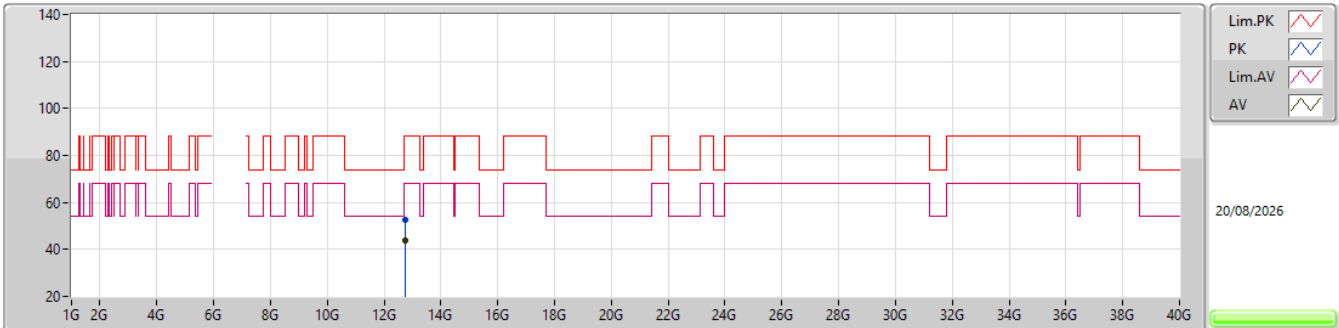EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.742G	52.75	88.20	-35.45	46.66	3	Horizontal	36	1.69	-	38.87	12.90	45.68			
RMS	12.7418G	44.00	68.20	-24.20	37.91	3	Horizontal	36	1.69	-	38.87	12.90	45.68			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6385MHz_TX

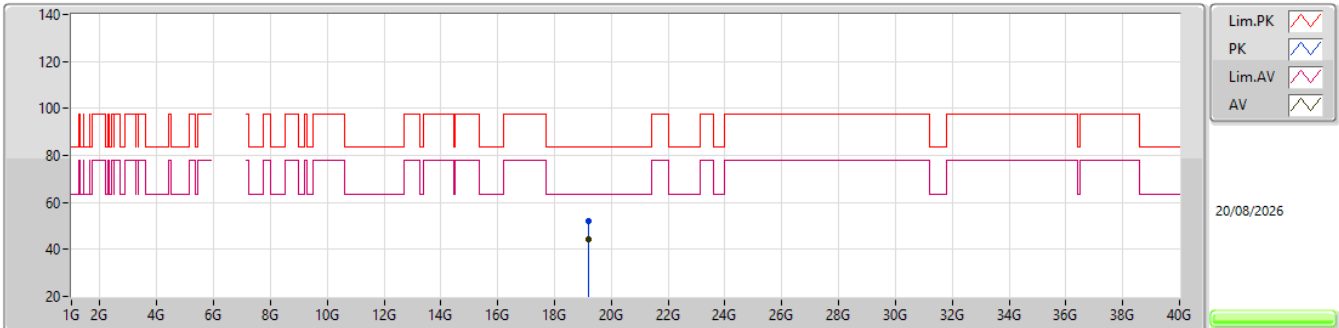EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.1798G	52.28	83.54	-31.26	47.44	1	Vertical	70	1.50	-	37.68	16.02	48.86			
AV	19.179G	44.28	63.54	-19.26	39.44	1	Vertical	70	1.50	-	37.68	16.02	48.86			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6385MHz_TX

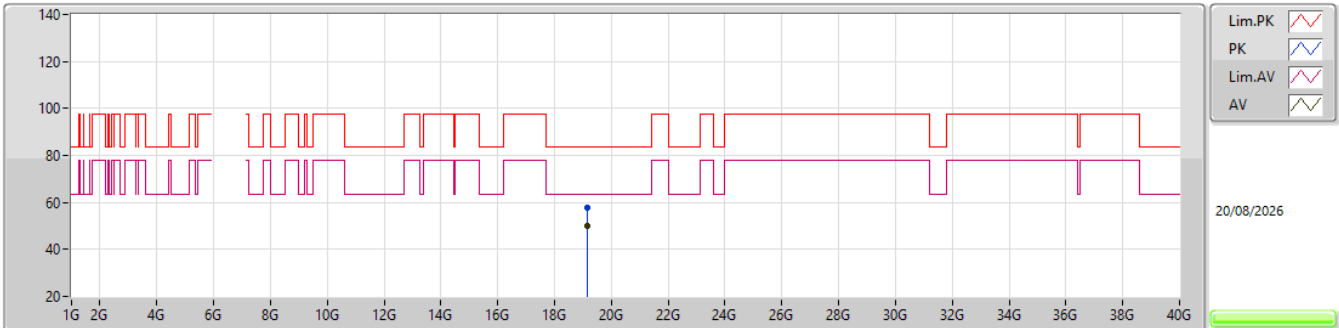EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.1474G	57.81	83.54	-25.73	52.89	1	Horizontal	46	1.49	-	37.79	16.00	48.87			
AV	19.1474G	49.93	63.54	-13.61	45.01	1	Horizontal	46	1.49	-	37.79	16.00	48.87			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6465MHz_TX

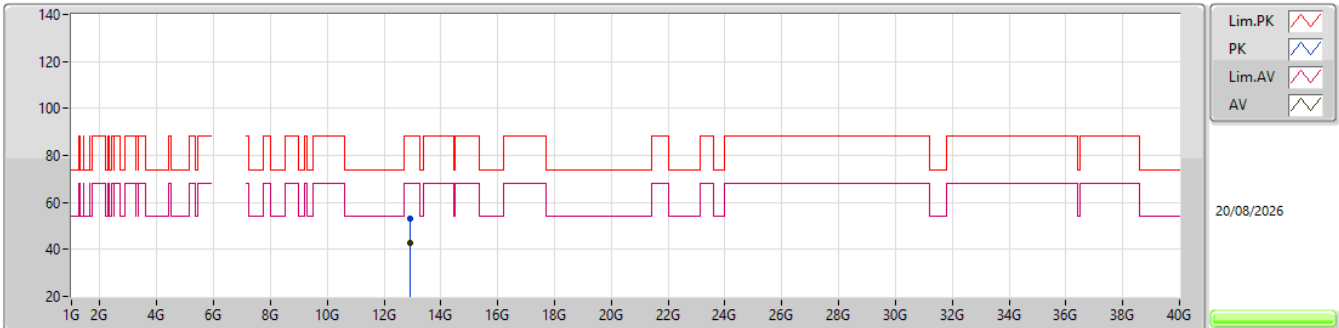EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9284G	53.22	88.20	-34.98	46.86	3	Vertical	65	1.80	-	39.26	12.95	45.85			
RMS	12.9298G	42.99	68.20	-25.21	36.64	3	Vertical	65	1.80	-	39.26	12.95	45.86			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6465MHz_TX

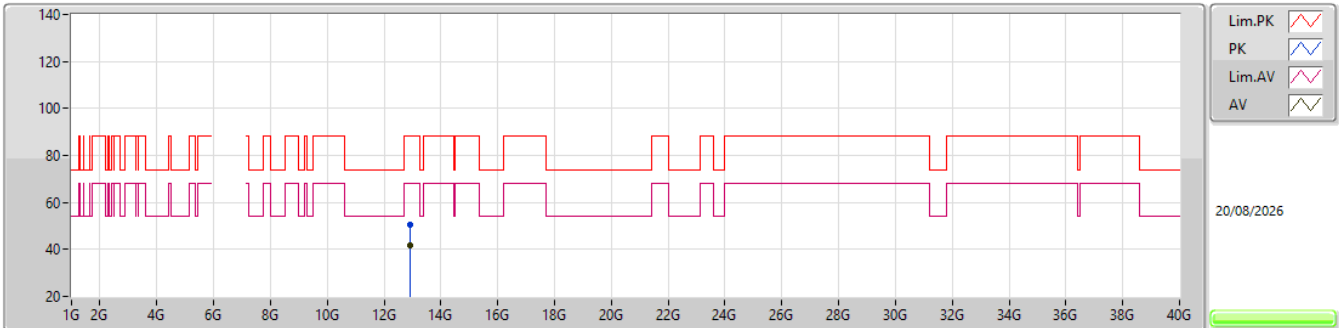


EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9286G	50.42	88.20	-37.78	44.06	3	Horizontal	35	1.80	-	39.26	12.95	45.85			
RMS	12.9298G	41.95	68.20	-26.25	35.60	3	Horizontal	35	1.80	-	39.26	12.95	45.86			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6465MHz_TX

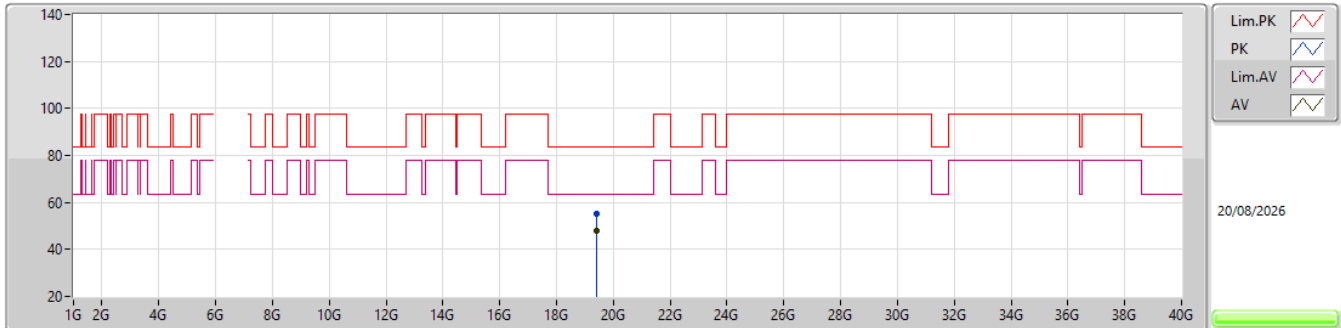EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.419G	54.98	83.54	-28.56	50.02	1	Vertical	260	1.51	-	37.66	16.12	48.82			
AV	19.419G	48.01	63.54	-15.53	43.05	1	Vertical	260	1.51	-	37.66	16.12	48.82			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6465MHz_TX

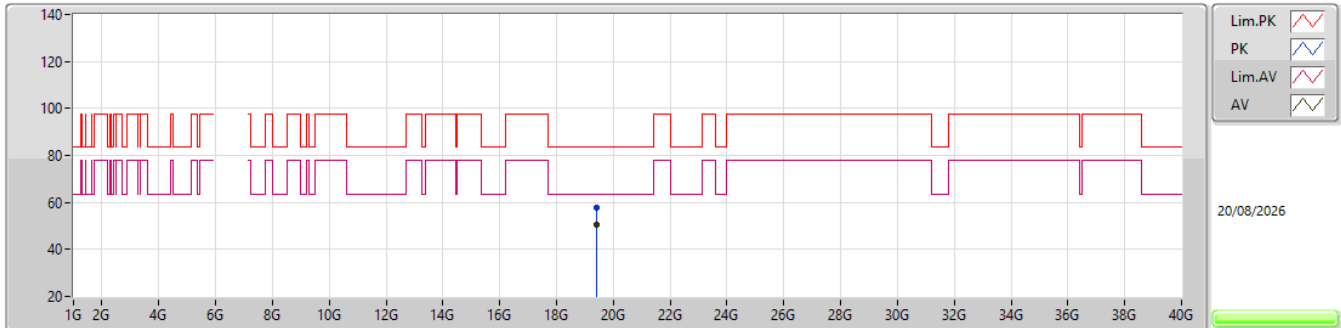EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.393G	57.89	83.54	-25.65	52.90	1	Horizontal	11	1.50	-	37.70	16.11	48.82			
AV	19.4194G	50.30	63.54	-13.24	45.34	1	Horizontal	11	1.50	-	37.66	16.12	48.82			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6545MHz_TX

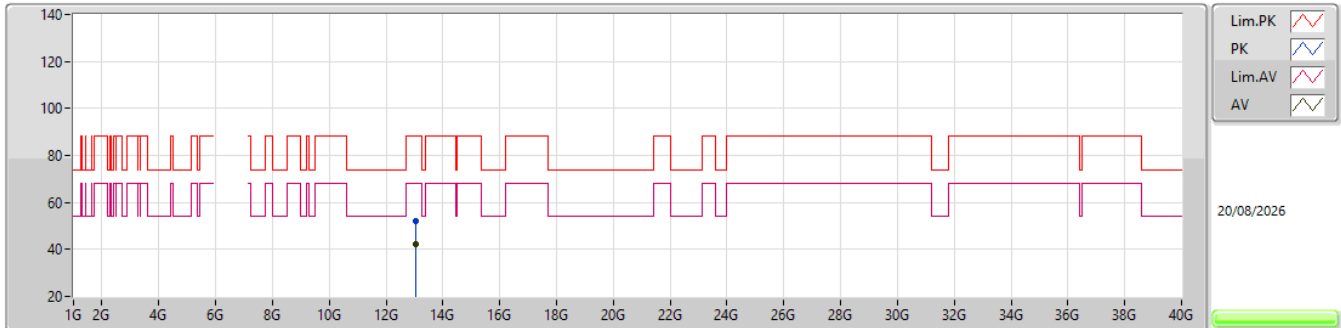EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0616G	51.90	88.20	-36.30	45.25	3	Vertical	80	1.74	-	39.47	12.99	45.81			
RMS	13.0618G	42.35	68.20	-25.85	35.70	3	Vertical	80	1.74	-	39.47	12.99	45.81			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6545MHz_TX

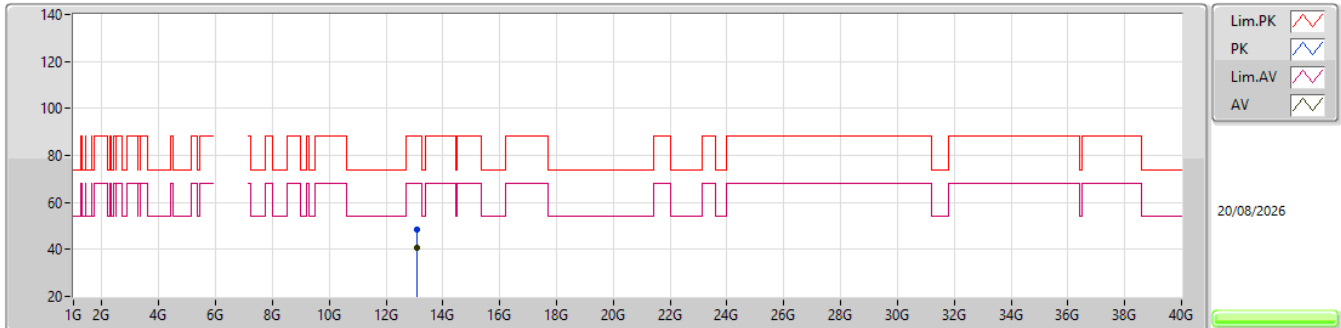EUT_V_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0898G	48.66	88.20	-39.54	41.78	3	Horizontal	36	1.82	-	39.64	13.00	45.76			
RMS	13.0898G	40.94	68.20	-27.26	34.06	3	Horizontal	36	1.82	-	39.64	13.00	45.76			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6545MHz_TX

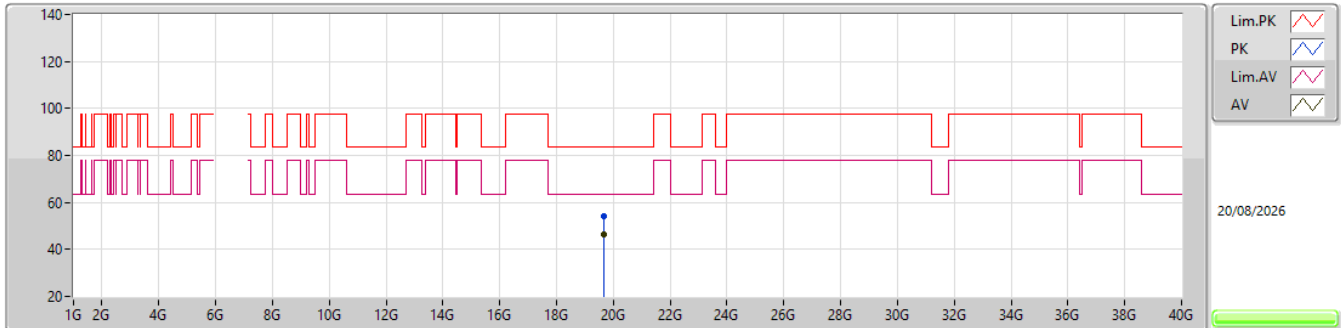EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6594G	54.28	83.54	-29.26	49.38	1	Vertical	71	1.50	-	37.54	16.22	48.86			
AV	19.659G	46.50	63.54	-17.04	41.60	1	Vertical	71	1.50	-	37.54	16.22	48.86			

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6545MHz_TX

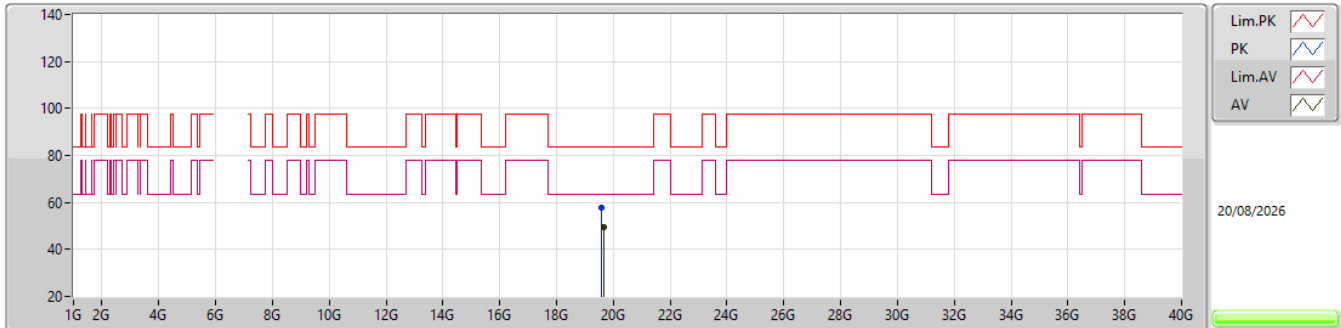EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.599G	57.70	83.54	-25.84	52.74	1	Horizontal	14	1.51	-	37.60	16.20	48.84			
AV	19.659G	49.26	63.54	-14.28	44.36	1	Horizontal	14	1.51	-	37.54	16.22	48.86			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6625MHz_TX

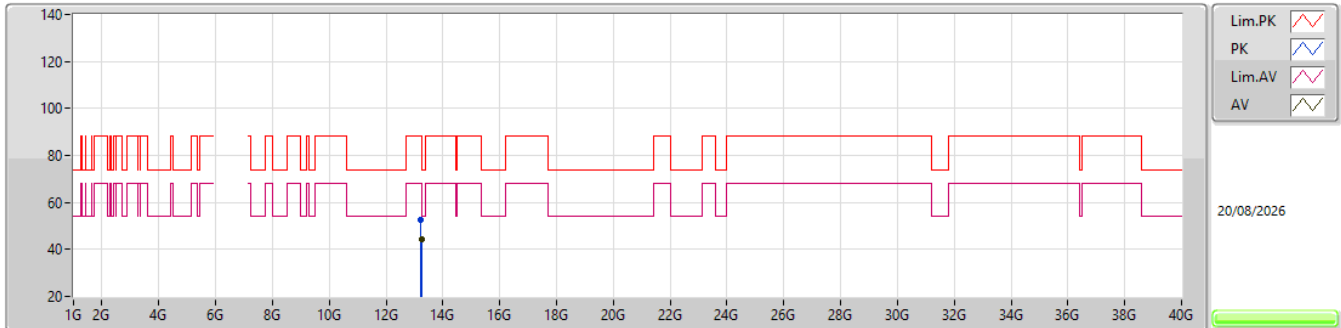EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.217G	52.43	88.20	-35.77	45.05	3	Vertical	88	1.80	-	39.87	13.04	45.53			
RMS	13.2498G	44.13	68.20	-24.07	36.55	3	Vertical	88	1.80	-	40.00	13.05	45.47			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6625MHz_TX

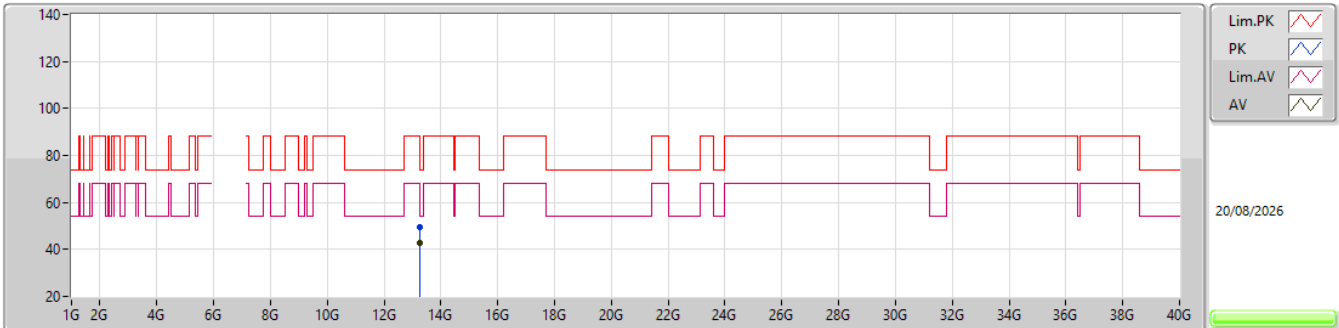EUT_Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.2498G	49.31	88.20	-38.89	41.73	3	Horizontal	34	1.84	-	40.00	13.05	45.47			
RMS	13.2498G	42.67	68.20	-25.53	35.09	3	Horizontal	34	1.84	-	40.00	13.05	45.47			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6625MHz_TX

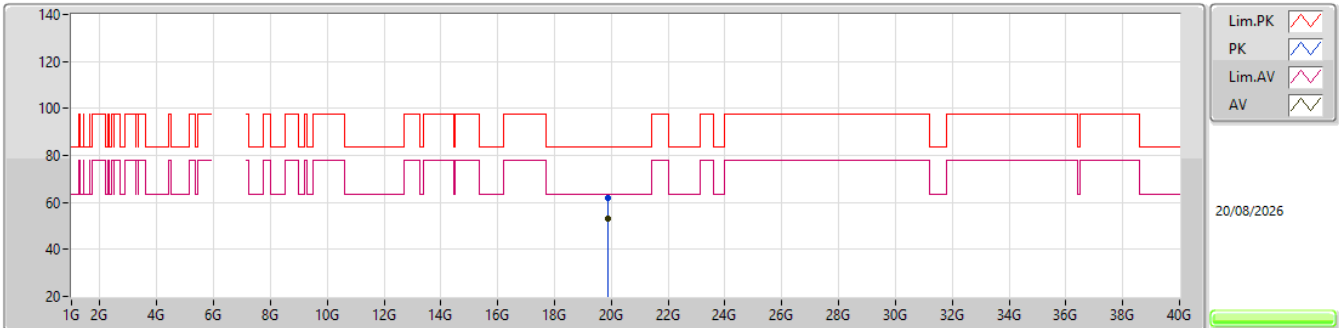EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.873G	61.83	83.54	-21.71	56.85	1	Vertical	286	1.67	-	37.61	16.32	48.95			
AV	19.873G	53.13	63.54	-10.41	48.15	1	Vertical	286	1.67	-	37.61	16.32	48.95			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6625MHz_TX

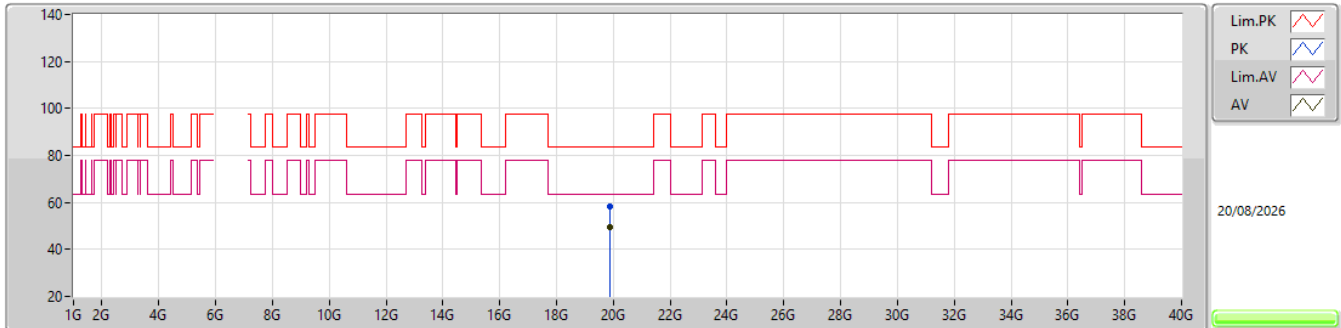EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.873G	58.42	83.54	-25.12	53.44	1	Horizontal	218	1.51	-	37.61	16.32	48.95			
AV	19.873G	49.71	63.54	-13.83	44.73	1	Horizontal	218	1.51	-	37.61	16.32	48.95			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6705MHz_TX

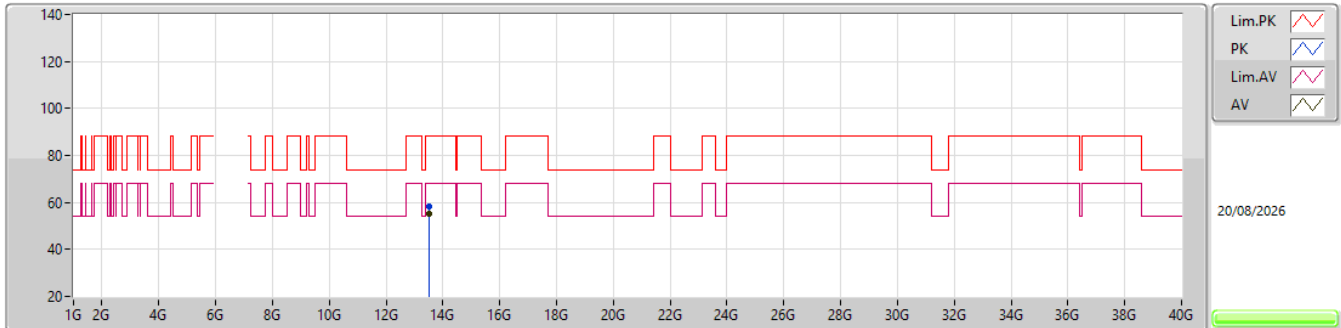


EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4998G	58.29	88.20	-29.91	49.67	3	Vertical	85	1.79	-	40.50	13.13	45.01			
RMS	13.4998G	54.92	68.20	-13.28	46.30	3	Vertical	85	1.79	-	40.50	13.13	45.01			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6705MHz_TX

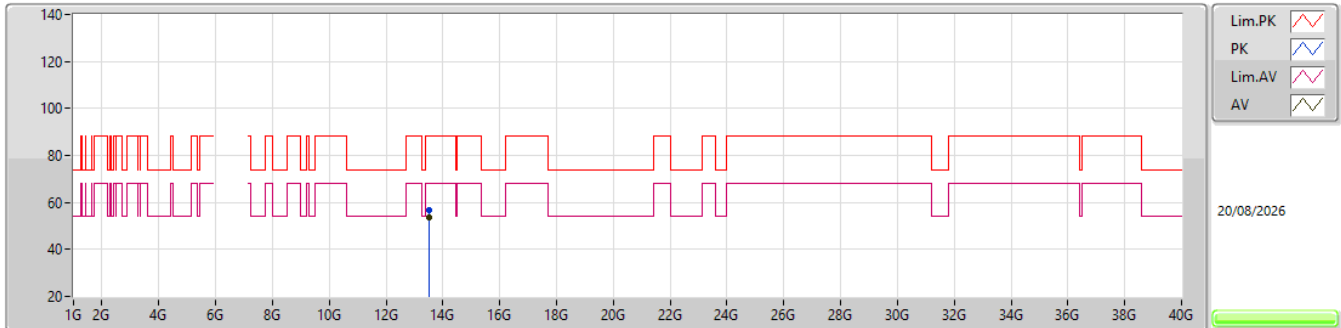EUT Y_4TX
Setting 44
02-Z-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4998G	56.49	88.20	-31.71	47.87	3	Horizontal	111	1.84	-	40.50	13.13	45.01			
RMS	13.4998G	53.73	68.20	-14.47	45.11	3	Horizontal	111	1.84	-	40.50	13.13	45.01			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6705MHz_TX

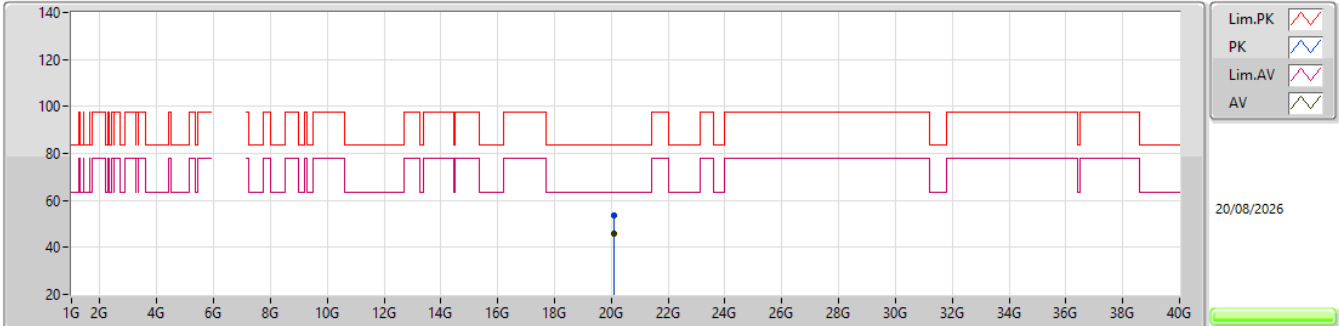EUT Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.087G	53.42	83.54	-30.12	48.72	1	Vertical	94	1.48	-	37.27	16.41	48.98			
AV	20.1074G	45.75	63.54	-17.79	41.01	1	Vertical	94	1.48	-	37.30	16.42	48.98			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6705MHz_TX

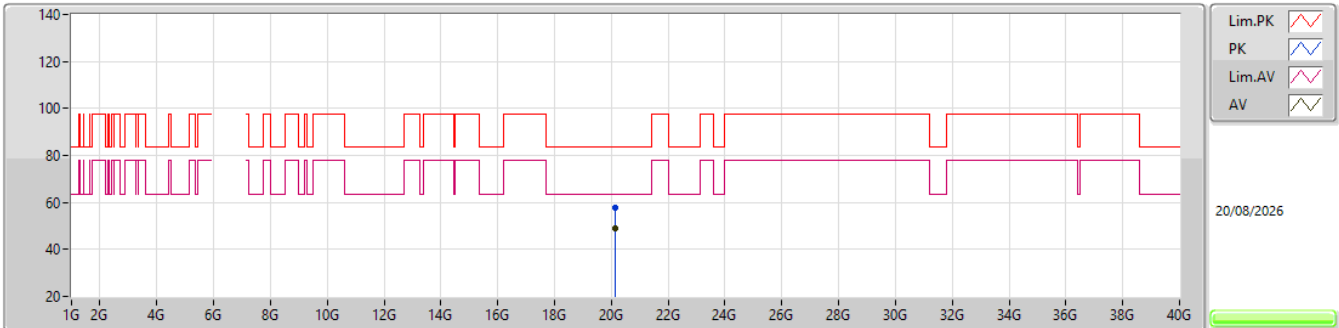EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.129G	57.63	83.54	-25.91	52.87	1	Horizontal	17	1.67	-	37.30	16.43	48.97			
AV	20.1486G	49.22	63.54	-14.32	44.45	1	Horizontal	17	1.67	-	37.30	16.44	48.97			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6785MHz_TX

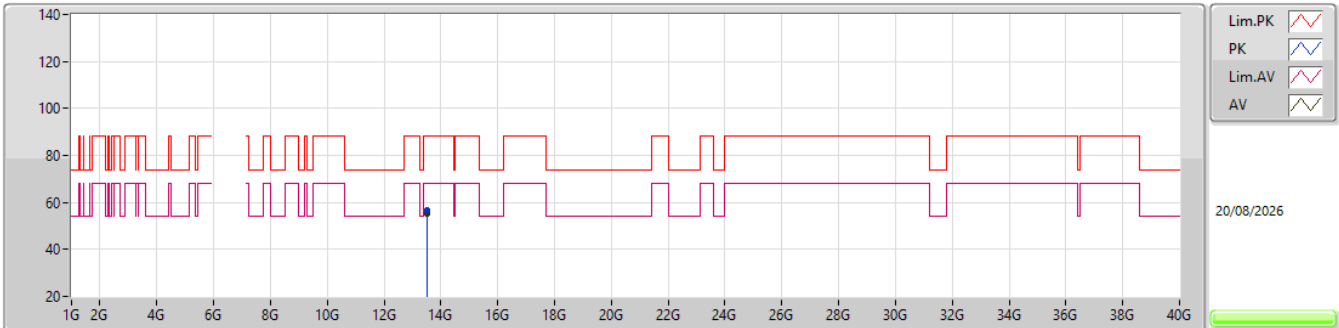EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4996G	56.98	88.20	-31.22	48.36	3	Vertical	81	1.82	-	40.50	13.13	45.01			
RMS	13.4996G	55.33	68.20	-12.87	46.71	3	Vertical	81	1.82	-	40.50	13.13	45.01			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6785MHz_TX

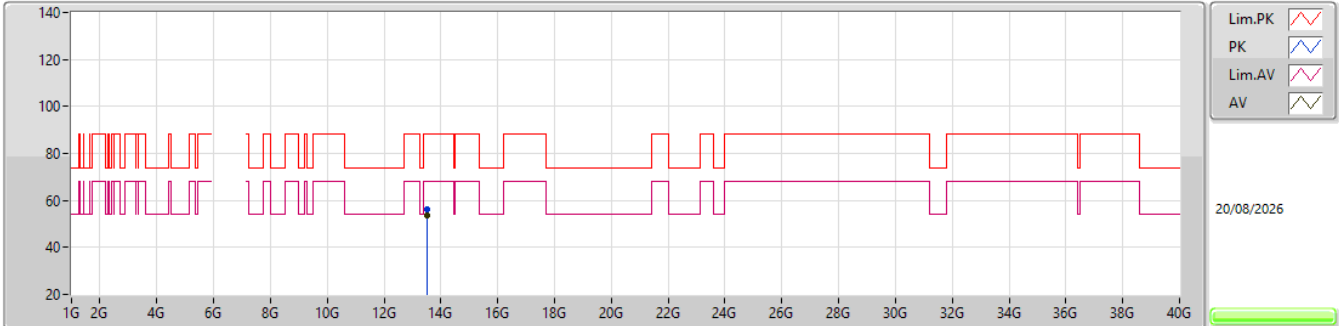


EUT_Y_4TX
Setting 44
02-Z-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.4996G	56.43	88.20	-31.77	47.81	3	Horizontal	111	1.85	-	40.50	13.13	45.01			
RMS	13.4996G	53.67	68.20	-14.53	45.05	3	Horizontal	111	1.85	-	40.50	13.13	45.01			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

6785MHz_TX

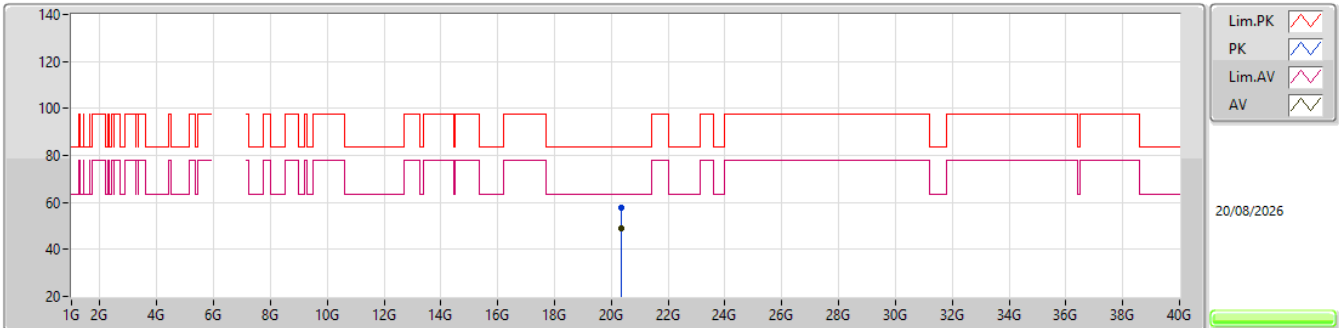EUT_Y_4TX
Setting 44
02-Z-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.3542G	57.64	83.54	-25.90	52.53	1	Vertical	61	1.52	-	37.50	16.54	48.93			
AV	20.353G	49.01	63.54	-14.53	43.90	1	Vertical	61	1.52	-	37.50	16.54	48.93			