

TEST REPORT

Applicant : GZ GRACE IT CO.,LTD
Address : ROOM 102, NO. 3 CUILAN STREET, HUANGGE TOWN, NANSHA DISTRICT, GUANGZHOU CHINA 510000
Manufacturer : GZ GRACE IT CO.,LTD
Address : ROOM 102, NO. 3 CUILAN STREET, HUANGGE TOWN, NANSHA DISTRICT, GUANGZHOU CHINA 510000
Product Name : MINI PC
Model Number : GII70, GII71, GII72, GII73, GII74, GII75, GI76, GII77, GII78, GII79, GII7X, GII7V, GII7P, GII7H, GII7J, GII7U, MQ
Trademark : N/A
FCC ID : 2BXP5-GII70
Test Date : Jun. 23, 2026 to Jul. 08, 2026
Date of Report : Jul. 08, 2026
Test Result : This device described above has been tested by NTT, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.


Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
KDB 558074 D01 15.247 Meas Guidance v05r02

Prepared by(Test Engineer):
Cindy Qin



Reviewer(Supervisor):
Ken Wu



Approved(Manager):
Abel Yu



TABLE OF CONTENT

1. General Information.....	5
1.1. Description of Device (EUT)	5
1.2. Channel List.....	5
1.3. Summary of test result.....	6
1.4. Special Accessories and Auxiliary Equipment	6
1.5. Test mode.....	6
1.6. Test configuration.....	7
1.7. Block Diagram	7
1.8. Test Conditions.....	7
1.9. Measurement Uncertainty (95% confidence levels, k=2)	8
1.10. Test Facility	8
1.11. Test Equipment.....	9
4. Conducted emission at the mains terminals test.....	11
4.1. Limit.....	11
4.2. Test Setup	11
4.3. Test Procedure	11
4.4. Test Result	12
5. Radiated Spurious Emissions.....	14
5.1. Limit.....	14
5.2. Test Setup	15
5.3. Test Procedure	17
5.4. Test Result	18
6. Maximum Peak Output Power	23
6.1. Limit.....	23
6.2. Test Setup	23
6.3. Test Procedure	23
6.4. Test Result	24
7. -20 dB Bandwidth Measurement	28
7.1. Limit.....	28
7.2. Test Setup	28
7.3. Test Procedure	28
7.4. Test Result	28
8. Carrier Frequency Separation Test.....	32
8.1. Limit.....	32
8.2. Test Setup	32
8.3. Test Procedure	32
8.4. Test Result	32
9. Number of Hopping Channel Test.....	36
9.1. Limit.....	36
9.2. Test Setup	36
9.3. Test Procedure	36
9.4. Test Result	36
10. Dwell Time Test.....	38
10.1. Limit.....	38
10.2. Test setup.....	38
10.3. Test Procedure	38

10.4. Test Result	38
-------------------------	----

12. Conducted Spurious Emissions and Band Edge Requirement 45

12.1. Limit.....	45
12.2. Test Setup	45
12.3. Test Procedure	45
12.4. Test Result	46

13. Antenna Requirement53

13.1. Test Standard and Requirement.....	53
13.2. Antenna Connected Construction.....	53

14. TEST SETUP & EUT PHOTOGRAPH.....54

Revision History of This Test Report

Report Number	Description	Issued Date
SZNTT26036976E1-2	Initial Issue	2026-7-08

1. General Information

1.1. Description of Device (EUT)

EUT Name : MINI PC
 Model No. : GII70, GII71, GII72, GII73, GII74, GII75, GII76, GII77, GII78, GII79, GII7X, GII7V, GII7P, GII7H, GII7J, GII7U, MQ
 Model Difference : All the model are the same circuit and RF module, only the name and appearance are different. Test sample model: GII70
 Power supply : DC 19V 3.42A
 Operation frequency : 2402-2480MHz
 Modulation : GFSK, $\pi/4$ DQPSK, 8DPSK
 Antenna Type : FPC antenna, Maximum Gain is 2.2dBi
 Intend use environment : Residential, commercial and light industrial environment

1.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

1.3. Summary of test result

RF PART		
Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth 99% Occupied Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.4. Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
Laptop	DELL	Vostro 5490	/	/
Adsptop	/	/	/	/
Cable	/	/	/	/

1.5. Test mode

The special RF test software was used to control EUT work in Continuous BT TX mode, and select test channel, wireless mode.

Test mode	Low channel	Middle channel	High channel
GFSK	2402MHz	2441MHz	2480MHz
Π/4-DQPSK	2402MHz	2441MHz	2480MHz
8DPSK	2402MHz	2441MHz	2480MHz
Note: Only the worst Data DH1/2DH1/3DH1 Record in the report			


1.6. Test configuration

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	


Test Software	FCC_assist_1.0.4
Power level setup	default

1.7. Block Diagram


Conducted Emission



Radiated Emission



RF Conducted Test



1.8. Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35℃	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	DC 19V	N/A

Note: N/A is an abbreviation for Not Applicable.

1.9. Measurement Uncertainty (95% confidence levels, k=2)

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark:When making a conformity declaration based on test results for regulations/standards or specifications,the default is to use Clause 4.2.1of ILAC-G8:09/2019 and the guidelines on decision rules and conformity declaration in IEC Guide 115:2023.	

1.10. Test Facility

Site Description		
Name of Firm	:	Shenzhen NTT Testing Technology Co.,Ltd.
Site Location	:	1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang Industrial Park, No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district, Bao 'an District, Shenzhen City, Guangdong, China
FCC Designation Number	:	CN3446
FCC Test Firm Registration Number	:	129414

1.11. Test Equipment

2. Conducted Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	HSRCE944	/	HTEC	2025/04/30	2028/04/29
EMI Test Receiver	ESCI	100881/003	ROHDE&SCHWARZ	2026/09/04	2027/09/03
LISN	AMN6500	101185	ROHDE&SCHWARZ	2026/09/04	2027/09/03
LISN	NNLK 8129	00603	SCHWARZBECK	2026/09/04	2027/09/03
Cable	RG223-2M	/	RG	2026/09/04	2027/09/03

3. Radiated Test Site(Below 1G and Above 1G)&RF Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/07/24	2028/07/23
EMI Test Receiver	ESPI	101018	ROHDE&SCHWARZ	2026/09/04	2027/09/03
Amplifier (30MHz-1GHz)	BBV 9745	00431	SCHWARZBECK	2026/09/04	2027/09/03
Bilog Antenna (30MHz-1GHz)	VULB9168	1858	SCHWARZBECK	2026/09/05	2027/09/04
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2026/09/05	2027/09/04
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2026/09/04	2027/09/03
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	ROHDE&SCHWARZ	2026/09/04	2027/09/03
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2026/09/04	2027/09/03
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2026/09/05	2027/09/04
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHWARZBECK	2026/09/04	2027/09/03
MXG Signal Analyzer	N9020A	MY49100730	Agilent	2026/09/04	2027/09/03
MXG Vector Signal Generator	N5182A	MY50144920	Agilent	2026/09/04	2027/09/03

WIDEBAND RADIO COMMUNICATION TESTER	CMW500	/	ROHDE&SCHWARZ	2026/09/07	2027/09/06
Power Sensor	MW100-RFC B-2	MW260105N TT-64	MWRFTtest	2026/09/04	2027/09/03
RF Swith	MW100-RFC B-1	MW260105N TT-64	MWRFTtest	2026/09/04	2027/09/03
Cable	RG223-3M	/	DA	2026/09/04	2027/09/03
Cable	RG223-12M	/	DA	2026/09/04	2027/09/03
Cable	SFT205-NM NMSW-2.5M	/	DA	2026/09/04	2027/09/03
Cable	SFT205-NM NM-12M	/	DA	2026/09/04	2027/09/03
Cable	UCA500-NJ WSM-1.5M	017	MWRFTtest	2026/09/04	2027/09/03

4.

5. Conducted emission at the mains terminals test


5.1. Limit

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

5.2. Test Setup

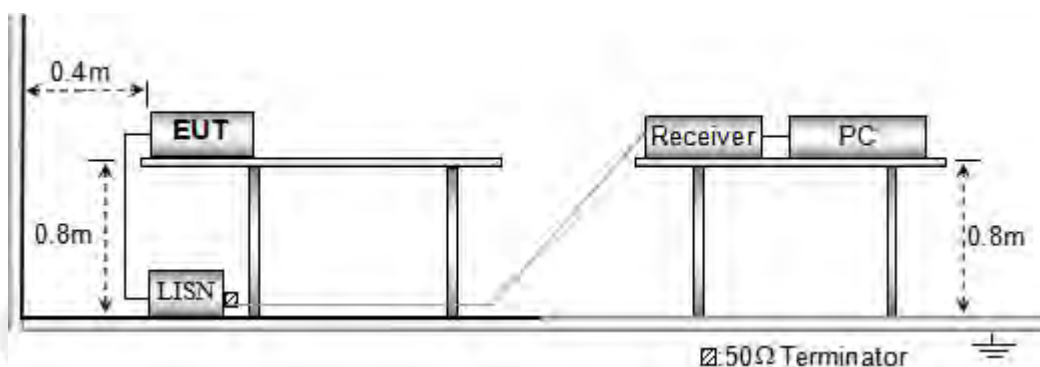


5.3. Test Procedure

1. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item - EUT Test Photos.

5.4. Test Result

Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	DC 19V 3.42A	Test Mode:	GFSK(CH00)

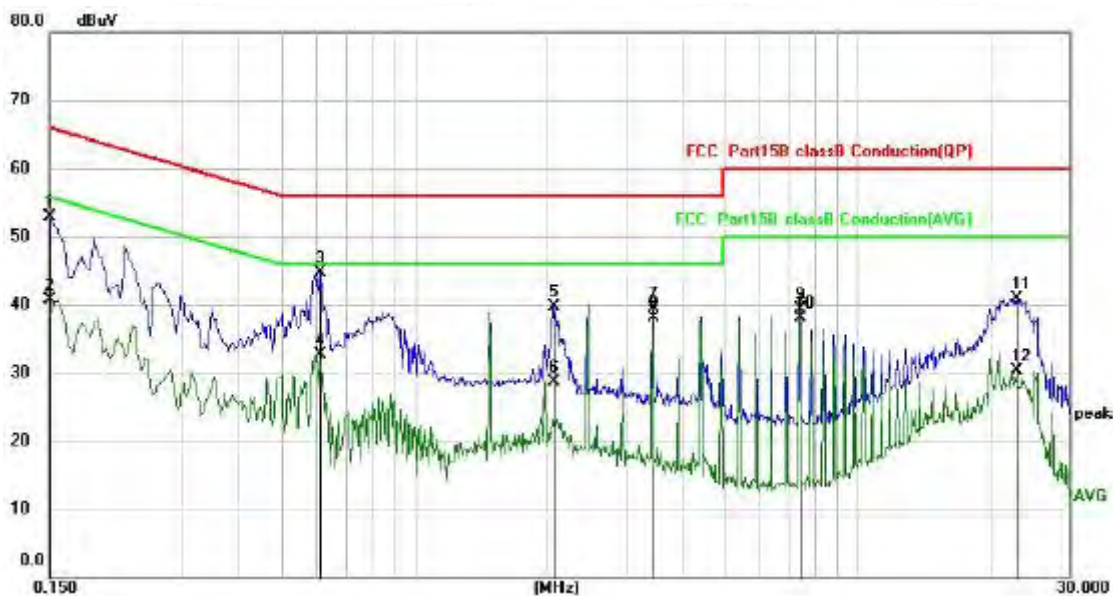


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
	MHz	dBμV	dB	dBμV	dBμV	dB	Detector
1	0.1500	42.92	10.07	52.99	66.00	-13.01	QP
2	0.1500	30.58	10.07	40.65	56.00	-15.35	AVG
3	0.6139	34.63	10.10	44.73	56.00	-11.27	QP
4	0.6139	22.60	10.10	32.70	46.00	-13.30	AVG
5	2.0579	29.46	10.17	39.63	56.00	-16.37	QP
6	2.0579	18.47	10.17	28.64	46.00	-17.36	AVG
7	3.4460	29.22	10.22	39.44	56.00	-16.56	QP
8 *	3.4460	27.82	10.22	38.04	46.00	-7.96	AVG
9	7.3859	28.83	10.39	39.22	60.00	-20.78	QP
10	7.3859	27.67	10.39	38.06	50.00	-11.94	AVG
11	22.8700	29.81	11.10	40.91	60.00	-19.09	QP
12	22.8700	19.26	11.10	30.36	50.00	-19.64	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(GFSK) in the report

Conducted Emission At The Mains Terminals Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	DC 19V 3.42A	Test Mode:	GFSK(CH00)

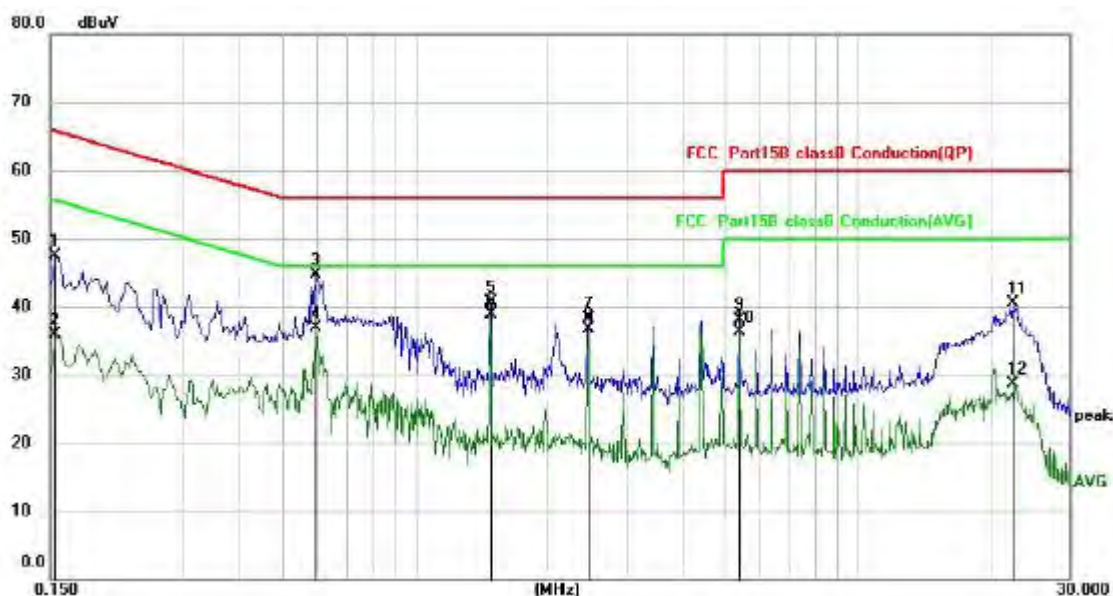

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	37.39	10.07	47.46	65.79	-18.33	QP
2		0.1539	25.91	10.07	35.98	55.79	-19.81	AVG
3		0.5977	34.64	10.10	44.74	56.00	-11.26	QP
4		0.5977	26.75	10.10	36.85	46.00	-9.15	AVG
5		1.4778	30.47	10.15	40.62	56.00	-15.38	QP
6	*	1.4778	28.77	10.15	38.92	46.00	-7.08	AVG
7		2.4620	28.10	10.19	38.29	56.00	-17.71	QP
8		2.4620	26.50	10.19	36.69	46.00	-9.31	AVG
9		5.4179	27.77	10.30	38.07	60.00	-21.93	QP
10		5.4179	25.94	10.30	36.24	50.00	-13.76	AVG
11		22.3857	29.40	11.07	40.47	60.00	-19.53	QP
12		22.3857	17.63	11.07	28.70	50.00	-21.30	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(GFSK) in the report

6. Radiated Spurious Emissions

6.1. Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
 ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024

Test Result: PASS
 Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$


6.2. Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

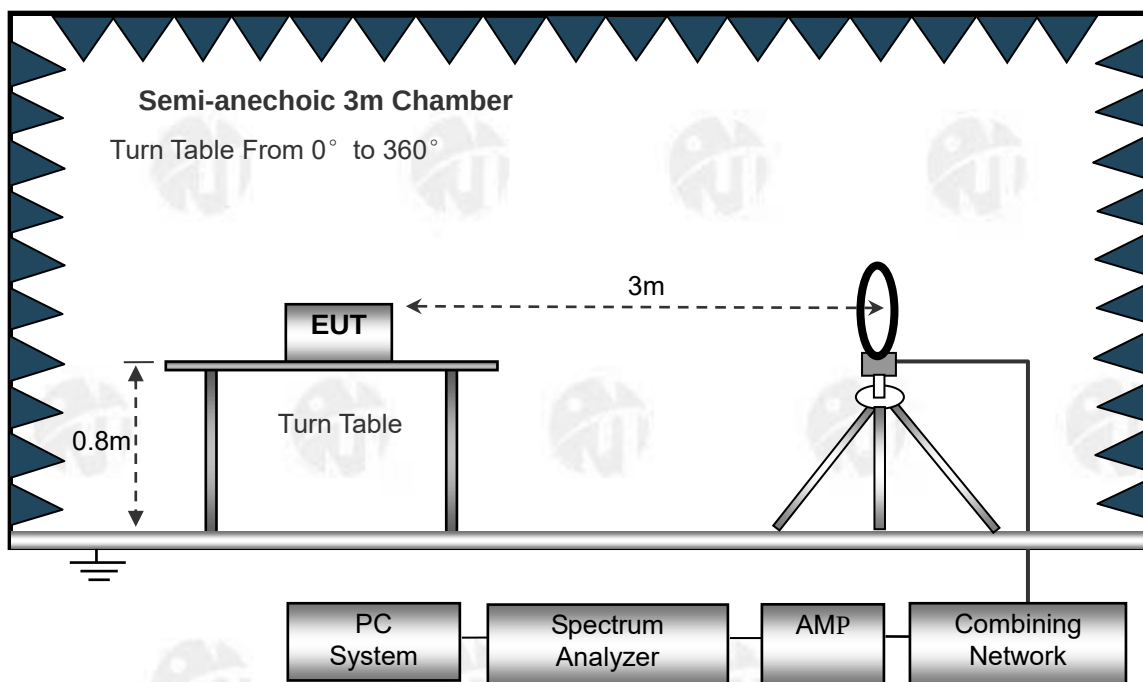

The test setup for emission measurement from 30 MHz to 1 GHz.

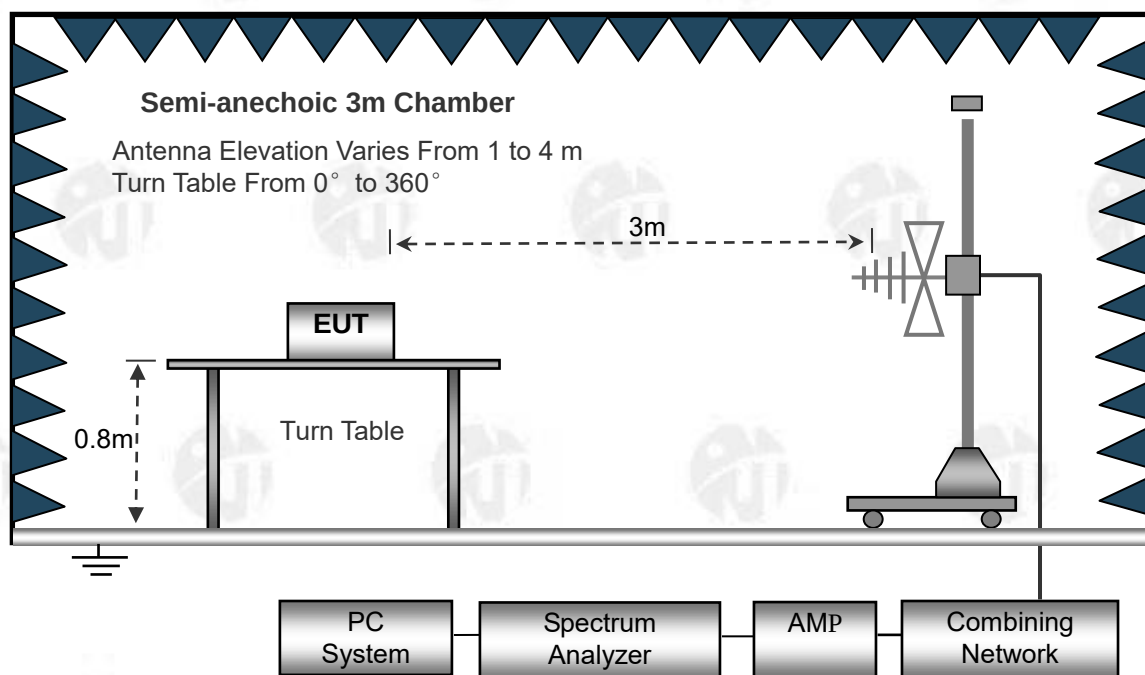

The test setup for emission measurement above 1 GHz.

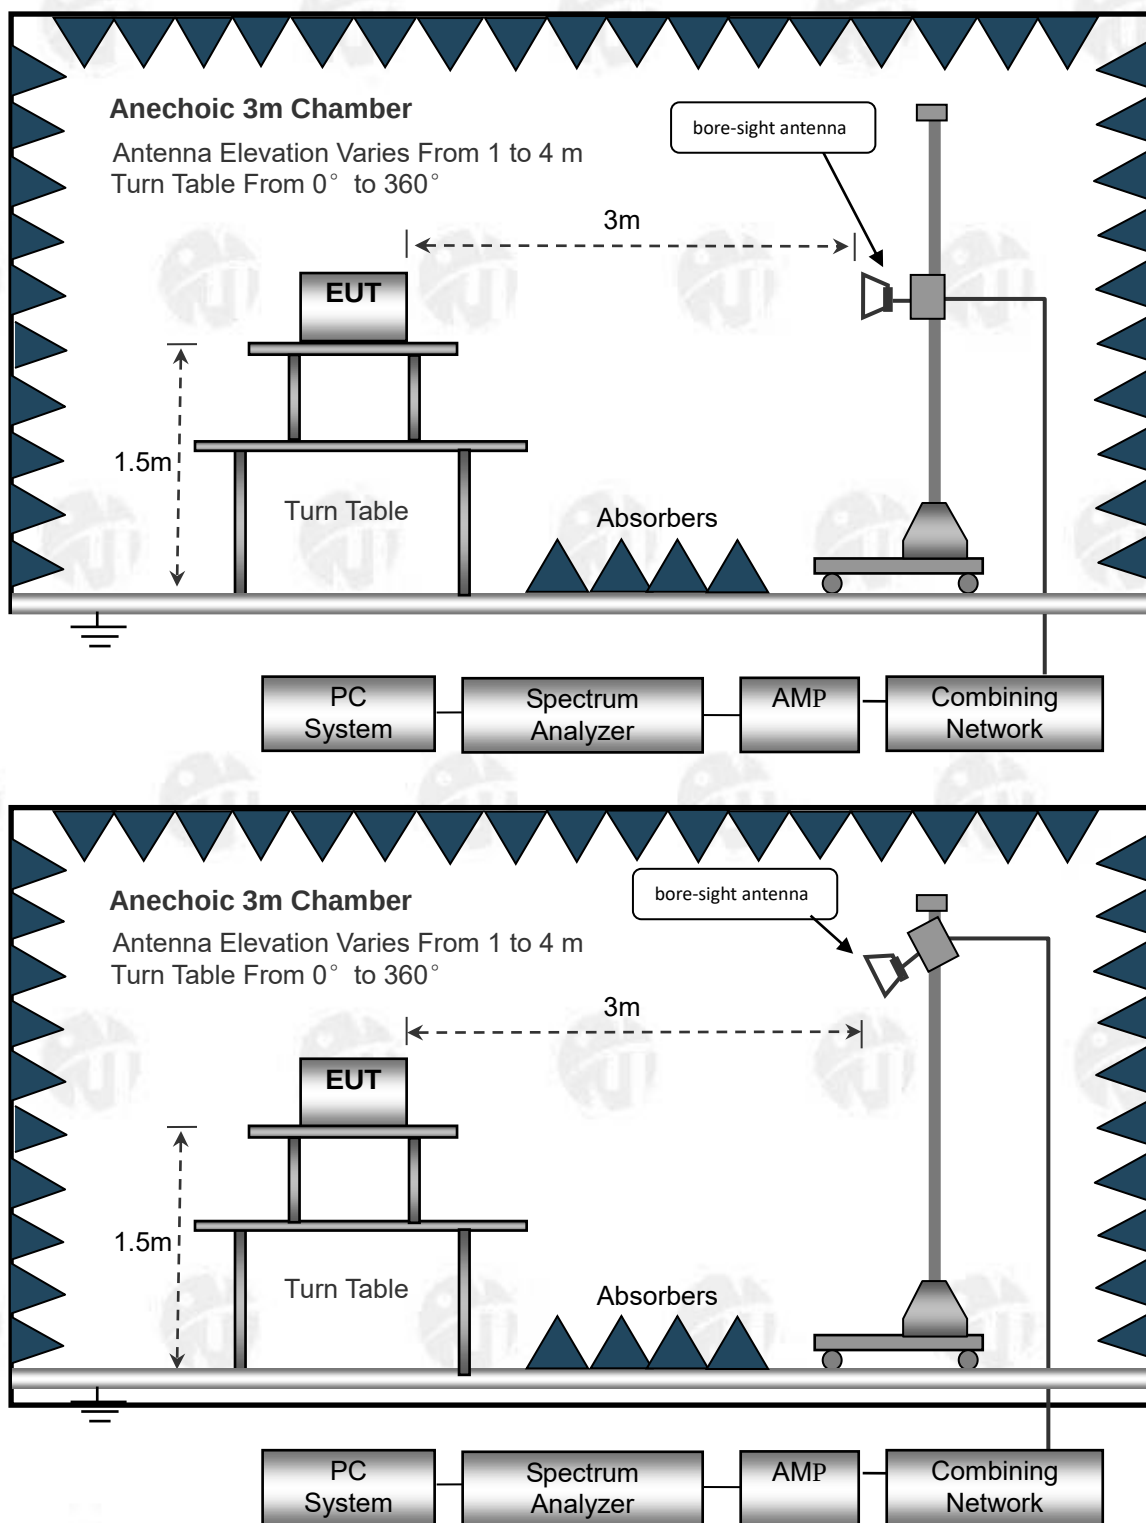

6.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.


6.4. Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 19V 3.42A	Test Mode	GFSK(CH00)

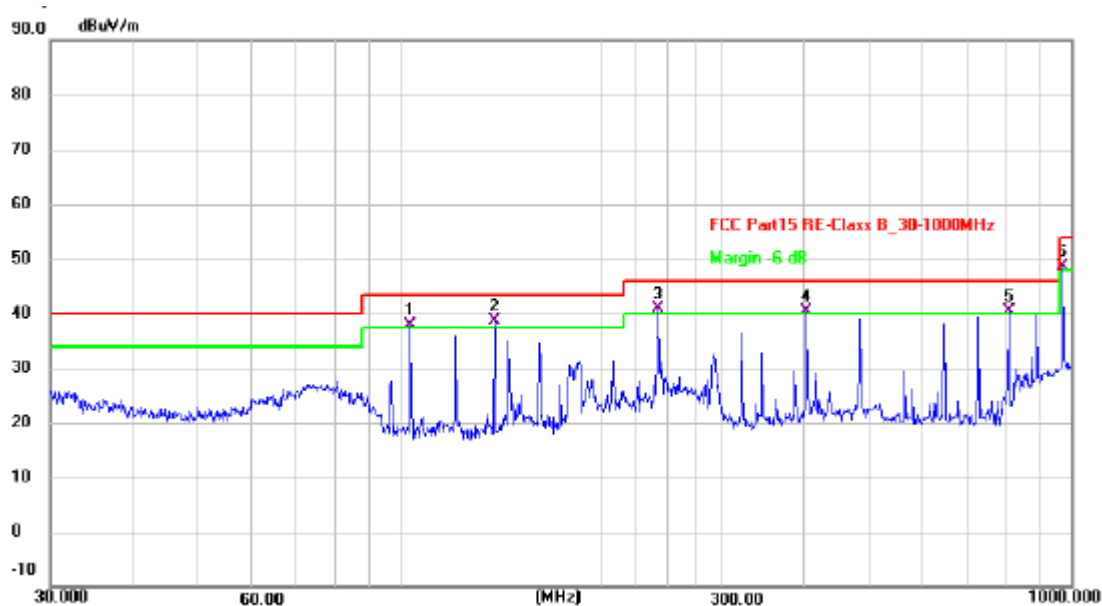

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	103.4419	55.50	-17.60	37.90	43.50	-5.60	QP
2 *	137.9030	52.27	-13.59	38.68	43.50	-4.82	QP
3 !	241.6760	55.15	-14.26	40.89	46.00	-5.11	QP
4 !	403.2500	50.58	-10.25	40.33	46.00	-5.67	QP
5 !	807.4290	42.18	-1.90	40.28	46.00	-5.72	QP
6 !	968.9337	48.45	0.28	48.73	54.00	-5.27	QP

Note:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(GFSK) in the report

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 19V 3.42A	Test Mode	GFSK(CH00)

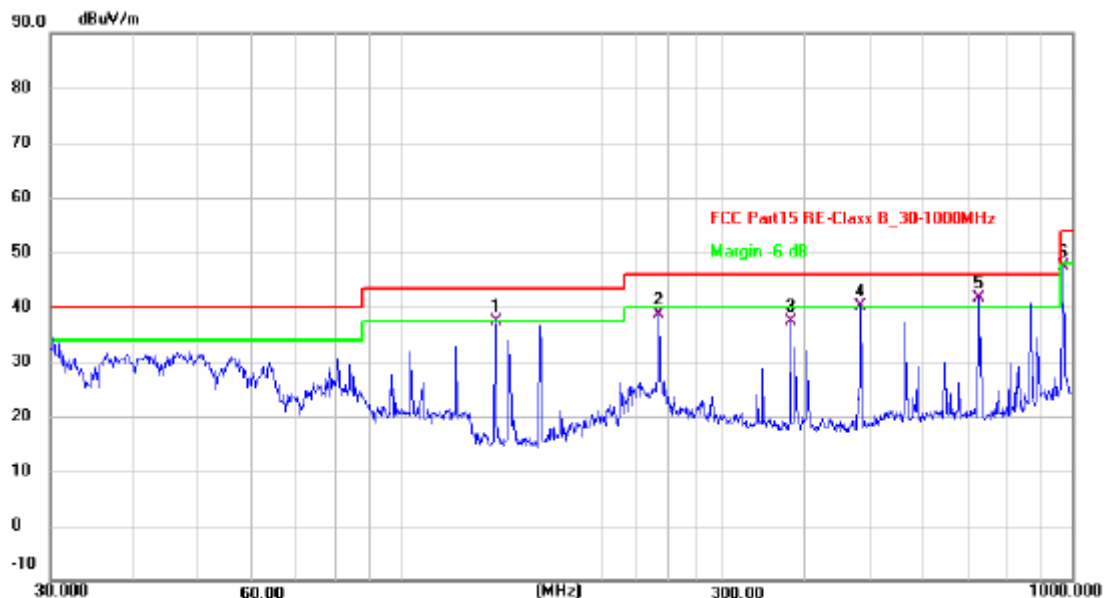

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	138.3873	50.89	-13.53	37.36	43.50	-6.14	QP
2	241.6760	52.80	-14.26	38.54	46.00	-7.46	QP
3	379.9141	48.12	-10.69	37.43	46.00	-8.57	QP
4 !	483.9094	48.53	-8.33	40.20	46.00	-5.80	QP
5 *	726.8052	44.81	-3.15	41.66	46.00	-4.34	QP
6	968.9337	47.21	0.28	47.49	54.00	-6.51	QP

Note:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(GFSK) in the report

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	53.10	30.55	5.77	24.66	52.98	74	-21.02	Pk
V	4804.00	38.97	30.55	5.77	24.66	38.85	54	-15.15	AV
V	7206.00	50.19	30.33	6.32	24.55	50.73	74	-23.27	Pk
V	7206.00	35.63	30.33	6.32	24.55	36.17	54	-17.83	AV
V	9608.00	48.76	30.85	7.45	24.69	50.05	74	-23.95	Pk
V	9608.00	32.87	30.85	7.45	24.69	34.16	54	-19.84	AV
V	12010.00	45.70	31.02	8.99	25.57	49.24	74	-24.76	Pk
V	12010.00	28.54	31.02	8.99	25.57	32.08	54	-21.92	AV
H	4804.00	49.61	30.55	5.77	24.66	49.49	74	-24.51	Pk
H	4804.00	39.42	30.55	5.77	24.66	39.30	54	-14.70	AV
H	7206.00	48.85	30.33	6.32	24.55	49.39	74	-24.61	Pk
H	7206.00	33.09	30.33	6.32	24.55	33.63	54	-20.37	AV
H	9608.00	47.43	30.85	7.45	24.69	48.72	74	-25.28	Pk
H	9608.00	29.94	30.85	7.45	24.69	31.23	54	-22.77	AV
H	12010.00	39.30	31.02	8.99	25.57	42.84	74	-31.16	Pk
H	12010.00	25.02	31.02	8.99	25.57	28.56	54	-25.44	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	50.77	30.55	5.77	24.66	50.65	74	-23.35	Pk
V	4882.00	39.51	30.55	5.77	24.66	39.39	54	-14.61	AV
V	7323.00	45.97	30.33	6.32	24.55	46.51	74	-27.49	Pk
V	7323.00	36.03	30.33	6.32	24.55	36.57	54	-17.43	AV
V	9764.00	43.11	30.85	7.45	24.69	44.40	74	-29.60	Pk
V	9764.00	31.52	30.85	7.45	24.69	32.81	54	-21.19	AV
V	12205.00	41.12	31.02	8.99	25.57	44.66	74	-29.34	Pk
V	12205.00	30.11	31.02	8.99	25.57	33.65	54	-20.35	AV
H	4882.00	49.10	30.55	5.77	24.66	48.98	74	-25.02	Pk
H	4882.00	39.30	30.55	5.77	24.66	39.18	54	-14.82	AV
H	7323.00	46.27	30.33	6.32	24.55	46.81	74	-27.19	Pk
H	7323.00	35.15	30.33	6.32	24.55	35.69	54	-18.31	AV
H	9764.00	43.51	30.85	7.45	24.69	44.80	74	-29.20	Pk
H	9764.00	29.44	30.85	7.45	24.69	30.73	54	-23.27	AV
H	12205.00	40.53	31.02	8.99	25.57	44.07	74	-29.93	Pk
H	12205.00	30.08	31.02	8.99	25.57	33.62	54	-20.38	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	48.18	30.55	5.77	24.66	48.06	74	-25.94	Pk
V	4960.00	36.94	30.55	5.77	24.66	36.82	54	-17.18	AV
V	7440.00	44.96	30.33	6.32	24.55	45.50	74	-28.50	Pk
V	7440.00	36.29	30.33	6.32	24.55	36.83	54	-17.17	AV
V	9920.00	40.87	30.85	7.45	24.69	42.16	74	-31.84	Pk
V	9920.00	31.31	30.85	7.45	24.69	32.60	54	-21.40	AV
V	12400.00	39.20	31.02	8.99	25.57	42.74	74	-31.26	Pk
V	12400.00	28.39	31.02	8.99	25.57	31.93	54	-22.07	AV
H	4960.00	48.51	30.55	5.77	24.66	48.39	74	-25.61	Pk
H	4960.00	39.16	30.55	5.77	24.66	39.04	54	-14.96	AV
H	7440.00	45.98	30.33	6.32	24.55	46.52	74	-27.48	Pk
H	7440.00	32.27	30.33	6.32	24.55	32.81	54	-21.19	AV
H	9920.00	41.67	30.85	7.45	24.69	42.96	74	-31.04	Pk
H	9920.00	28.39	30.85	7.45	24.69	29.68	54	-24.32	AV
H	12400.00	39.84	31.02	8.99	25.57	43.38	74	-30.62	Pk
H	12400.00	30.69	31.02	8.99	25.57	34.23	54	-19.77	AV

- Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.
 2. All other emissions more than 30dB below the limit.
 3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 Emission Level = Reading + Factor
 Margin=Emission Level-Limit
 4. All the modes have tested and recorded the worst mode(GFSK) in the report

Radiated Band Emission Measurement:

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector or Type
GFSK	Low Channel: 2402MHz									
	H	2390	58.34	35.17	3.48	27.49	54.14	74	-19.86	PK
	H	2390	50.88	35.17	3.48	27.49	46.68	54	-7.32	AV
	H	2400	60.35	35.16	3.49	27.52	56.20	74	-17.80	PK
	H	2400	48.91	35.16	3.49	27.52	44.76	54	-9.24	AV
	V	2390	60.11	35.17	3.48	27.49	55.91	74	-18.09	PK
	V	2390	50.55	35.17	3.48	27.49	46.35	54	-7.65	AV
	V	2400	59.12	35.16	3.49	27.52	54.97	74	-19.03	PK
	V	2400	51.29	35.16	3.49	27.52	47.14	54	-6.86	AV
	High Channel: 2480MHz									
	H	2483.5	59.13	35.11	3.56	27.75	55.33	74	-18.67	PK
	H	2483.5	50.74	35.11	3.56	27.75	46.94	54	-7.06	AV
	H	2500	60.71	35.1	3.57	27.8	56.98	74	-17.02	PK
	H	2500	50.56	35.1	3.57	27.8	46.83	54	-7.17	AV
	V	2483.5	59.99	35.11	3.56	27.75	56.19	74	-17.81	PK
	V	2483.5	50.33	35.11	3.56	27.75	46.53	54	-7.47	AV

	V	2500	58.79	35.1	3.57	27.8	55.06	74	-18.94	PK
	V	2500	49.91	35.1	3.57	27.8	46.18	54	-7.82	AV
π/4-DQP SK	Low Channel: 2402MHz									
	H	2390	59.53	35.17	3.48	27.49	55.33	74	-18.67	PK
	H	2390	49.76	35.17	3.48	27.49	45.56	54	-8.44	AV
	H	2400	60.73	35.16	3.49	27.52	56.58	74	-17.42	PK
	H	2400	51.07	35.16	3.49	27.52	46.92	54	-7.08	AV
	V	2390	59.73	35.17	3.48	27.49	55.53	74	-18.47	PK
	V	2390	51.60	35.17	3.48	27.49	47.40	54	-6.60	AV
	V	2400	60.71	35.16	3.49	27.52	56.56	74	-17.44	PK
	V	2400	49.09	35.16	3.49	27.52	44.94	54	-9.06	AV
	High Channel: 2480MHz									
	H	2483.5	58.30	35.11	3.56	27.75	54.50	74	-19.50	PK
	H	2483.5	50.64	35.11	3.56	27.75	46.84	54	-7.16	AV
	H	2500	59.01	35.1	3.57	27.8	55.28	74	-18.72	PK
	H	2500	51.16	35.1	3.57	27.8	47.43	54	-6.57	AV
	V	2483.5	59.65	35.11	3.56	27.75	55.85	74	-18.15	PK
	V	2483.5	51.37	35.11	3.56	27.75	47.57	54	-6.43	AV
	V	2500	57.80	35.1	3.57	27.8	54.07	74	-19.93	PK
	V	2500	51.70	35.1	3.57	27.8	47.97	54	-6.03	AV
8DPSK	Low Channel: 2402MHz									
	H	2390	59.66	35.17	3.48	27.49	55.46	74	-18.54	PK
	H	2390	50.00	35.17	3.48	27.49	45.80	54	-8.20	AV
	H	2400	59.86	35.16	3.49	27.52	55.71	74	-18.29	PK
	H	2400	49.69	35.16	3.49	27.52	45.54	54	-8.46	AV
	V	2390	57.51	35.17	3.48	27.49	53.31	74	-20.69	PK
	V	2390	50.08	35.17	3.48	27.49	45.88	54	-8.12	AV
	V	2400	60.23	35.16	3.49	27.52	56.08	74	-17.92	PK
	V	2400	50.73	35.16	3.49	27.52	46.58	54	-7.42	AV
	High Channel: 2480MHz									
	H	2483.5	58.06	35.11	3.56	27.75	54.26	74	-19.74	PK
	H	2483.5	48.94	35.11	3.56	27.75	45.14	54	-8.86	AV
	H	2500	61.52	35.1	3.57	27.8	57.79	74	-16.21	PK
	H	2500	49.79	35.1	3.57	27.8	46.06	54	-7.94	AV
	V	2483.5	57.76	35.11	3.56	27.75	53.96	74	-20.04	PK
	V	2483.5	50.53	35.11	3.56	27.75	46.73	54	-7.27	AV
	V	2500	57.92	35.1	3.57	27.8	54.19	74	-19.81	PK
	V	2500	50.89	35.1	3.57	27.8	47.16	54	-6.84	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

7. Maximum Peak Output Power

7.1. Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	1 watt or 21dBm	2400-2483.5	PASS

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247 § 5.4

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

7.2. Test Setup




7.3. Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold



7.4. Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	1.97	20.97	PASS
	MCH	2.06	20.97	PASS
	HCH	1.65	20.97	PASS
$\pi/4$ DQPSK	LCH	2.67	20.97	PASS
	MCH	2.77	20.97	PASS
	HCH	2.32	20.97	PASS
8DPSK	LCH	3.04	20.97	PASS
	MCH	3.05	20.97	PASS
	HCH	2.6	20.97	PASS

Test Graph:

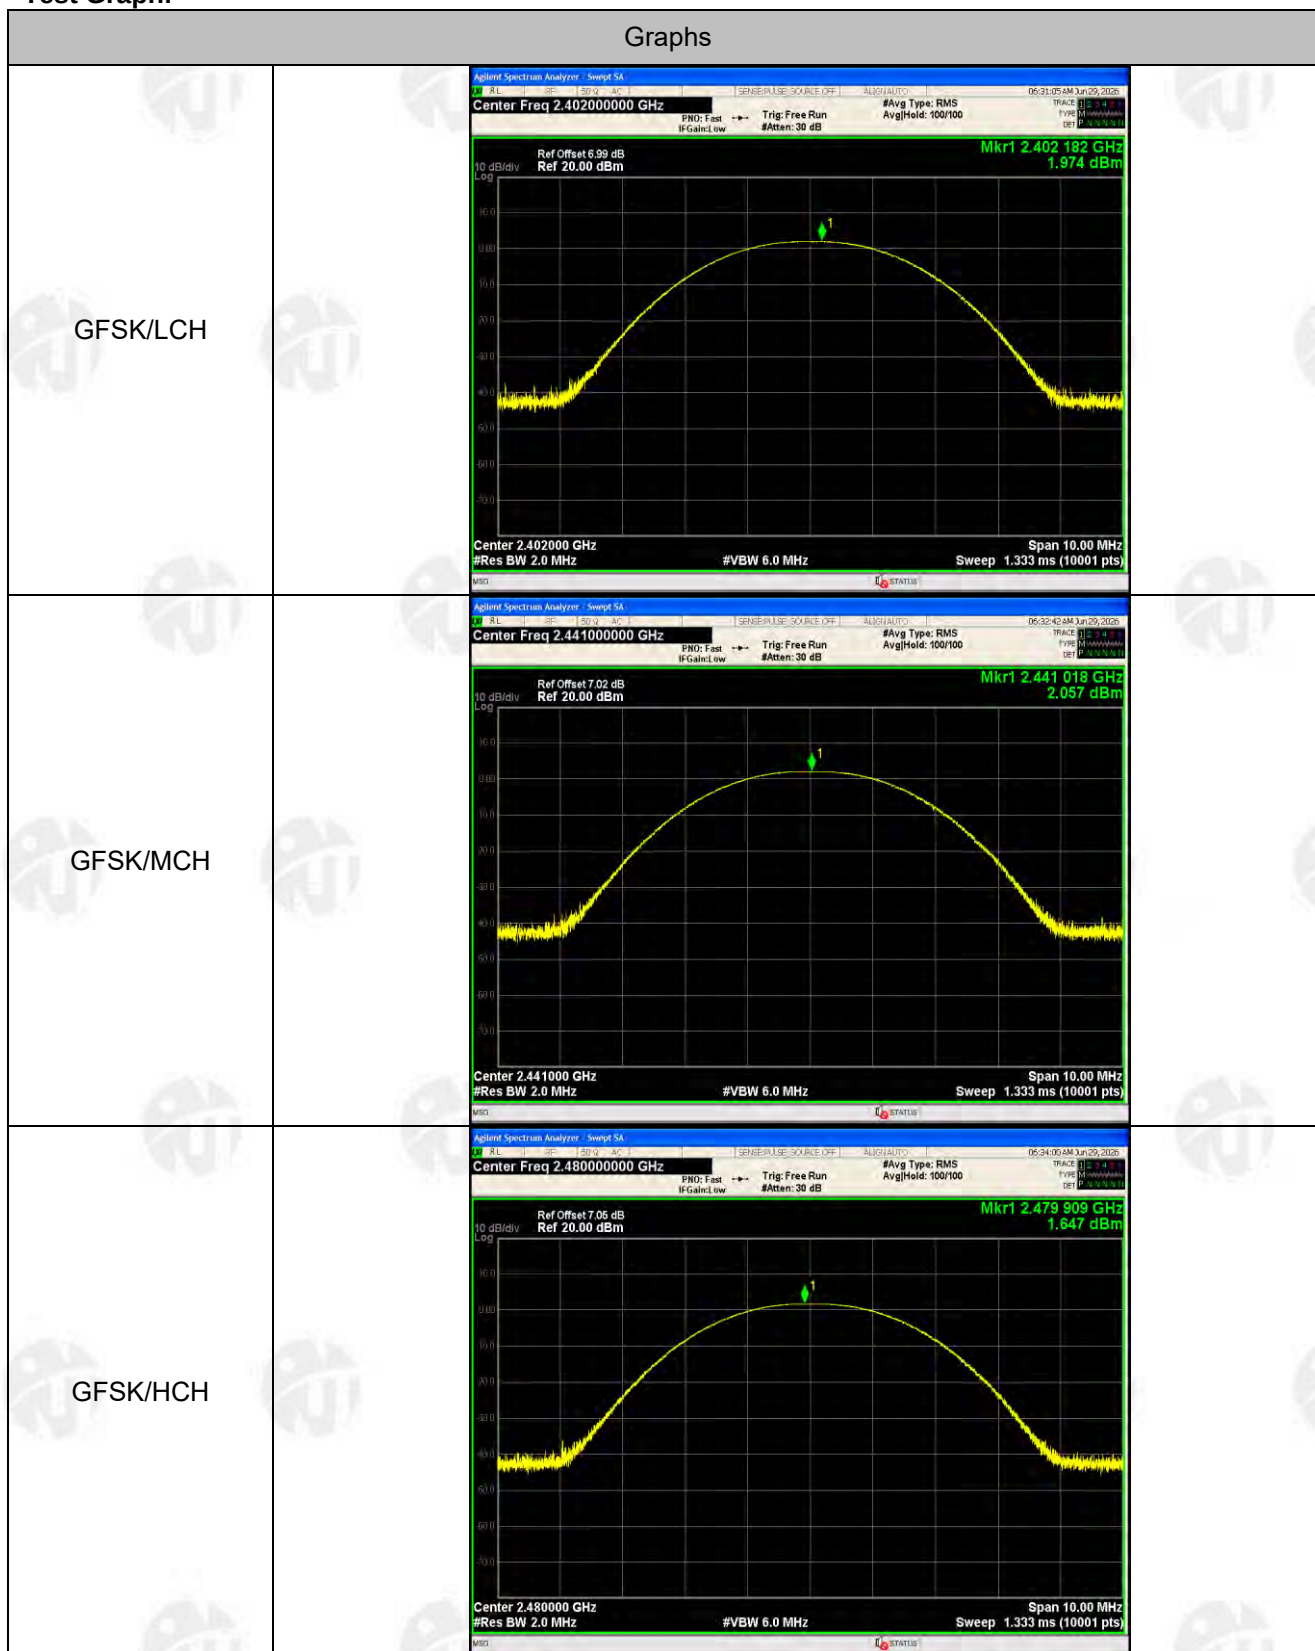

$\pi/4$DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.40200000 GHz Ref Offset 6.88 dB Ref 20.00 dBm Mkr1 2.402231 GHz 2.688 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.44100000 GHz Ref Offset 7.02 dB Ref 20.00 dBm Mkr1 2.440968 GHz 2.766 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.480094 GHz 2.319 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)

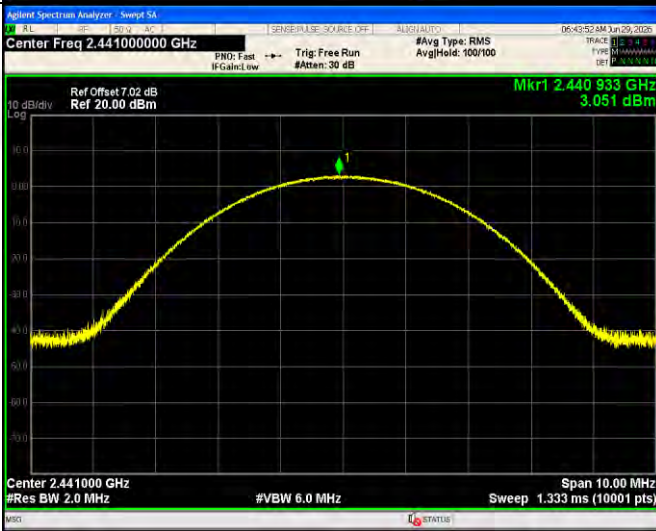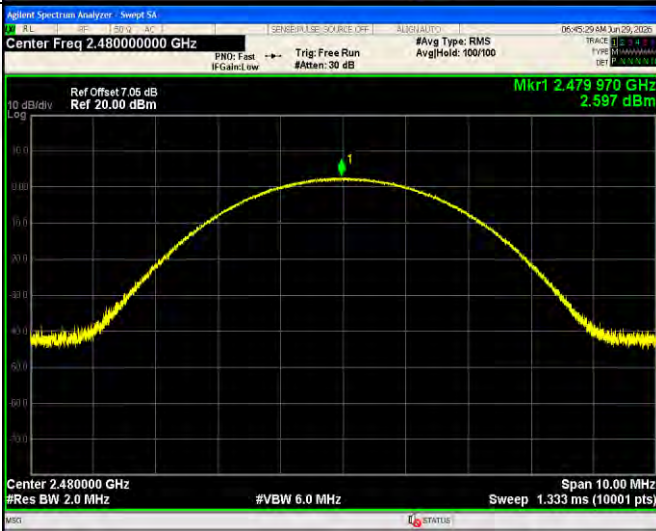8DPSK/LCH		
8DPSK /MCH		
8DPSK /HCH		

8. -20 dB Bandwidth Measurement

8.1. Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

1. Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019; ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

8.2. Test Setup



8.3. Test Procedure

For 20dB Bandwidth Measurement

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW ≥ 3RBW


8.4. Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.872	PASS
	Mid channel	0.857	PASS
	High channel	0.868	PASS
$\pi/4$ DQPSK	Low channel	1.275	PASS
	Mid channel	1.273	PASS
	High channel	1.281	PASS
8DPSK	Low channel	1.286	PASS
	Mid channel	1.289	PASS
	High channel	1.291	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Occupied Bandwidth 831.07 kHz Total Power 7.79 dBm Transmit Freq Error 13.687 kHz OBW Power 99.00 % x dB Bandwidth 871.5 kHz x dB -20.00 dB
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 7.02 dB Ref 27.02 dBm Occupied Bandwidth 834.26 kHz Total Power 7.90 dBm Transmit Freq Error 11.410 kHz OBW Power 99.00 % x dB Bandwidth 856.8 kHz x dB -20.00 dB
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Occupied Bandwidth 840.92 kHz Total Power 7.76 dBm Transmit Freq Error 12.561 kHz OBW Power 99.00 % x dB Bandwidth 868.4 kHz x dB -20.00 dB

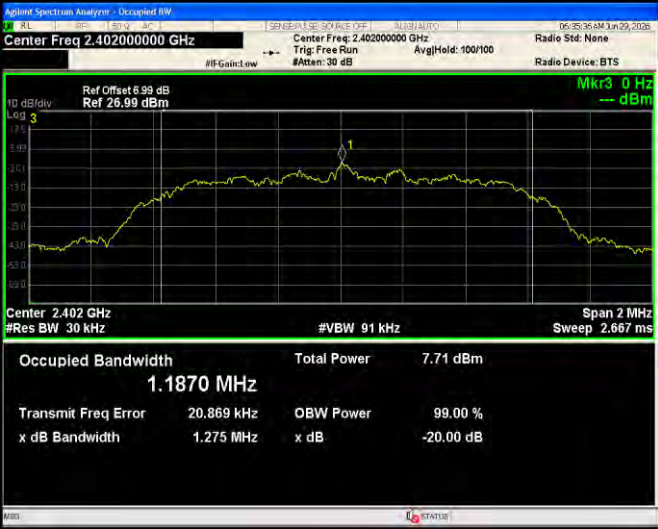$\pi/4$-DQPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 91 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.1870 MHz Total Power 7.71 dBm Transmit Freq Error 20.869 kHz OBW Power 99.00 % x dB Bandwidth 1.275 MHz x dB -20.00 dB
$\pi/4$-DQPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 7.02 dB Ref 27.02 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 91 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.1956 MHz Total Power 7.79 dBm Transmit Freq Error 20.859 kHz OBW Power 99.00 % x dB Bandwidth 1.273 MHz x dB -20.00 dB
$\pi/4$-DQPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 91 kHz Span 2 MHz Sweep 2.667 ms Occupied Bandwidth 1.1983 MHz Total Power 7.11 dBm Transmit Freq Error 22.438 kHz OBW Power 99.00 % x dB Bandwidth 1.281 MHz x dB -20.00 dB

8DPSK Low channel		
8DPSK Mid channel		
8DPSK High channel		

9. Carrier Frequency Separation Test

9.1. Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

9.2. Test Setup



9.3. Test Procedure


The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:



1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 1 MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4. Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.581	PASS
GFSK	MCH	1.000	0.571	PASS
GFSK	HCH	1.000	0.579	PASS
$\pi/4$ DQPSK	LCH	1.002	0.850	PASS
$\pi/4$ DQPSK	MCH	1.002	0.849	PASS
$\pi/4$ DQPSK	HCH	1.002	0.854	PASS
8DPSK	LCH	1.000	0.857	PASS
8DPSK	MCH	1.004	0.859	PASS
8DPSK	HCH	1.000	0.860	PASS

Test Graph

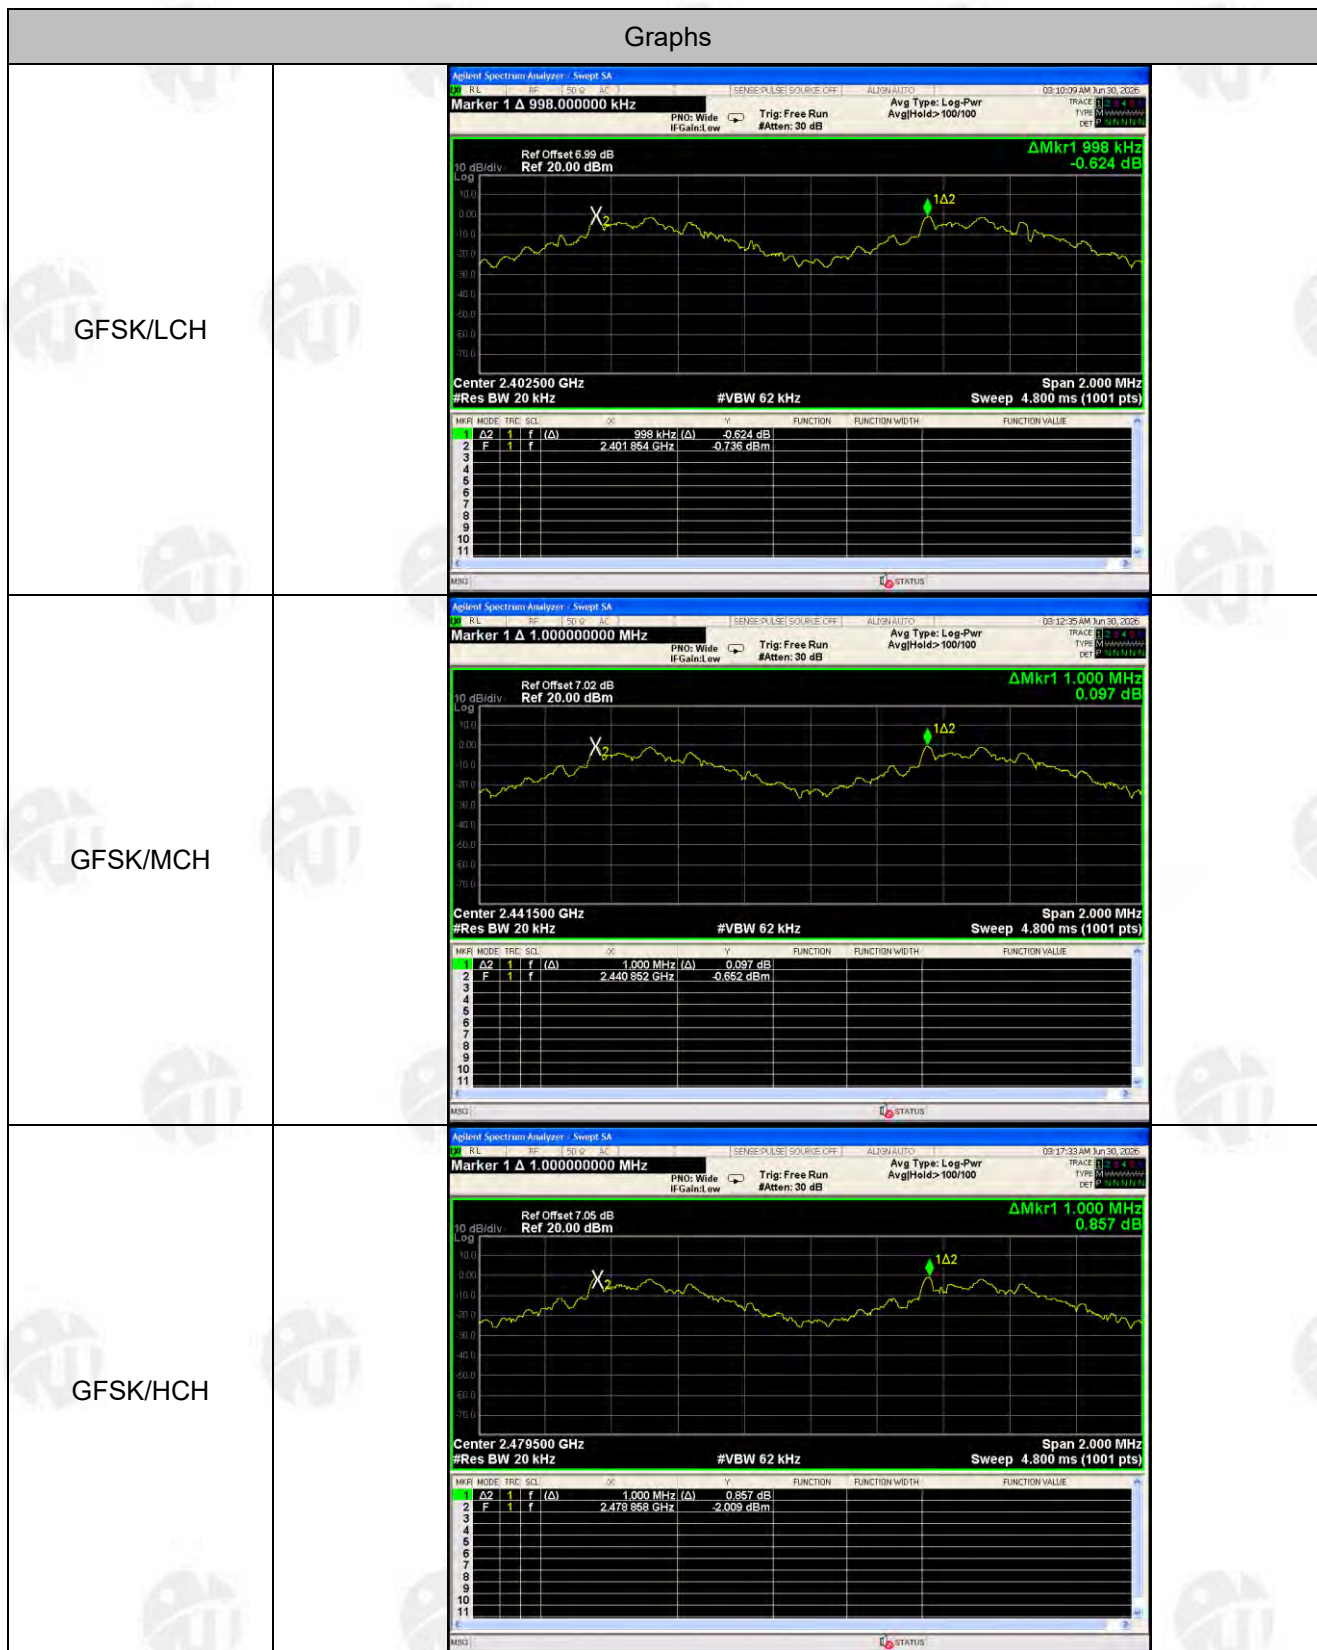

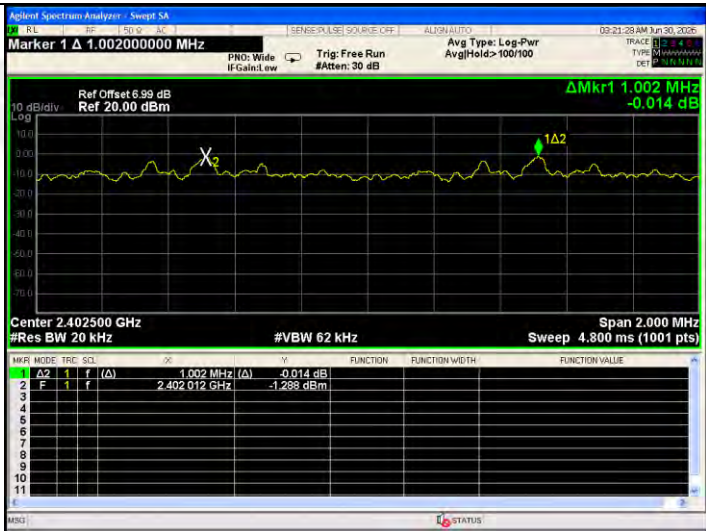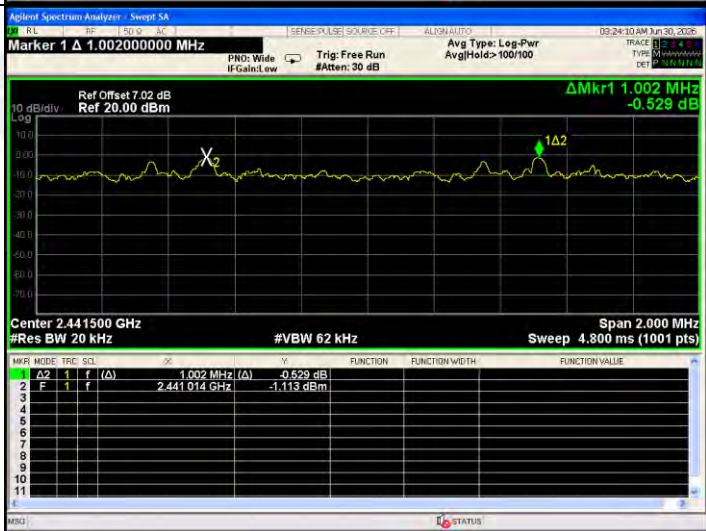$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.002000000 MHz Ref Offset 6.99 dB Ref 20.00 dBm ΔMkr1 1.002 MHz -0.014 dB Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.002 MHz (Δ)</td><td>-0.014 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 012 GHz</td><td>-1.298 dBm</td><td></td><td></td></tr></table>	MFR	MODE	TRF	SQL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.002 MHz (Δ)	-0.014 dB			2	F	1	f		2.402 012 GHz	-1.298 dBm			
MFR	MODE	TRF	SQL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.002 MHz (Δ)	-0.014 dB																							
2	F	1	f		2.402 012 GHz	-1.298 dBm																							
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.002000000 MHz Ref Offset 7.02 dB Ref 20.00 dBm ΔMkr1 1.002 MHz -0.529 dB Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.002 MHz (Δ)</td><td>-0.529 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.441 014 GHz</td><td>-1.113 dBm</td><td></td><td></td></tr></table>	MFR	MODE	TRF	SQL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.002 MHz (Δ)	-0.529 dB			2	F	1	f		2.441 014 GHz	-1.113 dBm			
MFR	MODE	TRF	SQL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.002 MHz (Δ)	-0.529 dB																							
2	F	1	f		2.441 014 GHz	-1.113 dBm																							
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.002000000 MHz Ref Offset 7.05 dB Ref 20.00 dBm ΔMkr1 1.002 MHz -0.332 dB Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.002 MHz (Δ)</td><td>-0.332 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.479 014 GHz</td><td>-2.026 dBm</td><td></td><td></td></tr></table>	MFR	MODE	TRF	SQL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.002 MHz (Δ)	-0.332 dB			2	F	1	f		2.479 014 GHz	-2.026 dBm			
MFR	MODE	TRF	SQL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.002 MHz (Δ)	-0.332 dB																							
2	F	1	f		2.479 014 GHz	-2.026 dBm																							

8DPSK/LCH



8DPSK /MCH



8DPSK /HCH



10. Number of Hopping Channel Test

10.1. Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	>15 channels

10.2. Test Setup



10.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


10.4. Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Test Graph

Graphs


GFSK/Hop

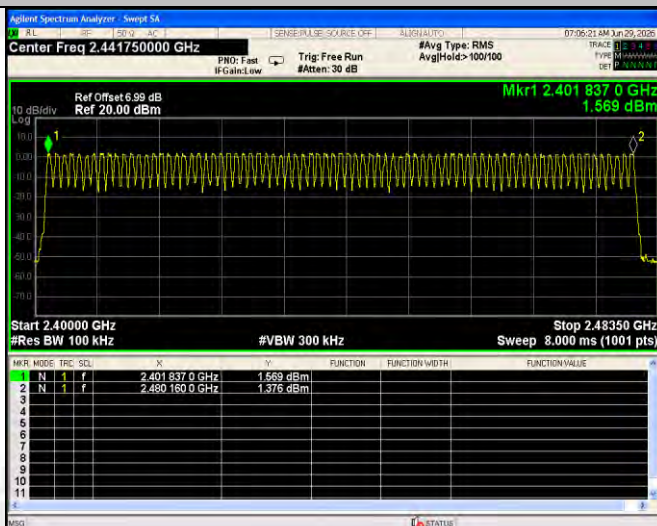

π /4DQPSK/Hop

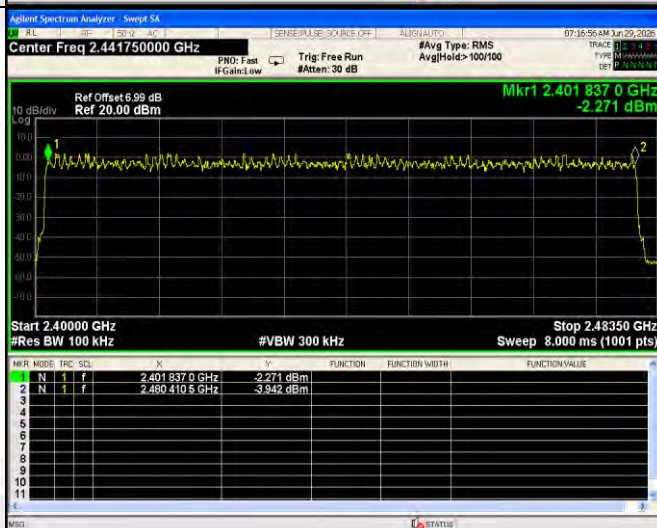

8DPSK/Hop

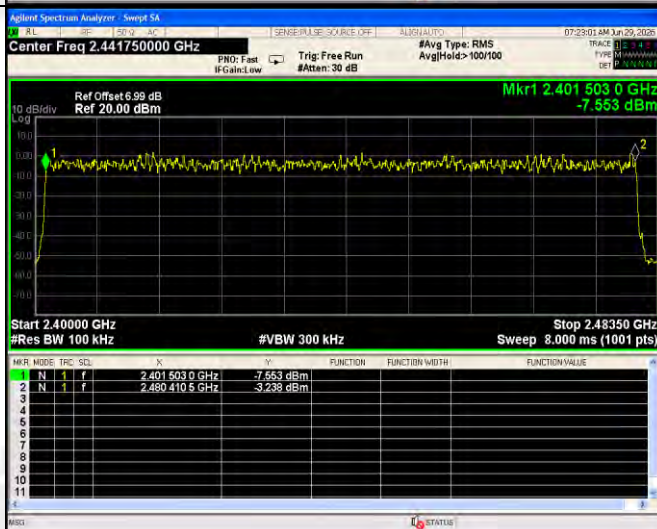

11. Dwell Time Test

11.1. Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	0.4 sec

11.2. Test setup



11.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a Hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600/6=266.67$ [ch*hop/s]
- The hops per second on one channel: 266.67 [ch*hops/s]/ 79 [ch]= 3.38 [hop/s].
The total hops for all channels within the dwell time calculation duration: 3.38 [hop/s]* 31.6 [s*ch]= 106.67 [hop*ch].
The dwell time for all channels hopping: 106.67 [hop*ch]*Burst Width [ms/hop/ch].
9. The duration for dwell time calculation: 0.4 [s]*hopping number= 0.4 [s]* 79 [ch]= 31.6 [s*ch].
10. Pulse Time(ms)*Total Hops=Dwell Time


11.4. Test Result




Packet	Channel	Pulse Time (ms)	Burst Count (Num)	Total Dwell Time (ms)	Limit (ms)	Verdict
DH1	LCH	0.382	317	121.094	400	PASS
DH1	MCH	0.382	318	121.476	400	PASS
DH1	HCH	0.382	318	121.476	400	PASS
2DH3	LCH	1.642	168	275.856	400	PASS
2DH3	MCH	1.643	155	254.665	400	PASS
2DH3	HCH	1.643	157	257.951	400	PASS
3DH5	LCH	2.893	93	269.049	400	PASS
3DH5	MCH	2.893	121	350.053	400	PASS
3DH5	HCH	2.893	103	297.979	400	PASS




Remark: Dwell time = Pulse time * Total Hops




Remark: Mkr Delta is once pulse time.

Test Graph

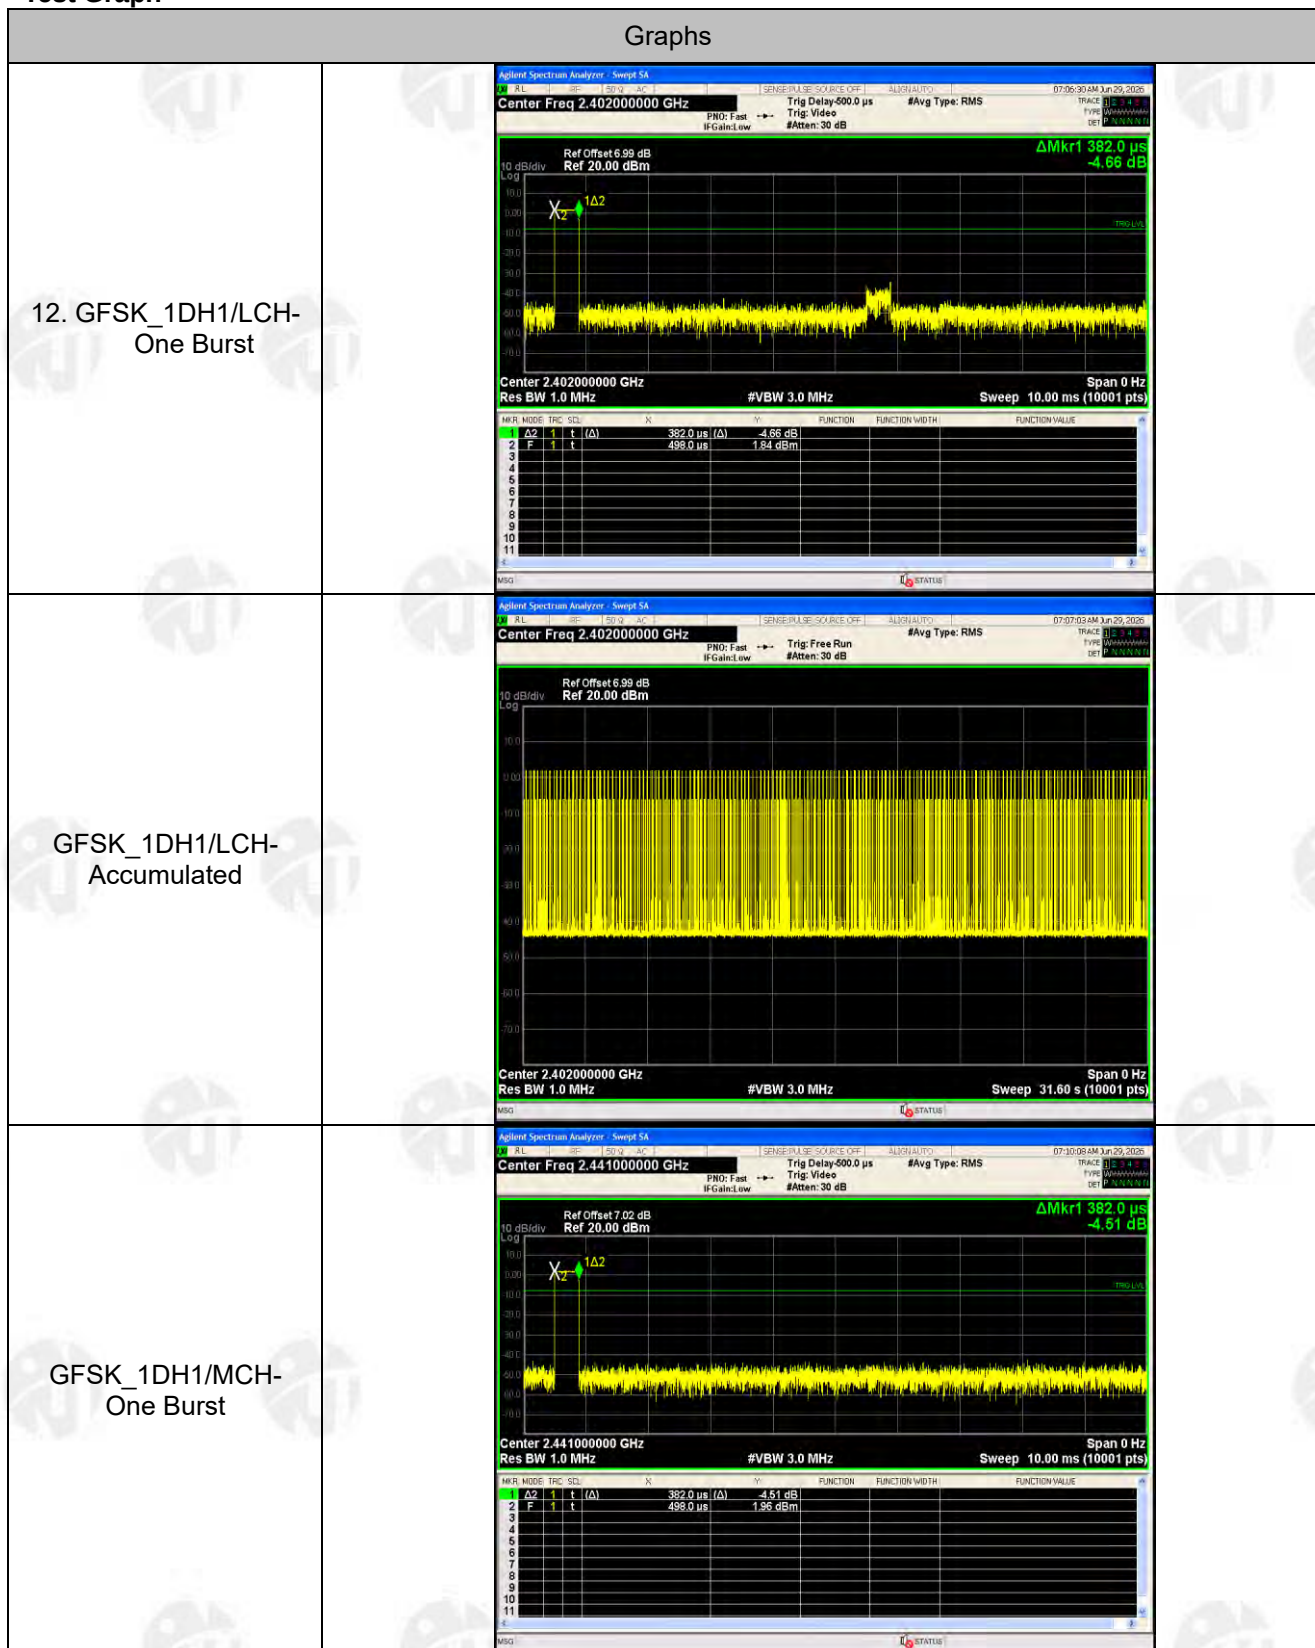


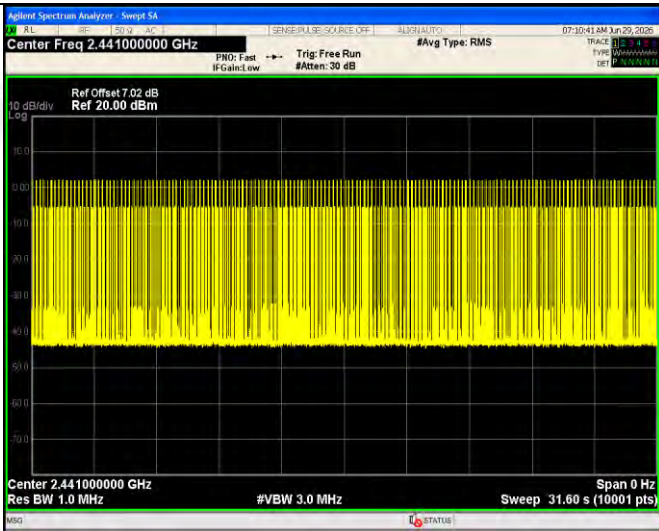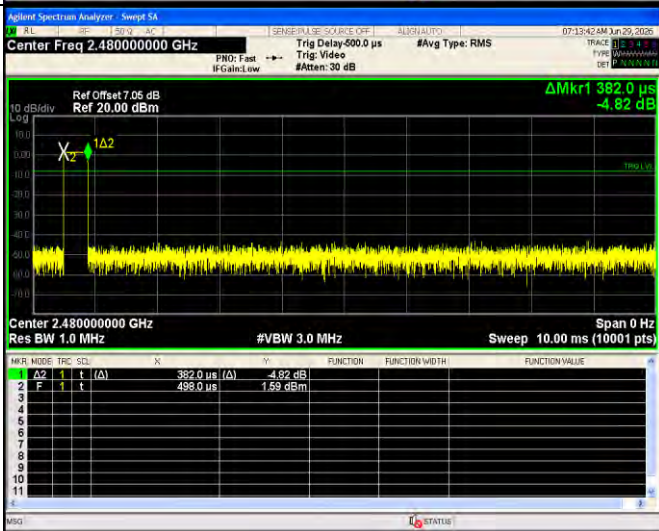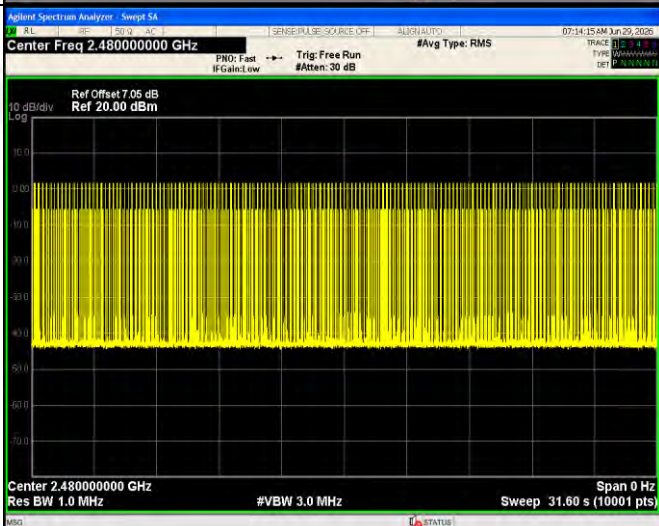GFSK_1DH1/MCH- Accumulated																																																																																																													
GFSK_1DH1/HCH- One Burst	 <table data-bbox="612 1140 1273 1296"><thead><tr><th>MR</th><th>MODE</th><th>TRIG</th><th>SD</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td></td><td></td><td></td><td>382.0 us (Δ)</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td></td><td></td><td></td><td></td><td>498.0 us</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-4.82 dB</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>1.59 dBm</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MR	MODE	TRIG	SD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)				382.0 us (Δ)	2	F	1	t					498.0 us	3								-4.82 dB	4								1.59 dBm	5									6									7									8									9									10									11								
MR	MODE	TRIG	SD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	Δ2	1	t	(Δ)				382.0 us (Δ)																																																																																																					
2	F	1	t					498.0 us																																																																																																					
3								-4.82 dB																																																																																																					
4								1.59 dBm																																																																																																					
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
GFSK_1DH1/HCH- Accumulated																																																																																																													

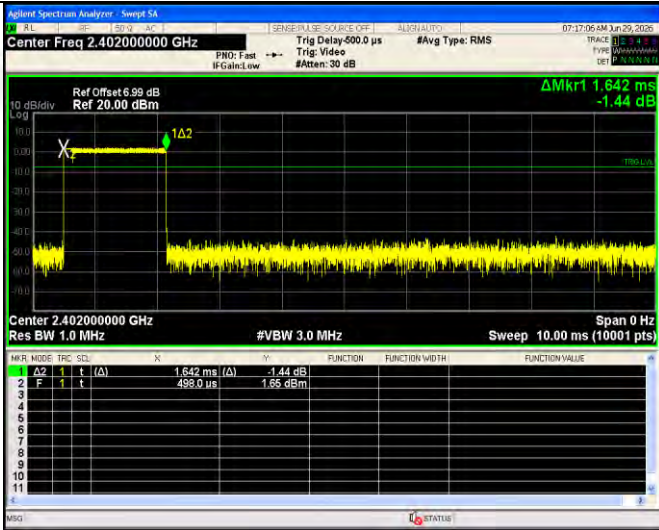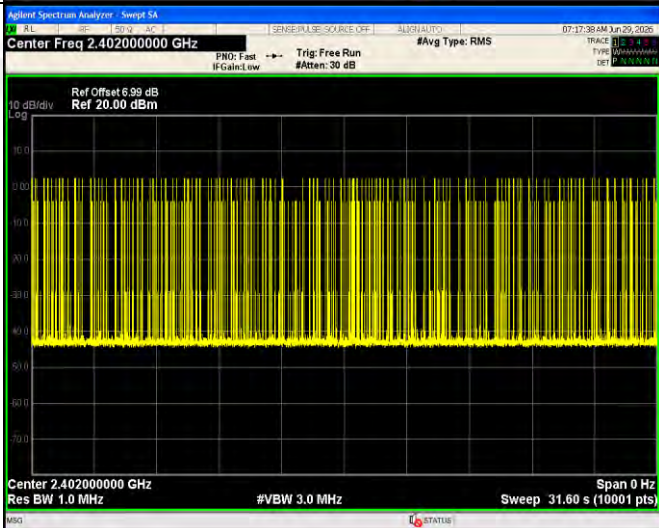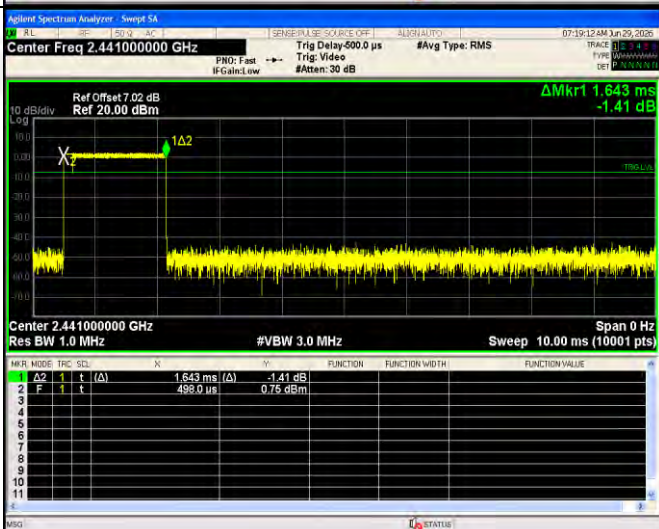
$\pi/4$ DQPSK_2DH3 /LCH- One Burst	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.402000000 GHz Ref Offset 6.88 dB Ref 20.00 dBm ΔMkr1 1.642 ms -1.44 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.642 ms (Δ)</td><td>-1.44 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>498.0 μs</td><td>-1.65 dBm</td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	1.642 ms (Δ)	-1.44 dB			2	F	1	t	(Δ)	498.0 μs	-1.65 dBm		
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	t	(Δ)	1.642 ms (Δ)	-1.44 dB																						
2	F	1	t	(Δ)	498.0 μs	-1.65 dBm																						
$\pi/4$ DQPSK_2DH3 /LCH- Accumulated	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.402000000 GHz Ref Offset 6.88 dB Ref 20.00 dBm ΔMkr1 1.643 ms -1.41 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 31.60 s (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.643 ms (Δ)</td><td>-1.41 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>498.0 μs</td><td>-1.41 dBm</td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	1.643 ms (Δ)	-1.41 dB			2	F	1	t	(Δ)	498.0 μs	-1.41 dBm		
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	t	(Δ)	1.643 ms (Δ)	-1.41 dB																						
2	F	1	t	(Δ)	498.0 μs	-1.41 dBm																						
$\pi/4$ DQPSK_2DH3 /MCH- One Burst	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.441000000 GHz Ref Offset 7.02 dB Ref 20.00 dBm ΔMkr1 1.643 ms -1.41 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.643 ms (Δ)</td><td>-1.41 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>498.0 μs</td><td>-1.41 dBm</td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	1.643 ms (Δ)	-1.41 dB			2	F	1	t	(Δ)	498.0 μs	-1.41 dBm		
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	t	(Δ)	1.643 ms (Δ)	-1.41 dB																						
2	F	1	t	(Δ)	498.0 μs	-1.41 dBm																						

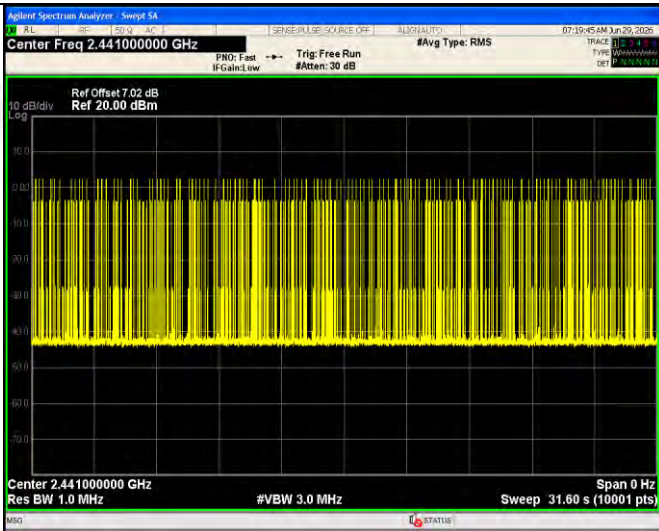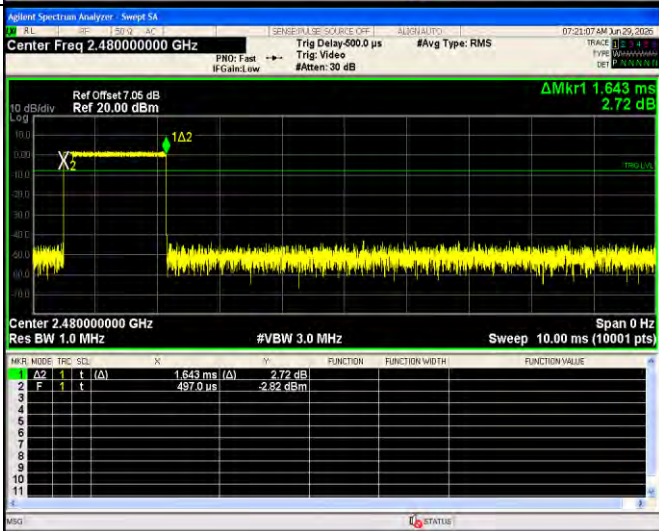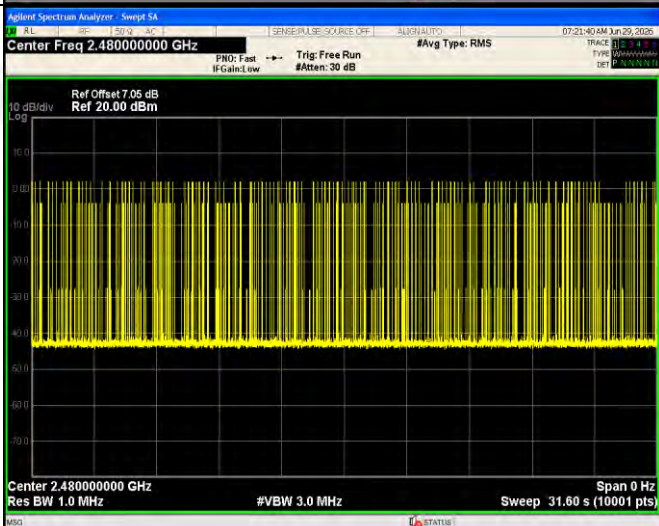$\pi/4$ DQPSK_2DH3 /MCH- Accumulated																																																																																																													
$\pi/4$ DQPSK_2DH3 /HCH- One Burst	 <table data-bbox="612 1140 1273 1296"><thead><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SD</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td></td><td></td><td></td><td>1.643 ms (Δ)</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td></td><td></td><td></td><td></td><td>2.72 dB</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>497.0 us</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-2.82 dBm</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRIG	SD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	t	(Δ)				1.643 ms (Δ)	2	F	1	t					2.72 dB	3								497.0 us	4								-2.82 dBm	5									6									7									8									9									10									11								
MNR	MODE	TRIG	SD	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	Δ 2	1	t	(Δ)				1.643 ms (Δ)																																																																																																					
2	F	1	t					2.72 dB																																																																																																					
3								497.0 us																																																																																																					
4								-2.82 dBm																																																																																																					
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
$\pi/4$ DQPSK_2DH3 /HCH- Accumulated																																																																																																													


8DPSK_3DH5/LCH-
One Burst


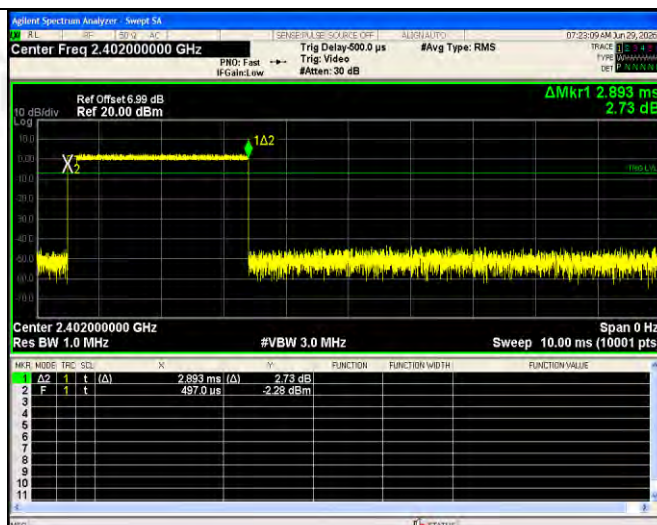


8DPSK_3DH5/LCH-
Accumulated

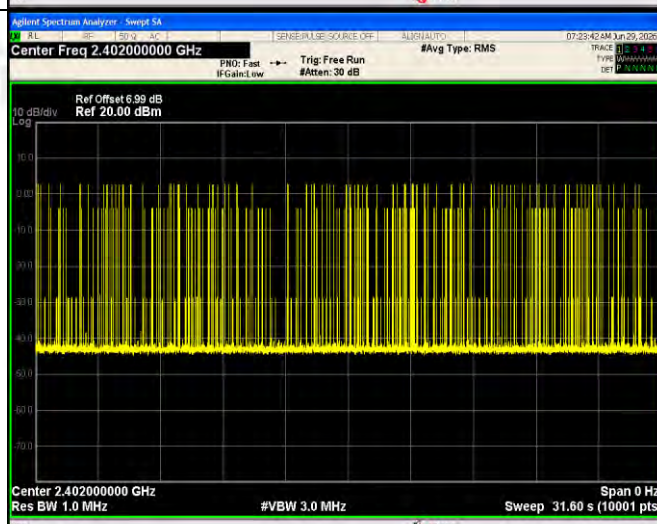

8DPSK_3DH5/MCH-
One Burst

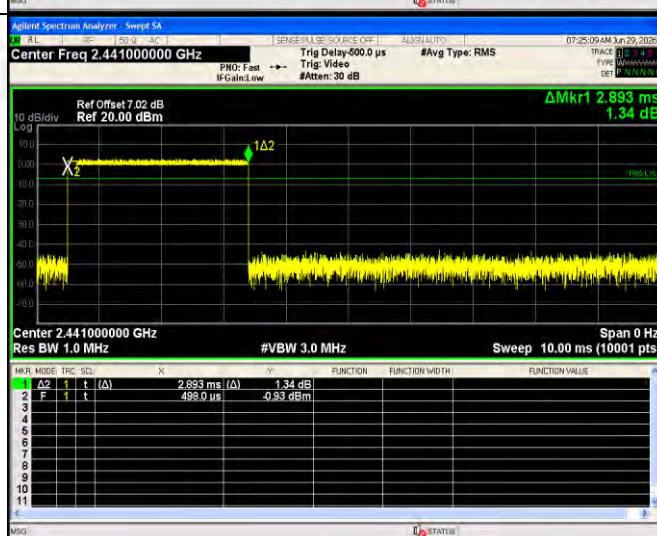

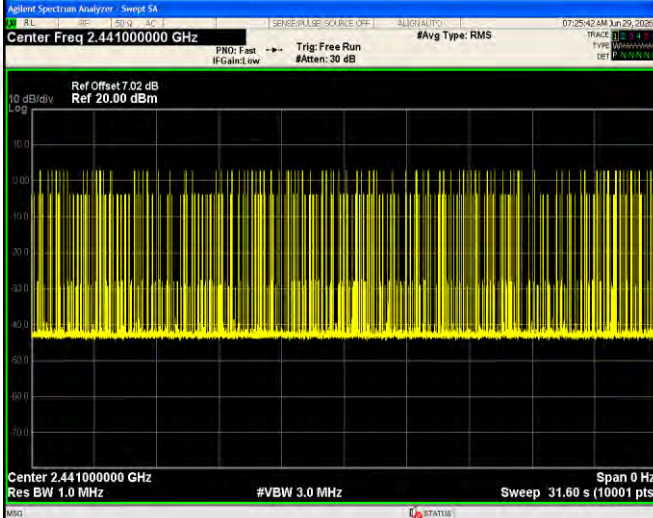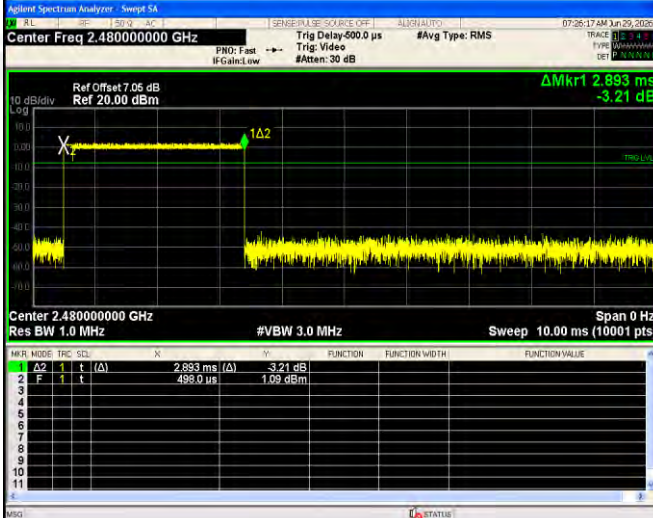8DPSK_3DH5/MCH- Accumulated																																																																																																													
8DPSK_3DH5/HCH- One Burst	 <table data-bbox="612 1173 1267 1330"><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SEL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>Δf</td><td>1</td><td>t</td><td>(Δ)</td><td>2.893 ms</td><td>(Δ)</td><td>-3.21 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td></td><td>498.0 μs</td><td></td><td>1.09 dBm</td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δf	1	t	(Δ)	2.893 ms	(Δ)	-3.21 dB		2	F	1	t		498.0 μs		1.09 dBm		3									4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	Δf	1	t	(Δ)	2.893 ms	(Δ)	-3.21 dB																																																																																																						
2	F	1	t		498.0 μs		1.09 dBm																																																																																																						
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
8DPSK_3DH5/HCH- Accumulated																																																																																																													

13. Conducted Spurious Emissions and Band Edge Requirement

13.1. Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2. Test Setup




13.3. Test Procedure


The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


13.4. Test Result

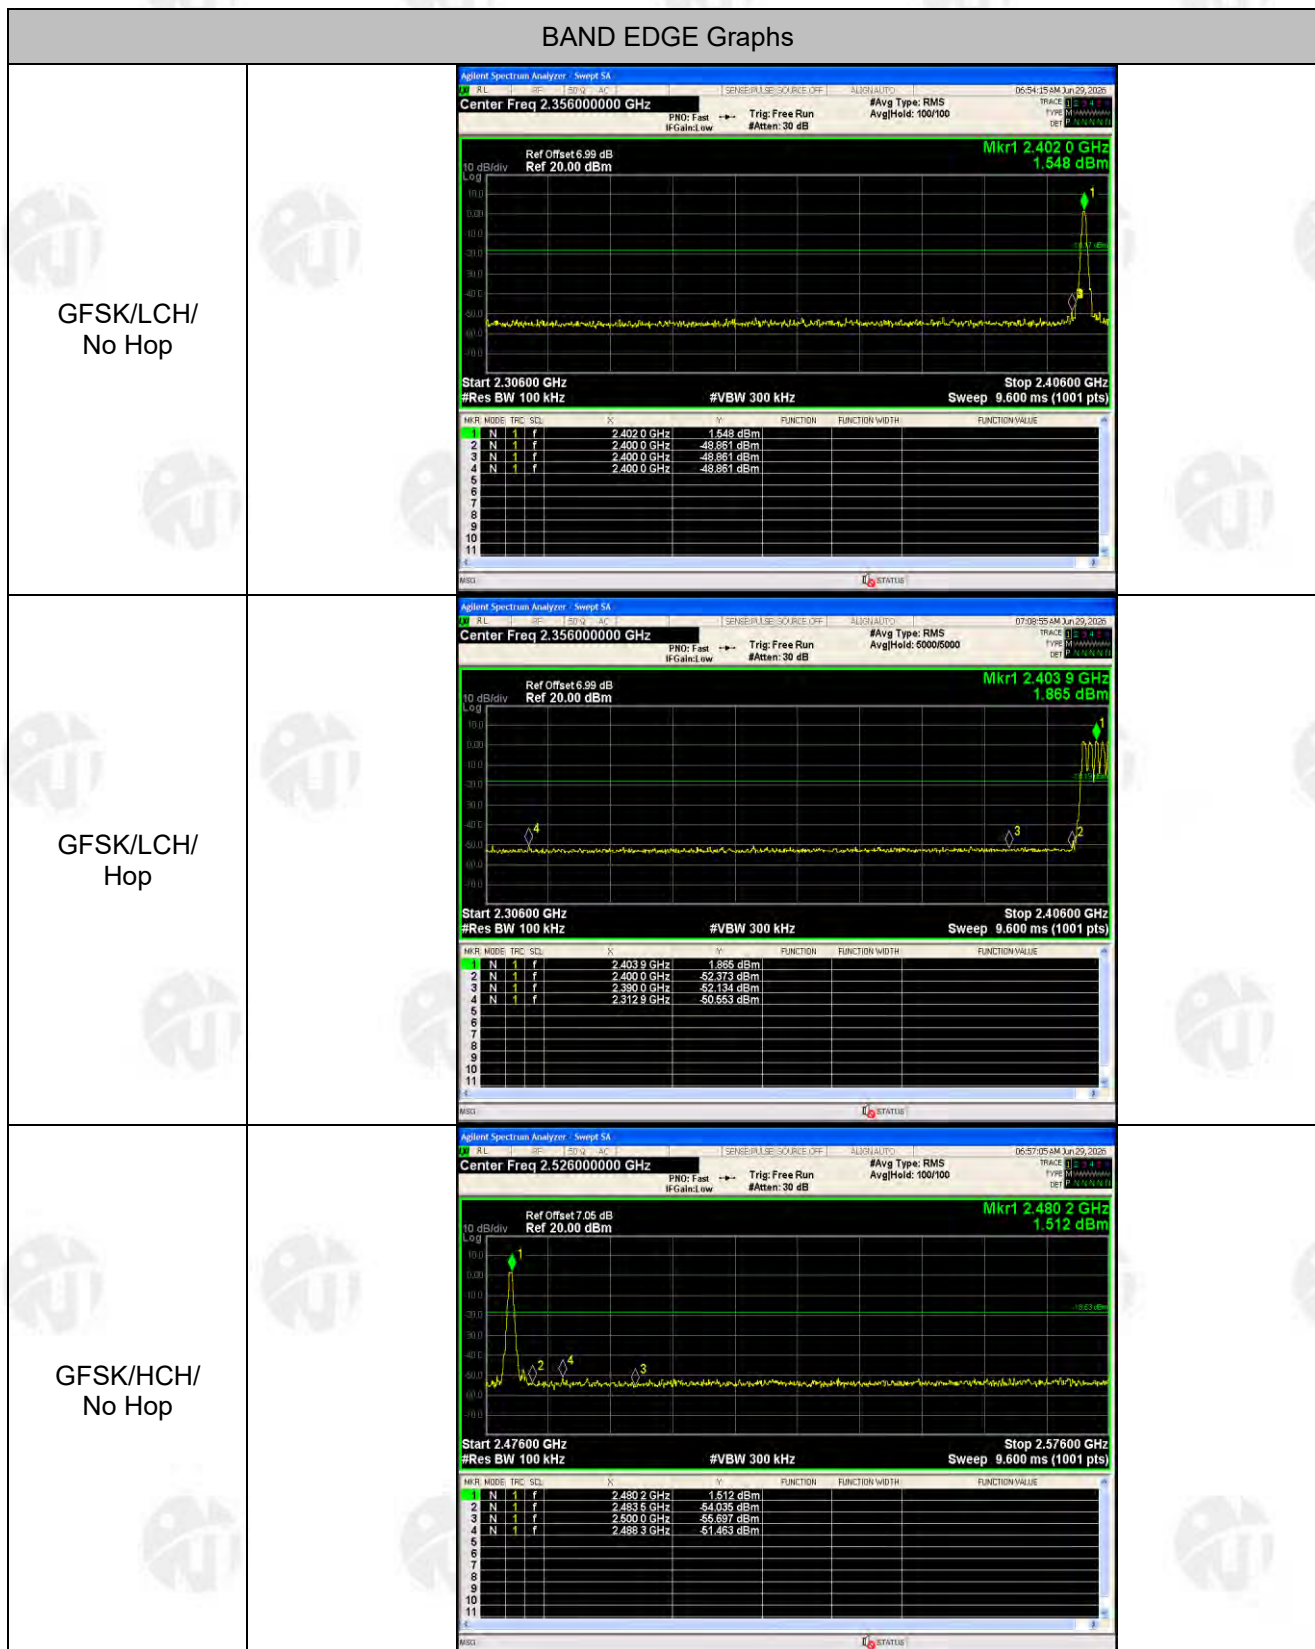


GFSK/HCH/
Hop



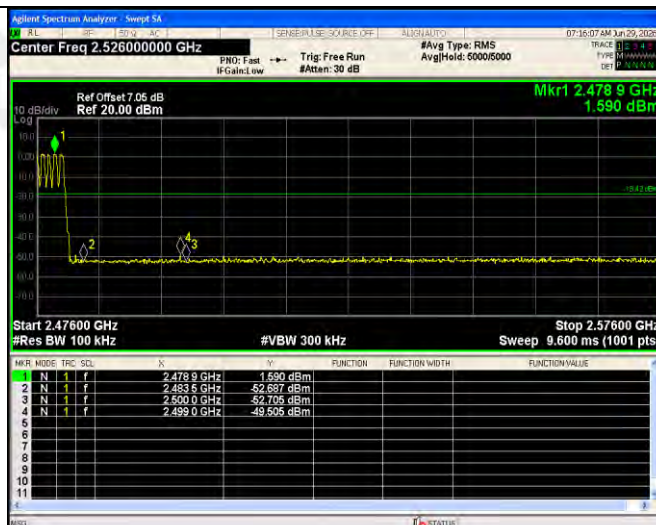


$\pi/4$ DQPSK/LCH/
No Hop

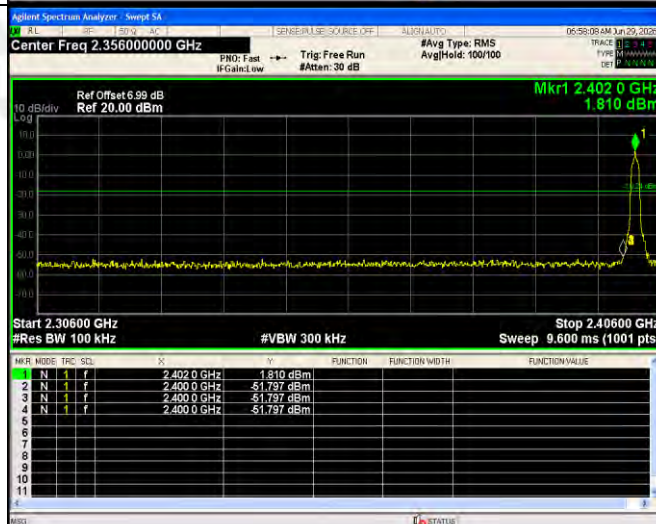


$\pi/4$ DQPSK/LCH/
Hop

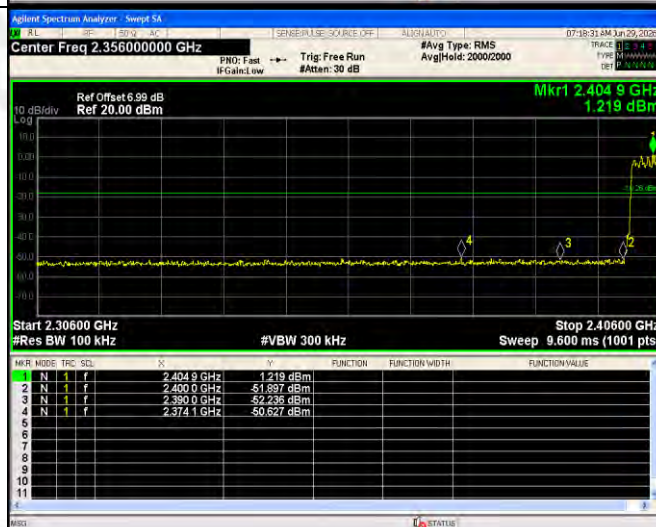


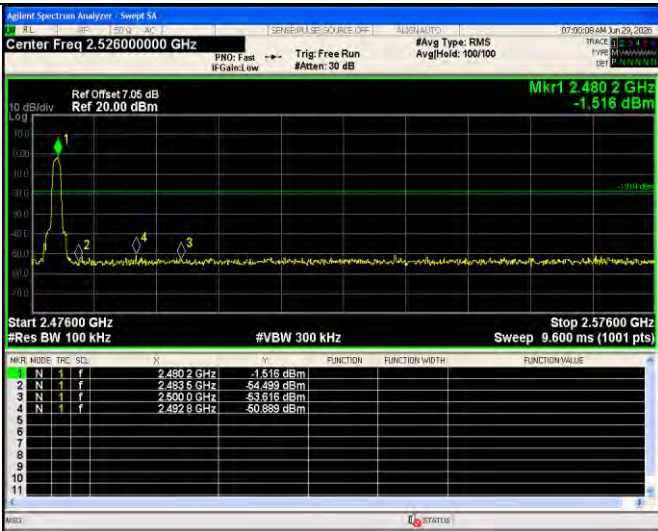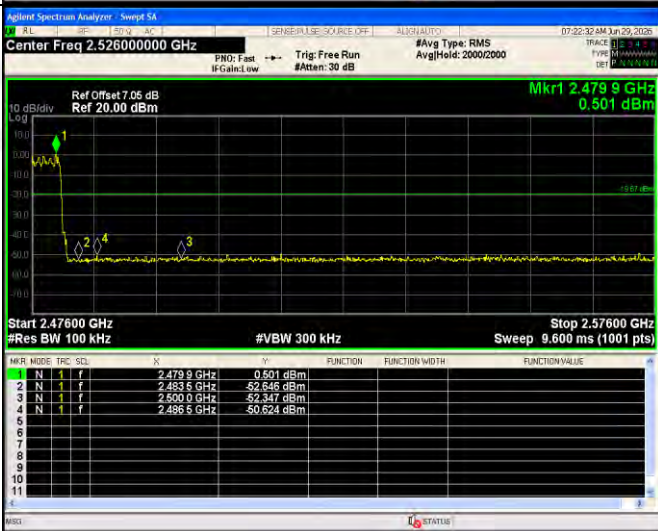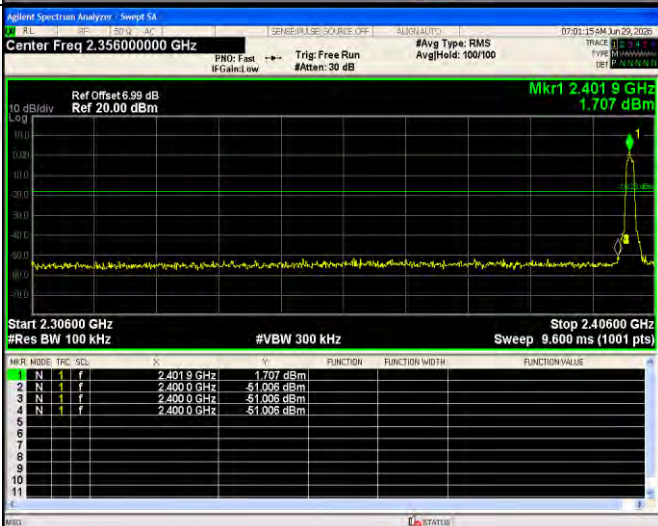$\pi/4$ DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.526000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.480 2 GHz -1.516 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>-1.516 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 6 GHz</td><td>-54.499 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 0 GHz</td><td>-53.616 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.492 8 GHz</td><td>-50.889 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-1.516 dBm				2	N	1	f	2.483 6 GHz	-54.499 dBm				3	N	1	f	2.500 0 GHz	-53.616 dBm				4	N	1	f	2.492 8 GHz	-50.889 dBm			
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 2 GHz	-1.516 dBm																																									
2	N	1	f	2.483 6 GHz	-54.499 dBm																																									
3	N	1	f	2.500 0 GHz	-53.616 dBm																																									
4	N	1	f	2.492 8 GHz	-50.889 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.526000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.479 9 GHz 0.501 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 9 GHz</td><td>0.501 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 6 GHz</td><td>-52.646 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 0 GHz</td><td>-52.347 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.496 8 GHz</td><td>-50.624 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 9 GHz	0.501 dBm				2	N	1	f	2.483 6 GHz	-52.646 dBm				3	N	1	f	2.500 0 GHz	-52.347 dBm				4	N	1	f	2.496 8 GHz	-50.624 dBm			
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 9 GHz	0.501 dBm																																									
2	N	1	f	2.483 6 GHz	-52.646 dBm																																									
3	N	1	f	2.500 0 GHz	-52.347 dBm																																									
4	N	1	f	2.496 8 GHz	-50.624 dBm																																									
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.356000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.401 9 GHz 1.707 dBm Start 2.30600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 9 GHz</td><td>1.707 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 0 GHz</td><td>-51.006 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.400 0 GHz</td><td>-51.006 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.400 0 GHz</td><td>-51.006 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 9 GHz	1.707 dBm				2	N	1	f	2.400 0 GHz	-51.006 dBm				3	N	1	f	2.400 0 GHz	-51.006 dBm				4	N	1	f	2.400 0 GHz	-51.006 dBm			
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 9 GHz	1.707 dBm																																									
2	N	1	f	2.400 0 GHz	-51.006 dBm																																									
3	N	1	f	2.400 0 GHz	-51.006 dBm																																									
4	N	1	f	2.400 0 GHz	-51.006 dBm																																									


8DPSK
/LCH/Hop

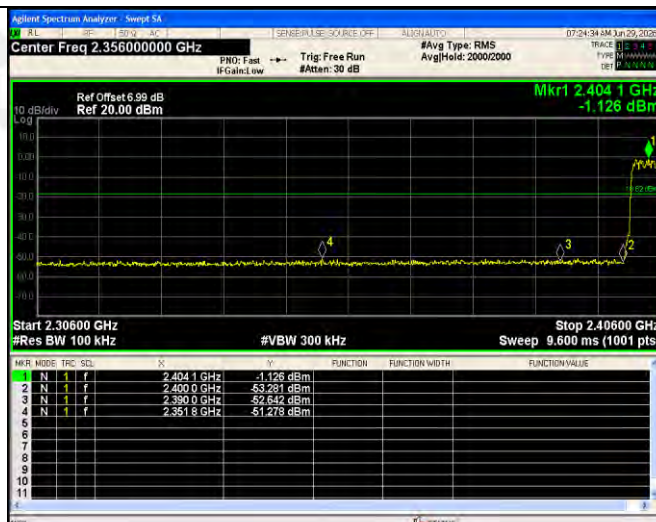

8DPSK /HCH/No
Hop

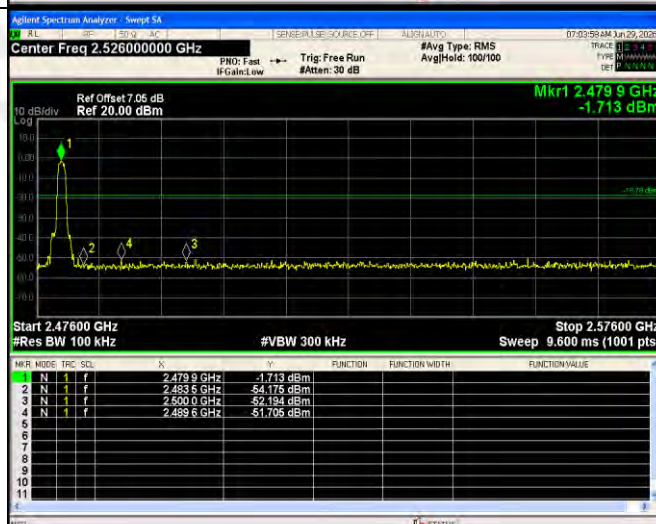


8DPSK
/HCH/Hop

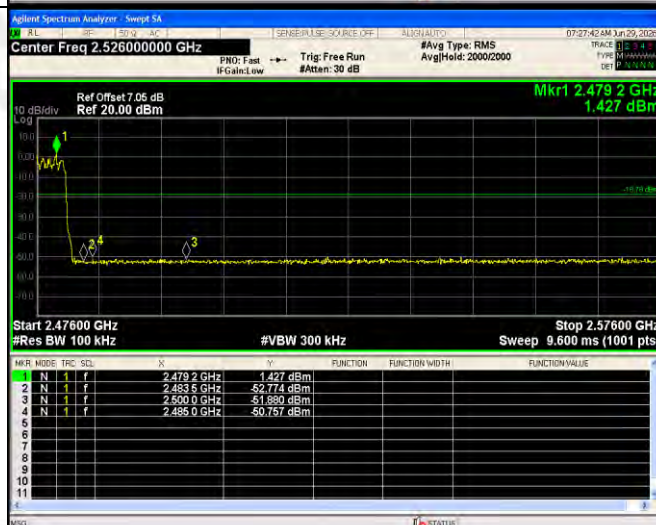


RF Conducted Spurious Emissions Graphs


GFSK/LCH



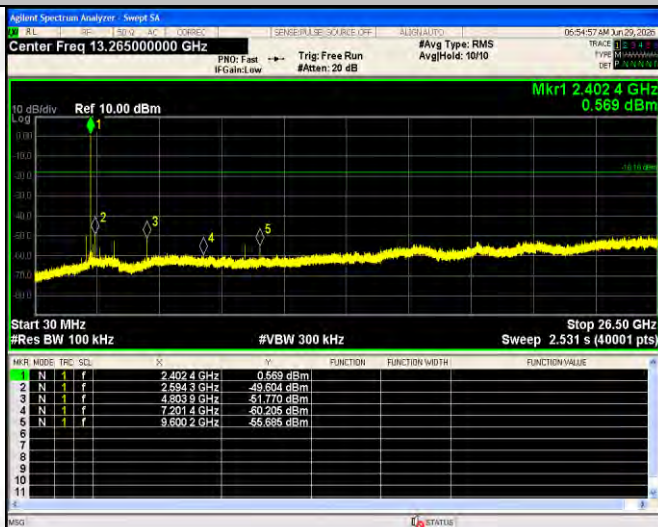


GFSK/MCH

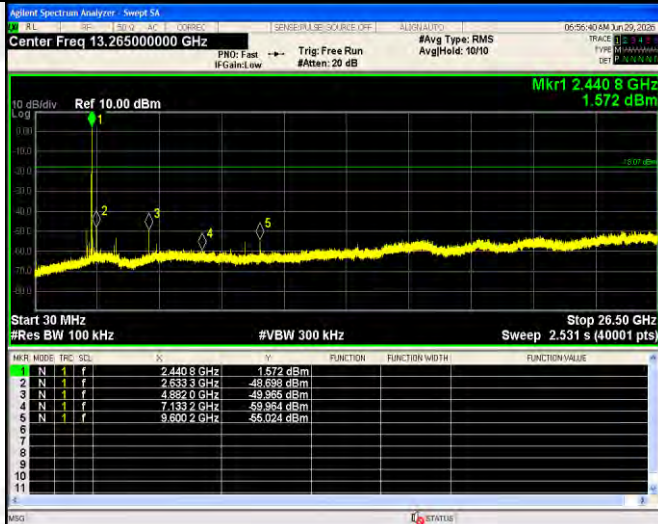


GFSK/HCH

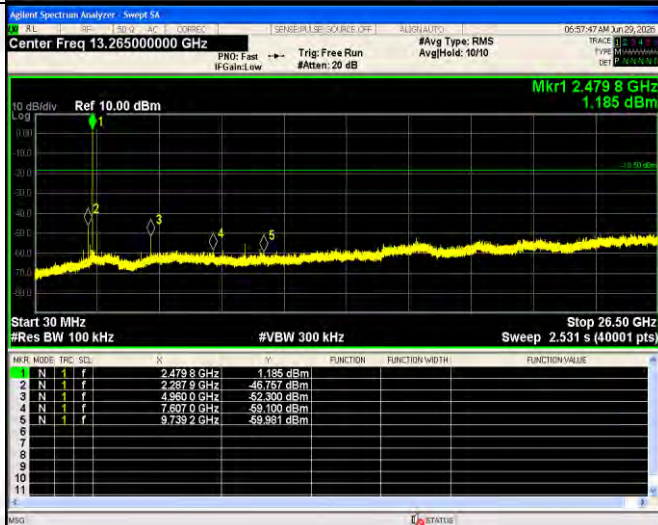


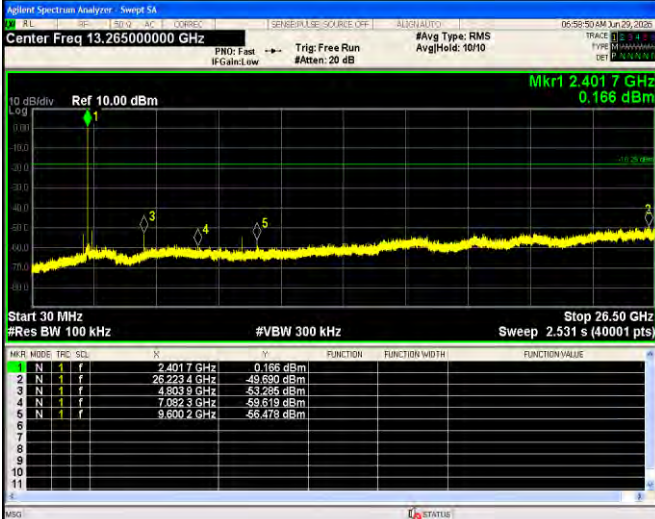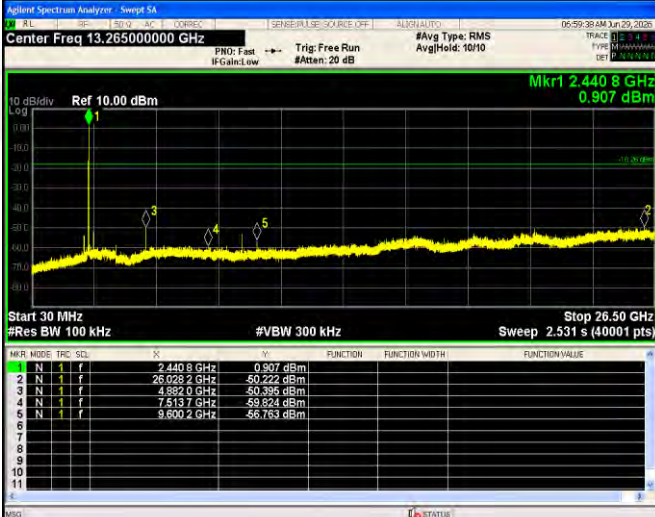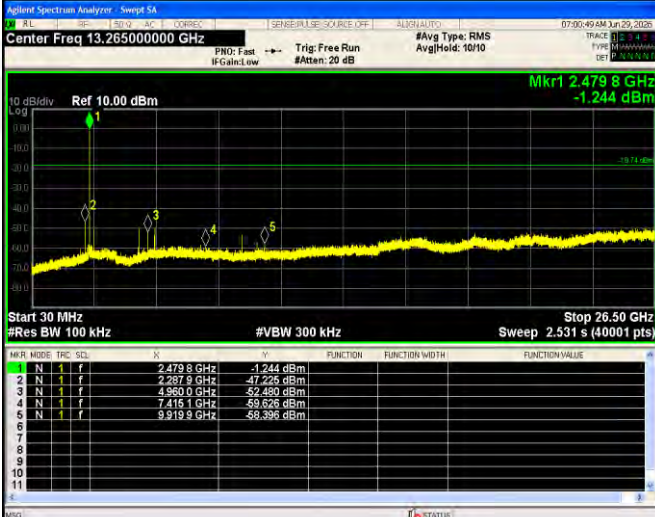$\pi/4$ DQPSK /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4017 GHz</td><td>0.166 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.2234 GHz</td><td>-49.690 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.6089 GHz</td><td>-53.266 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.0823 GHz</td><td>-59.619 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6002 GHz</td><td>-56.478 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	0.166 dBm				2	N	1	f	26.2234 GHz	-49.690 dBm				3	N	1	f	4.6089 GHz	-53.266 dBm				4	N	1	f	7.0823 GHz	-59.619 dBm				5	N	1	f	9.6002 GHz	-56.478 dBm			
MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	0.166 dBm																																																		
2	N	1	f	26.2234 GHz	-49.690 dBm																																																		
3	N	1	f	4.6089 GHz	-53.266 dBm																																																		
4	N	1	f	7.0823 GHz	-59.619 dBm																																																		
5	N	1	f	9.6002 GHz	-56.478 dBm																																																		
$\pi/4$ DQPSK/MCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4408 GHz</td><td>0.907 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.0282 GHz</td><td>-50.222 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8920 GHz</td><td>-50.395 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5137 GHz</td><td>-59.924 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6002 GHz</td><td>-56.753 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4408 GHz	0.907 dBm				2	N	1	f	26.0282 GHz	-50.222 dBm				3	N	1	f	4.8920 GHz	-50.395 dBm				4	N	1	f	7.5137 GHz	-59.924 dBm				5	N	1	f	9.6002 GHz	-56.753 dBm			
MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4408 GHz	0.907 dBm																																																		
2	N	1	f	26.0282 GHz	-50.222 dBm																																																		
3	N	1	f	4.8920 GHz	-50.395 dBm																																																		
4	N	1	f	7.5137 GHz	-59.924 dBm																																																		
5	N	1	f	9.6002 GHz	-56.753 dBm																																																		
$\pi/4$ DQPSK/HCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4798 GHz</td><td>-1.244 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.2879 GHz</td><td>-47.226 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9600 GHz</td><td>-52.490 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4161 GHz</td><td>-59.026 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9199 GHz</td><td>-59.396 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4798 GHz	-1.244 dBm				2	N	1	f	2.2879 GHz	-47.226 dBm				3	N	1	f	4.9600 GHz	-52.490 dBm				4	N	1	f	7.4161 GHz	-59.026 dBm				5	N	1	f	9.9199 GHz	-59.396 dBm			
MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4798 GHz	-1.244 dBm																																																		
2	N	1	f	2.2879 GHz	-47.226 dBm																																																		
3	N	1	f	4.9600 GHz	-52.490 dBm																																																		
4	N	1	f	7.4161 GHz	-59.026 dBm																																																		
5	N	1	f	9.9199 GHz	-59.396 dBm																																																		


8DPSK /LCH

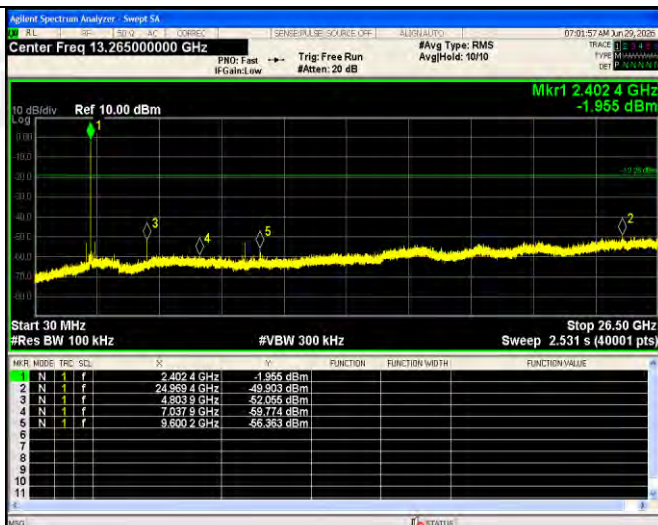

8DPSK /MCH

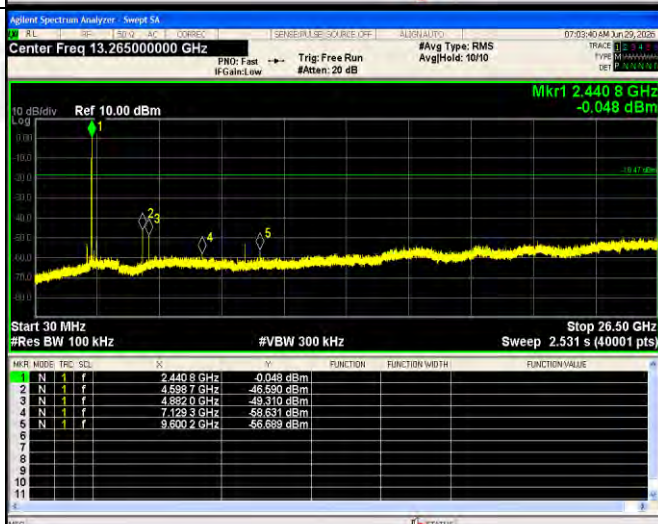

8DPSK /HCH

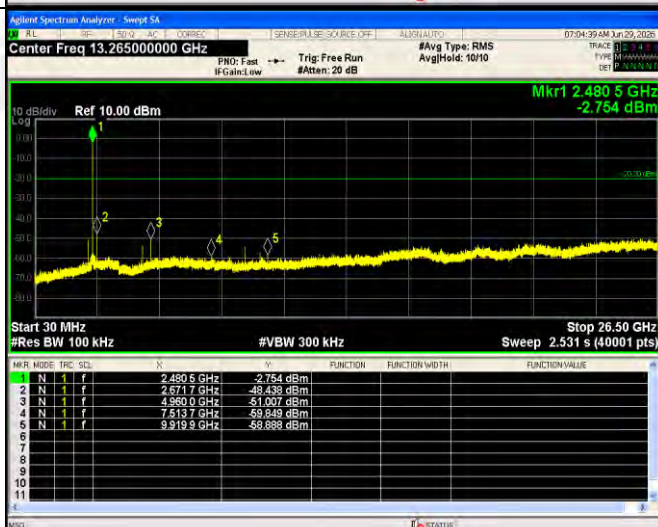

14. Antenna Requirement

14.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(b)(4)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Antenna Connected Construction

The antenna is FPC antenna which permanently attached, and the best case gain of the antenna is 2.2dBi. It complies with the standard requirement.

15. TEST SETUP & EUT PHOTOGRAPH

Reference to EUT photo attachment for details.

----- End of Report -----