



BLE_1M-Ant1-2480-0~Reference-PASS




BLE_1M-Ant1-2480-30~1000-PASS



BLE_1M-Ant1-2480-1000~26500-PASS



BLE_2M-Ant1-2402-0~Reference-PASS

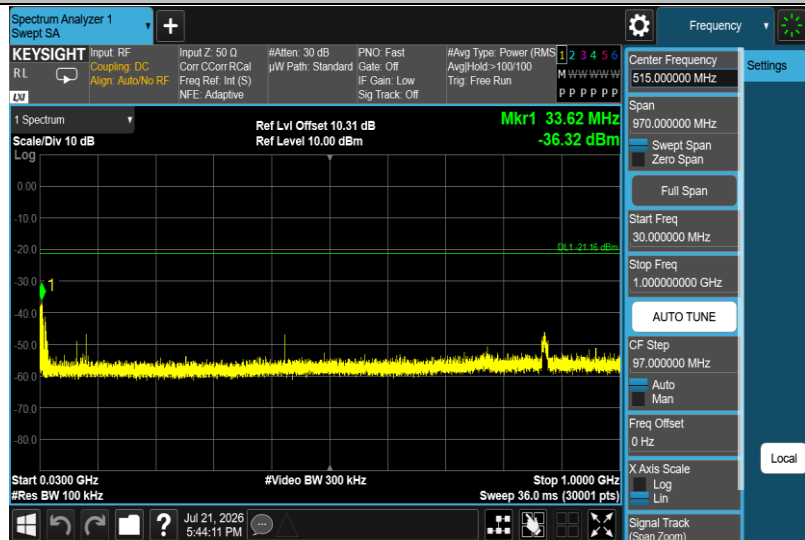


BLE_2M-Ant1-2402-30~1000-PASS



BLE_2M-Ant1-2402-1000~26500-PASS



BLE_2M-Ant1-2440-0~Reference-PASS

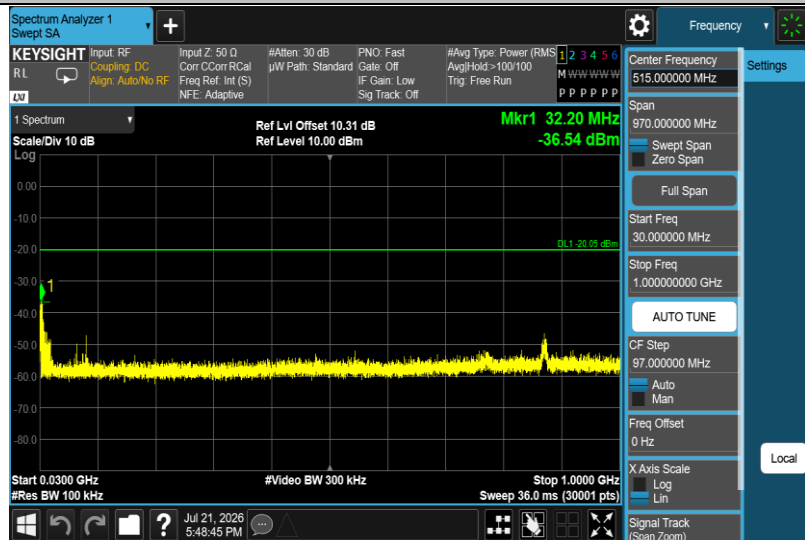

BLE_2M-Ant1-2440-30~1000-PASS



BLE_2M-Ant1-2440-1000~26500-PASS



BLE_2M-Ant1-2480-0~Reference-PASS



BLE_2M-Ant1-2480-30~1000-PASS




BLE_2M-Ant1-2480-1000~26500-PASS

Appendix G: Duty Cycle


Test Result

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2440	2.10	2.50	84.00	0.76
BLE_1M	Ant1	2480	2.10	2.50	84.00	0.76
BLE_2M	Ant1	2402	1.06	1.87	56.68	2.47
BLE_2M	Ant1	2440	1.06	1.88	56.38	2.49
BLE_2M	Ant1	2480	1.06	1.87	56.68	2.47

Test Graphs

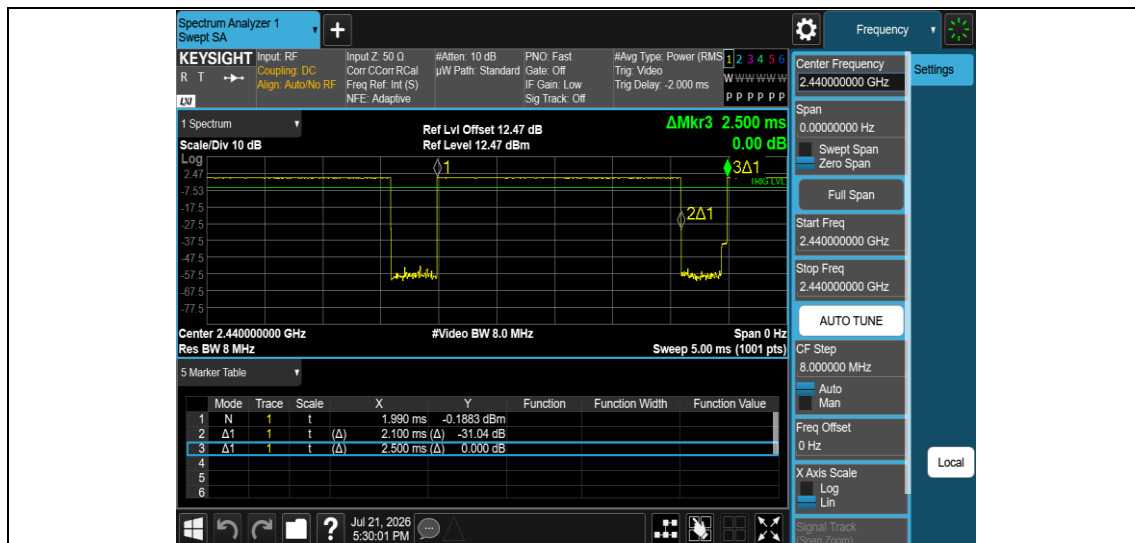


NTNV-BLE_1M-Ant1-2440

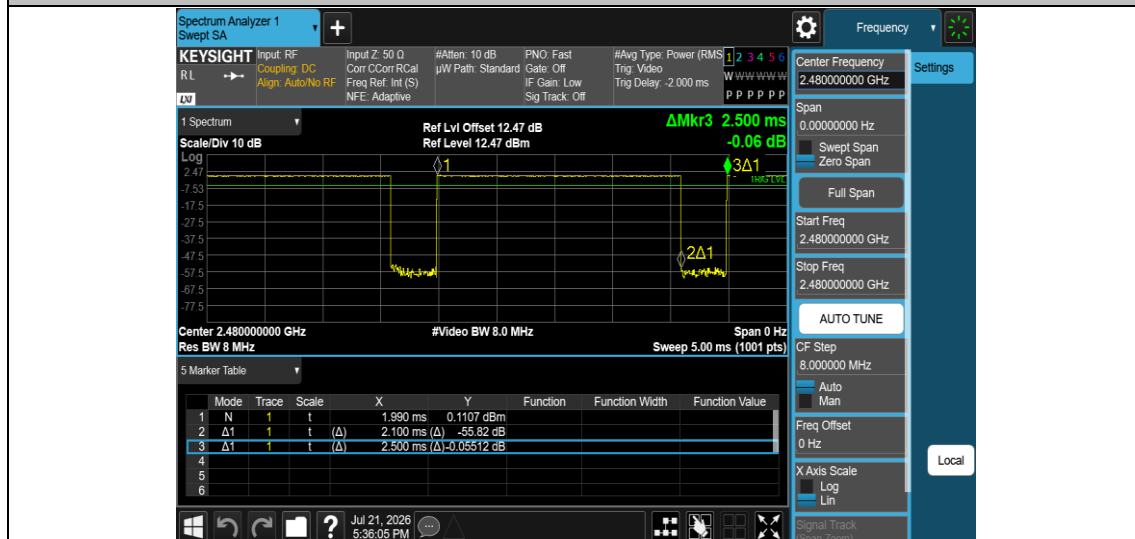


NTNV-BLE_1M-Ant1-2480



NTNV-BLE_2M-Ant1-2402

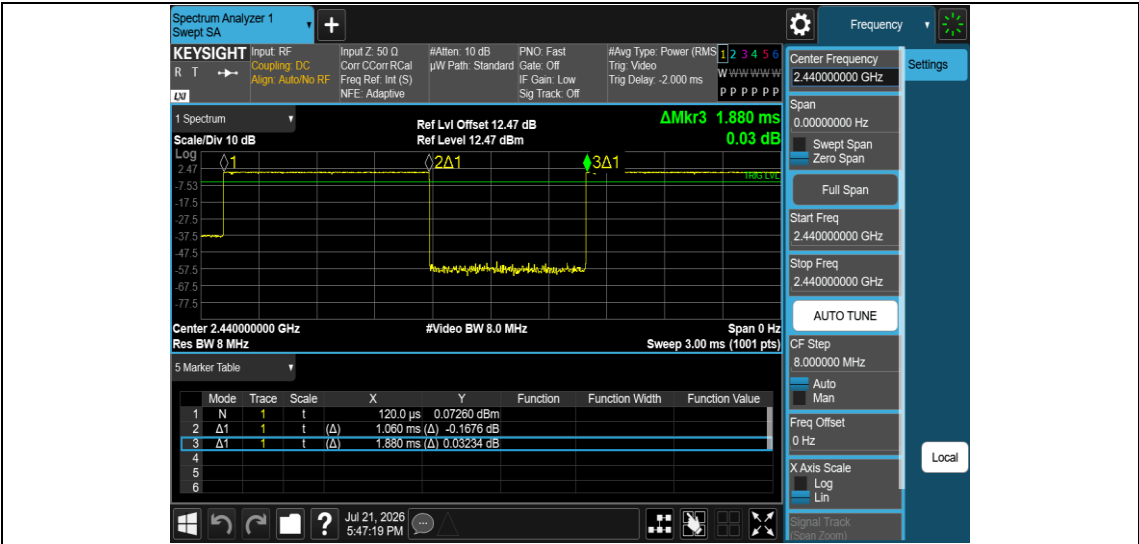

NTNV-BLE_2M-Ant1-2440

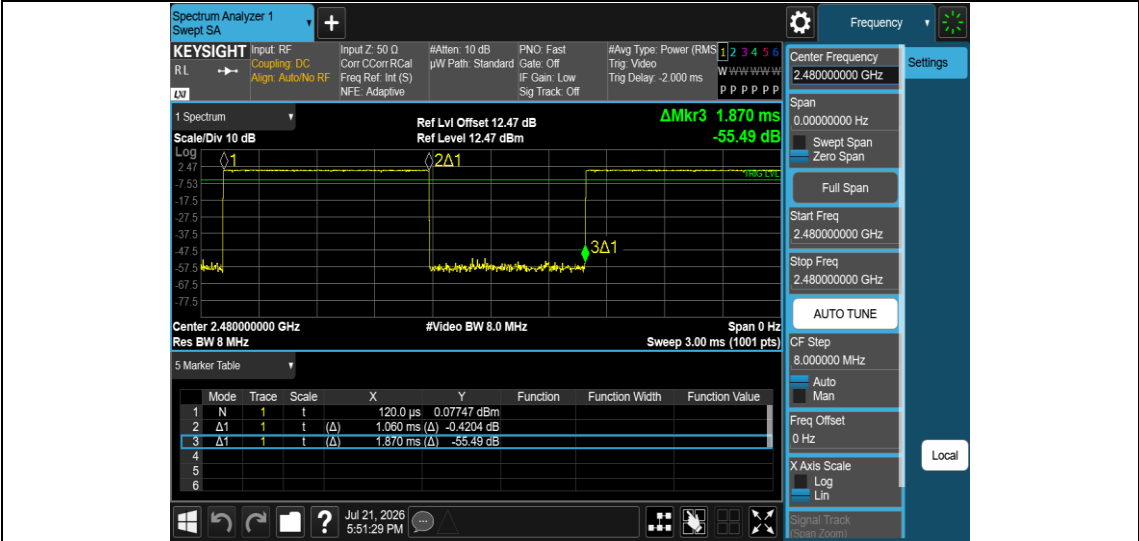

NTNV-BLE_2M-Ant1-2480

Appendix I: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Frequenc y[MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
TestMode	Antenna	ChName	Channel	Detector	Freq	Result	Limit	E	Limit1	Verdict

Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

--