

Front desk led display



Flexible led module 320x160mm, GOB protection




ModuleNumber	P1.86	P0.7	P0.9	P1.25	P1.53	P2	P2.3	P2.5	P3	P4
PixelPitch	1.86mm	0.7mm	0.9mm	1.25mm	1.53mm	2mm	2.3mm	2.5mm	3mm	4mm
LedArrangement	GOB									
ModuleDimensions	320*160mm									
ModuleResolution	172x86pixels	456x228pixels	344x172pixels	256*128pixels	208x104pixels	160*80pixels	138x69pixels	128x64pixels	104x52pixels	80x40pixels
CabinetResolution	256x512 pixels	1824x1368pixels	1720x1032pixels	384x768 pixels	312x624 pixels	240x480pixels	1380x6pixels	1408x384pixels	1248x312pixels	1040x240pixels
Module scan	1/43s	1/57s	1/43s	1/32s	1/52s	1/54s	1/18s	1/32s	1/26s	1/10s
Display size	1920*960mm (L*H)	1280*960mm (L*H)	1600*960mm (L*H)	1920*960mm (L*H)	2240*960mm (L*H)	2880*960mm (L*H)	3200*960mm (L*H)	3520*960mm (L*H)	3840*960mm (L*H)	4160*960mm (L*H)
Product size	1675*585*1100mm(L*W*H)	500*585*1100mm (L*W*H)	770*585*1100m m(L*W*H)	1065*585*1100 mm(L*W*H)	1360*585*1100 mm(L*W*H)	1995*585*1100 mm(L*W*H)	2315*585*1100 mm(L*W*H)	2610*585*1100 mm(L*W*H)	2905*585*1100 mm(L*W*H)	3200*585*1100 mm(L*W*H)
Product weight	130	59	78KG	97KG	115KG	145KG	165KG	184KG	219KG	238KG
Material	Iron									
Brightness	600 nits (10-level adjustment)									
PowerConsumption	170w/pcs /150/pcs									
ViewingAngle	160°(W)160°(H)									
OperatingPower source	110-240VAC50-60Hz									
OperatingTemperature	-20℃~-+50℃									
RefreshRate	3840Hz									
IPRating	IP43									
Video Interface	HDMI*2 (1 input and 1 Output),UsB 2.0*1									
Audio Interface	RJ45,WIFI,AP Local Network,4G Network (Optional)									
Control interface	Composite,S-video, Component,HDMISDI HD,VGA,DV									
Installation/Main tenance	Standing(StandardyStacking(OptionalyHanging(OptionalyVall Mounting									
Certificate	MET.FCC.CCC.RoHS.CE									

productsize: L1065*w585*H1100MM

Module size:320x160mm

Displaysize: 1920x800+160mm

spraycolor: black

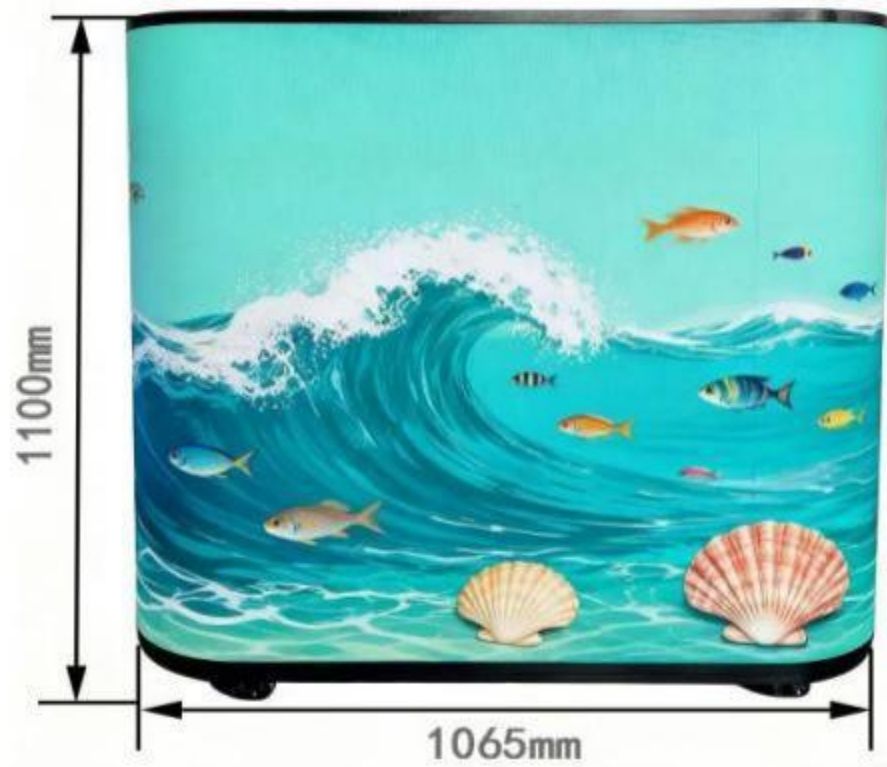

Product size: L1675*W585*H1100MM

Module size: 320x160mm

Display size: 2560x800+160mm

Spray color: black



Product size: L1995*W585*H1100MM

Module size:320x160mm

Display size: 2880x800+160mm

Spray color: black



Product size: L2315*W585*H1100MM

Module size:320x160mm

Display size: 3200x800+160mm

Spray color: black



Detail for overview



Power cable



Plug and Play



Easy maintenance with tool



Adjustable height wheels

Socket can be customized, US standard, Eu standard, UK standard, South non-standard standard etc.



Led controller box, with Nova AD20 Support wifi, U disk, HDMI, can add speaker)



Flight case packing

Packed in a flight case, it is impact-resistant, waterproof and insulating to ensure the safety of the product durring transportation



i□is?LNY

shenzhen iDisplay Technology co., Ltd.
Add:3rd Floor,5th Building, FLT industrial park, Long hua, shenzhen, china
Factory:5th Building, NO.6of xinhua Avenue, chengjiang, zhong kai, Hui zhou, china
Tel phone:86-755-85280348
E-mail: hello@idisplayled.com
www.idisplayled.com

Application

Suitable for various application scenarios, such as exhibition, company reception desk, cashier desk, DJ desk,etc



FCC STATEMENT

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation