


COMPONENTS

AVENZA Hub

The Hub is the source selector, system controller, and audio transmitter.

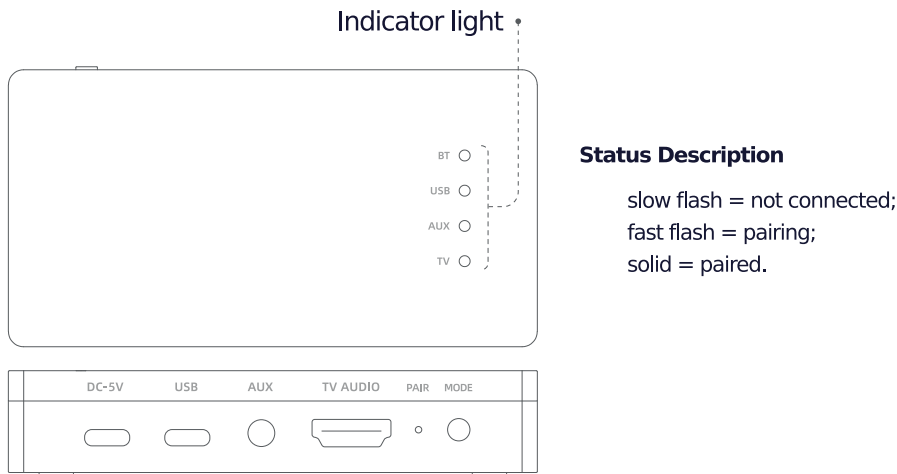

MARKING	FUNCTION
DC 5V	USB power input for BT, AUX, and TV Audio operation.
USB	USB Audio input, also bus-powers the Hub from a compatible computer or mobile device.
AUX	Analog auxiliary audio input.
TV AUDIO	Input interface compatible with HDMI-ARC protocol.
PAIR	Recessed pairing key. Press briefly with a suitable pointed tool.
MODE	Press to cycle BT, USB Audio, AUX, and TV Audio sources.

TV AUDIO is compatible with HDMI ARC audio return channel protocol, and the host device should output PCM audio format.

The Hub features a built-in sound card. For USB-Audio operation, the host device must support standard USB Audio class protocols.

COMPLIANCE

FCC, disposal, and transport

FCC Part 15

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.