



FCC TEST REPORT

FCC ID: 2BYAH-CRS001

On Behalf of

Shenzhen Zhaohe Technology Co., Ltd

POS Machine

Model No.: CRS001, FCR001, TC001, ATT900PRO, ATT900PRO MAX,
TFC001, FCT001, SK001, BSK001, CR001, ACR001, PCR001, TC002,
CRS002, ZH-T80, ZH-F100, ZH-T160, KR800, KR810, KR900

Prepared for : Shenzhen Zhaohe Technology Co., Ltd
Address : 7th Floor, Building 3A, Dongweifeng New Material Industrial
Park, Shenzhen, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2609086-C01-R03
Date of Receipt : September 15, 2026
Date of Test : September 16, 2026–October 12, 2026
Date of Report : October 13, 2026
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS.....	7
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
2.8	ADDITIONAL INSTRUCTIONS	8
2.9	TEST CONDITIONS	8
3	TEST INSTRUMENTS LIST	9
4	TEST RESULTS AND MEASUREMENT DATA.....	10
4.1	ANTENNA REQUIREMENT:	10
4.2	CONDUCTED EMISSIONS	11
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	14
4.4	MAXIMUM CONDUCTED OUTPUT POWER.....	87
4.5	POWER SPECTRAL DENSITY	93
4.6	BAND EDGE.....	137
4.7	RADIATED EMISSION	159
4.8	FREQUENCY STABILITY	171
5	PHOTOS OF TEST SETUP.....	173
6	PHOTOS OF EUT	173

TEST REPORT DECLARATION

Applicant : Shenzhen Zhaohe Technology Co., Ltd
Address : 7th Floor, Building 3A, Dongweifeng New Material Industrial Park, Shenzhen, China
Manufacturer : Shenzhen Zhaohe Technology Co., Ltd
Address : 7th Floor, Building 3A, Dongweifeng New Material Industrial Park, Shenzhen, China
EUT Description : POS Machine

(A) Model No. : CRS001, FCR001, TC001, ATT900PRO, ATT900PRO MAX, TFC001, FCT001, SK001, BSK001, CR001, ACR001, PCR001, TC002, CRS002, ZH-T80, ZH-F100, ZH-T160, KR800, KR810, KR900
(B) Trademark : **WeStarPOS**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Jensen Wang
Test Engineer 
Approved by (name + signature).....: Simple Guan
Project Manager 
Date of issue.....: October 13, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	October 13, 2026	Initial released Issue	Jensen Wang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024	PASS
Occupied bandwidth	Section 15.407 (e)	PASS
Maximum Conducted Output Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.
4. Measurement-method usage KDB 789033 D02 General UNII Test Procedures New Rules v02r01 and ANSI C63.4:2014, ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024

1.1 Measurement Uncertainty

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : POS Machine

Model : CRS001, FCR001, TC001, ATT900PRO, ATT900PRO MAX, TFC001, FCT001, SK001, BSK001, CR001, ACR001, PCR001, TC002, CRS002, ZH-T80, ZH-F100, ZH-T160, KR800, KR810, KR900

Diff : There is no difference except the name of the model. All tests are made with the CRS001 model.

Test Voltage : AC 120V/60Hz

Radio Technology : 5G WIFI

Operation frequency : 802.11a/802.11ac20/802.11n(HT20): 5180-5240MHz, 5745-5825MHz
802.11ac40/802.11n(HT40): 5190-5230MHz, 5755-5795MHz
802.11ac80: 5210MHz, 5775MHz

Channel separation : 20MHz for 802.11a/802.11ac20/802.11n(HT20)
40MHz for 802.11ac40/ 802.11n(HT40)
80MHz for 802.11ac80

Modulation technology: : IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)

Antenna Type : Internal antenna , Maximum Gain is 4dBi.

Software version : V1.0

Hardware version : V1.0
FVIN

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.
This product comes with two identical antennas.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.4 Description of Support Units

Accessories : AC ADAPTER
Manufacturer : Channel Well Technology(Guangzhou) Co., Ltd.
Model : 2AAL090F
Input : 100-240V~ 50/60Hz 1.5A
Output : DC 12V, 5A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

2.9 Test Conditions


Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

3 Test Instruments list


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.18	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118 G-50	SK20220329 01	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840 G-50	SK20190403 02	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2025.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

4 Test results and Measurement Data

4.1 Antenna requirement:

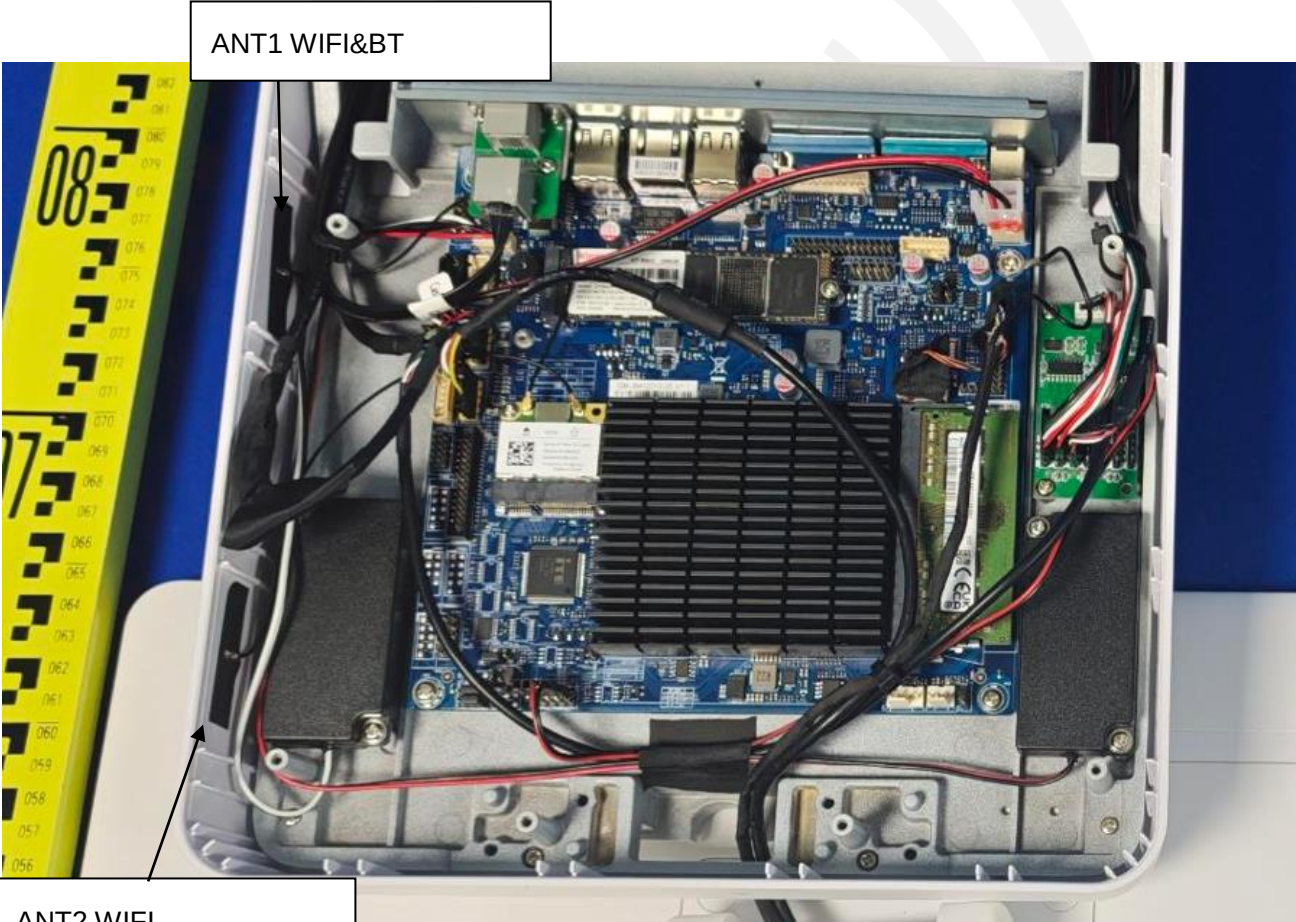Standard requirement:	FCC Part15 C Section 15.203, RSS-GEN(6.8)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
Internal antenna , Maximum Gain is 4dBi, for 5180-5240MHz, 5745-5825MHz	
 ANT1 WIFI&BT ANT2 WIFI	


4.2 Conducted Emissions

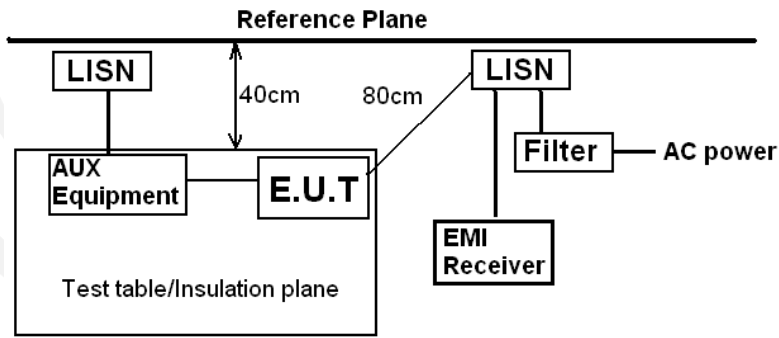Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8		
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 on conducted measurement.		
Test setup:	 Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	Pass		

Measurement Data


An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

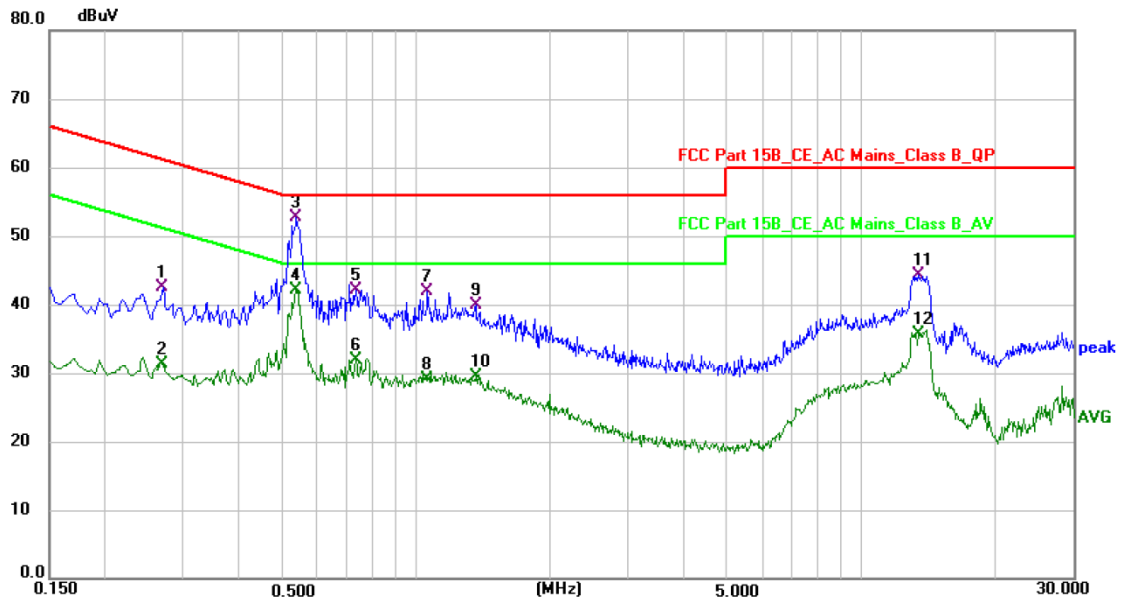

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2700	33.19	9.40	42.59	61.12	-18.53	QP
2	0.2700	21.86	9.40	31.26	51.12	-19.86	AVG
3 *	0.5380	43.00	9.64	52.64	56.00	-3.36	QP
4	0.5380	32.41	9.64	42.05	46.00	-3.95	AVG
5	0.7340	32.60	9.45	42.05	56.00	-13.95	QP
6	0.7340	22.47	9.45	31.92	46.00	-14.08	AVG
7	1.0620	32.14	9.81	41.95	56.00	-14.05	QP
8	1.0620	19.32	9.81	29.13	46.00	-16.87	AVG
9	1.3660	30.14	9.84	39.98	56.00	-16.02	QP
10	1.3660	19.63	9.84	29.47	46.00	-16.53	AVG
11	13.4780	34.64	9.74	44.38	60.00	-15.62	QP
12	13.4780	26.04	9.74	35.78	50.00	-14.22	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

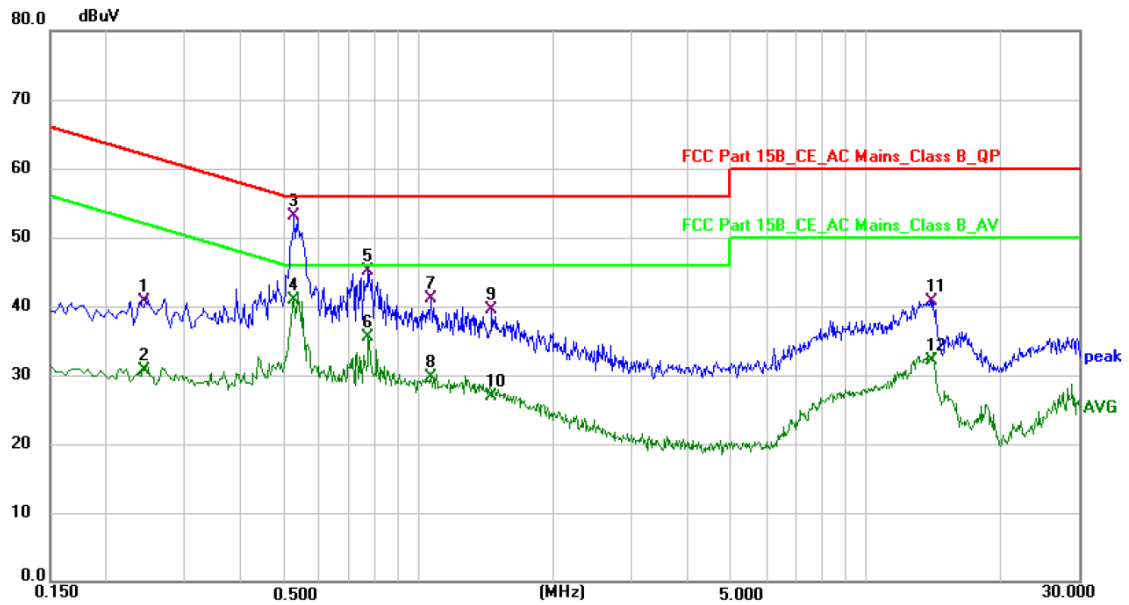
Neutral:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2442	31.29	9.40	40.69	61.95	-21.26	QP
2	0.2442	21.31	9.40	30.71	51.95	-21.24	AVG
3 *	0.5260	43.44	9.73	53.17	56.00	-2.83	QP
4	0.5260	31.19	9.73	40.92	46.00	-5.08	AVG
5	0.7740	35.19	9.83	45.02	56.00	-10.98	QP
6	0.7740	25.59	9.83	35.42	46.00	-10.58	AVG
7	1.0660	31.46	9.59	41.05	56.00	-14.95	QP
8	1.0660	20.02	9.59	29.61	46.00	-16.39	AVG
9	1.4580	30.00	9.51	39.51	56.00	-16.49	QP
10	1.4580	17.47	9.51	26.98	46.00	-19.02	AVG
11	14.0780	31.31	9.48	40.79	60.00	-19.21	QP
12	14.0780	22.60	9.48	32.08	50.00	-17.92	AVG

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

All modes and channels have been tested and only the A 5180MHz mode with the worst data is listed.

4.3 Emission Bandwidth and 99% Occupied Bandwidth

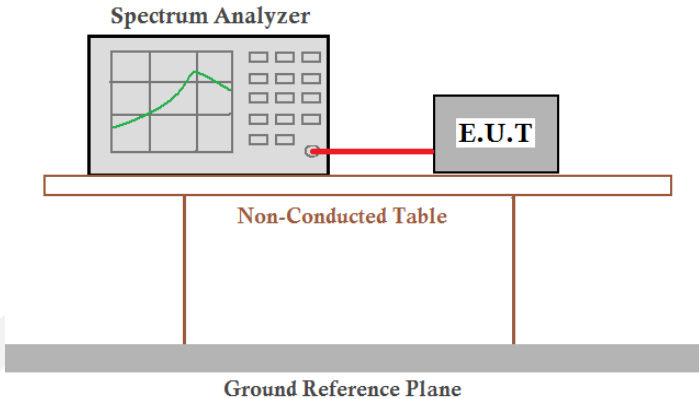
Test Requirement:	FCC Part15 E Section 15.407, RSS-Gen §6.7; RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane. The Spectrum Analyzer screen shows a frequency spectrum with a peak.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:


Band 1 (5150-5250 MHz):

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5180.00	26.95	16.59
NVNT	ANT2	802.11a	5180.00	27.02	16.61
NVNT	ANT1	802.11a	5200.00	28.49	16.64
NVNT	ANT2	802.11a	5200.00	27.51	16.63
NVNT	ANT1	802.11a	5240.00	19.92	16.51
NVNT	ANT2	802.11a	5240.00	20.26	16.49
NVNT	ANT1	802.11n(HT20)	5180.00	25.49	17.79
NVNT	ANT2	802.11n(HT20)	5180.00	27.81	17.77
NVNT	ANT1	802.11n(HT20)	5200.00	31.38	17.85
NVNT	ANT2	802.11n(HT20)	5200.00	28.04	17.83
NVNT	ANT1	802.11n(HT20)	5240.00	20.37	17.68
NVNT	ANT2	802.11n(HT20)	5240.00	20.08	17.65
NVNT	ANT1	802.11ac(VHT20)	5180.00	28.21	17.80
NVNT	ANT2	802.11ac(VHT20)	5180.00	26.41	17.76
NVNT	ANT1	802.11ac(VHT20)	5200.00	28.45	17.82
NVNT	ANT2	802.11ac(VHT20)	5200.00	27.86	17.86
NVNT	ANT1	802.11ac(VHT20)	5240.00	20.29	17.68
NVNT	ANT2	802.11ac(VHT20)	5240.00	20.33	17.70
NVNT	ANT1	802.11n(HT40)	5190.00	51.34	36.24
NVNT	ANT2	802.11n(HT40)	5190.00	48.32	36.18
NVNT	ANT1	802.11n(HT40)	5230.00	40.32	36.05
NVNT	ANT2	802.11n(HT40)	5230.00	39.84	36.01
NVNT	ANT1	802.11ac(VHT40)	5190.00	60.12	36.34
NVNT	ANT2	802.11ac(VHT40)	5190.00	50.35	36.30
NVNT	ANT1	802.11ac(VHT40)	5230.00	40.25	36.08
NVNT	ANT2	802.11ac(VHT40)	5230.00	39.72	36.15
NVNT	ANT1	802.11ac(VHT80)	5210.00	101.33	75.50
NVNT	ANT2	802.11ac(VHT80)	5210.00	97.70	75.57



99%_OCB_NVNT_ANT1_802_11a_5180

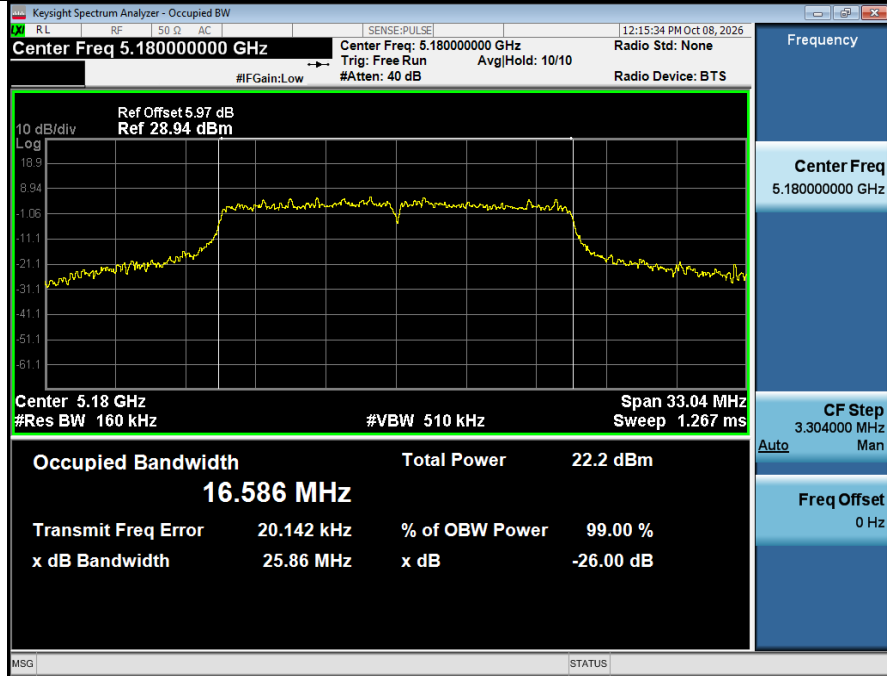



-26BW_NVNT_ANT1_802_11a_5180

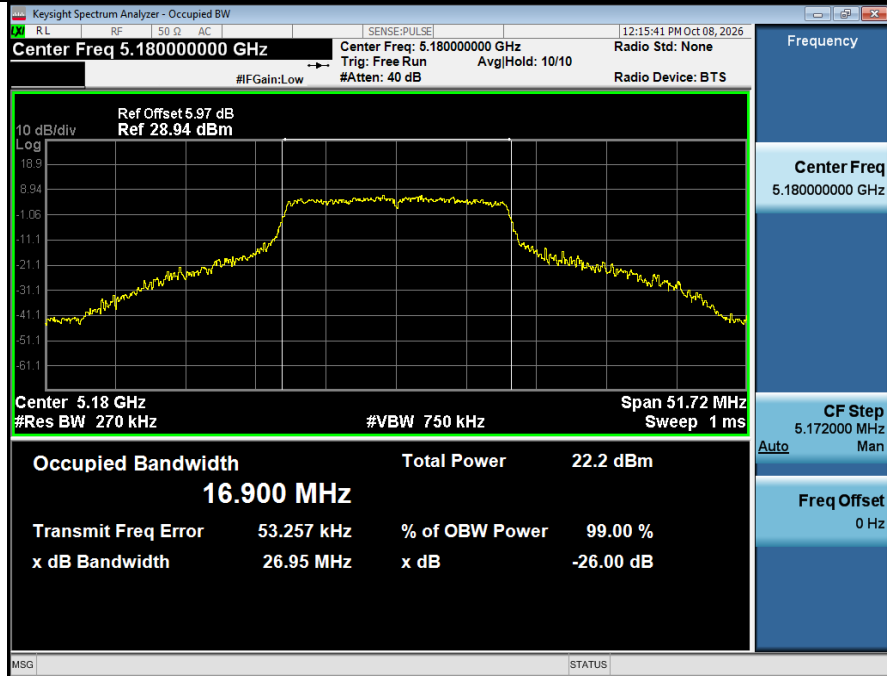


99%_OCB_NVNT_ANT2_802_11a_5180

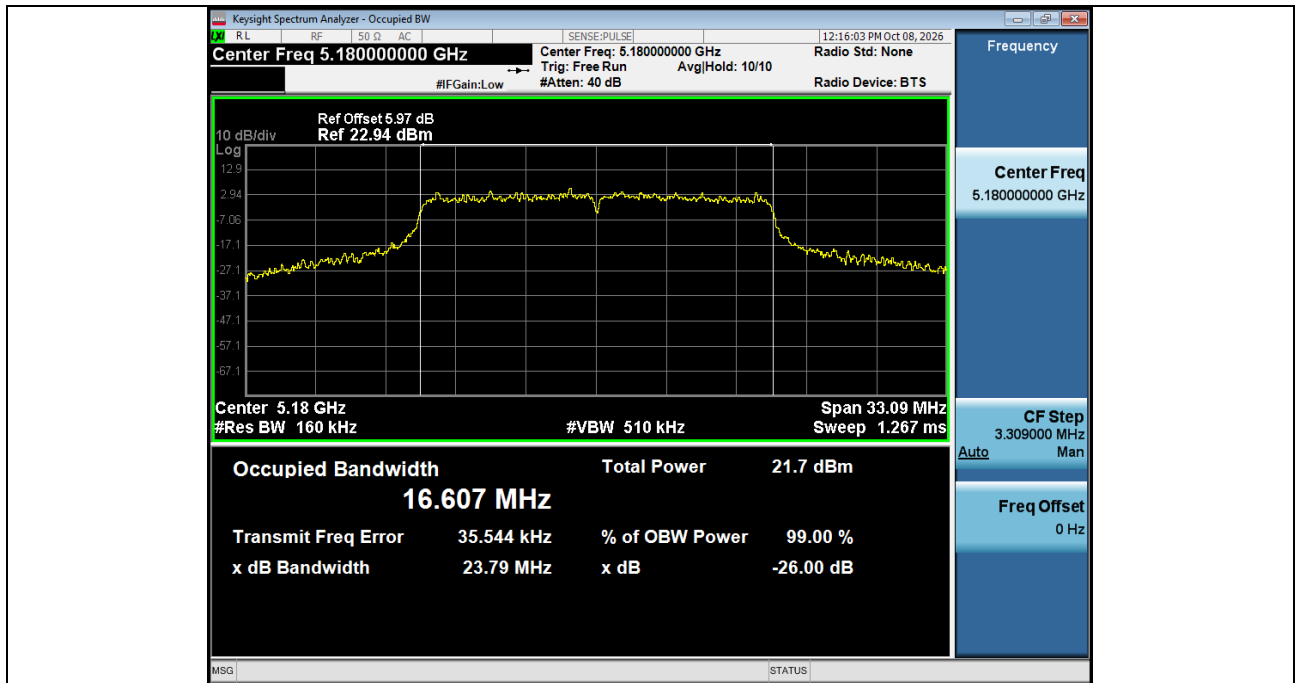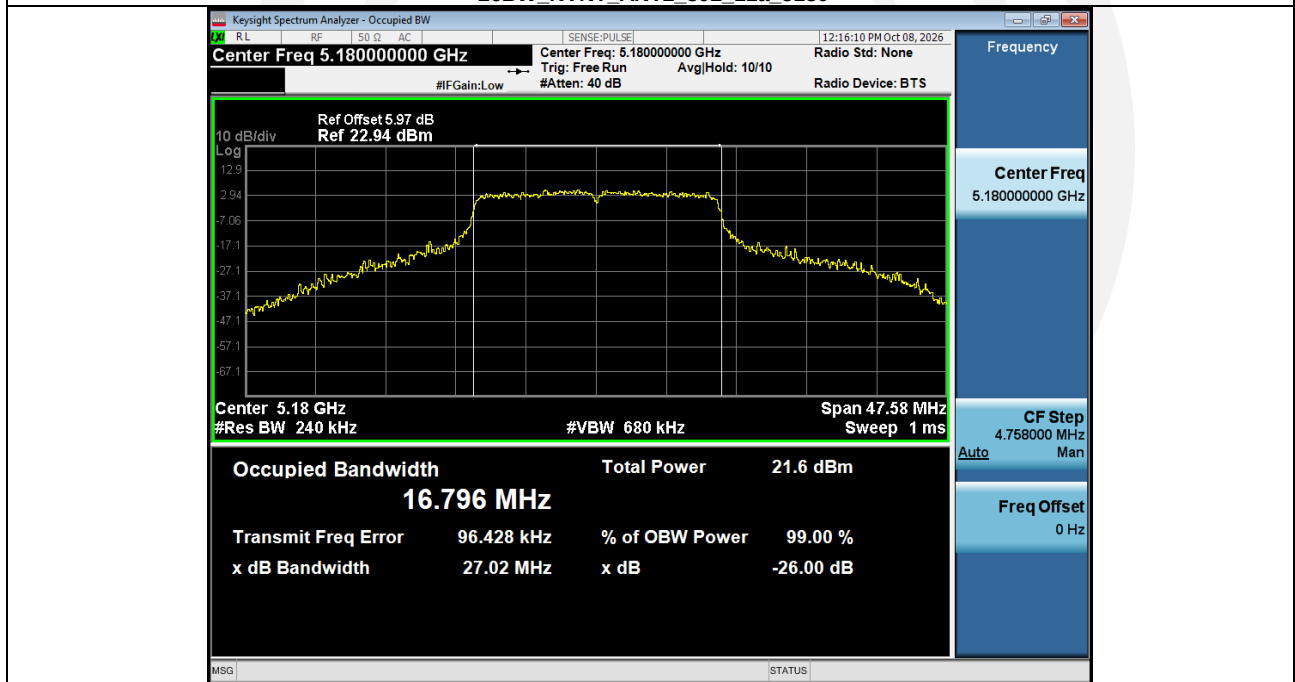**-26BW_NVNT_ANT2_802_11a_5180****99%_OCB_NVNT_ANT1_802_11a_5200**

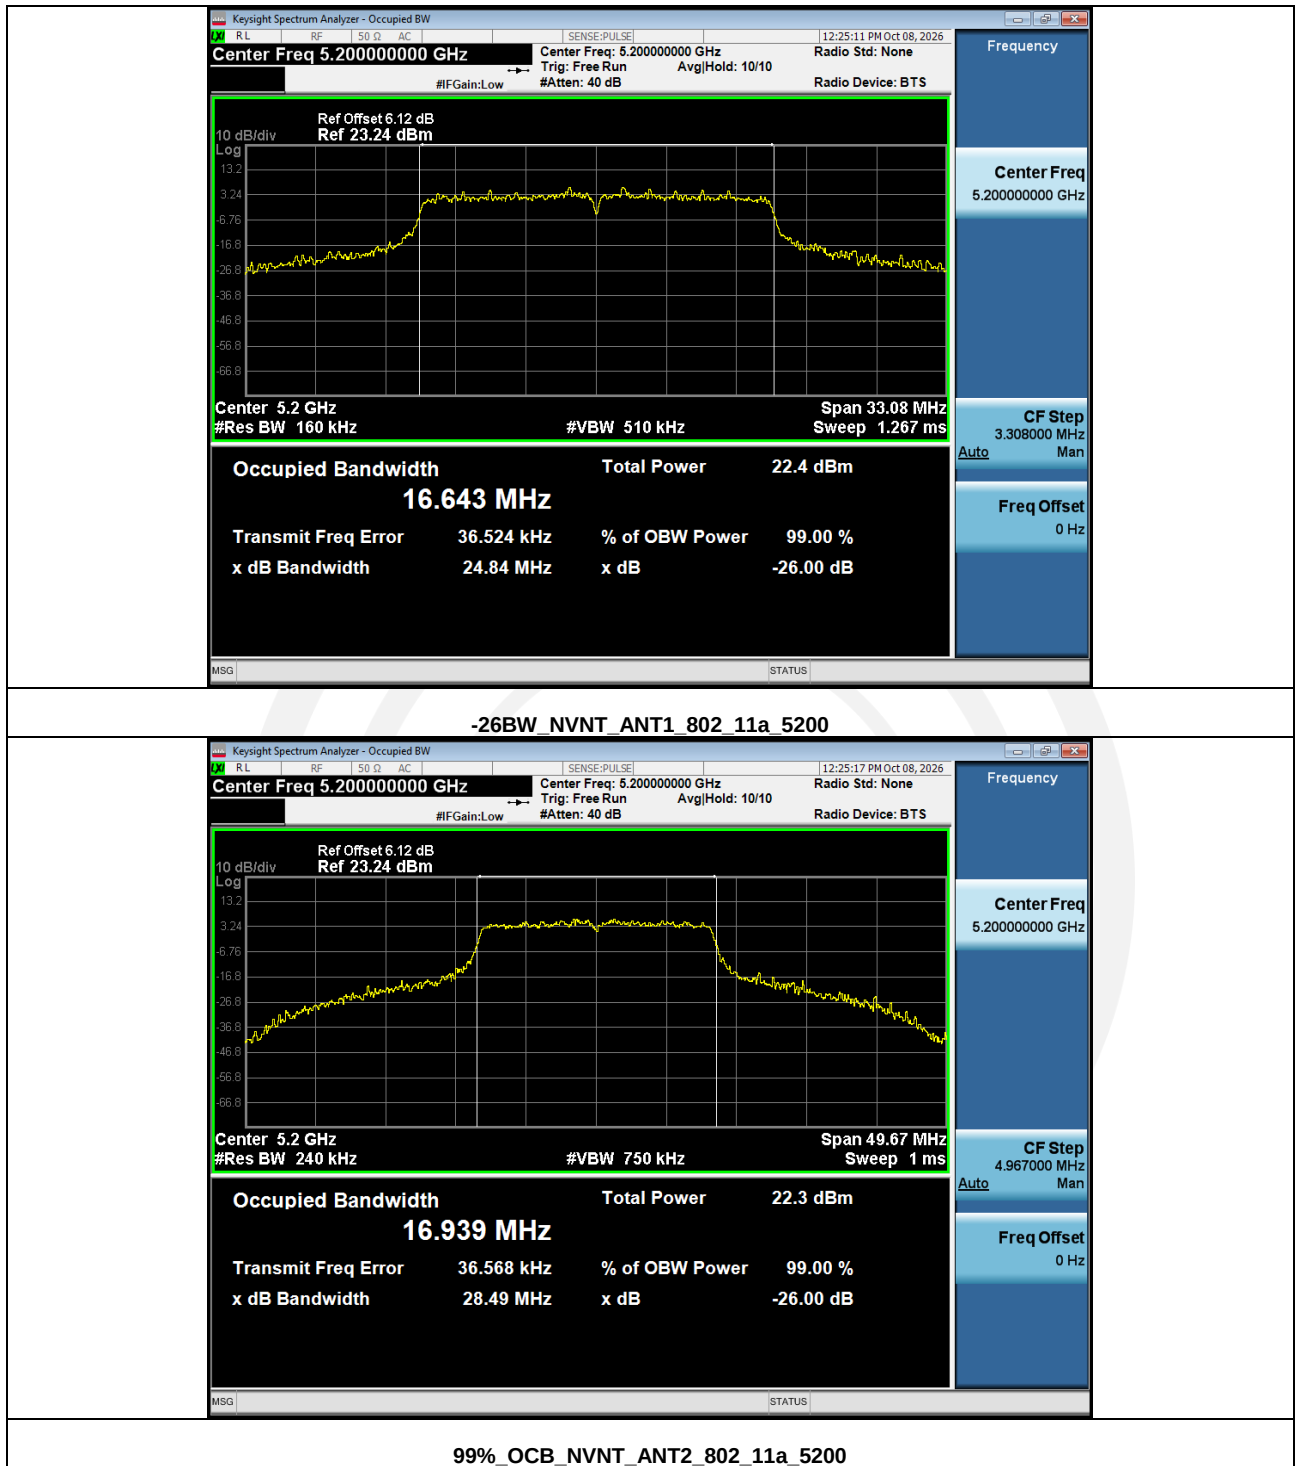



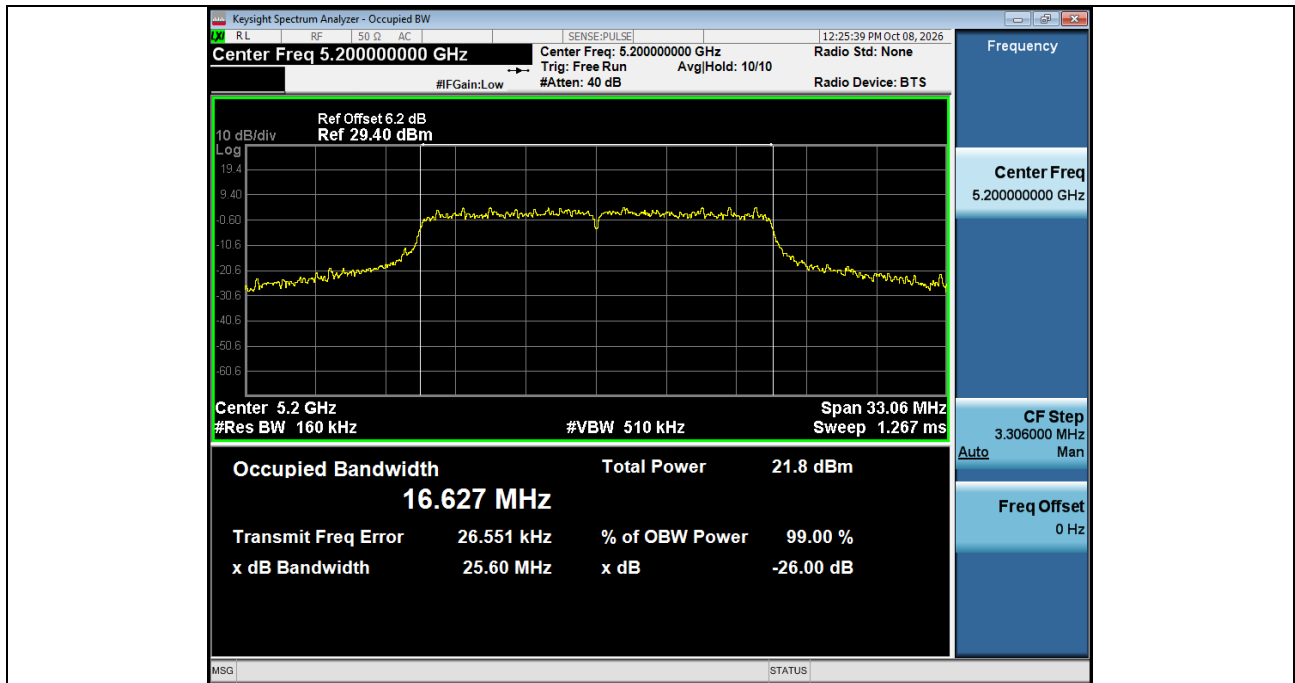



-26BW_NVNT_ANT2_802_11a_5200

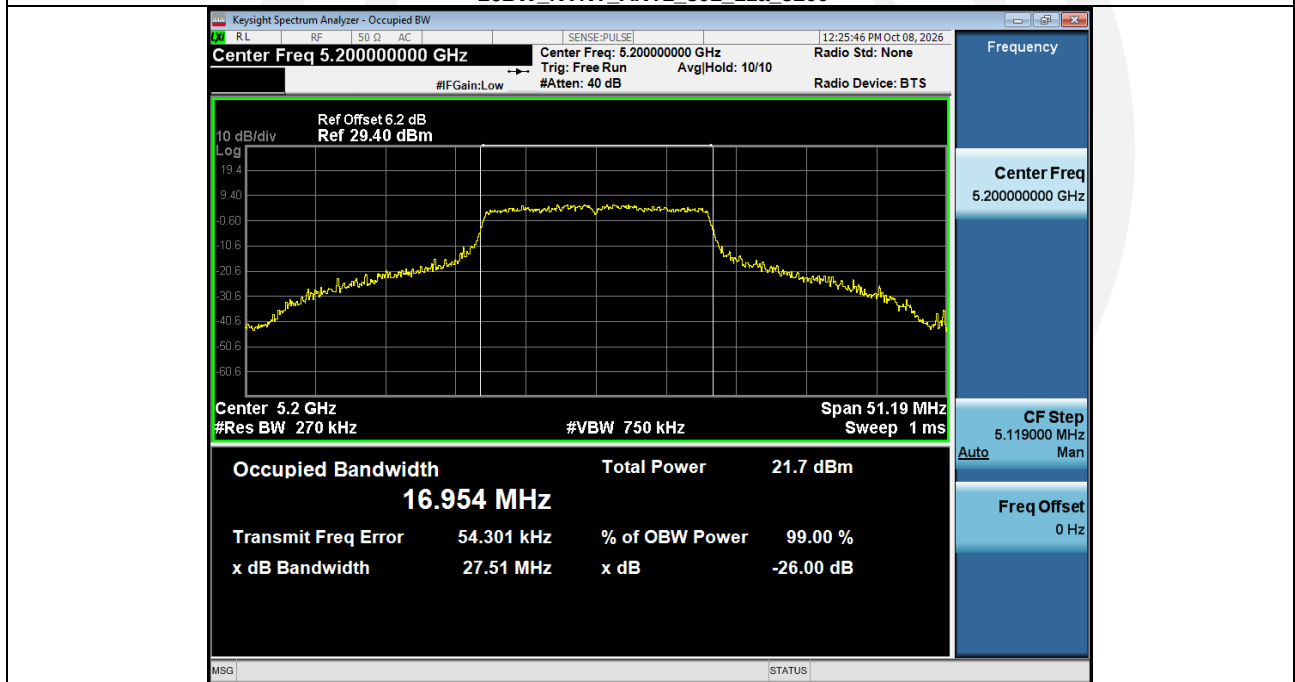


99%_OCB_NVNT_ANT1_802_11a_5240

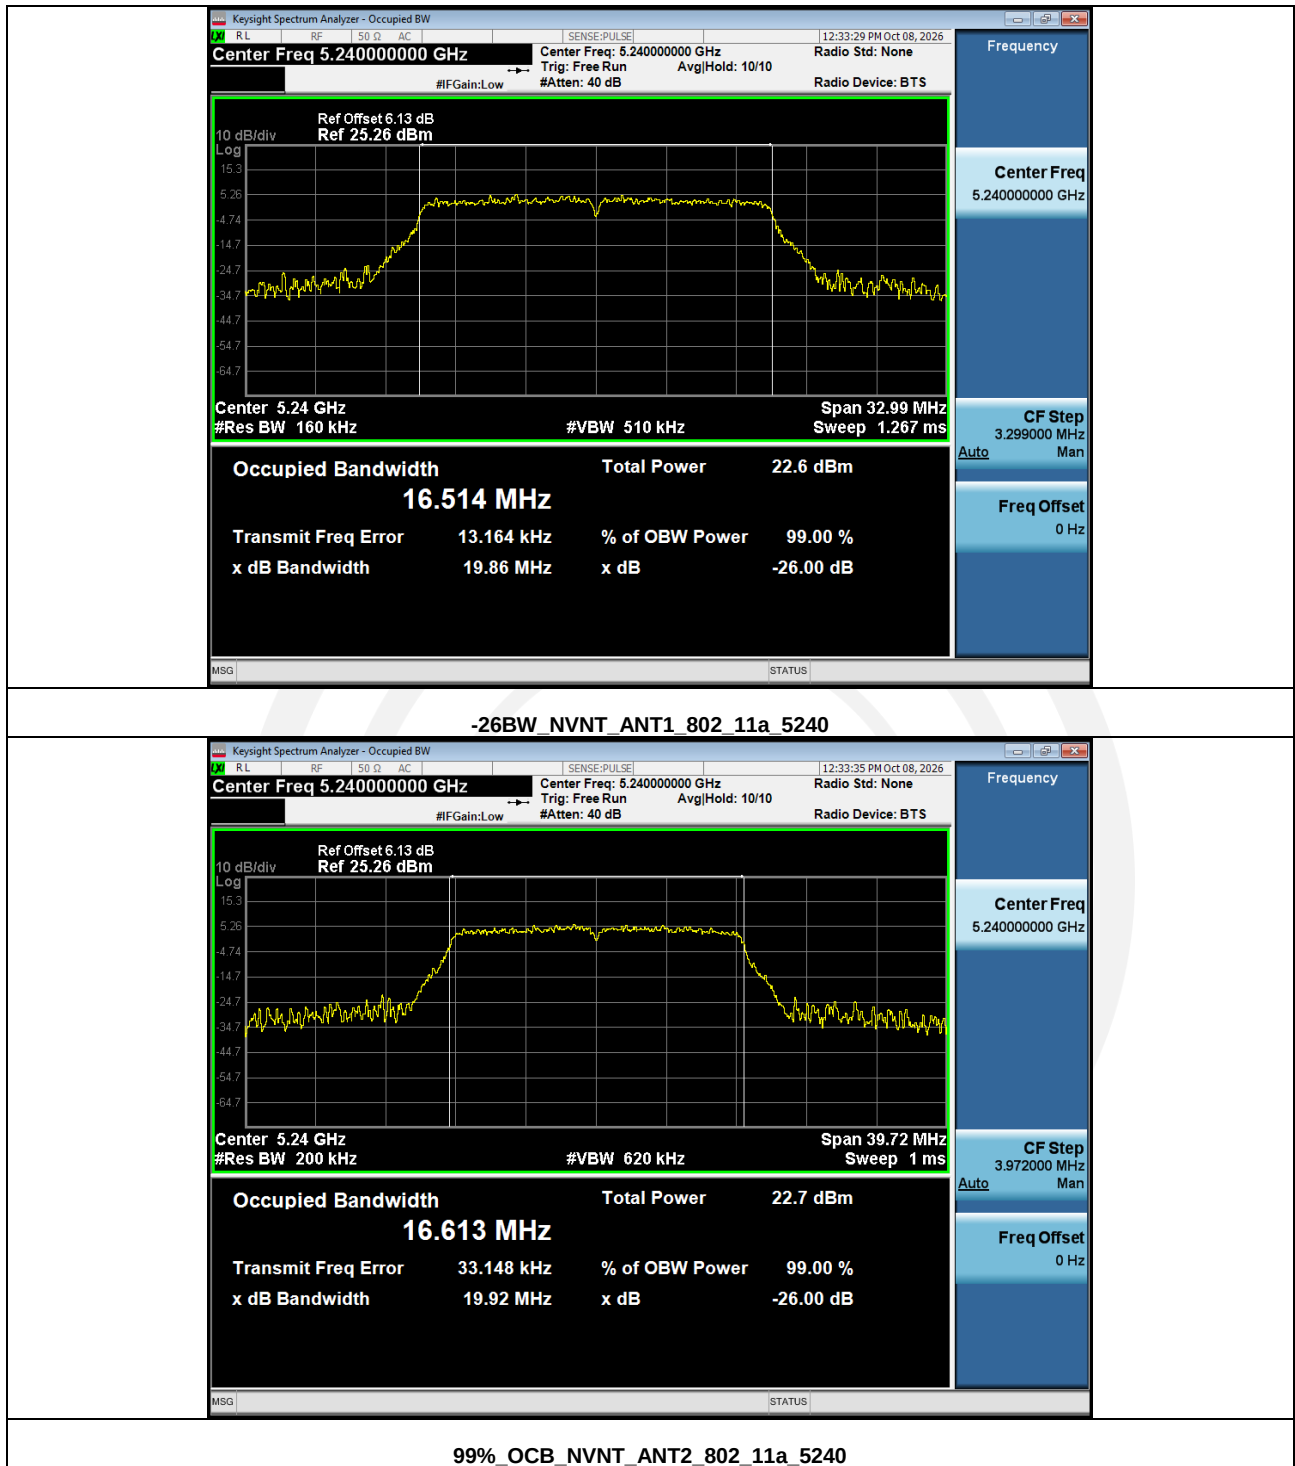


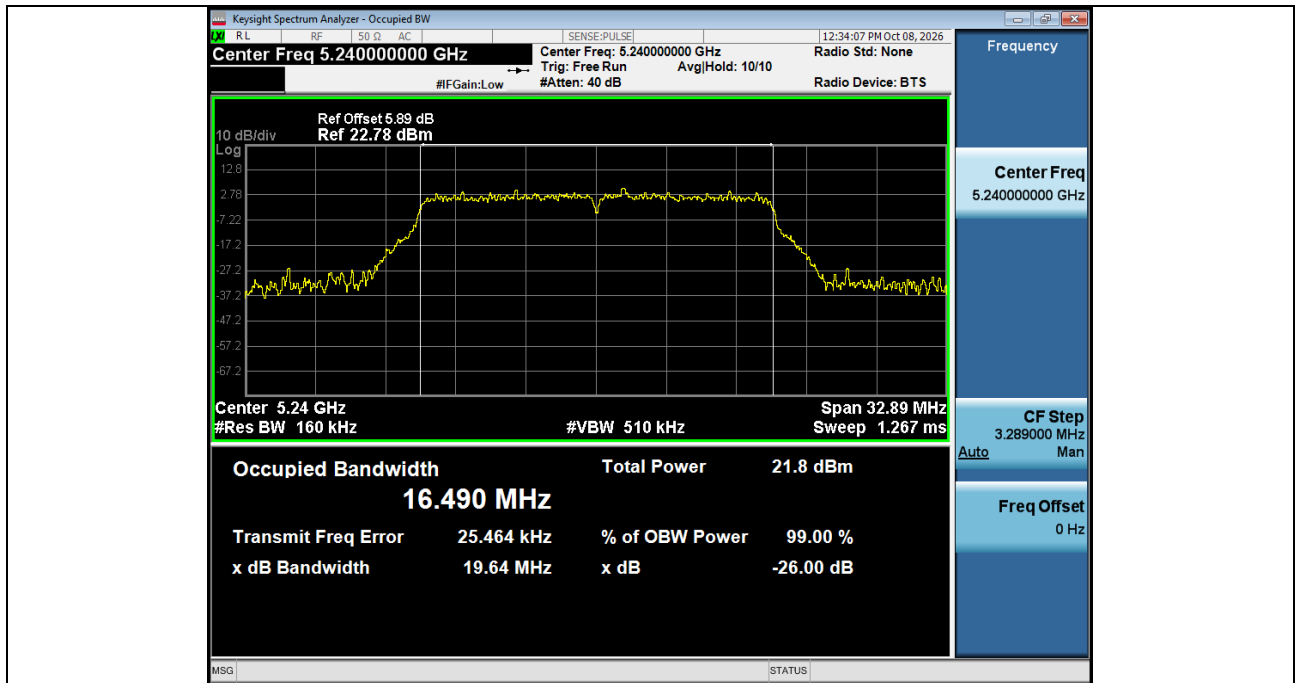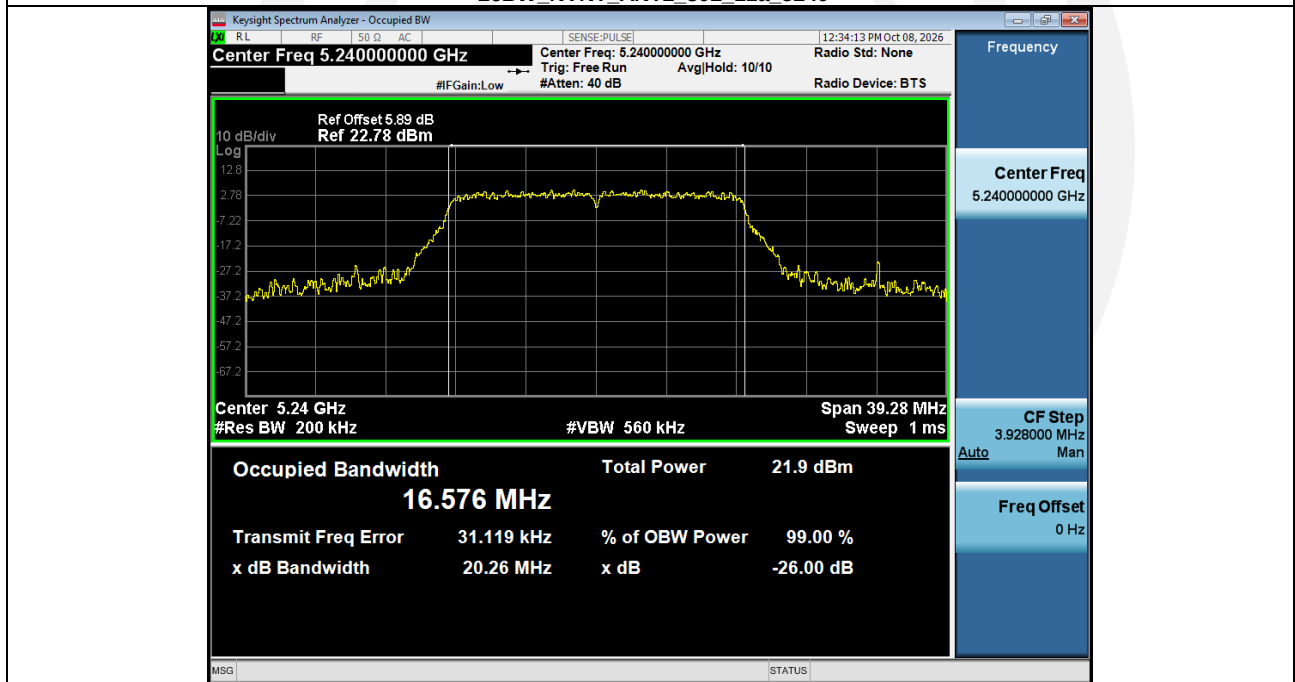**-26BW_NVNT_ANT2_802_11a_5240****99%_OCB_NVNT_ANT1_802_11n(HT20)_5180**

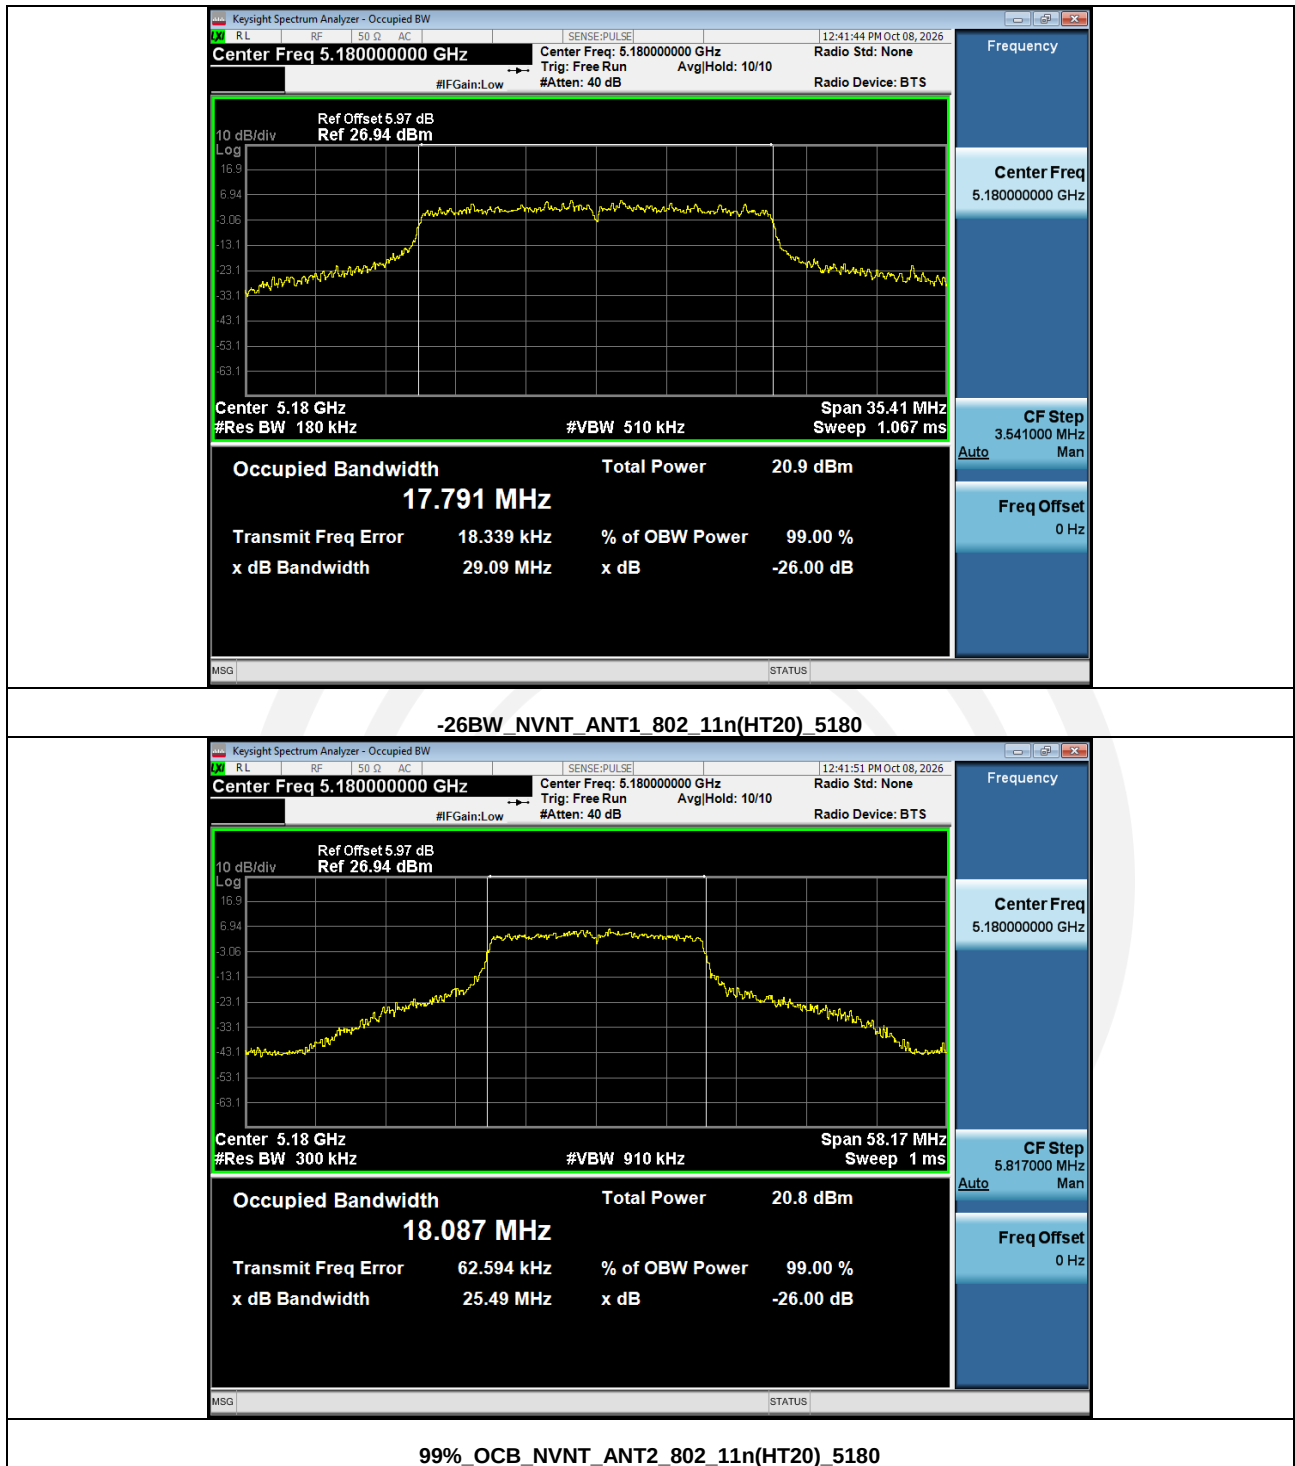



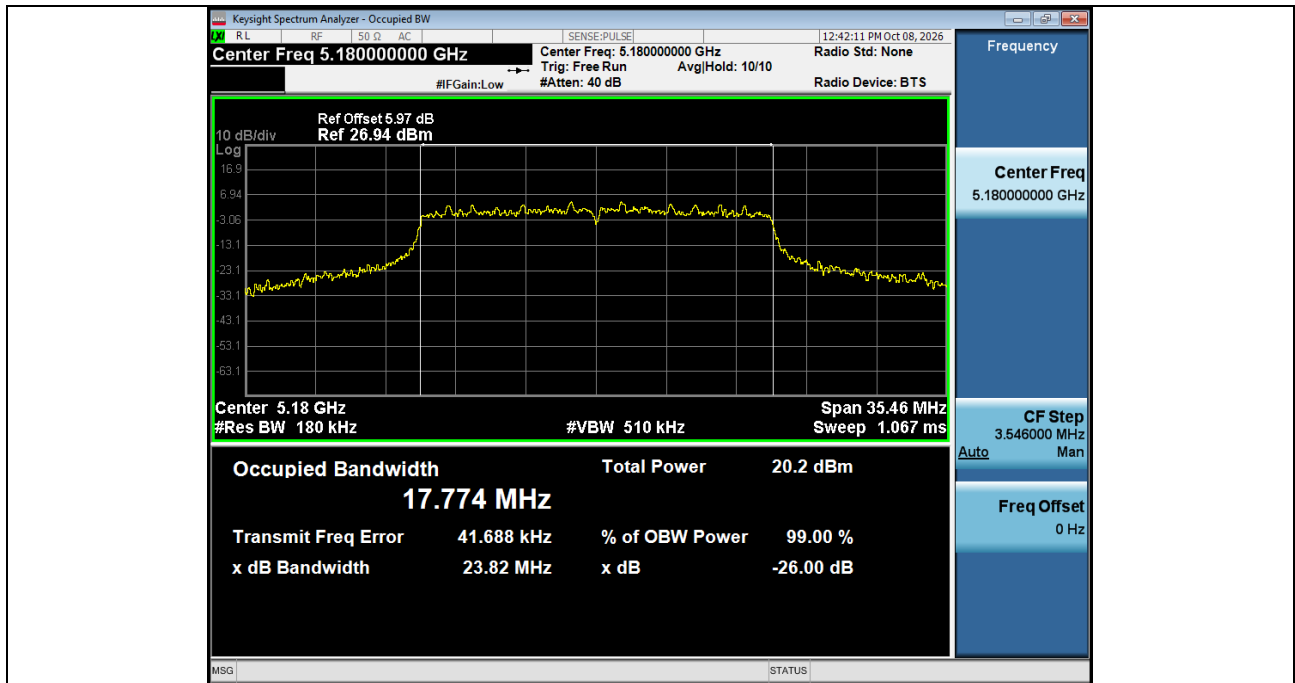



-26BW_NVNT_ANT2_802_11n(HT20)_5180

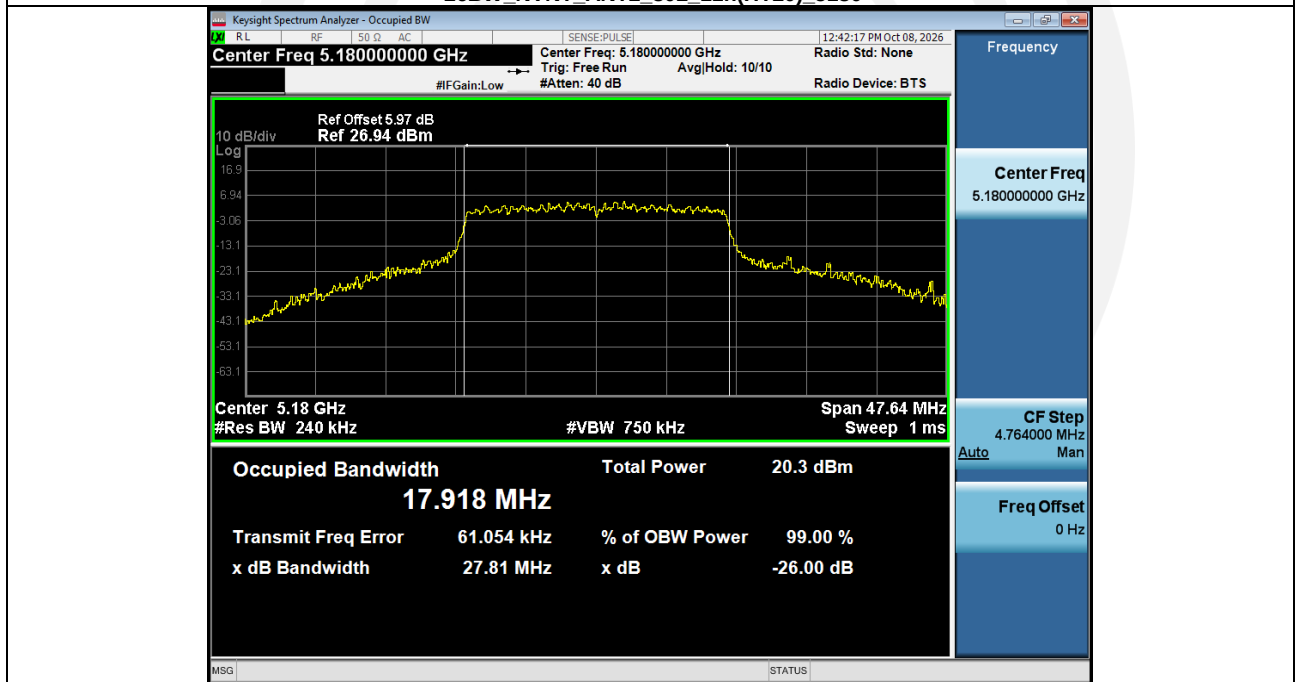


99%_OCB_NVNT_ANT1_802_11n(HT20)_5200

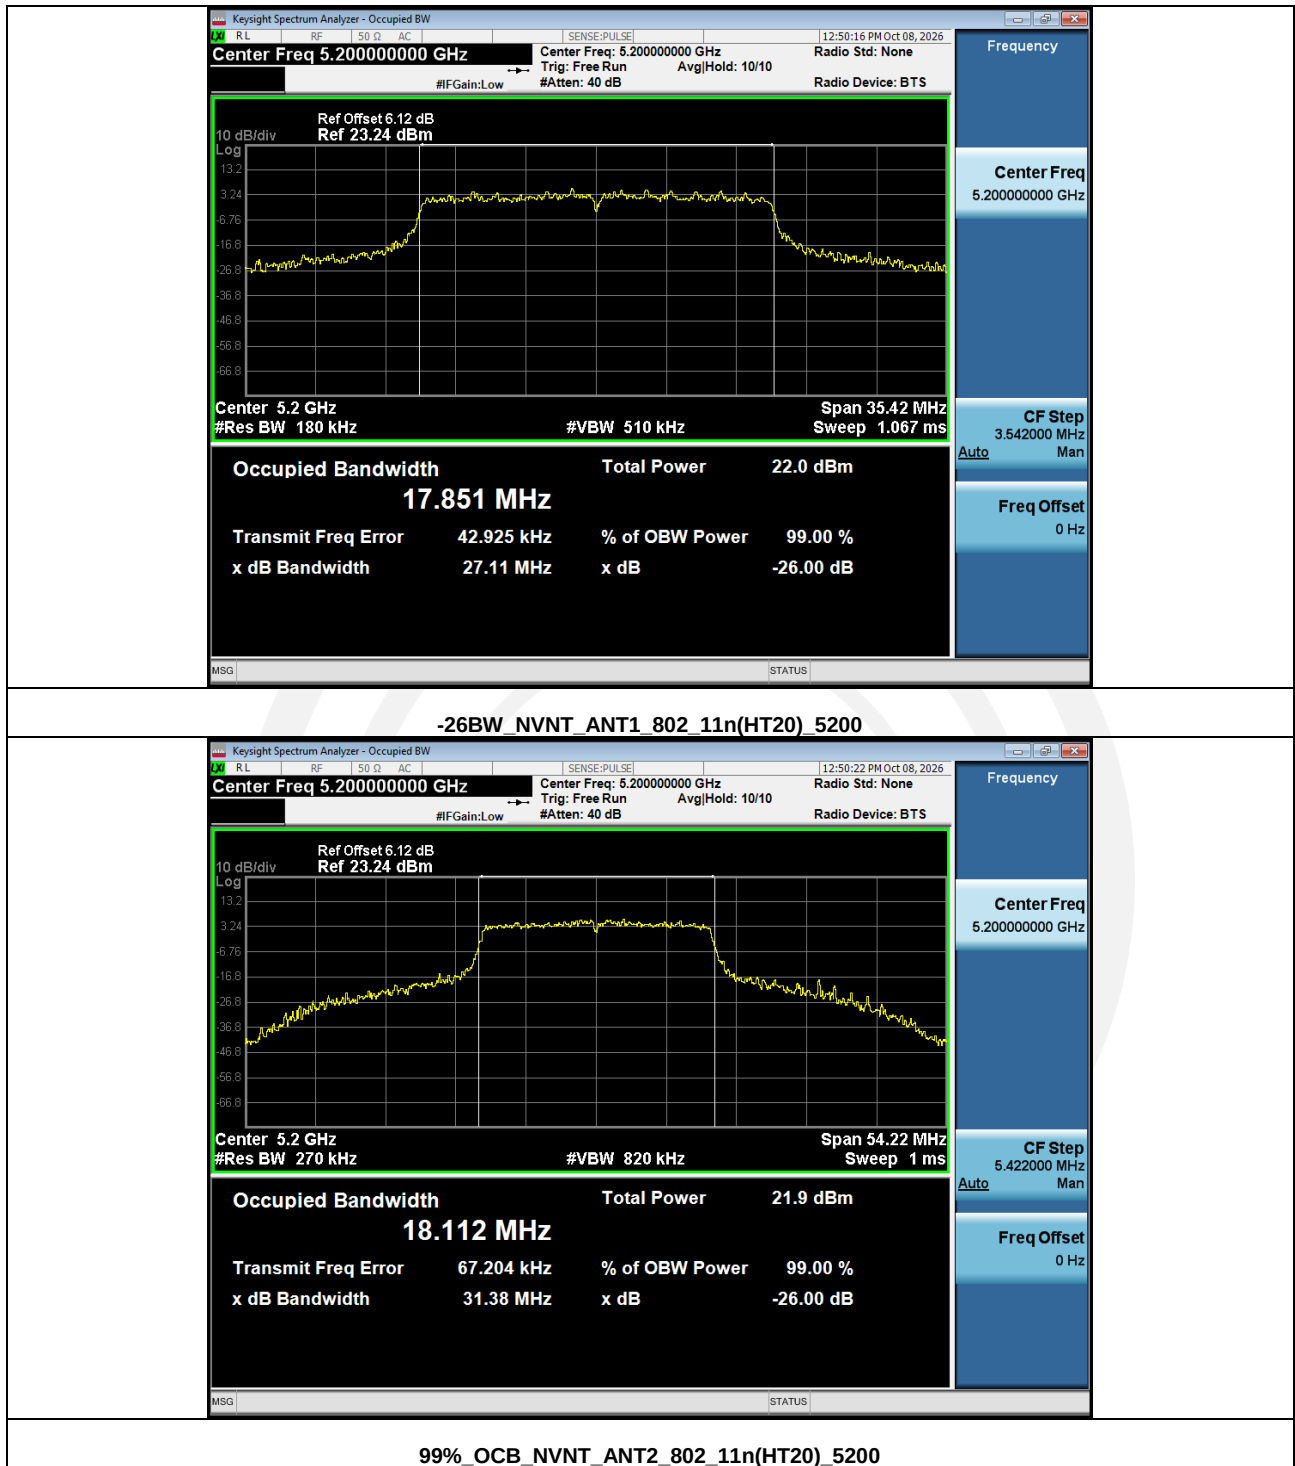


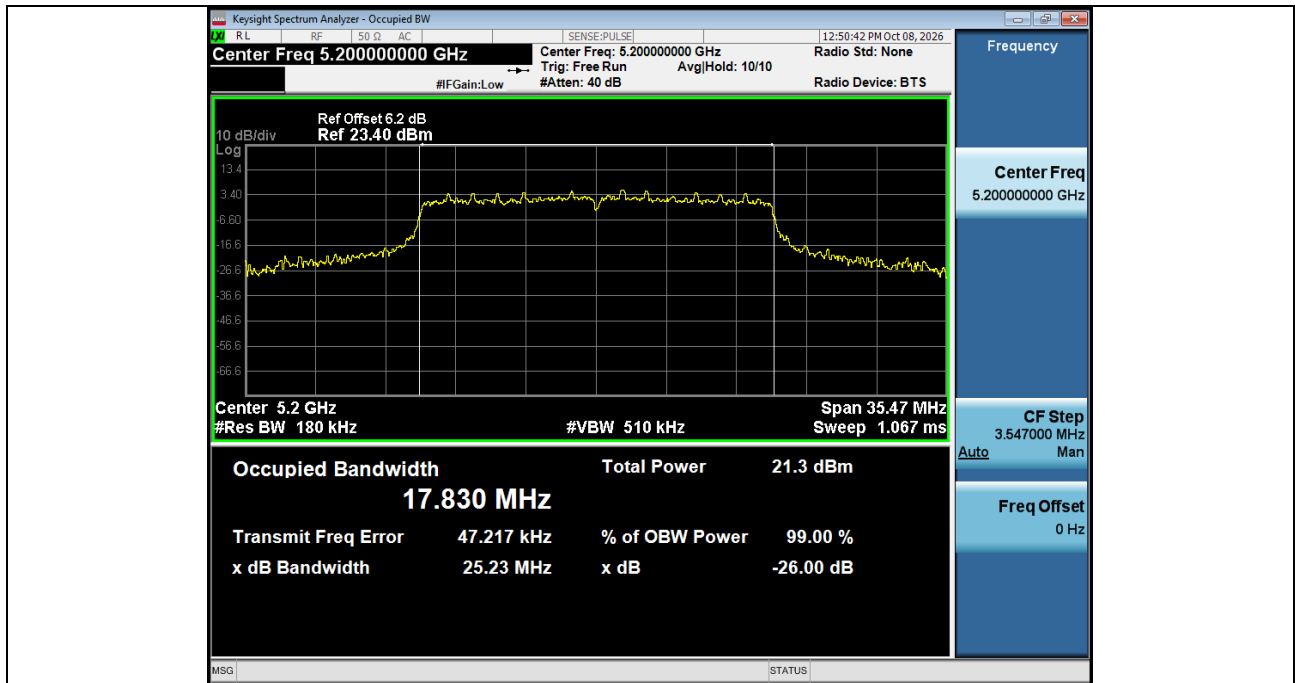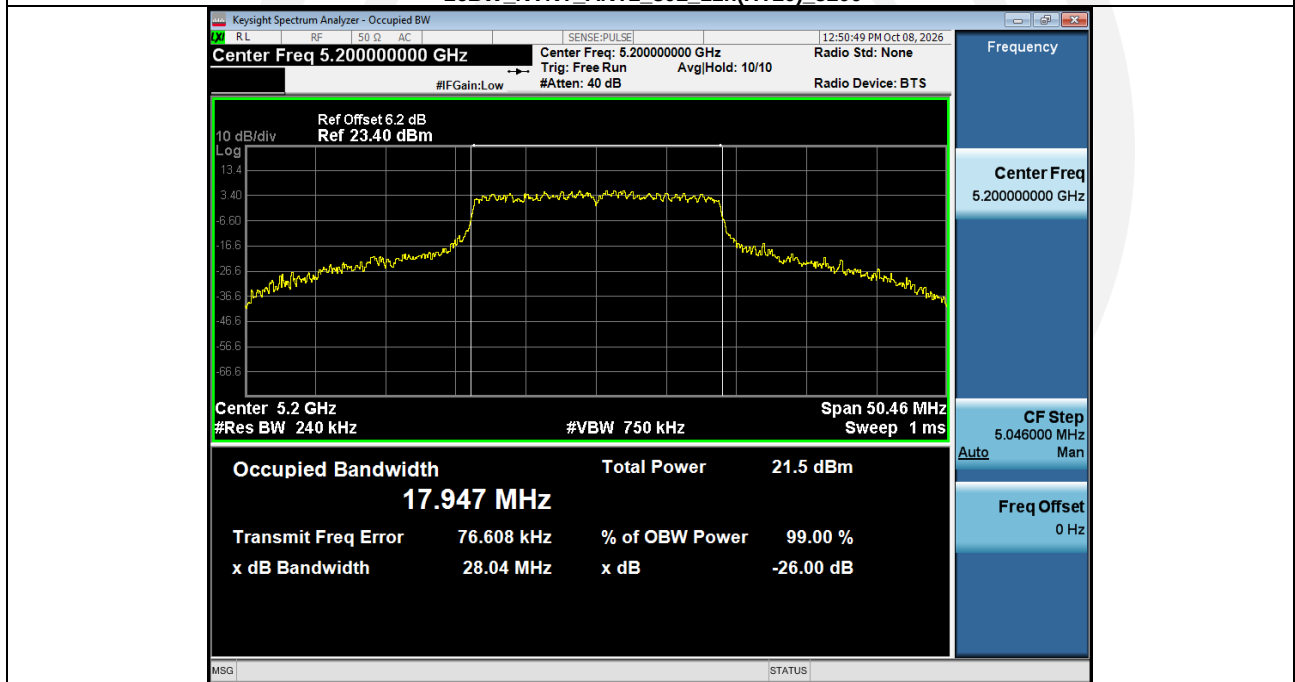**-26BW_NVNT_ANT2_802_11n(HT20)_5200****99%_OCB_NVNT_ANT1_802_11n(HT20)_5240**

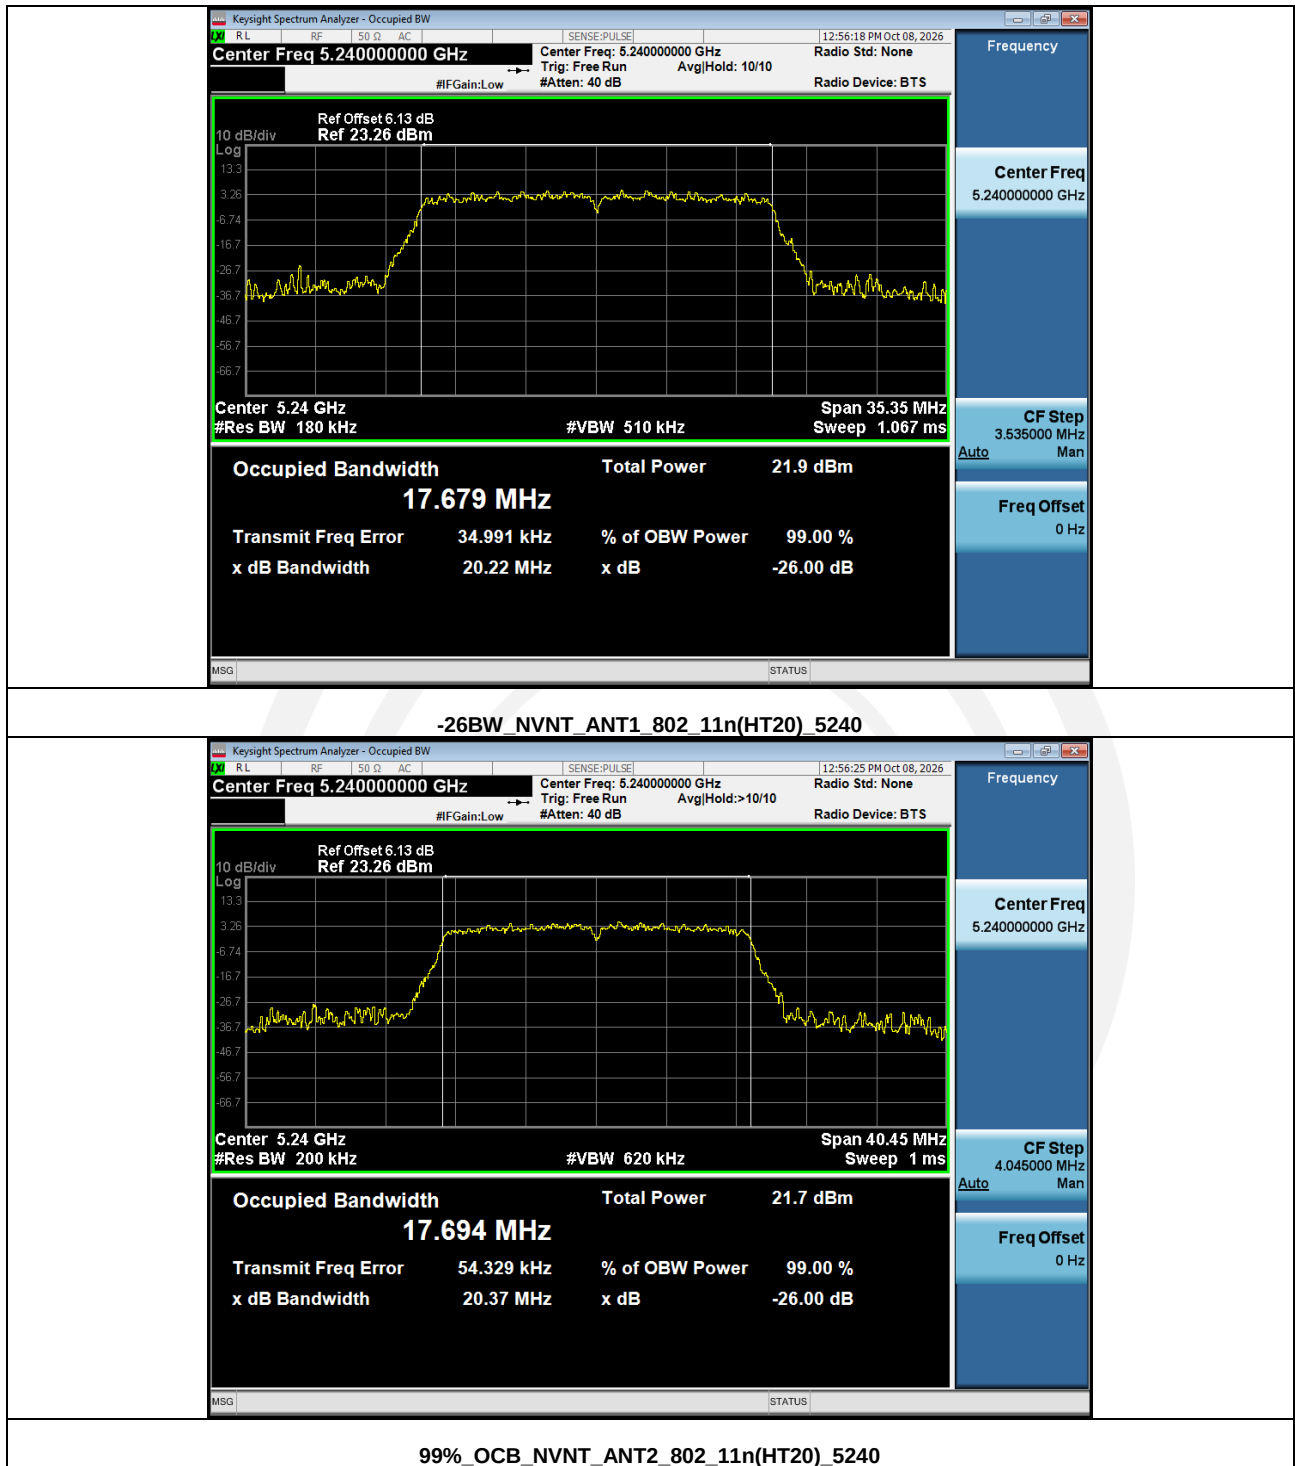


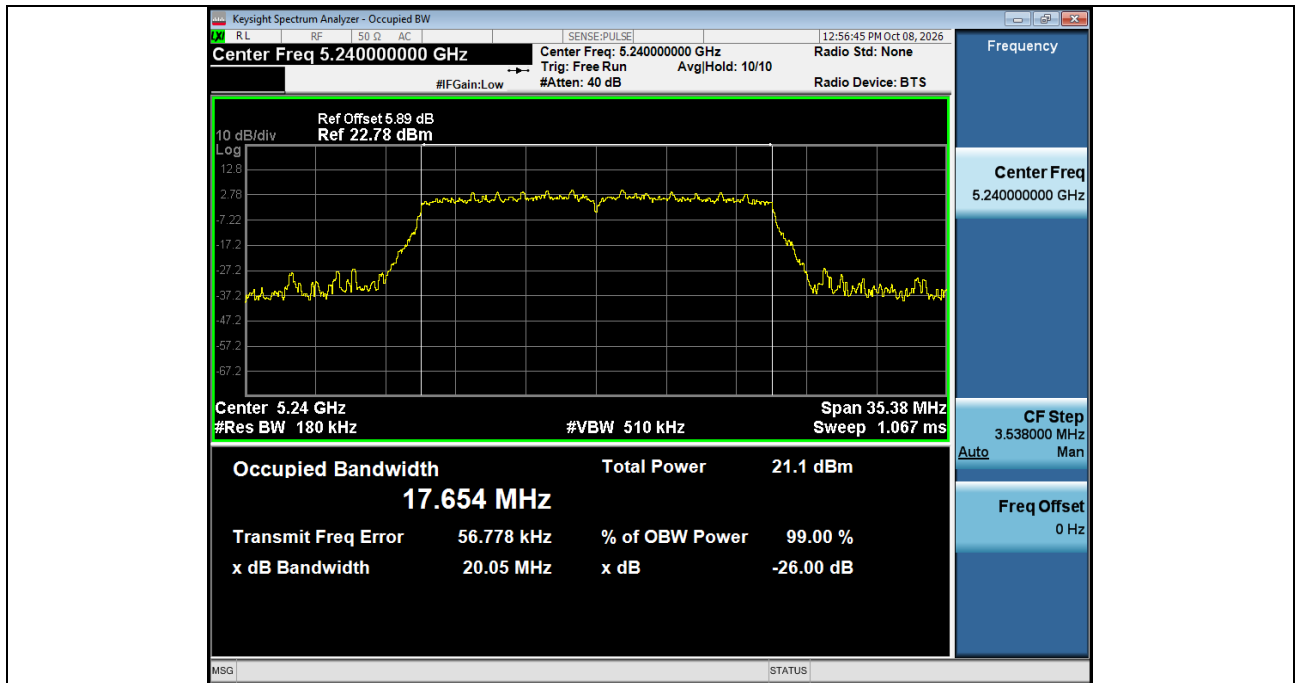


-26BW_NVNT_ANT2_802_11n(HT20)_5240

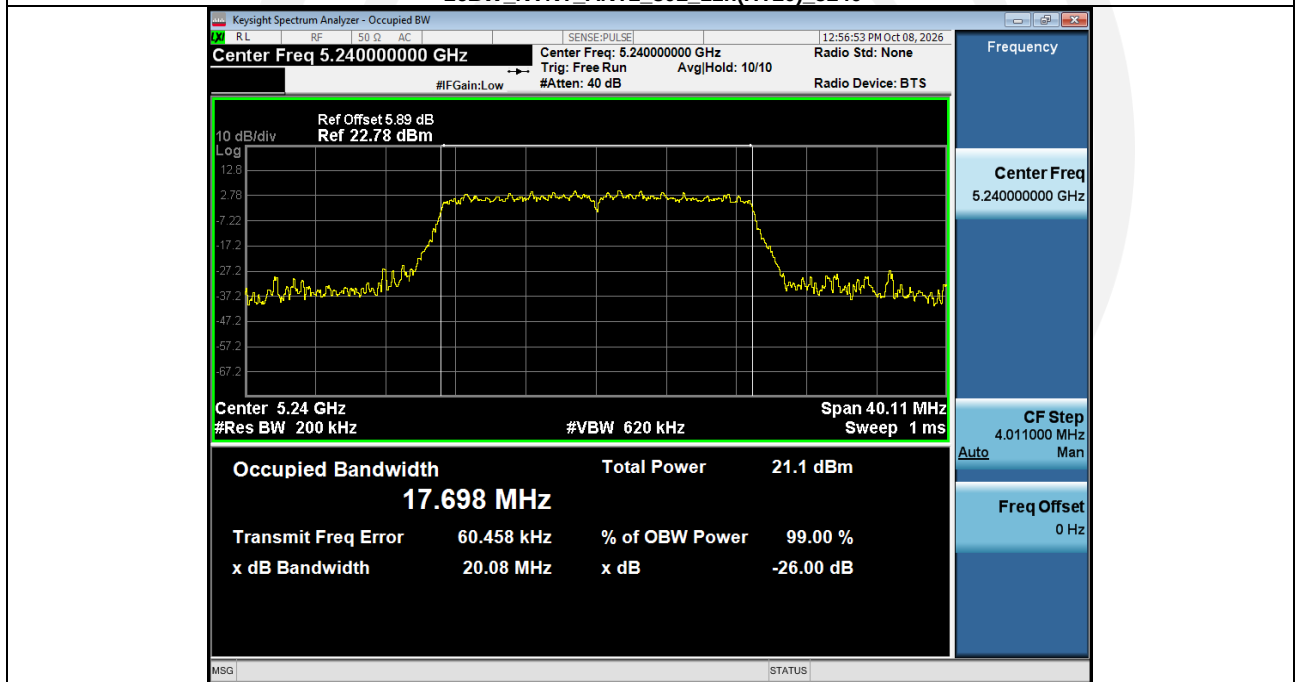


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5180

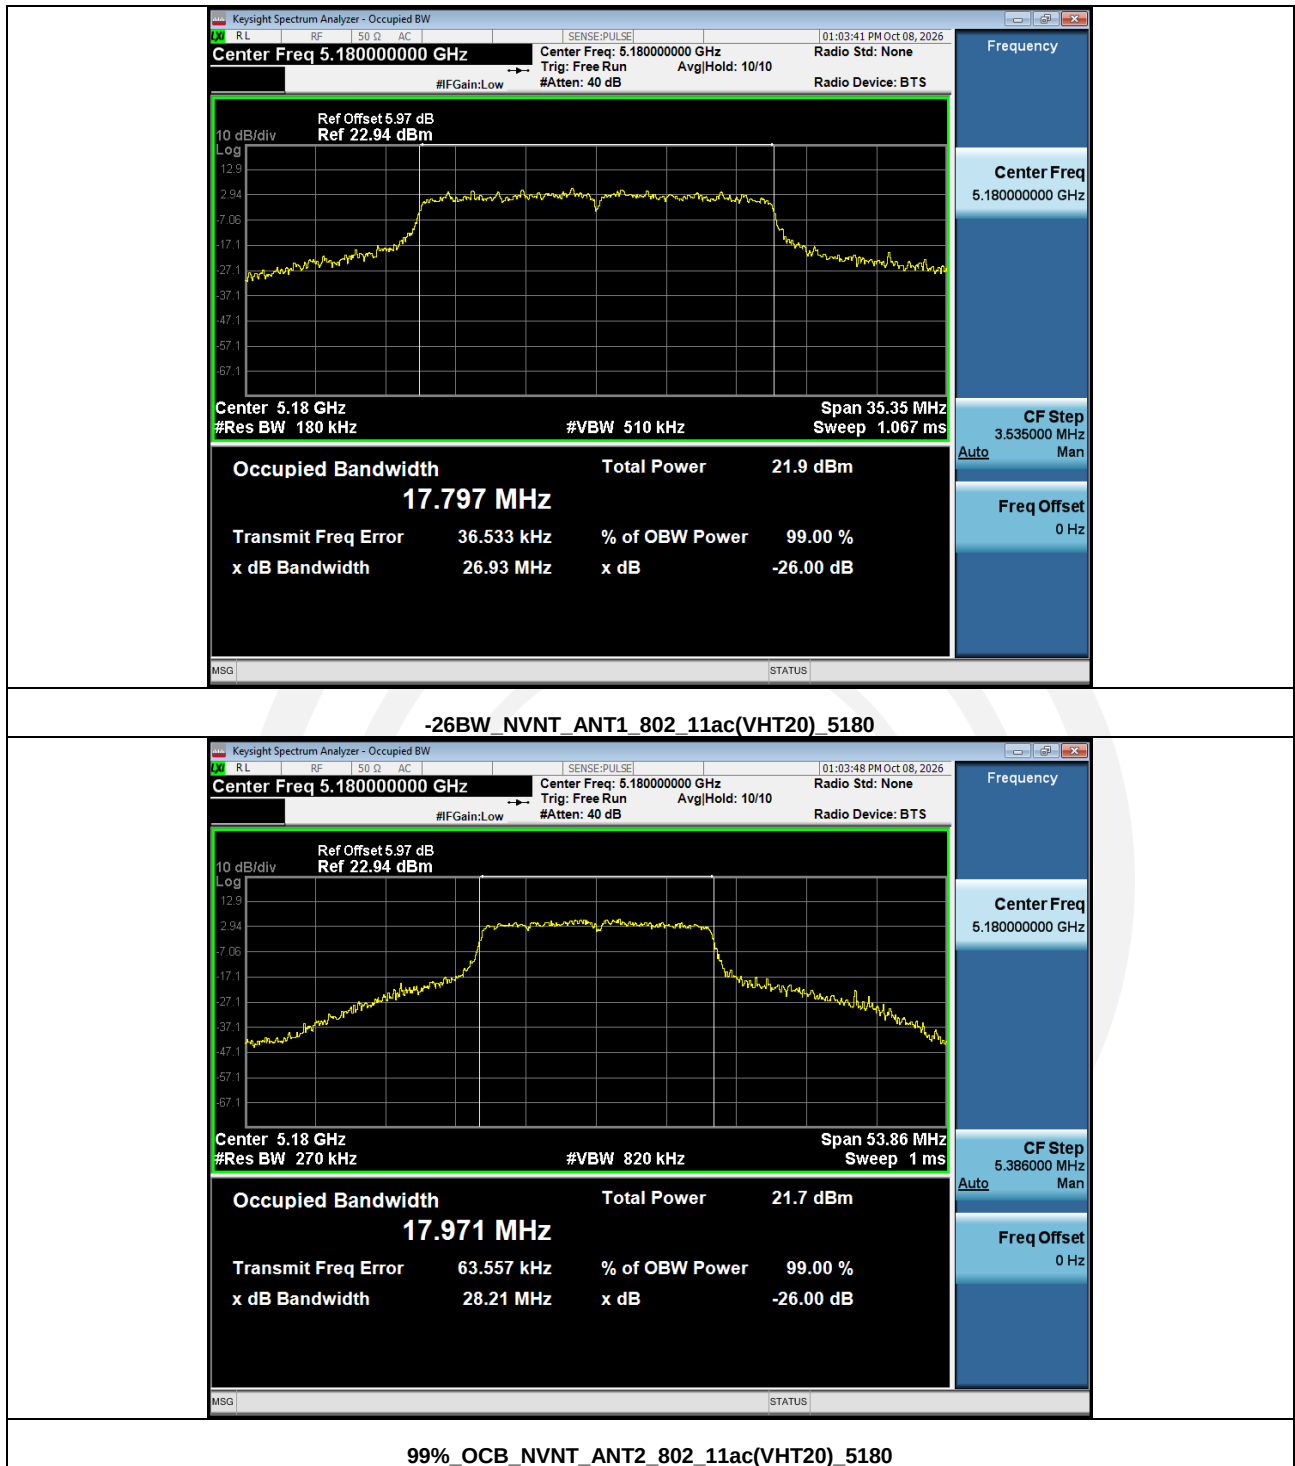


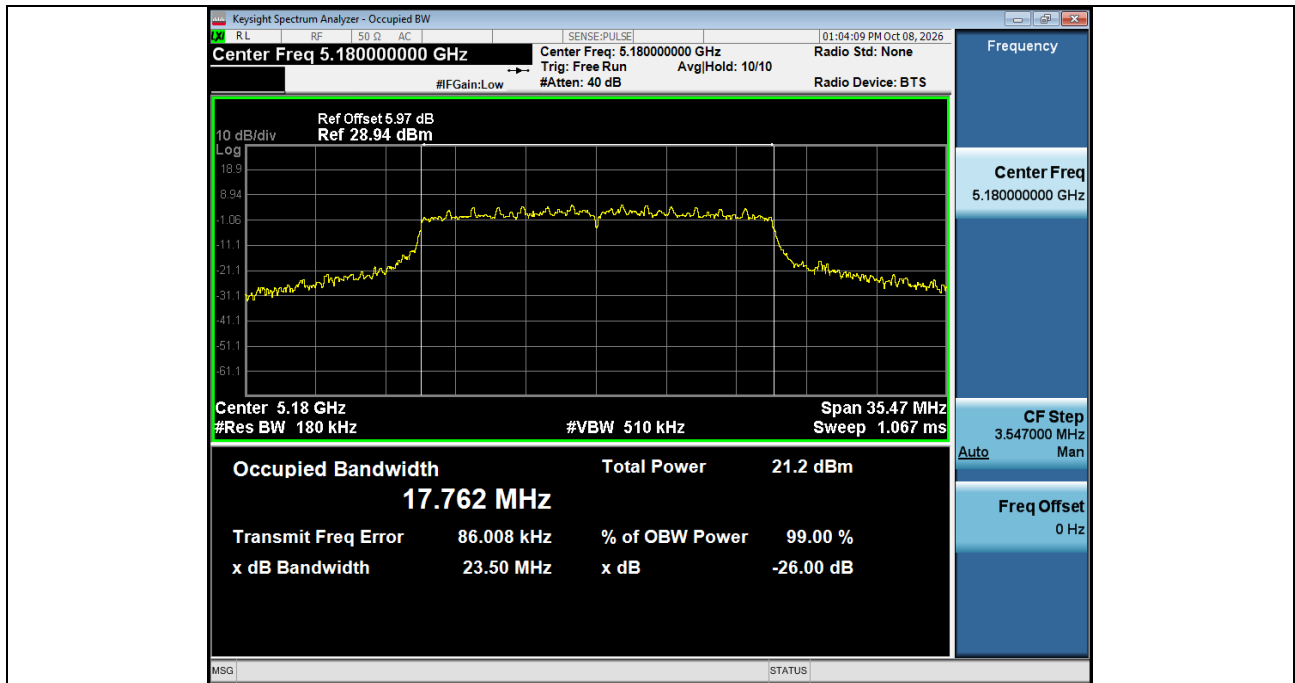


-26BW_NVNT_ANT2_802_11ac(VHT20)_5180

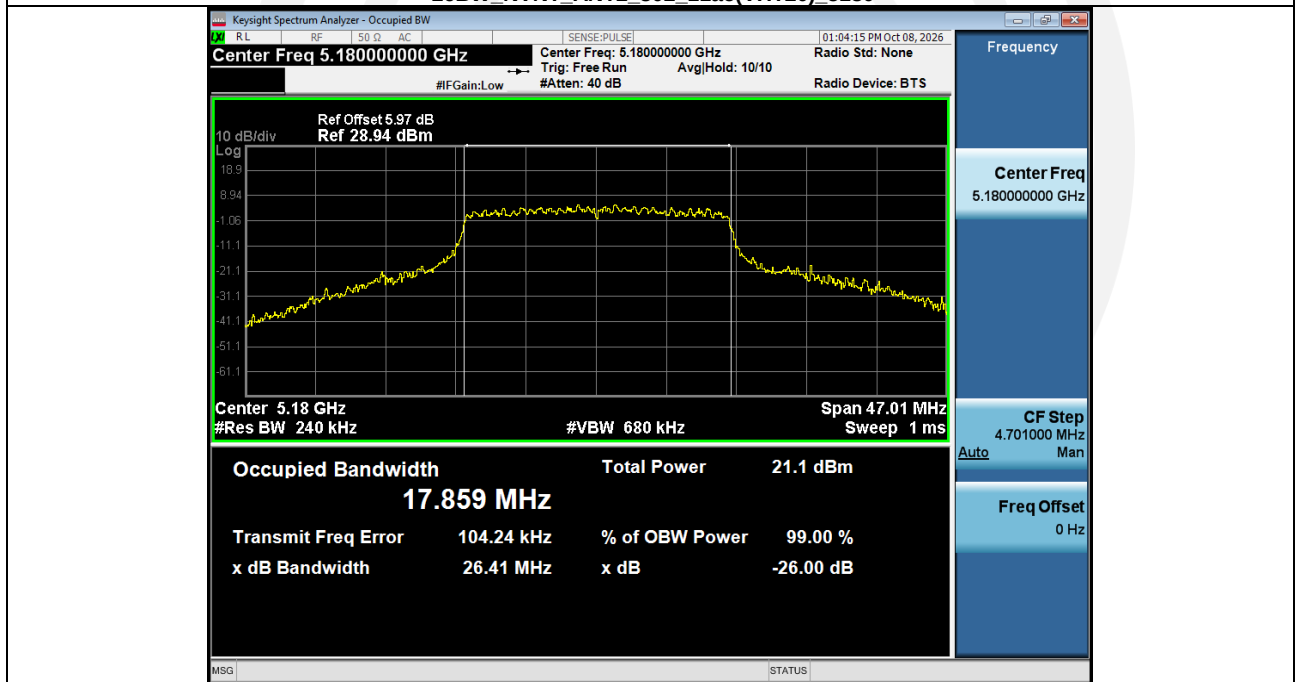


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5200

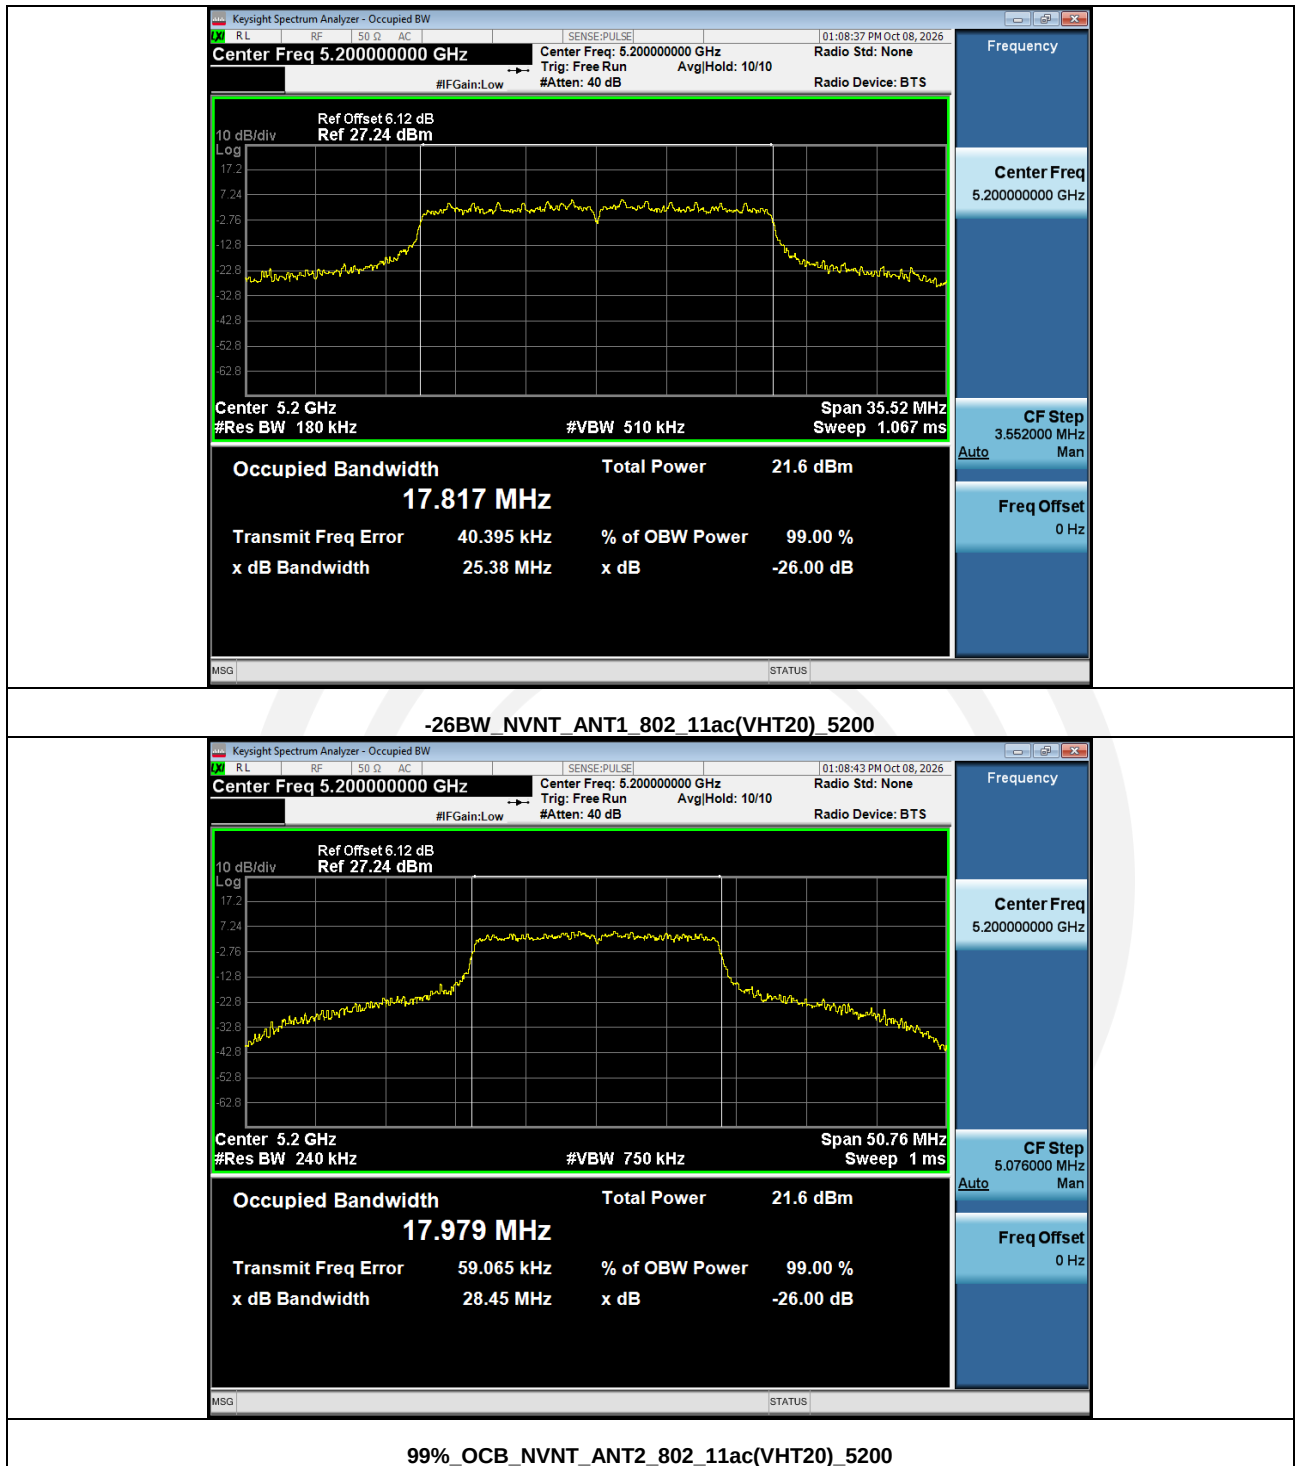


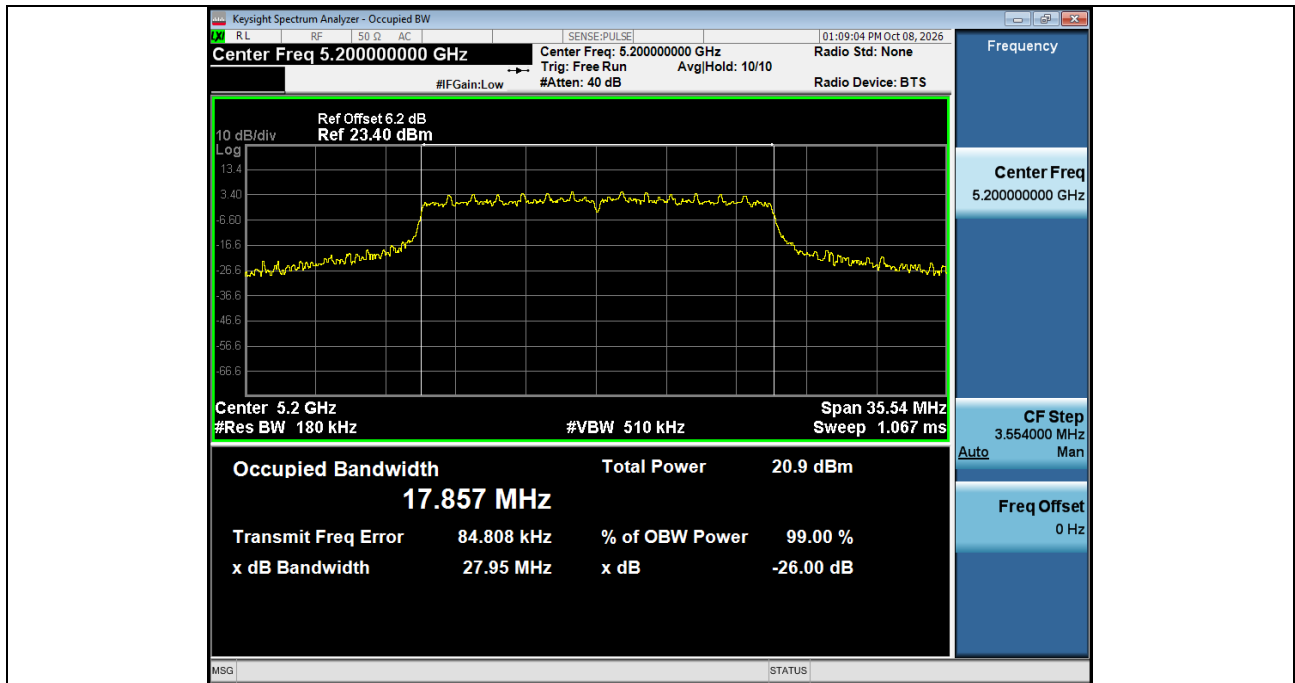


-26BW_NVNT_ANT2_802_11ac(VHT20)_5200

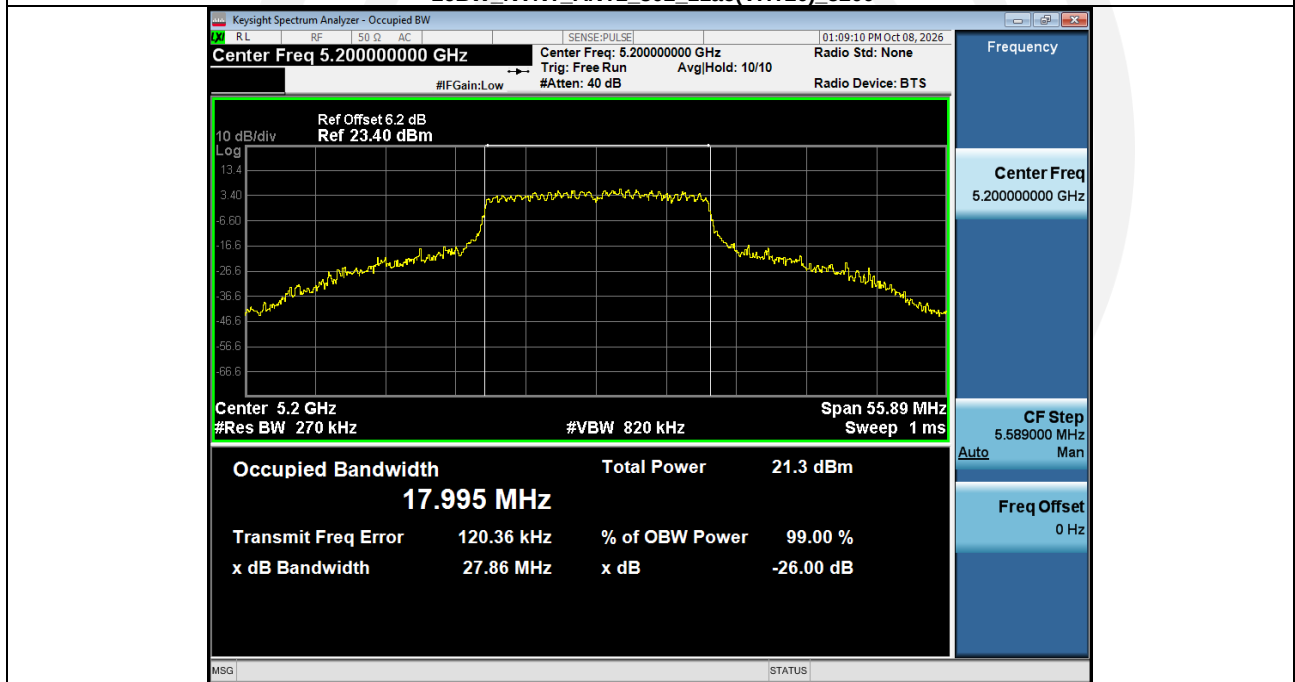


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5240

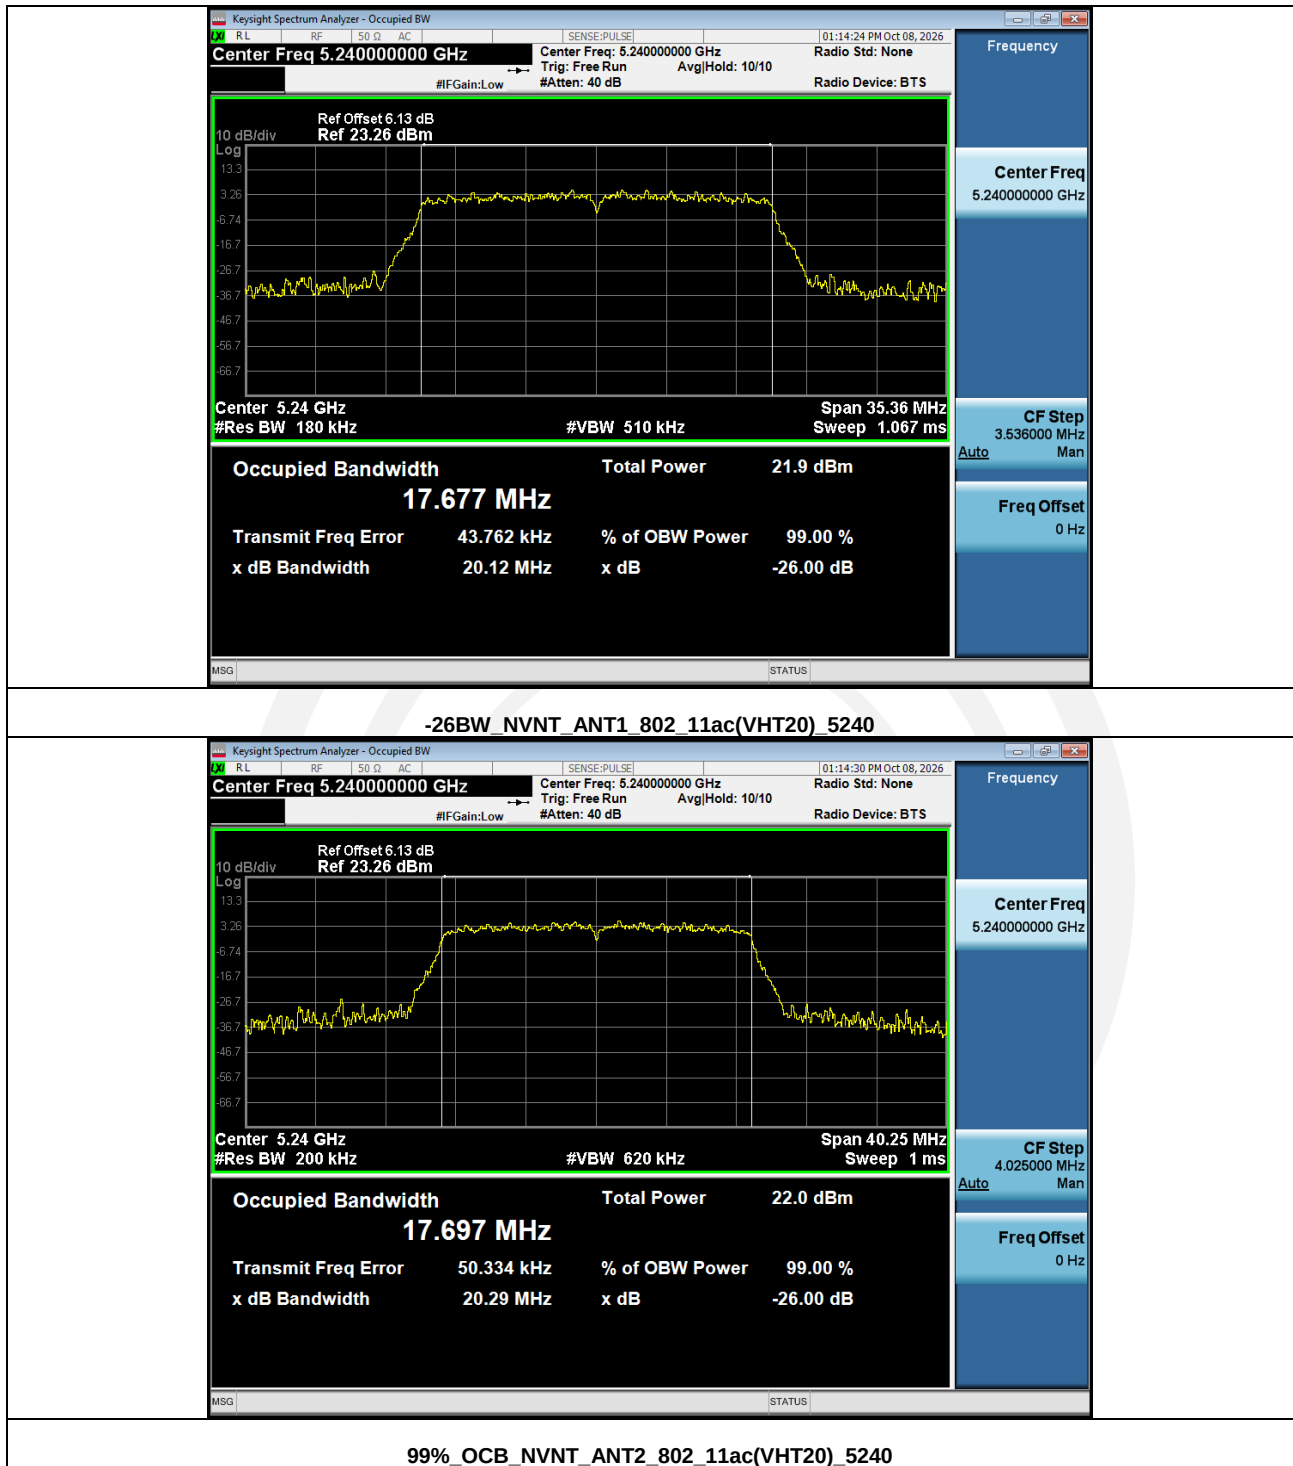



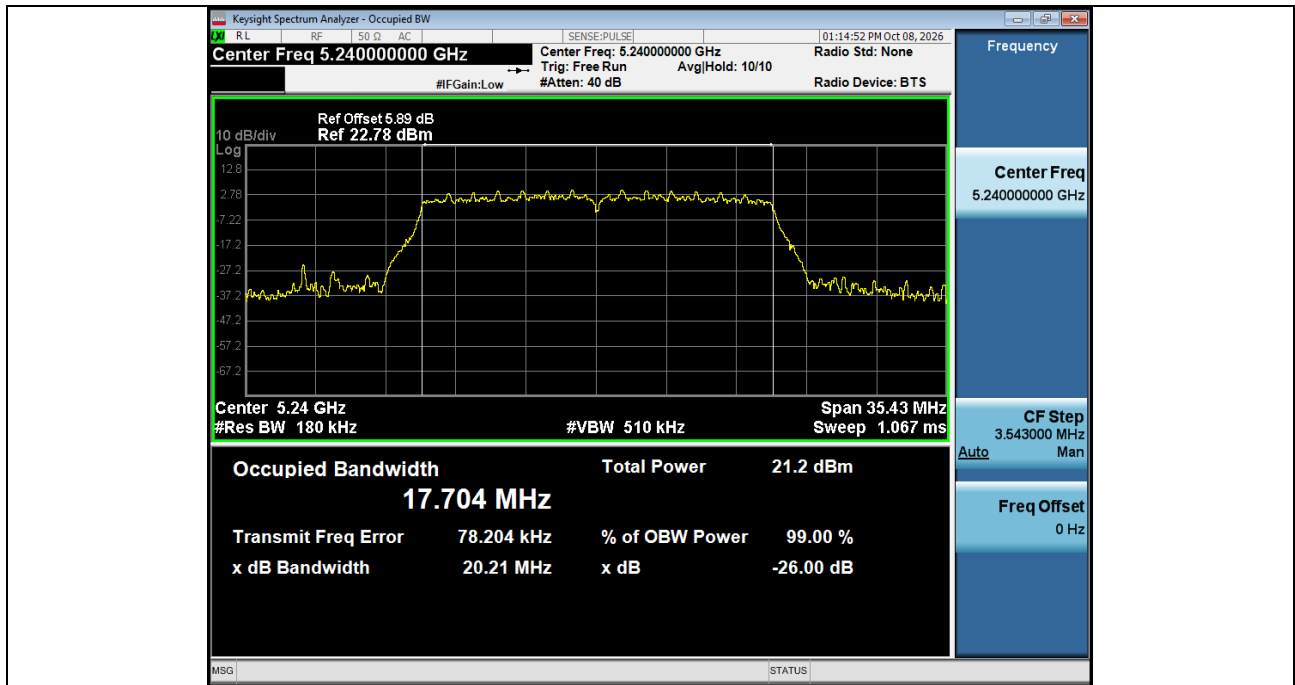



-26BW_NVNT_ANT2_802_11ac(VHT20)_5240

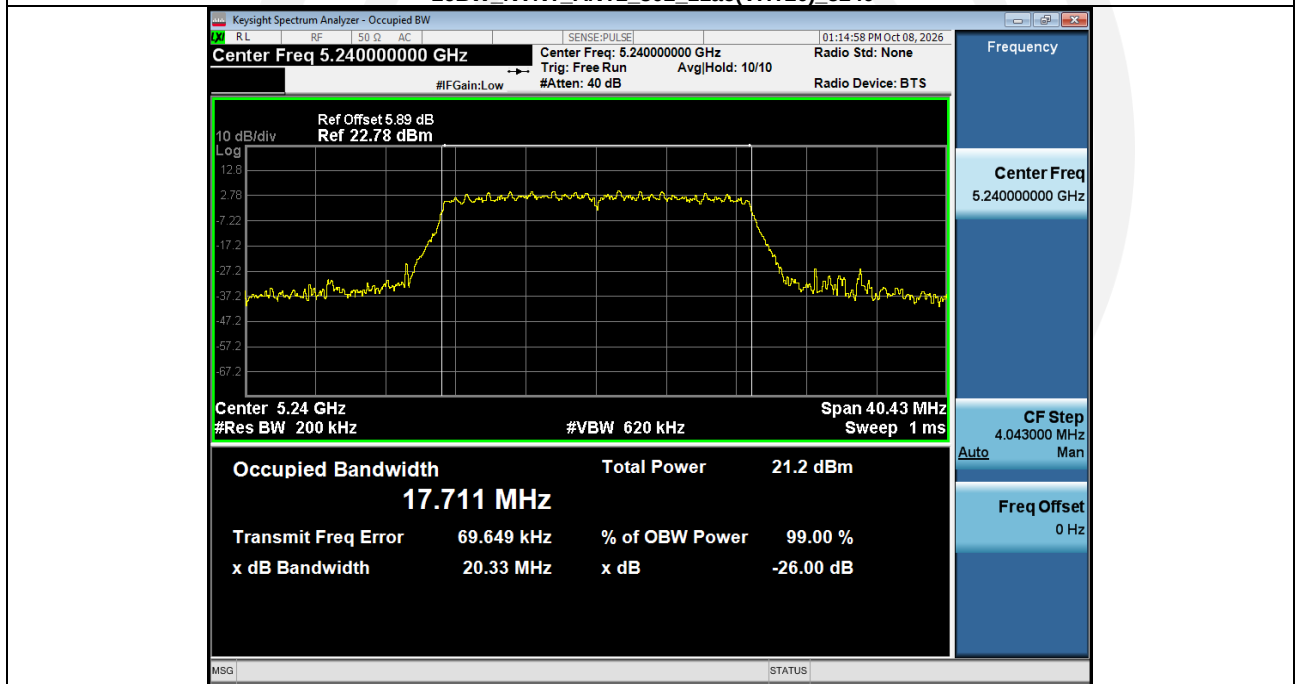


99%_OCB_NVNT_ANT1_802_11n(HT40)_5190

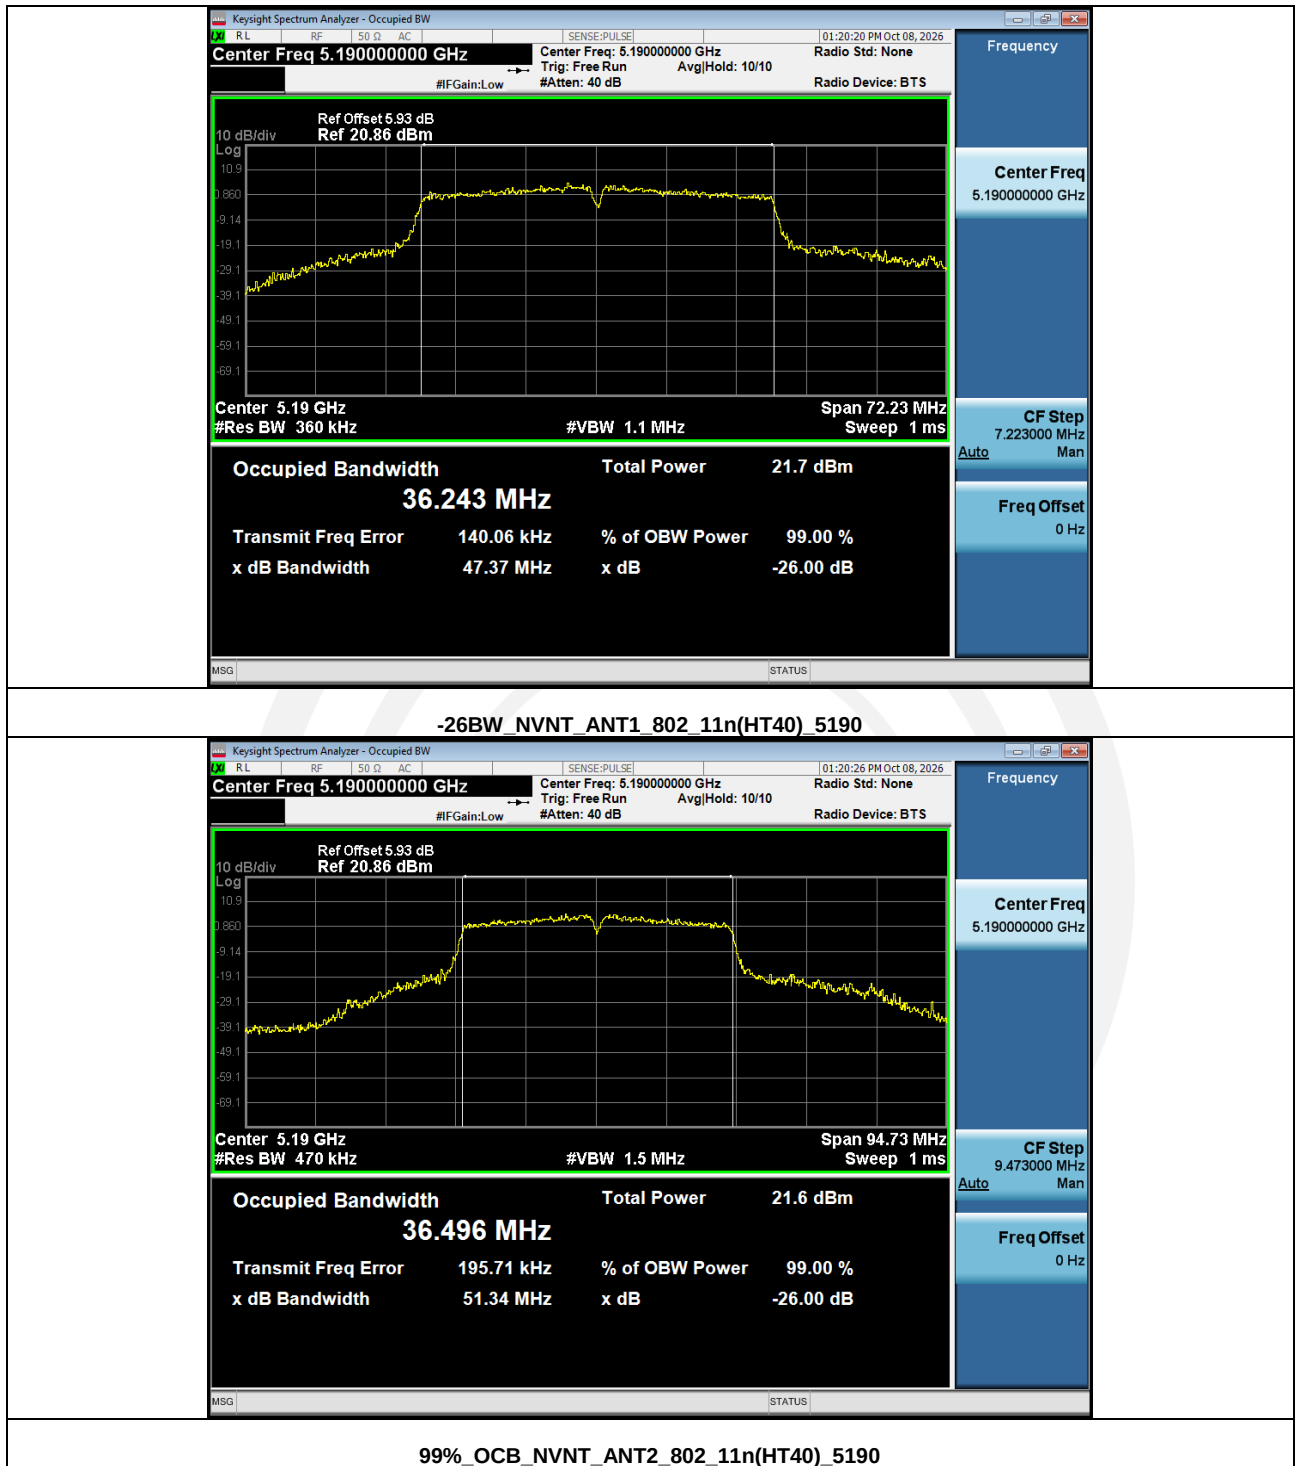


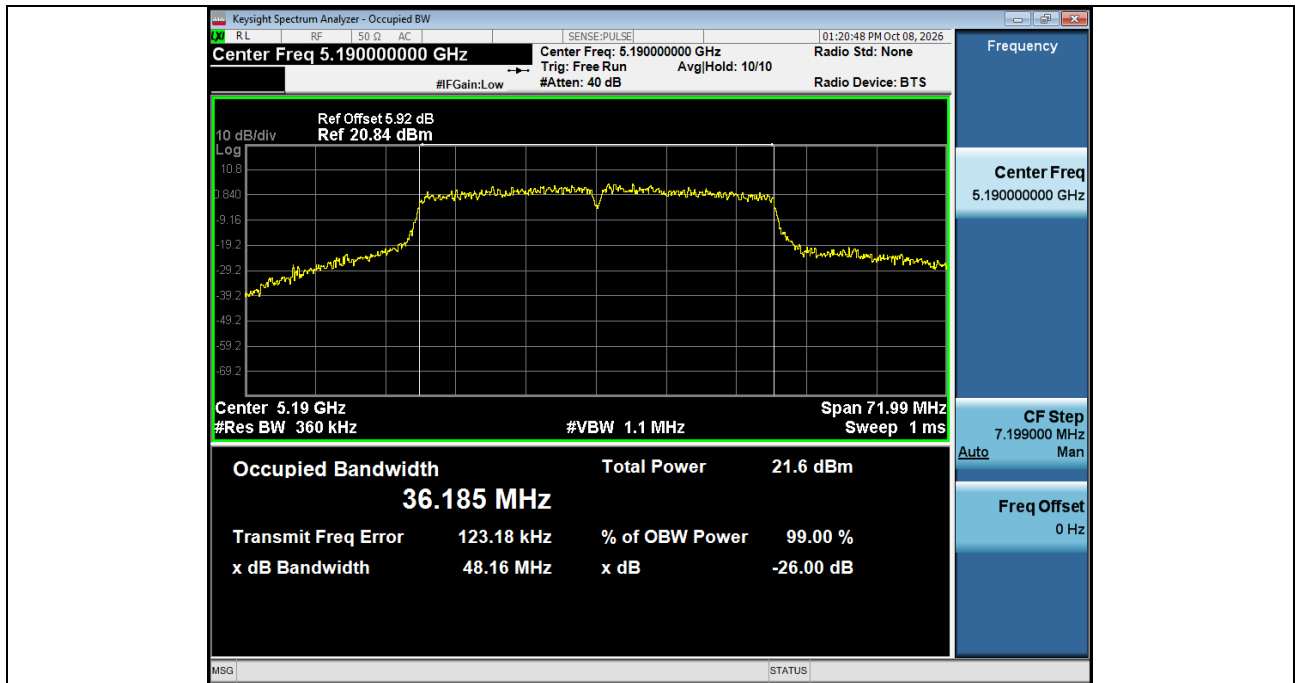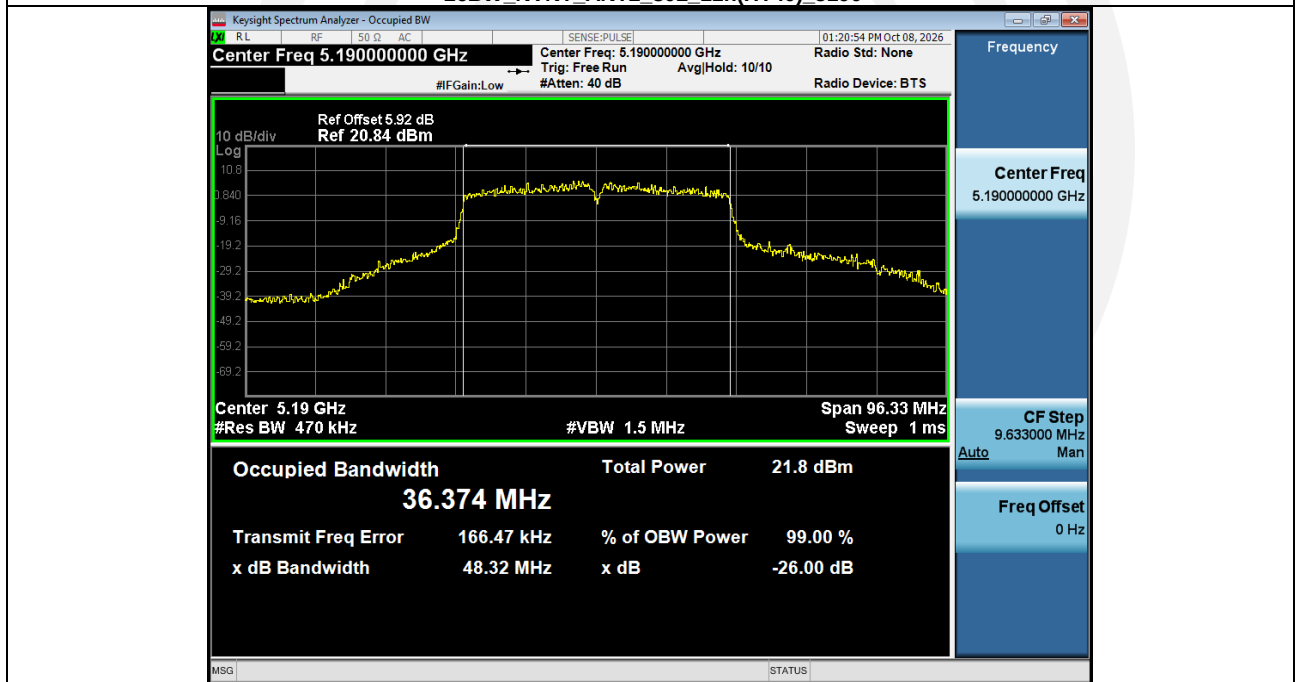**-26BW_NVNT_ANT2_802_11n(HT40)_5190****99%_OCB_NVNT_ANT1_802_11n(HT40)_5230**

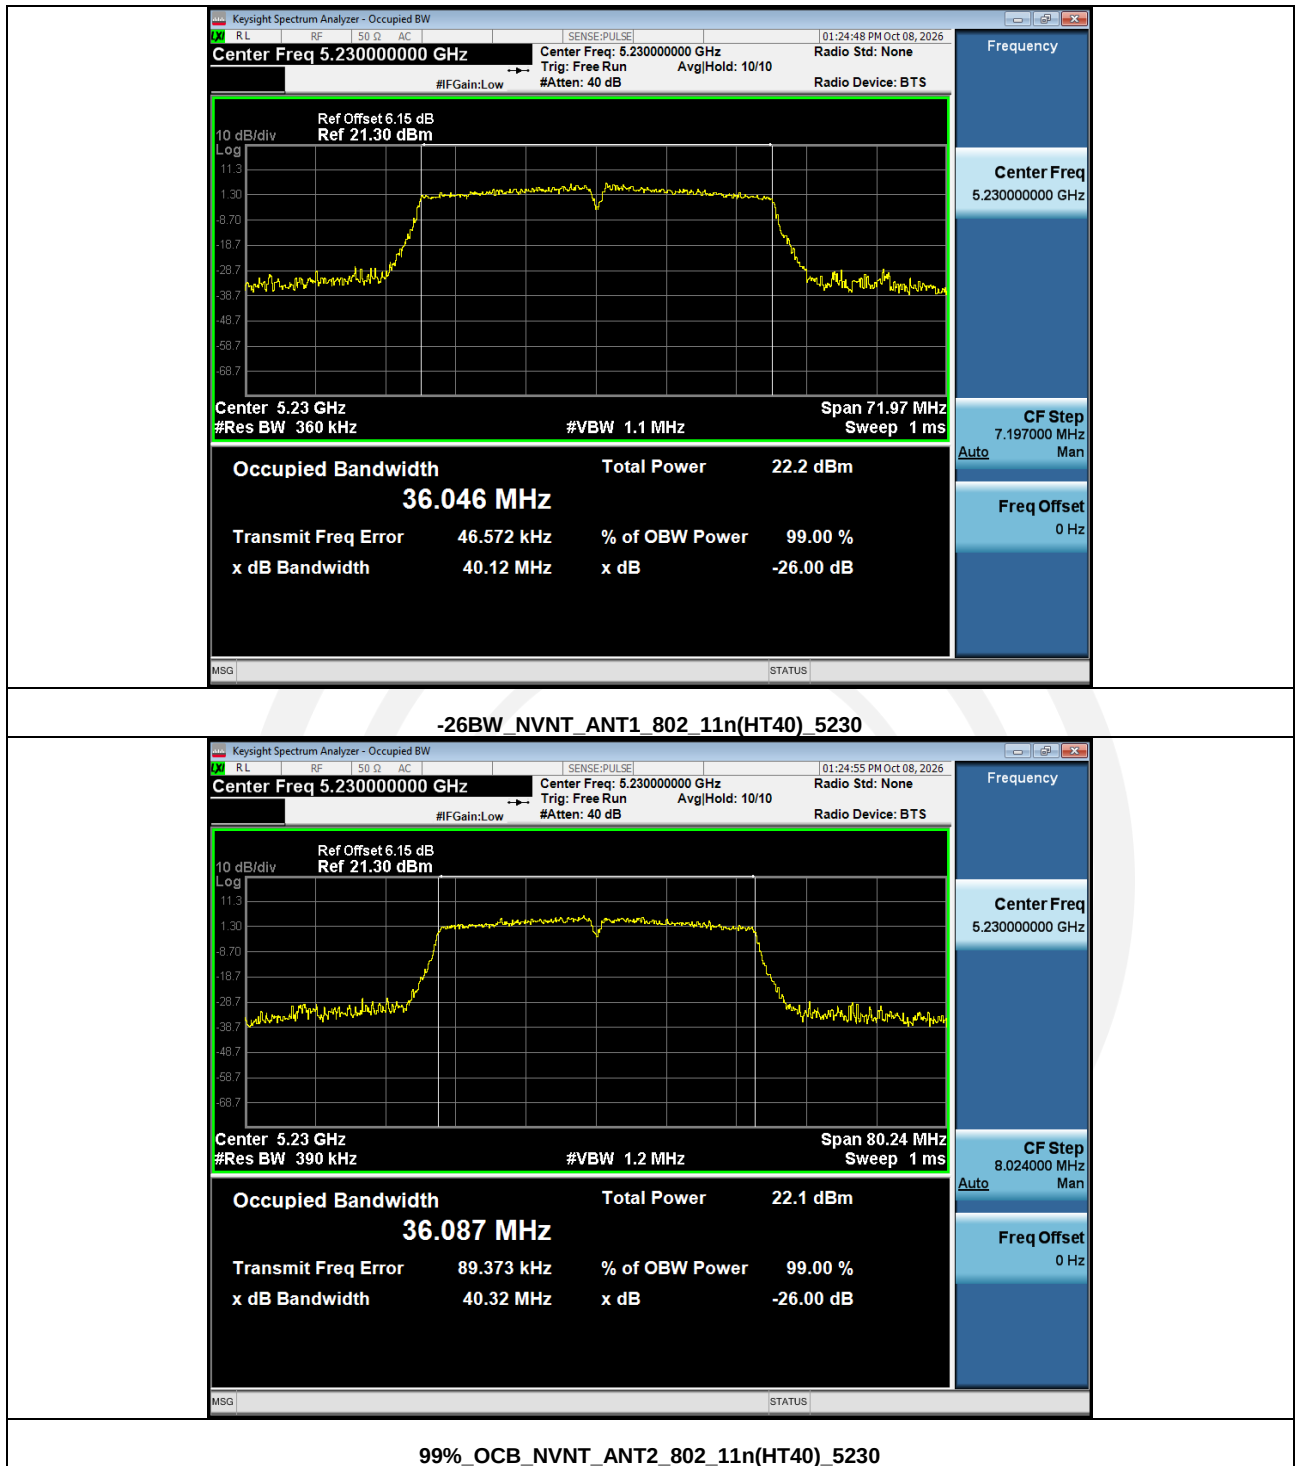


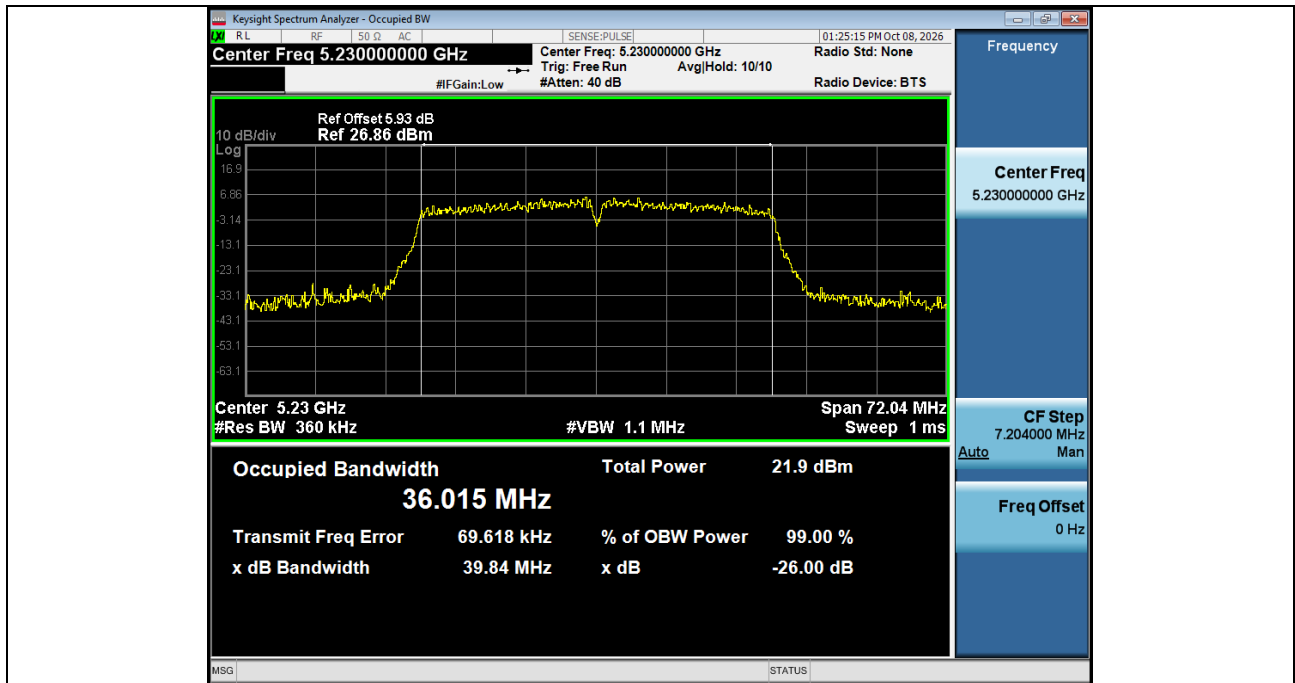


-26BW_NVNT_ANT2_802_11n(HT40)_5230

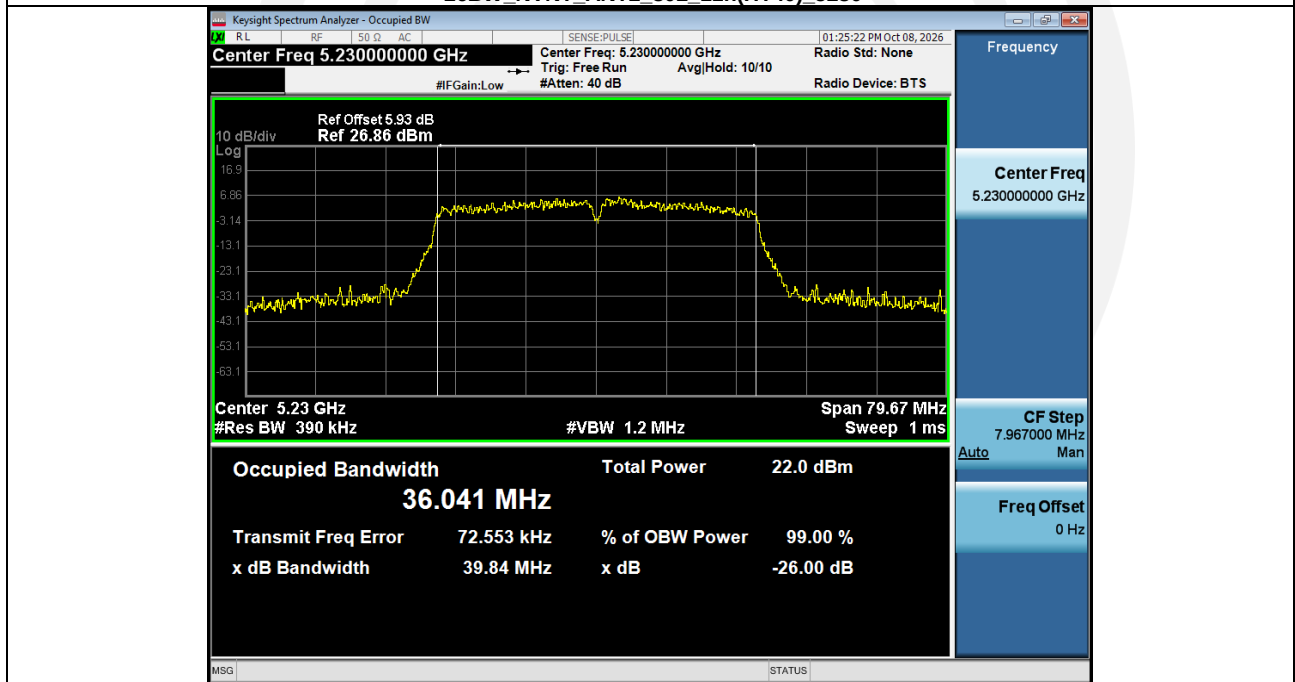

99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5190

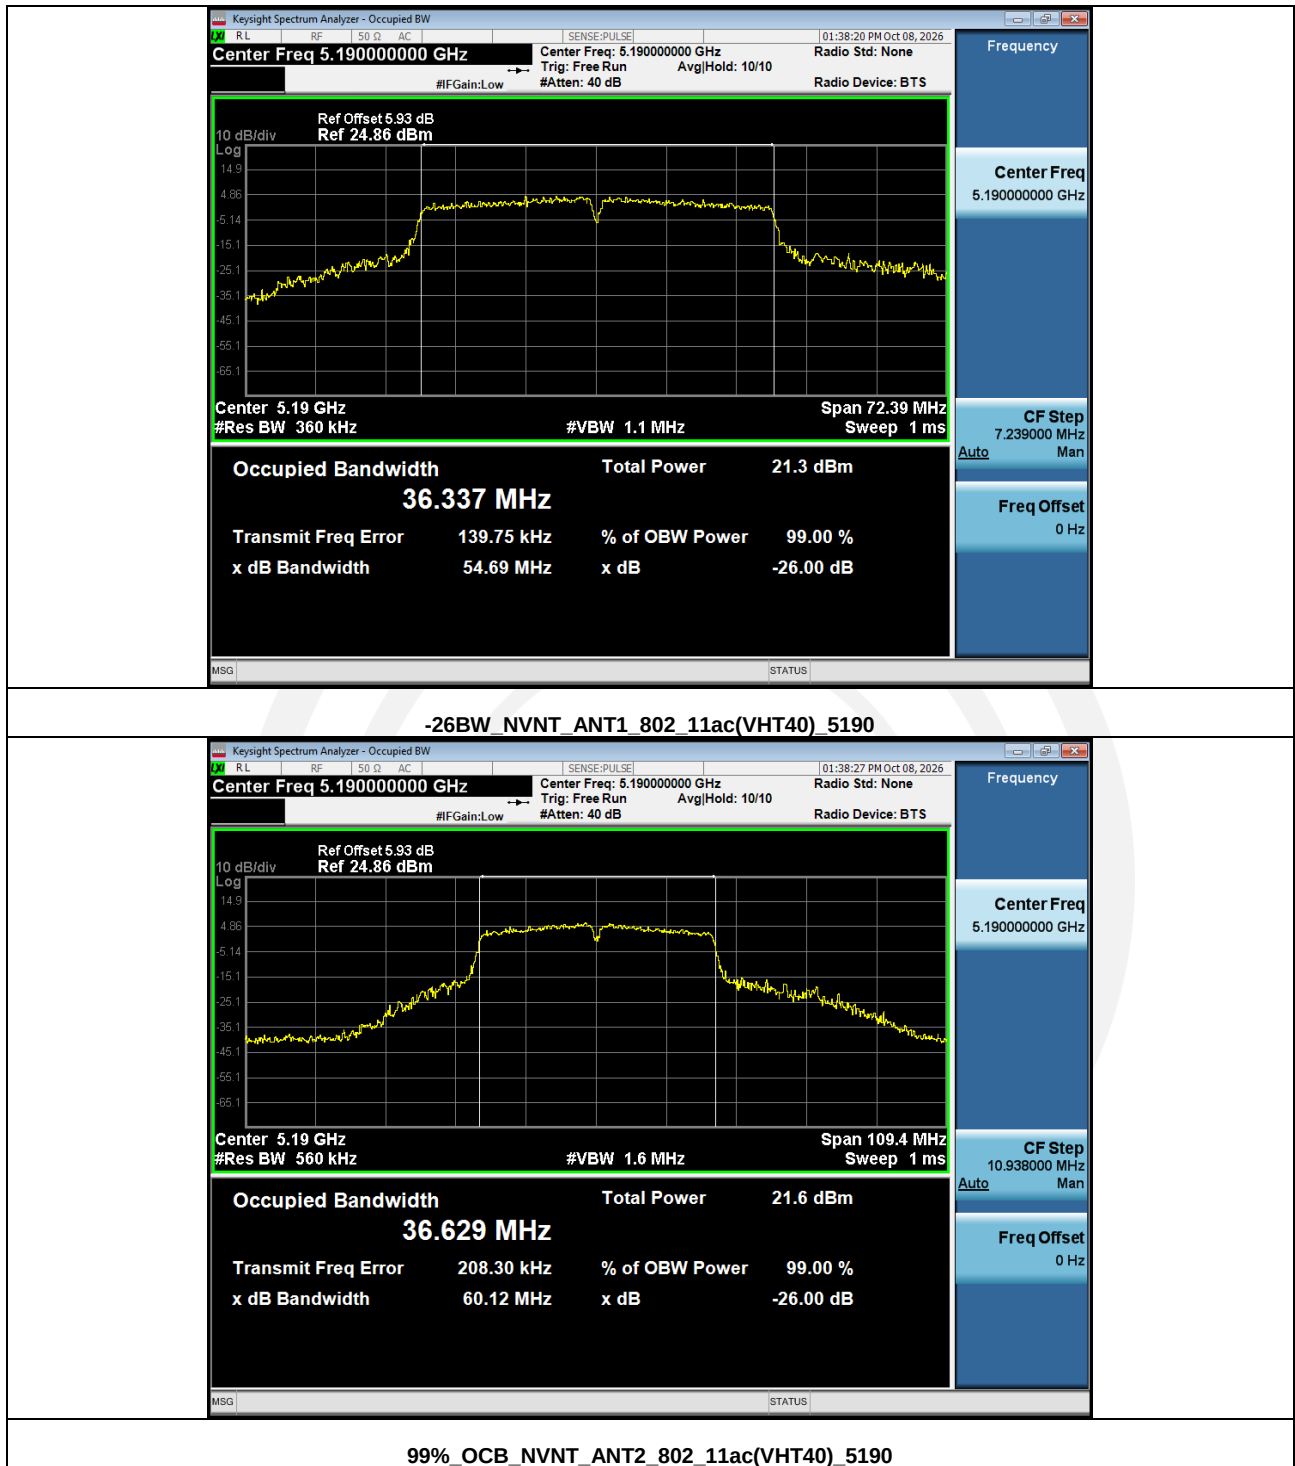


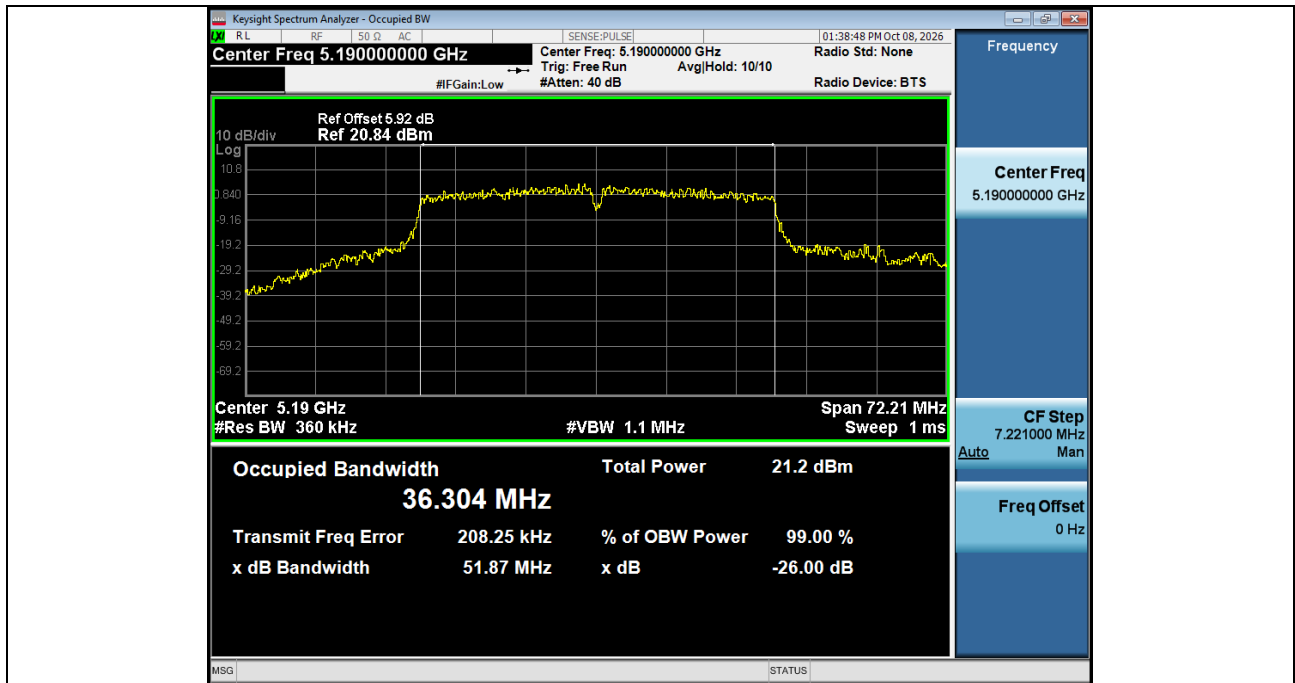


-26BW_NVNT_ANT2_802_11ac(VHT40)_5190




99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5230

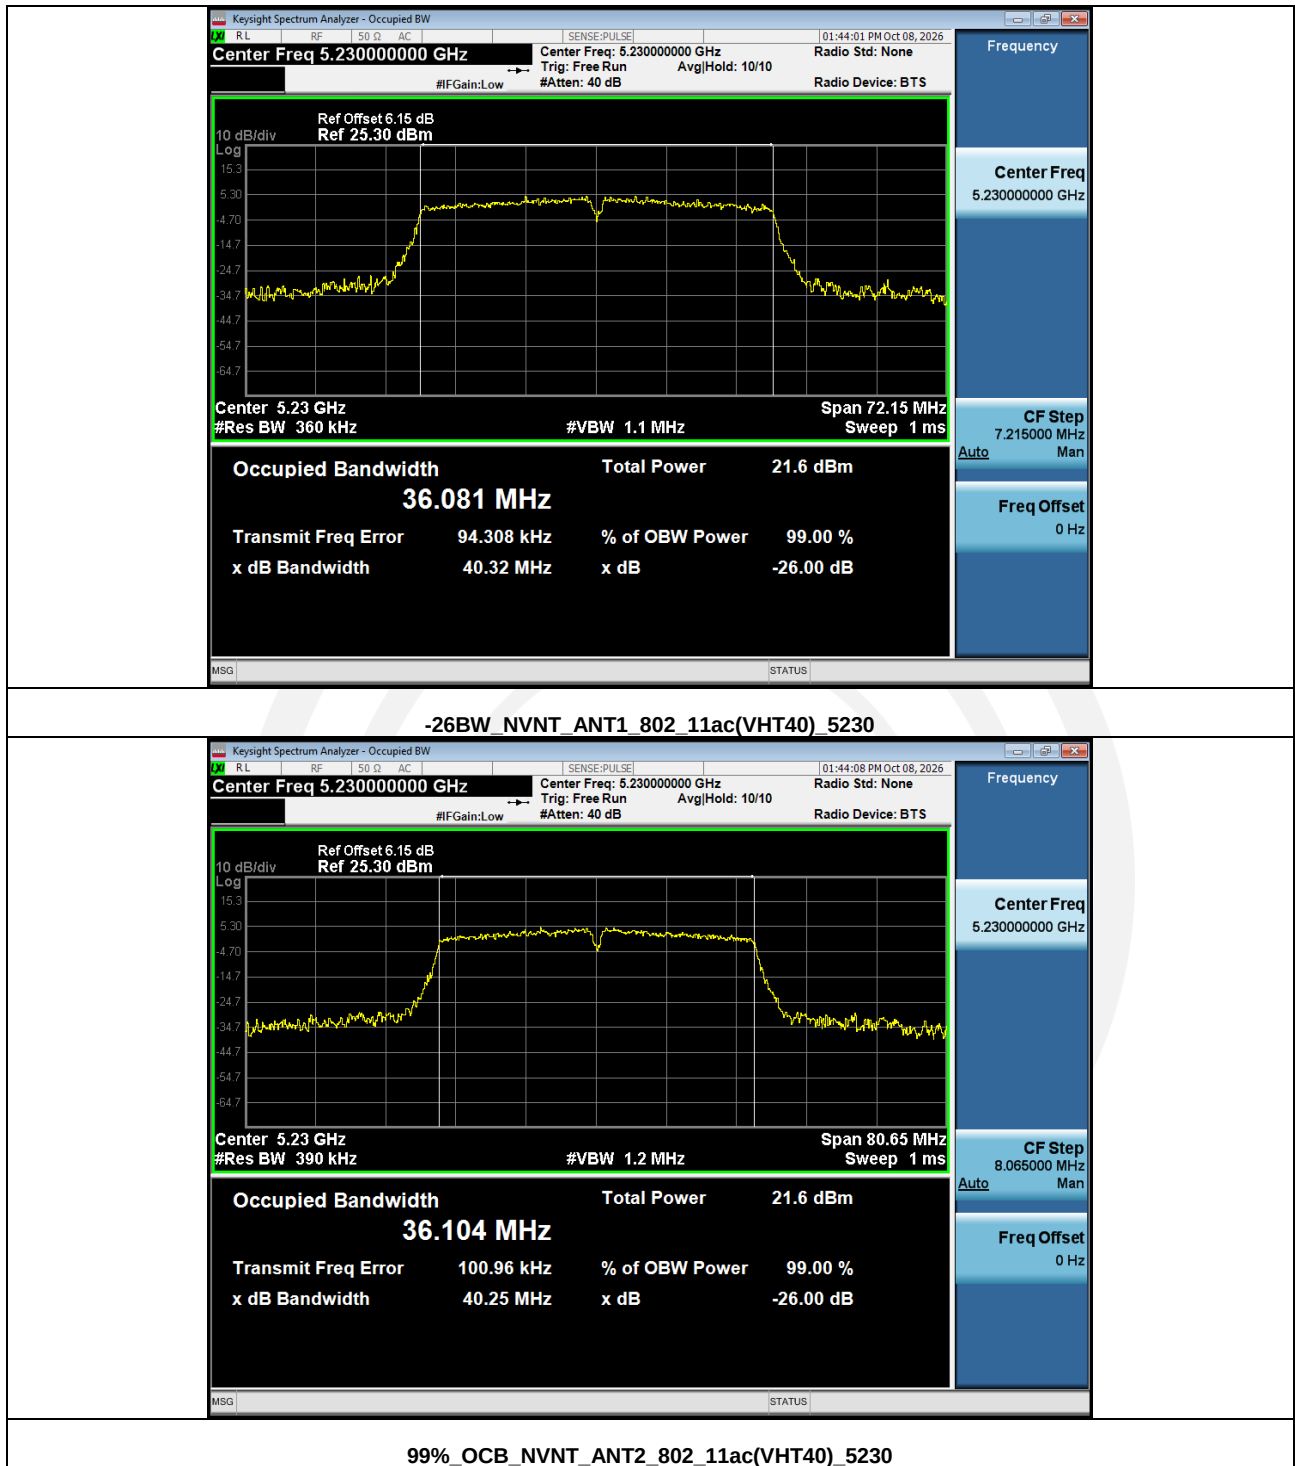


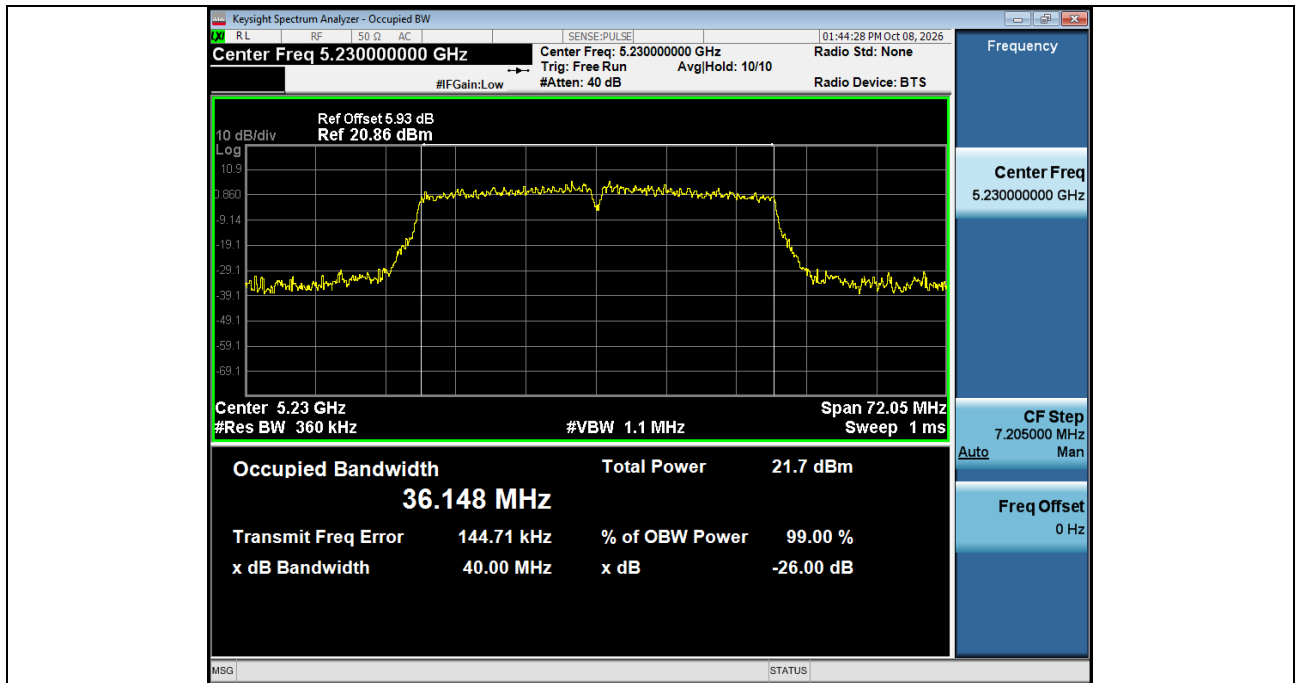


-26BW_NVNT_ANT2_802_11ac(VHT40)_5230

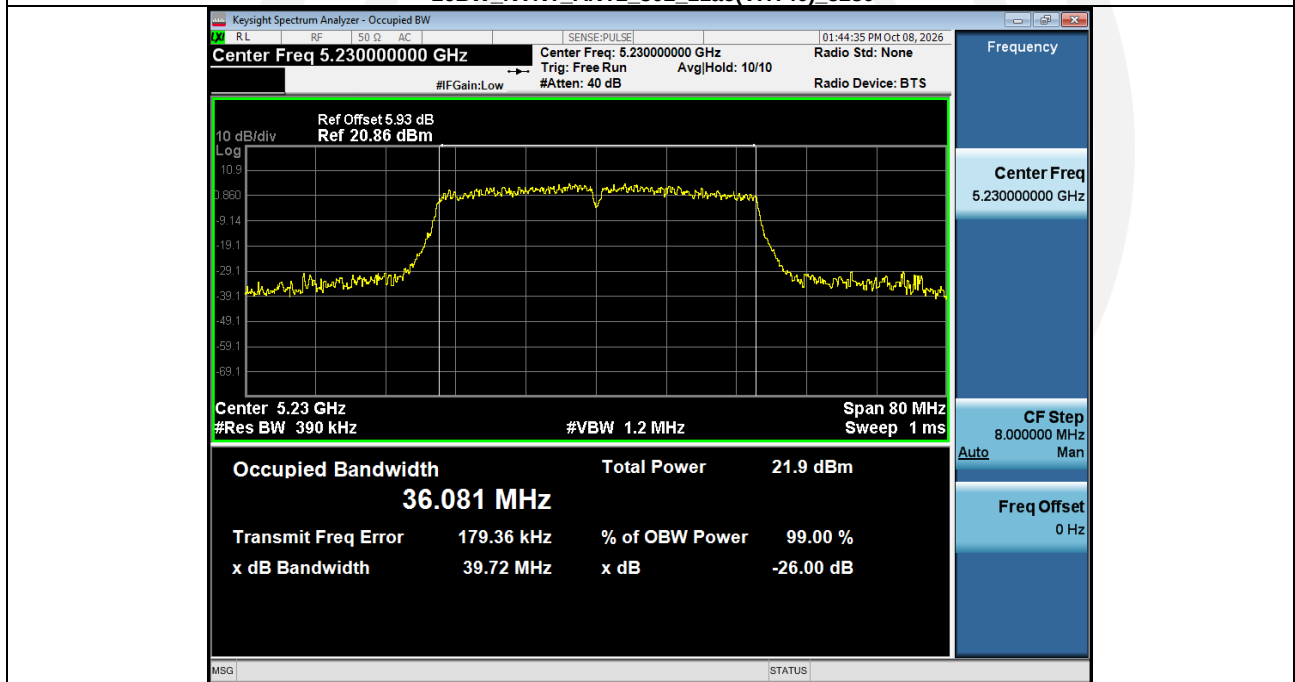



99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5210

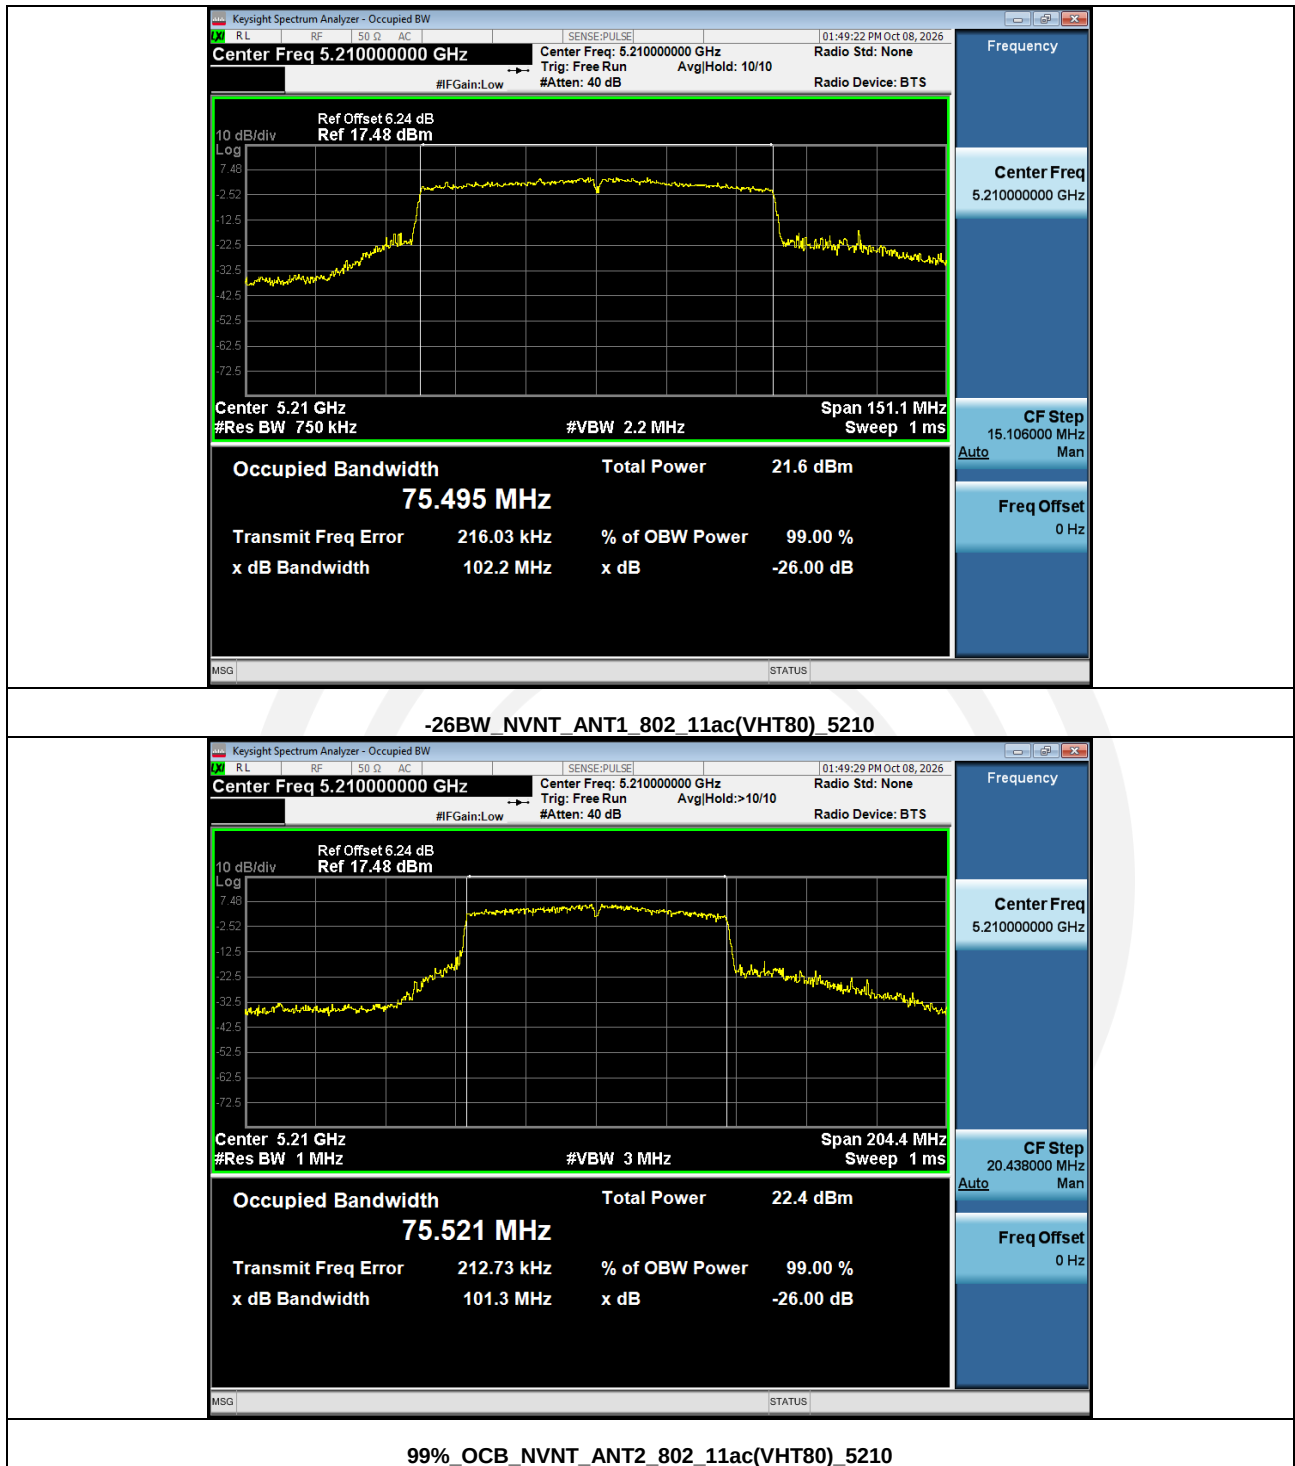


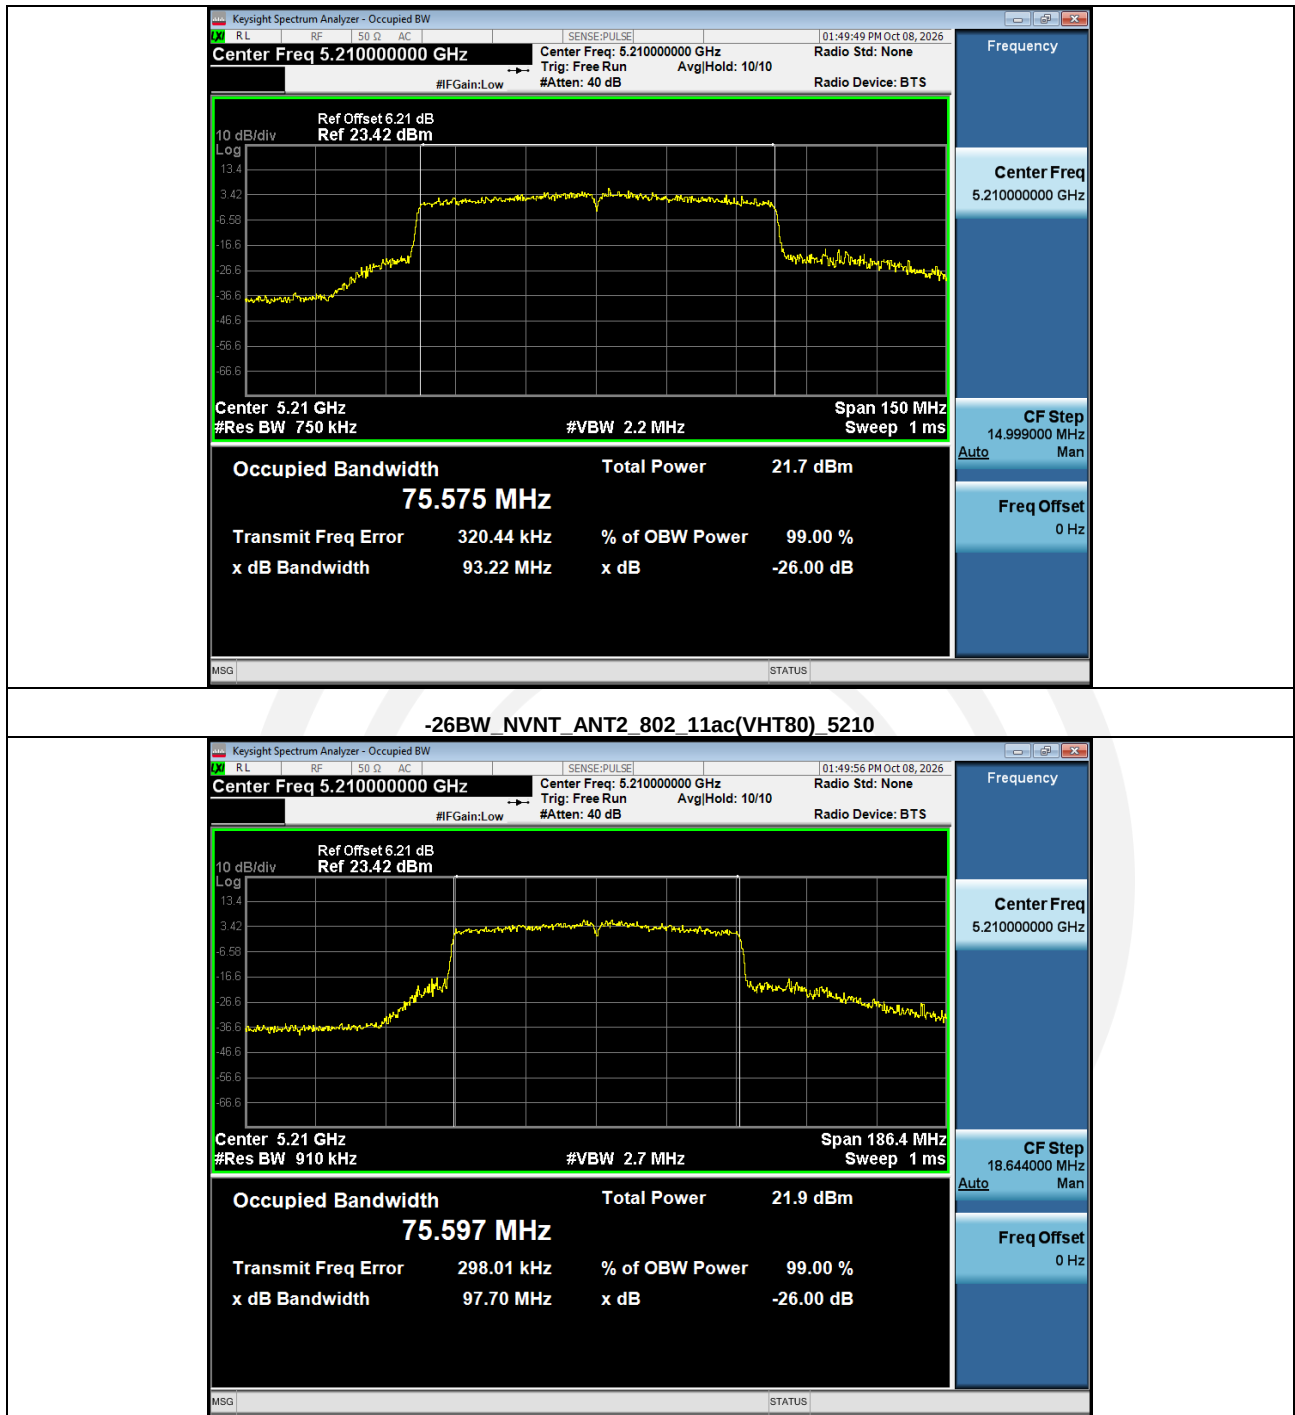


Band 4 (5725-5850 MHz):

Condition	Antenna	Mode	Frequency(MHz)	-6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	16.344	0.500	Pass
NVNT	ANT2	802.11a	5745.00	16.317	0.500	Pass
NVNT	ANT1	802.11a	5785.00	16.342	0.500	Pass
NVNT	ANT2	802.11a	5785.00	16.343	0.500	Pass
NVNT	ANT1	802.11a	5825.00	16.337	0.500	Pass
NVNT	ANT2	802.11a	5825.00	16.082	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	17.352	0.500	Pass
NVNT	ANT2	802.11n(HT20)	5745.00	17.606	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	17.540	0.500	Pass
NVNT	ANT2	802.11n(HT20)	5785.00	17.583	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	16.947	0.500	Pass
NVNT	ANT2	802.11n(HT20)	5825.00	17.588	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	16.981	0.500	Pass
NVNT	ANT2	802.11ac(VHT20)	5745.00	17.557	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	17.057	0.500	Pass
NVNT	ANT2	802.11ac(VHT20)	5785.00	17.593	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	17.407	0.500	Pass
NVNT	ANT2	802.11ac(VHT20)	5825.00	17.177	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	35.136	0.500	Pass
NVNT	ANT2	802.11n(HT40)	5755.00	35.184	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	35.151	0.500	Pass
NVNT	ANT2	802.11n(HT40)	5795.00	35.134	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	35.185	0.500	Pass
NVNT	ANT2	802.11ac(VHT40)	5755.00	35.175	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	35.154	0.500	Pass
NVNT	ANT2	802.11ac(VHT40)	5795.00	35.171	0.500	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	75.258	0.500	Pass
NVNT	ANT2	802.11ac(VHT80)	5775.00	75.181	0.500	Pass

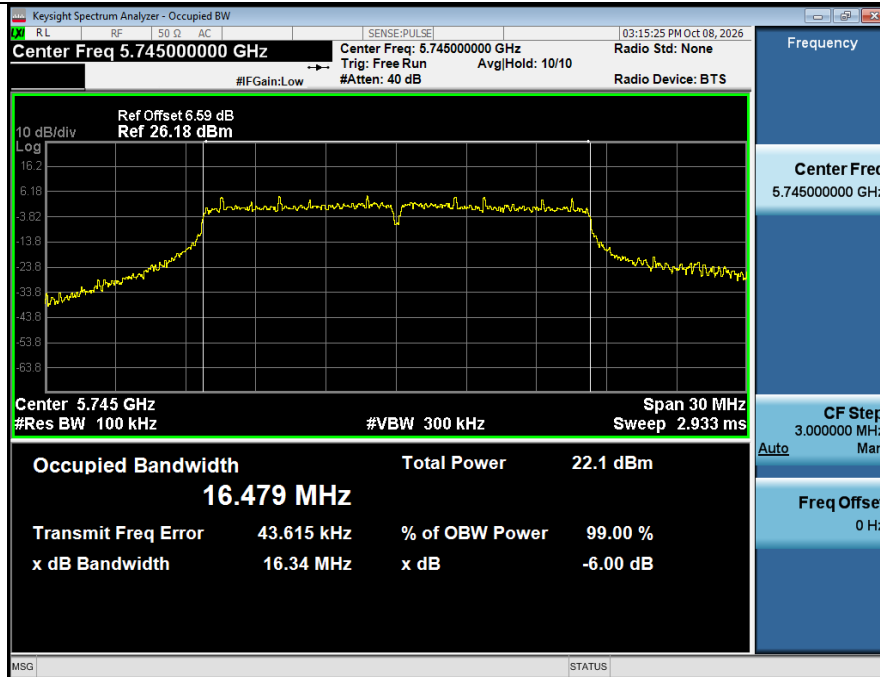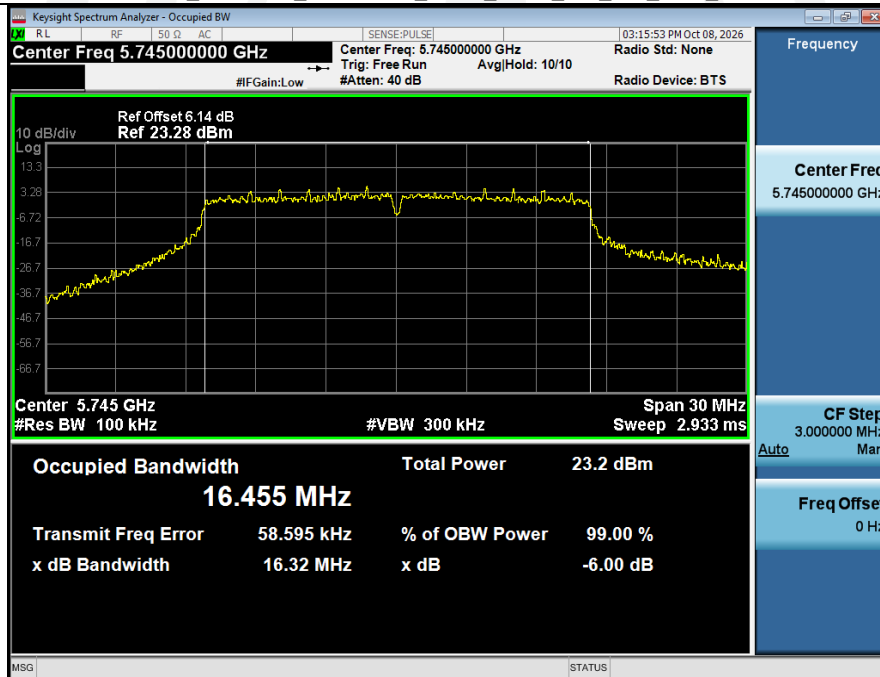-6dB Emission Bandwidth_NVNT_ANT1_802_11a_5745_20M**-6dB Emission Bandwidth_NVNT_ANT2_802_11a_5745_20M****-6dB Emission Bandwidth_NVNT_ANT1_802_11a_5785_20M**

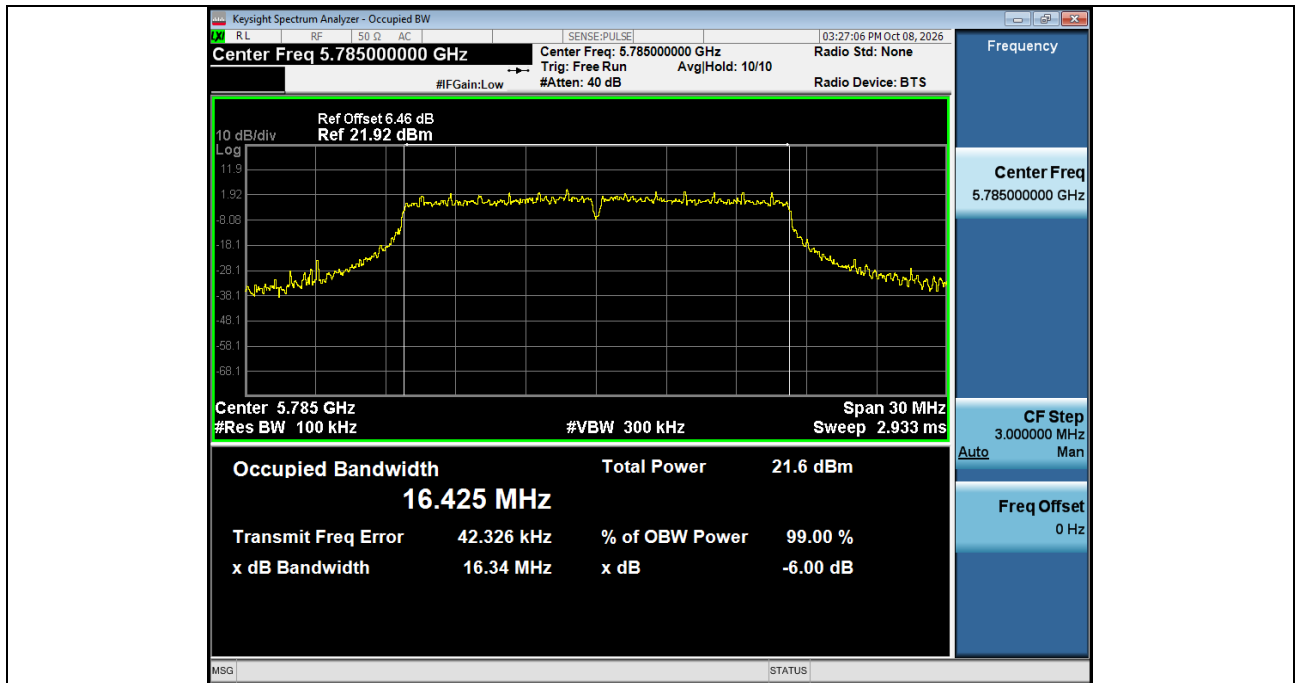


-6dB Emission Bandwidth_NVNT_ANT2_802_11a_5785_20M

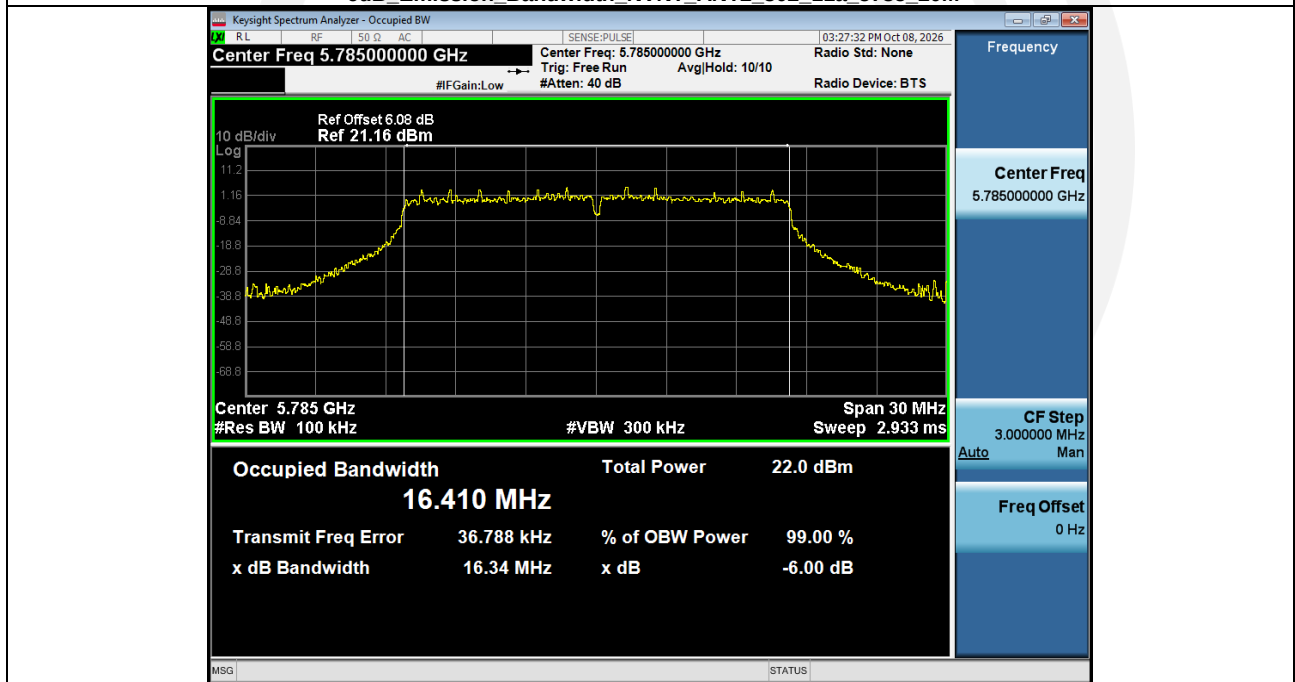


-6dB Emission Bandwidth_NVNT_ANT1_802_11a_5825_20M




-6dB Emission Bandwidth_NVNT_ANT2_802_11a_5825_20M

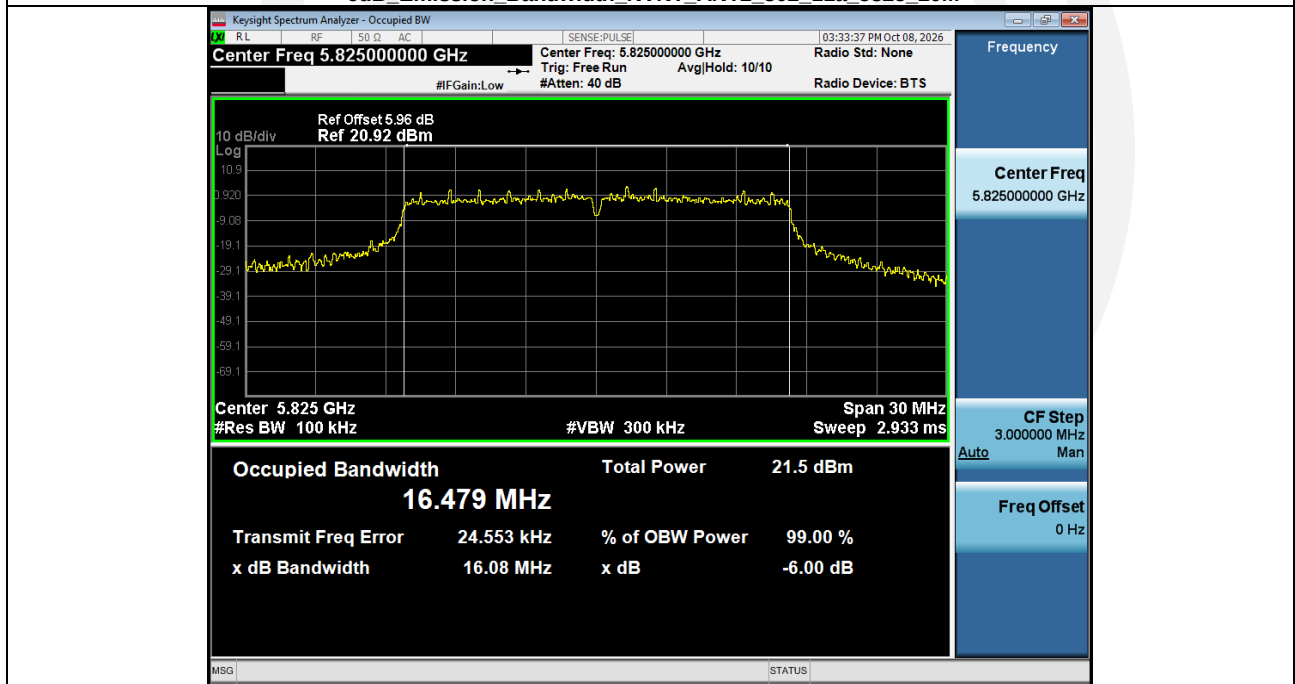


-6dB Emission Bandwidth_NVNT_ANT1_802_11n(HT20)_5745_20M

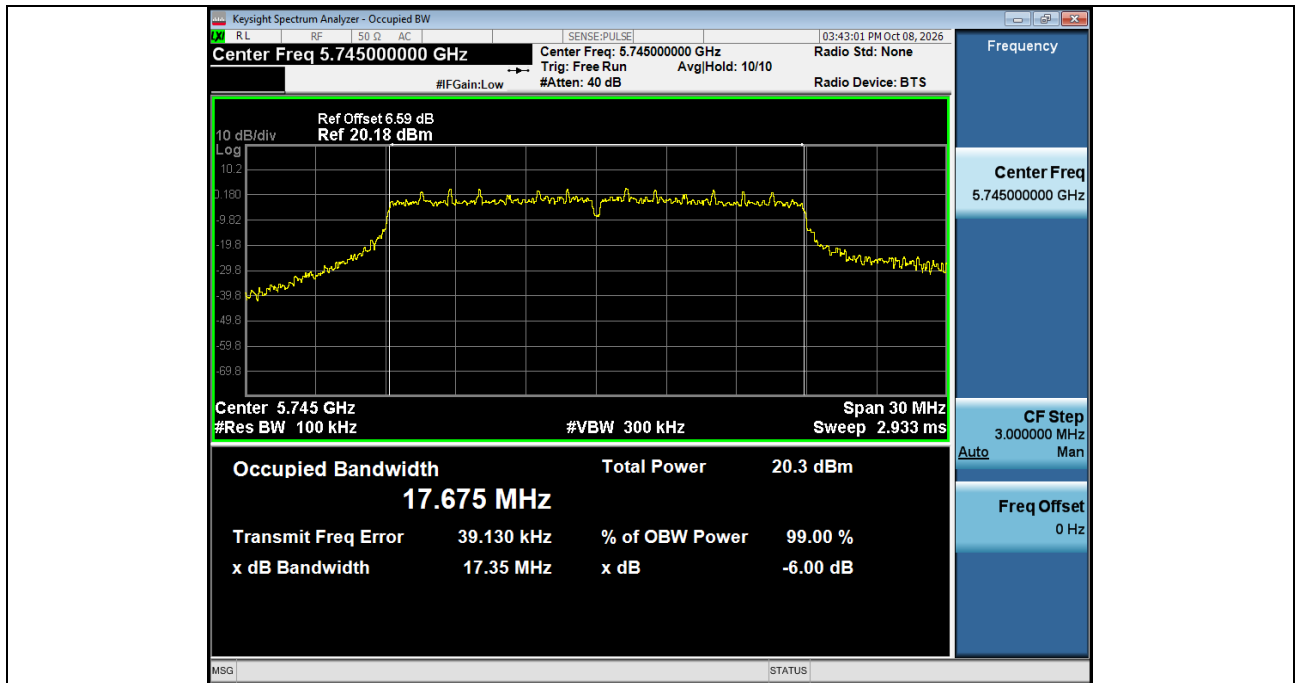


-6dB_Emission_Bandwidth_NVNT_ANT2_802_11n(HT20)_5745_20M

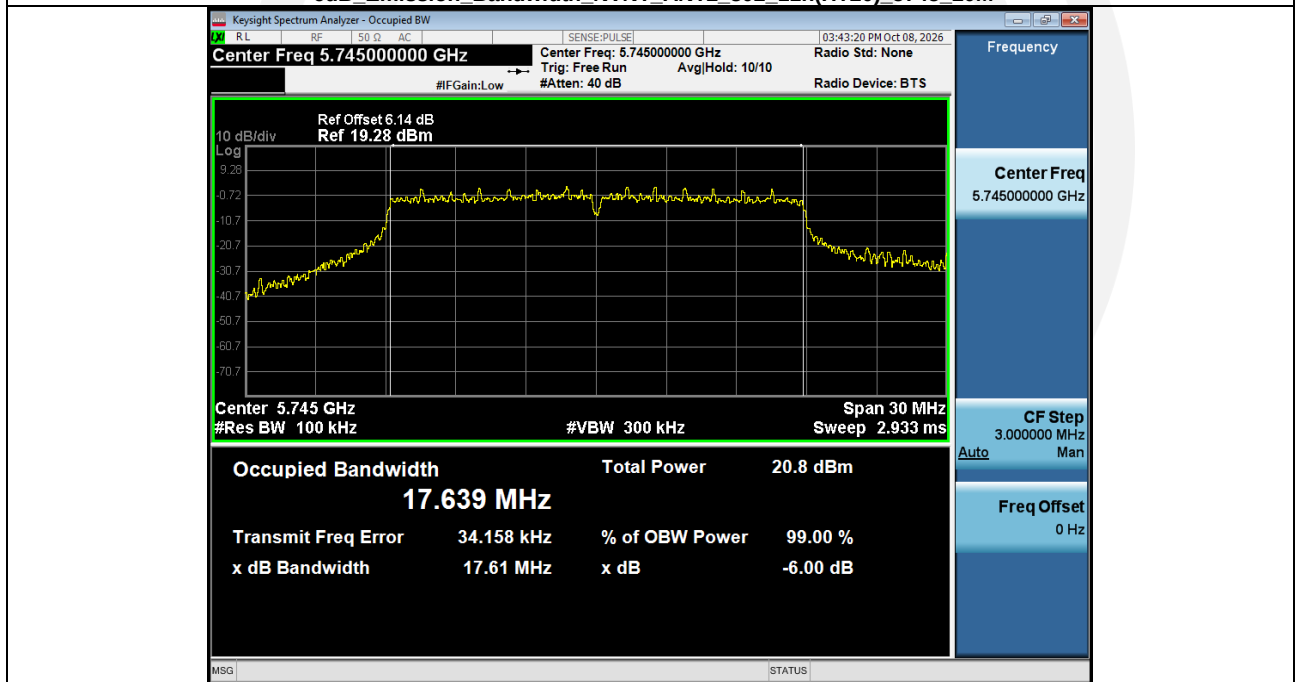


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT20)_5785_20M

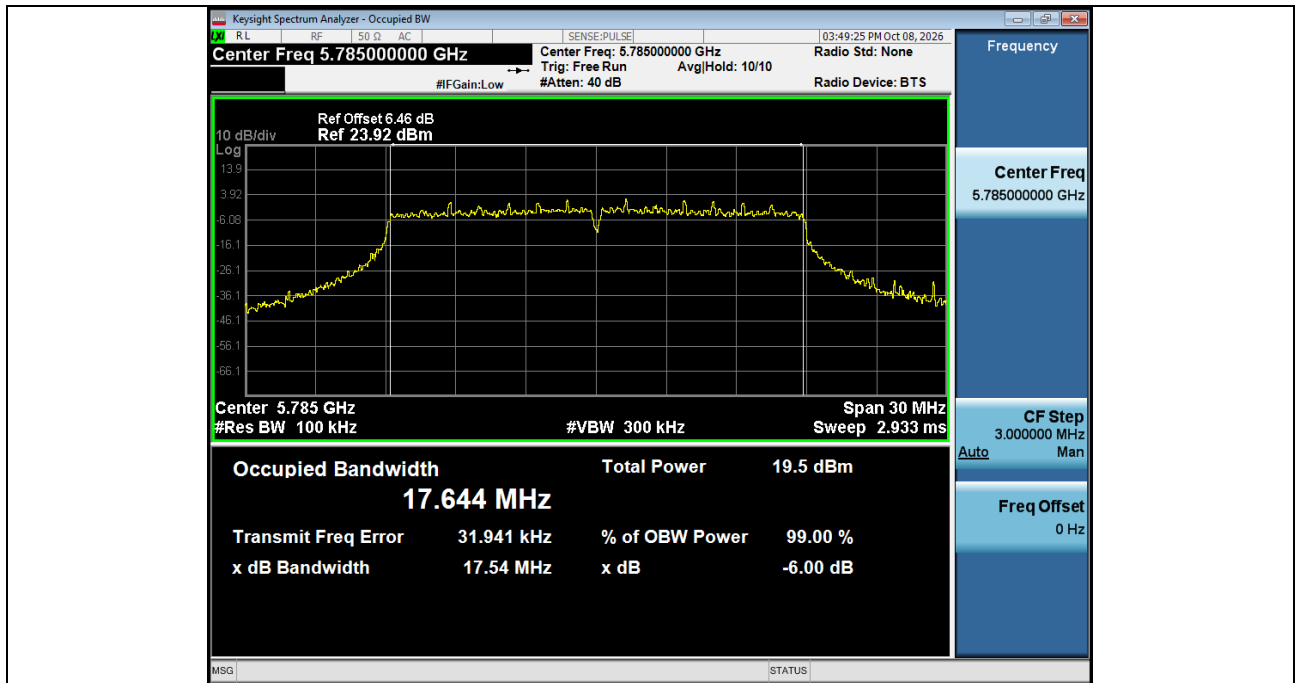


-6dB_Emission_Bandwidth_NVNT_ANT2_802_11n(HT20)_5785_20M

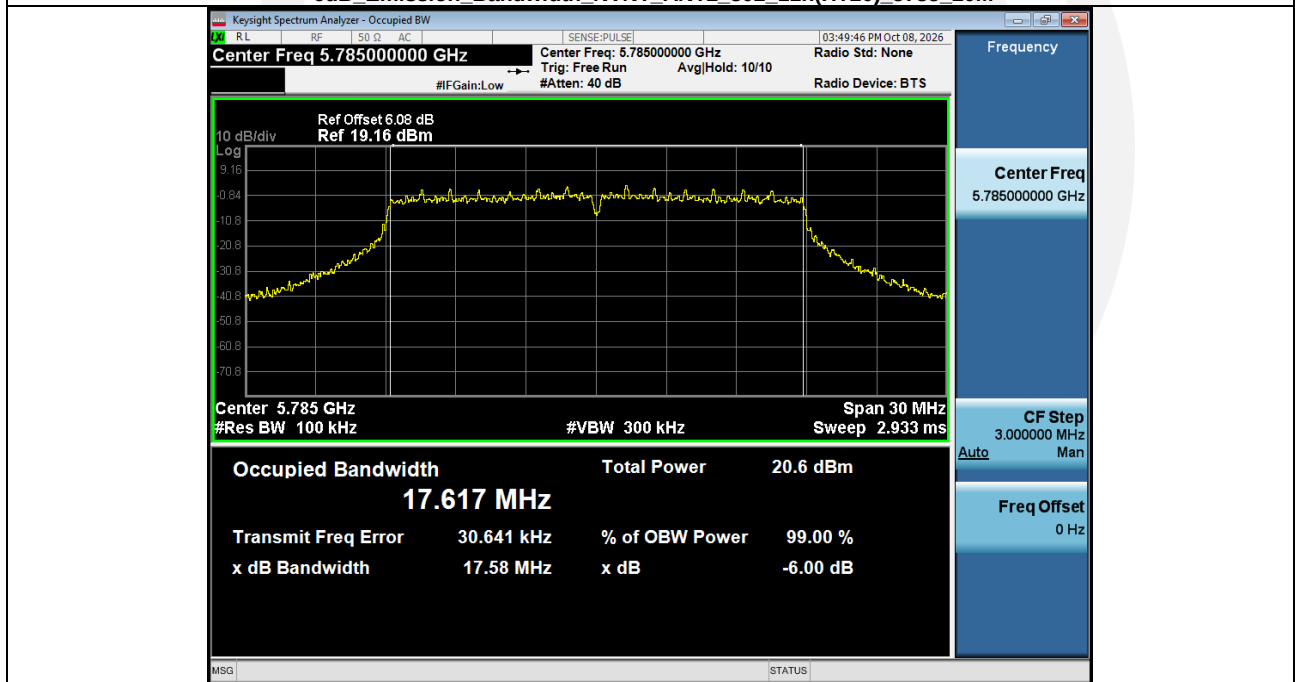


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT20)_5825_20M

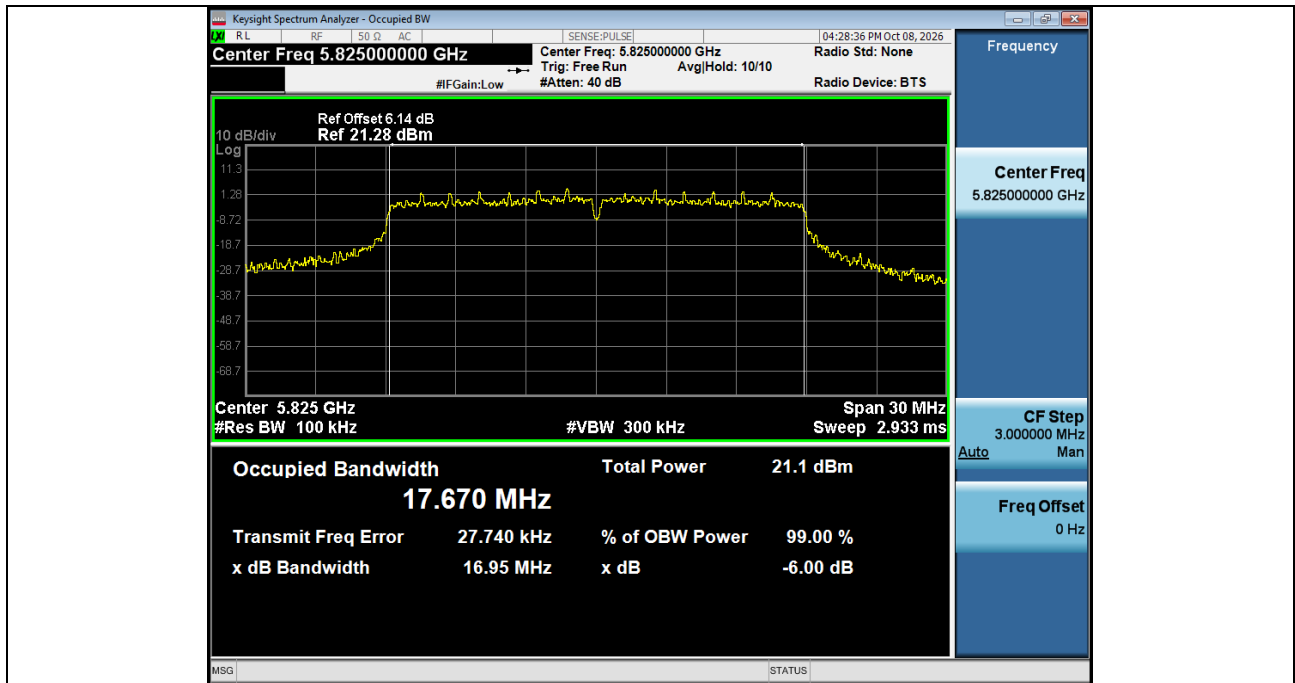


-6dB Emission Bandwidth NVNT ANT2 802_11n(HT20) 5825_20M

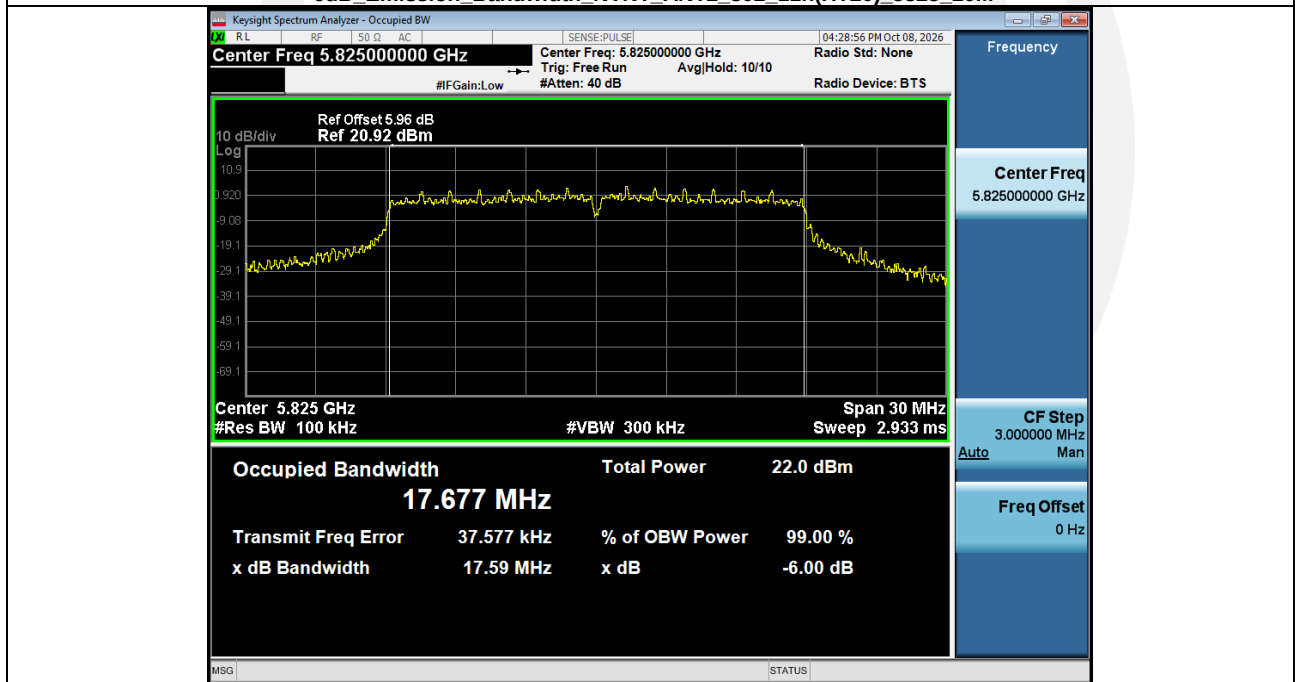


-6dB Emission Bandwidth NVNT ANT1 802_11ac(VHT20) 5745_20M

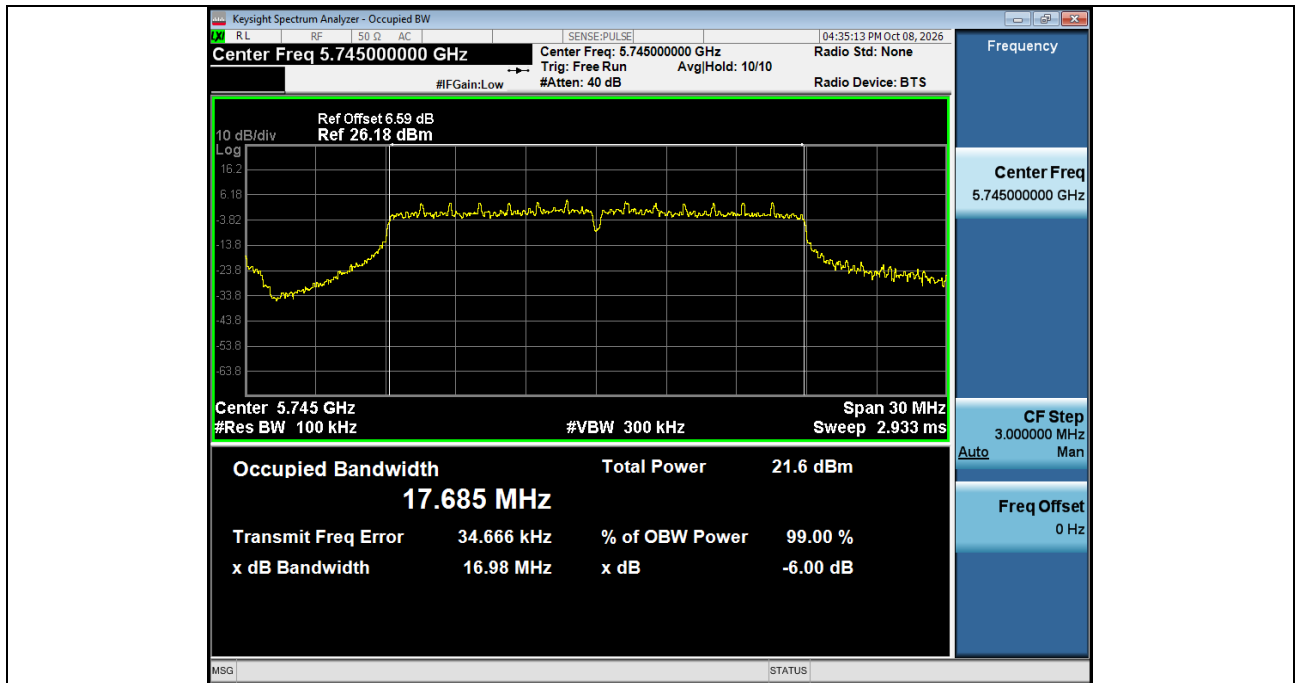


-6dB Emission Bandwidth_NVNT_ANT2_802_11ac(VHT20)_5745_20M

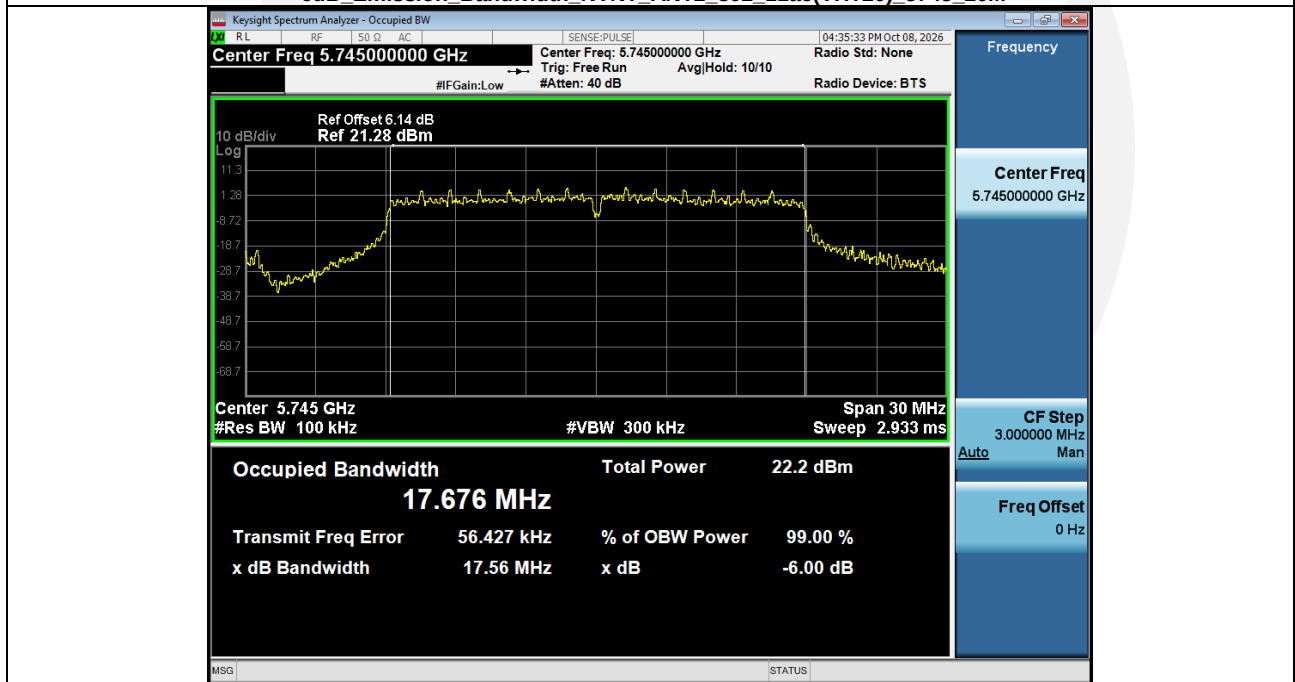


-6dB Emission Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5785_20M

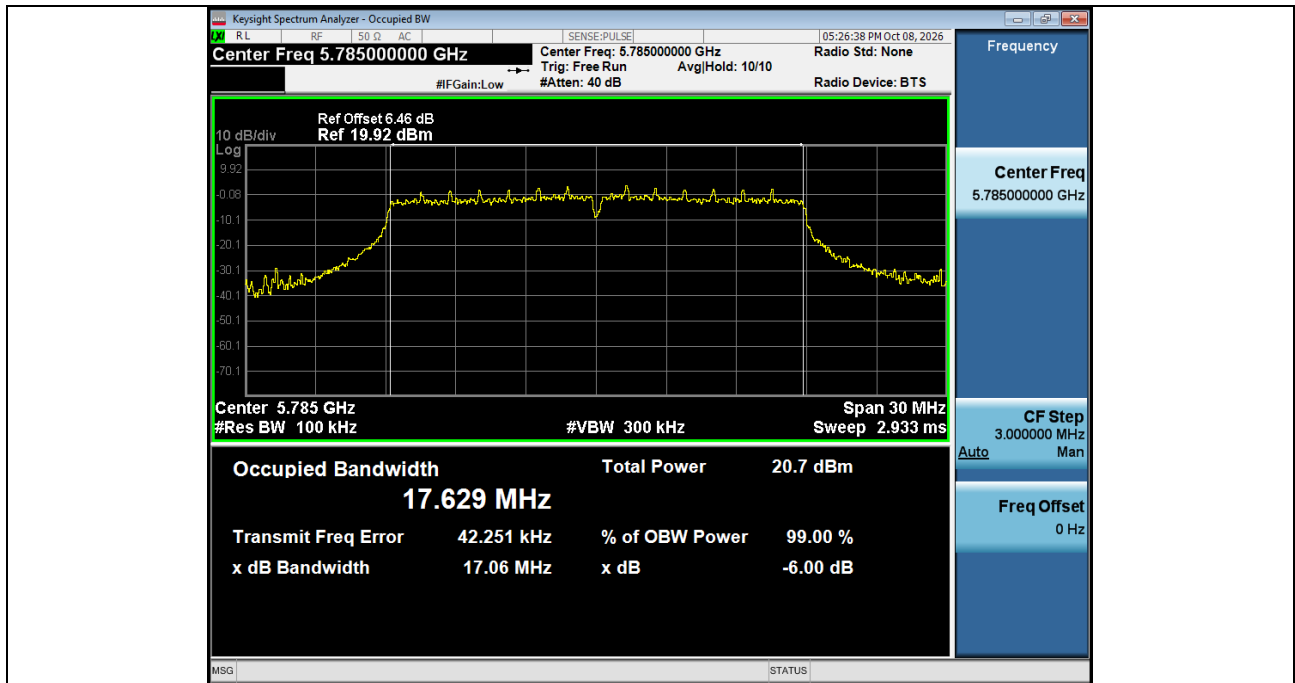


-6dB Emission Bandwidth_NVNT_ANT2_802_11ac(VHT20)_5785_20M

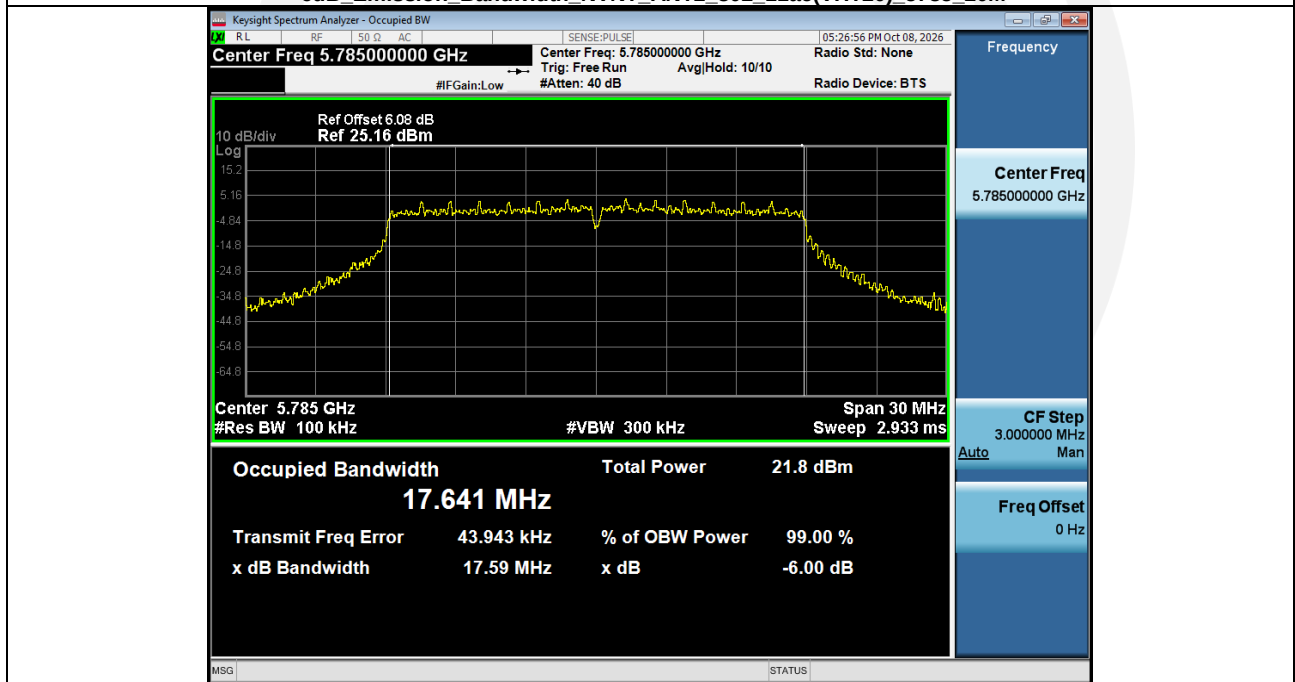


-6dB Emission Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5825_20M

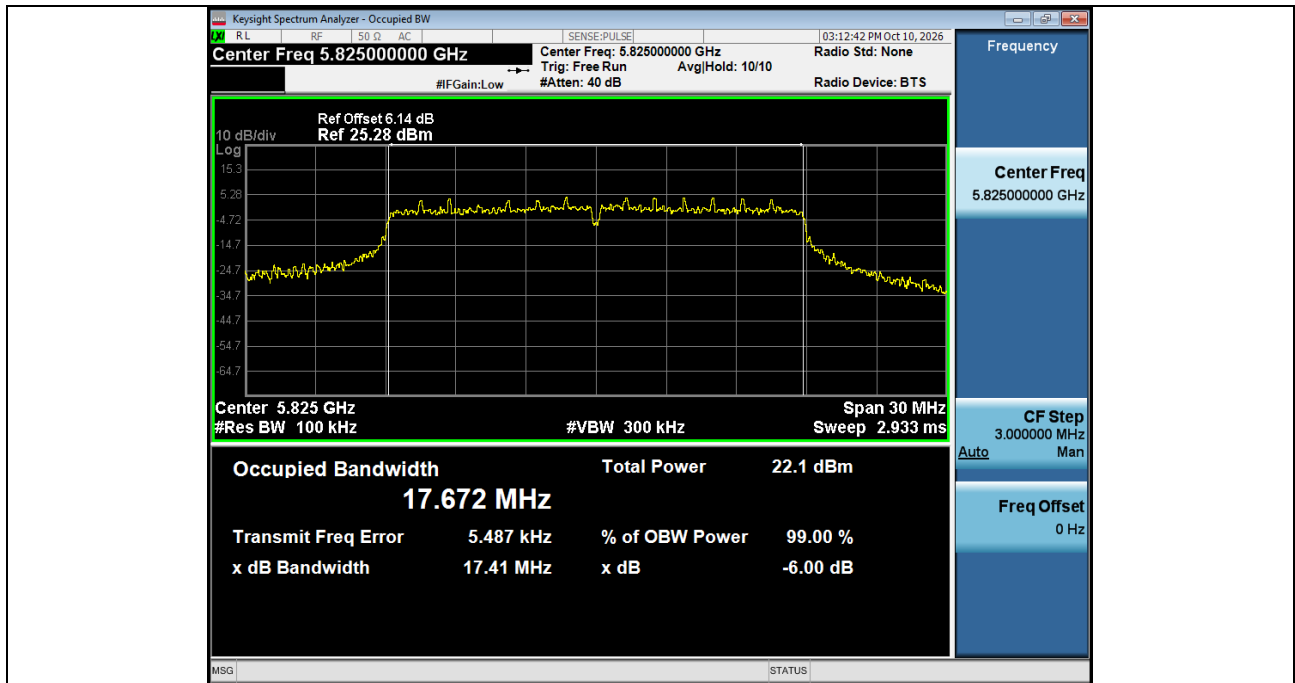


-6dB Emission Bandwidth_NVNT_ANT2_802_11ac(VHT20)_5825_20M

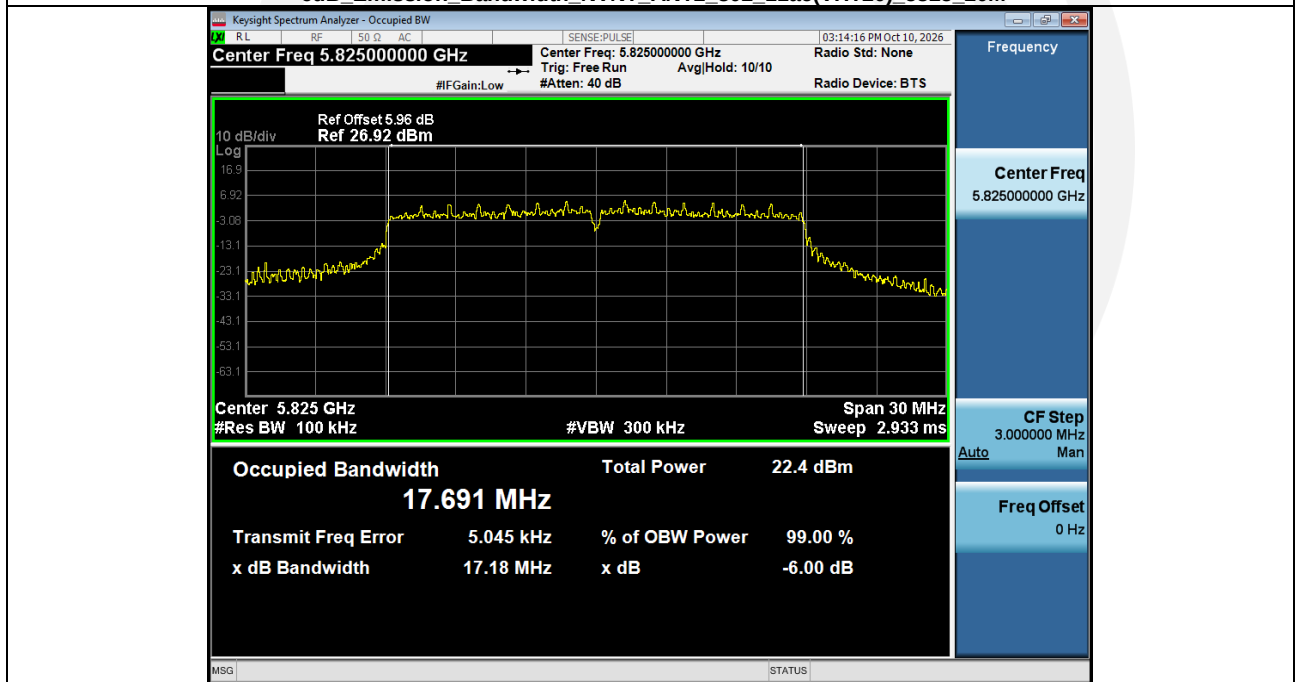


-6dB Emission Bandwidth_NVNT_ANT1_802_11n(HT40)_5755_40M

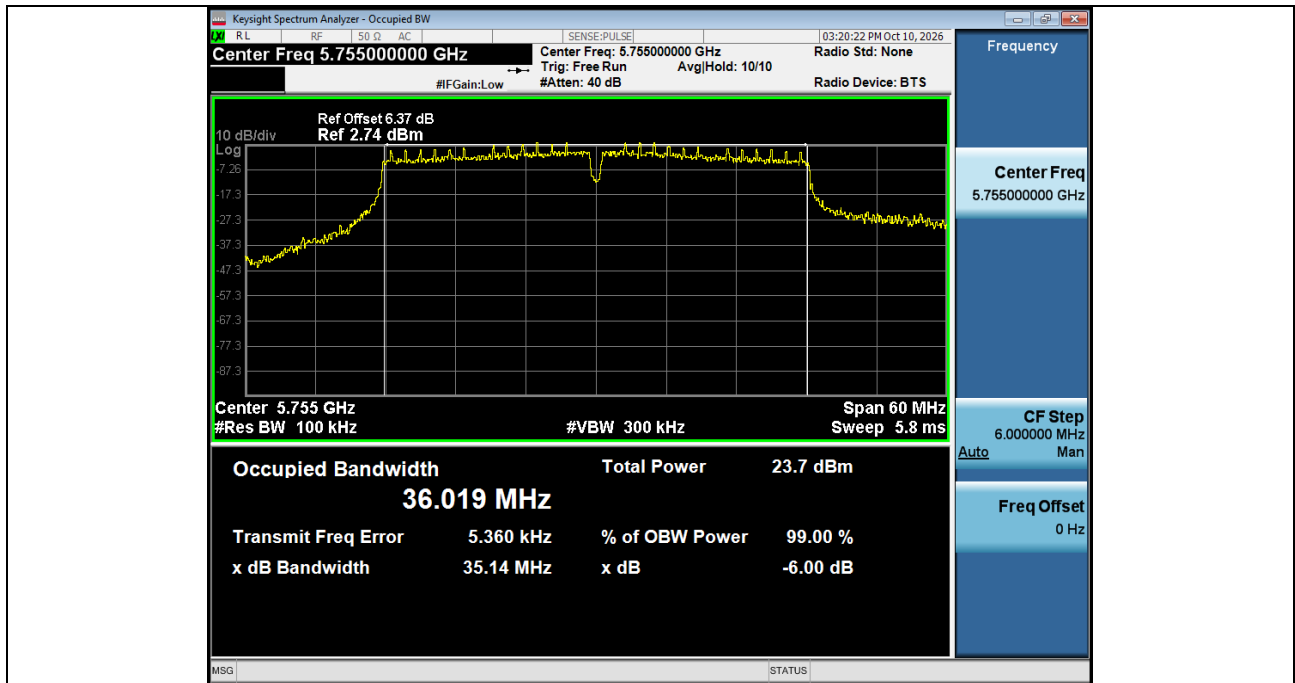


-6dB_Emission_Bandwidth_NVNT_ANT2_802_11n(HT40)_5755_40M

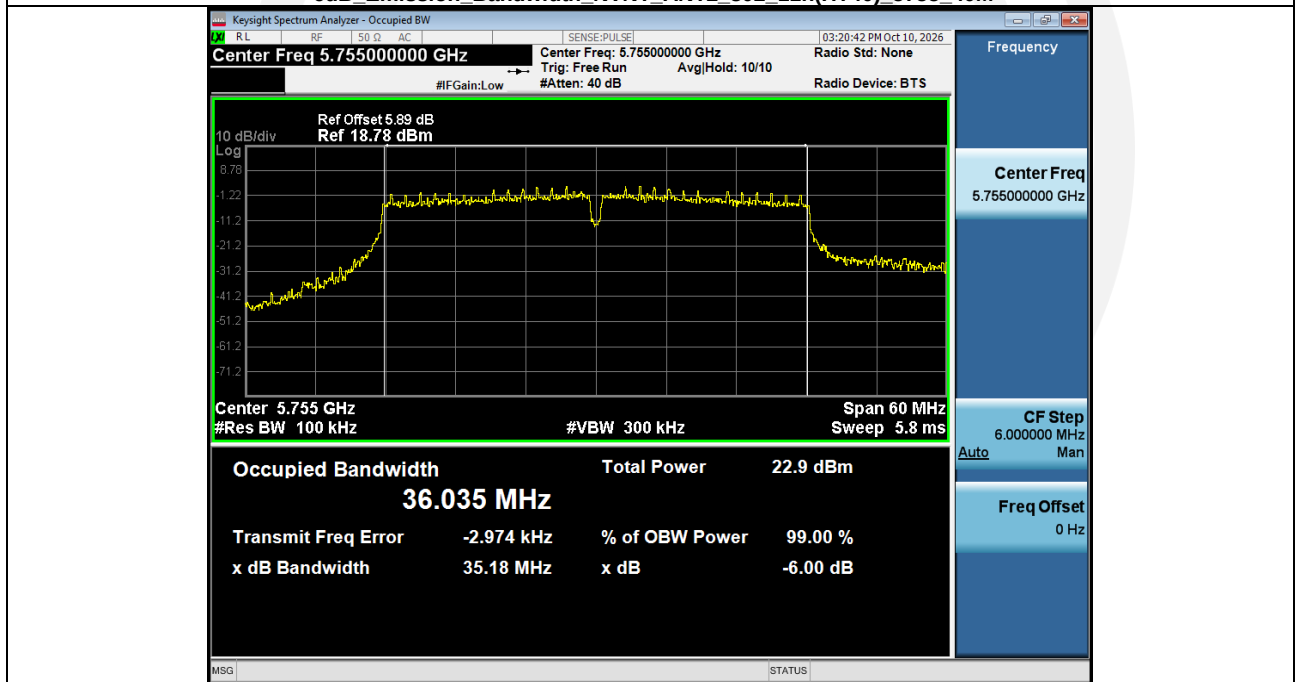

-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT40)_5795_40M

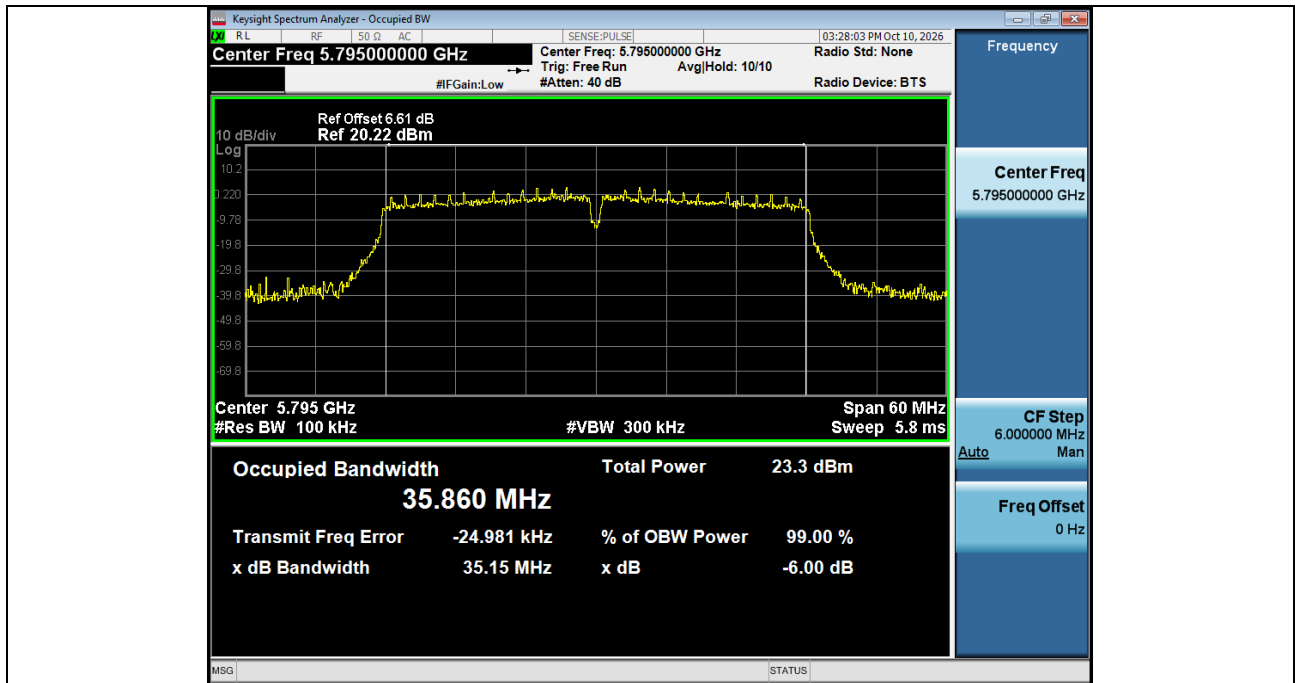


-6dB Emission Bandwidth NVNT ANT2 802_11n(HT40) 5795_40M

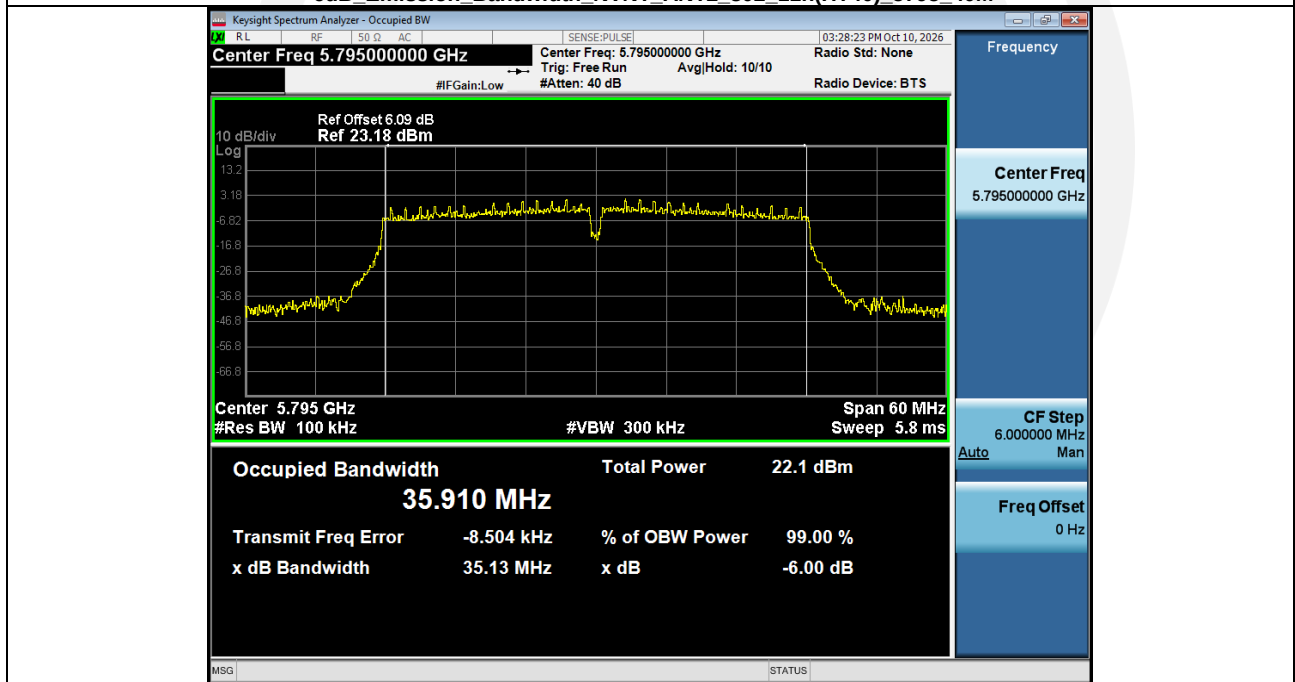


-6dB Emission Bandwidth NVNT ANT1 802_11ac(VHT40) 5755_40M




-6dB Emission Bandwidth_NVNT_ANT2_802_11ac(VHT40)_5755_40M

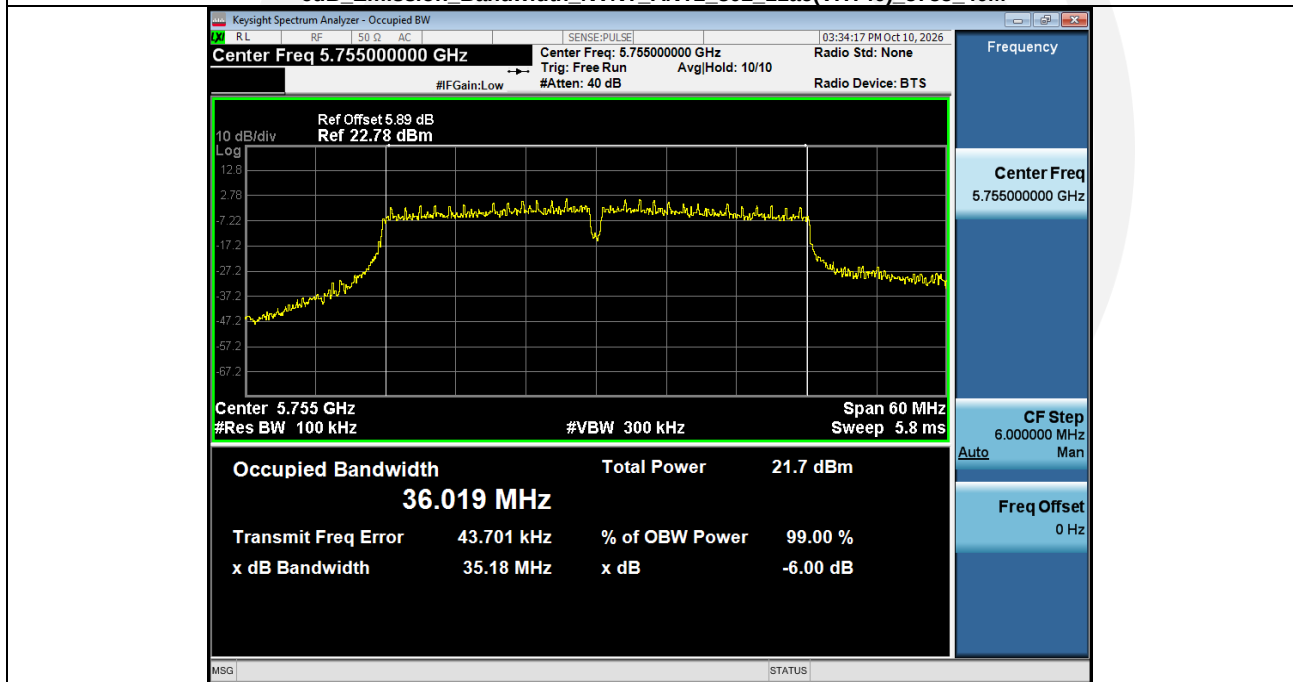


-6dB Emission Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5795_40M

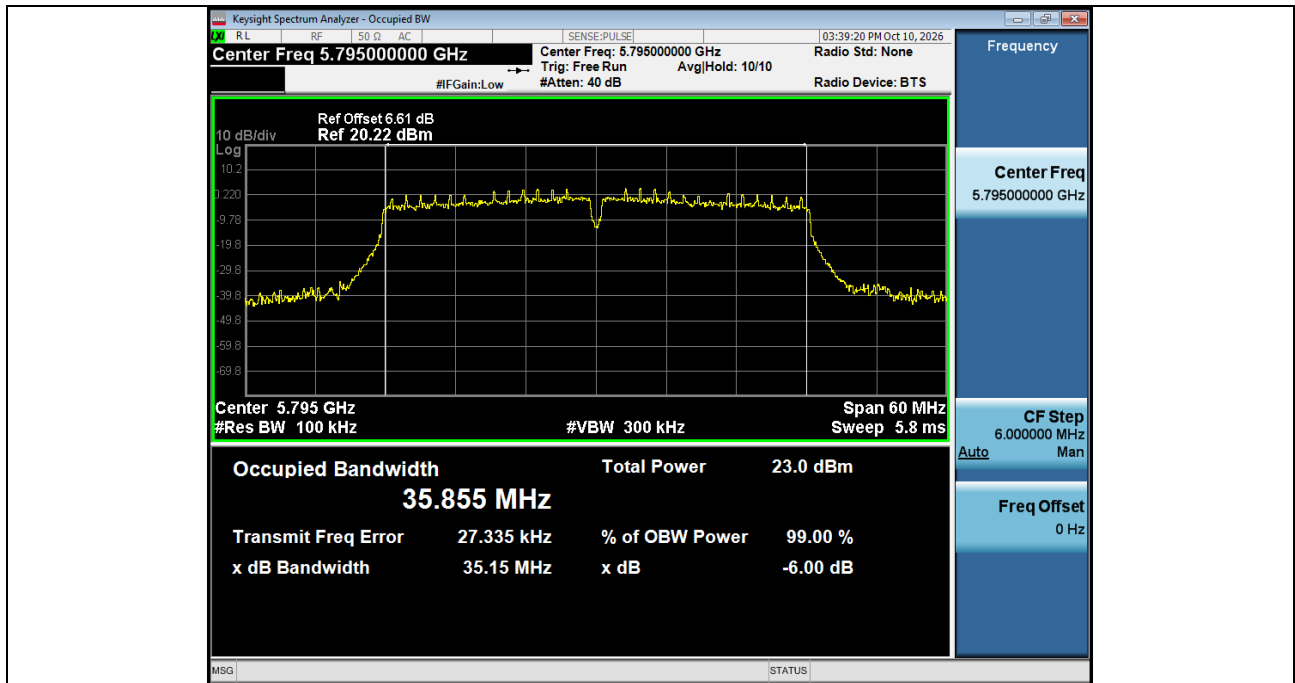

-6dB Emission Bandwidth_NVNT_ANT2_802_11ac(VHT40)_5795_40M

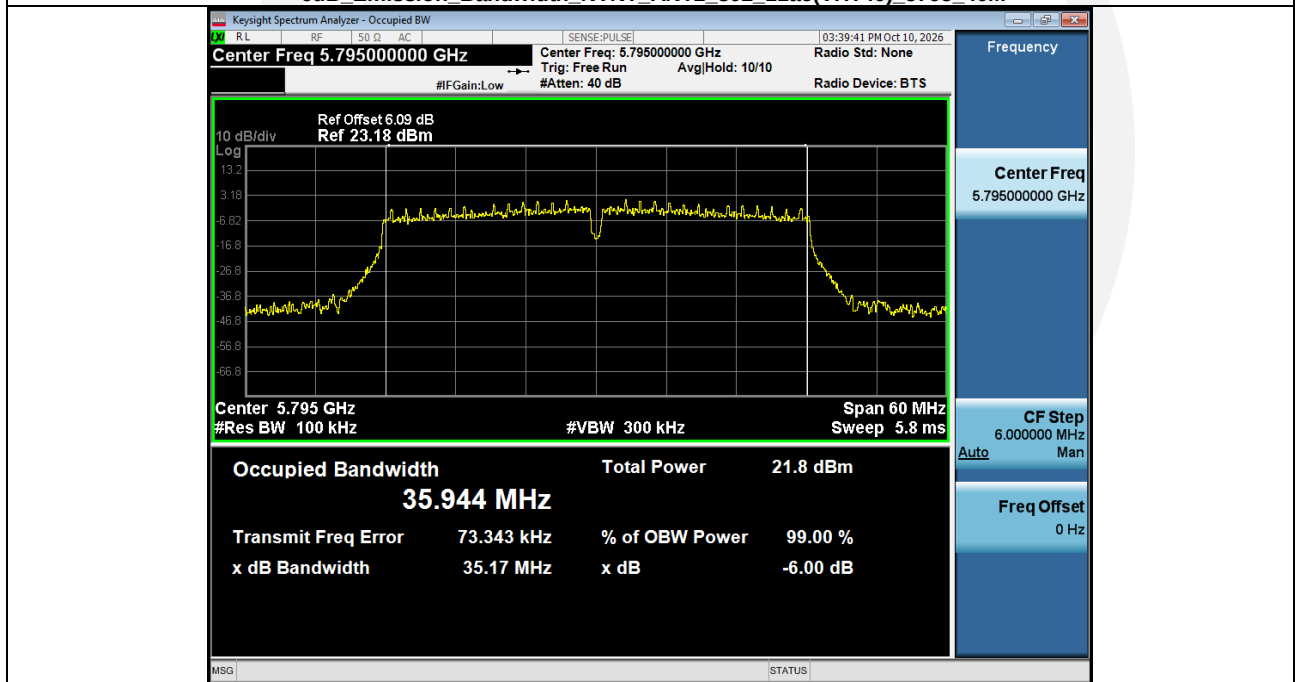


-6dB Emission Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5775_80M

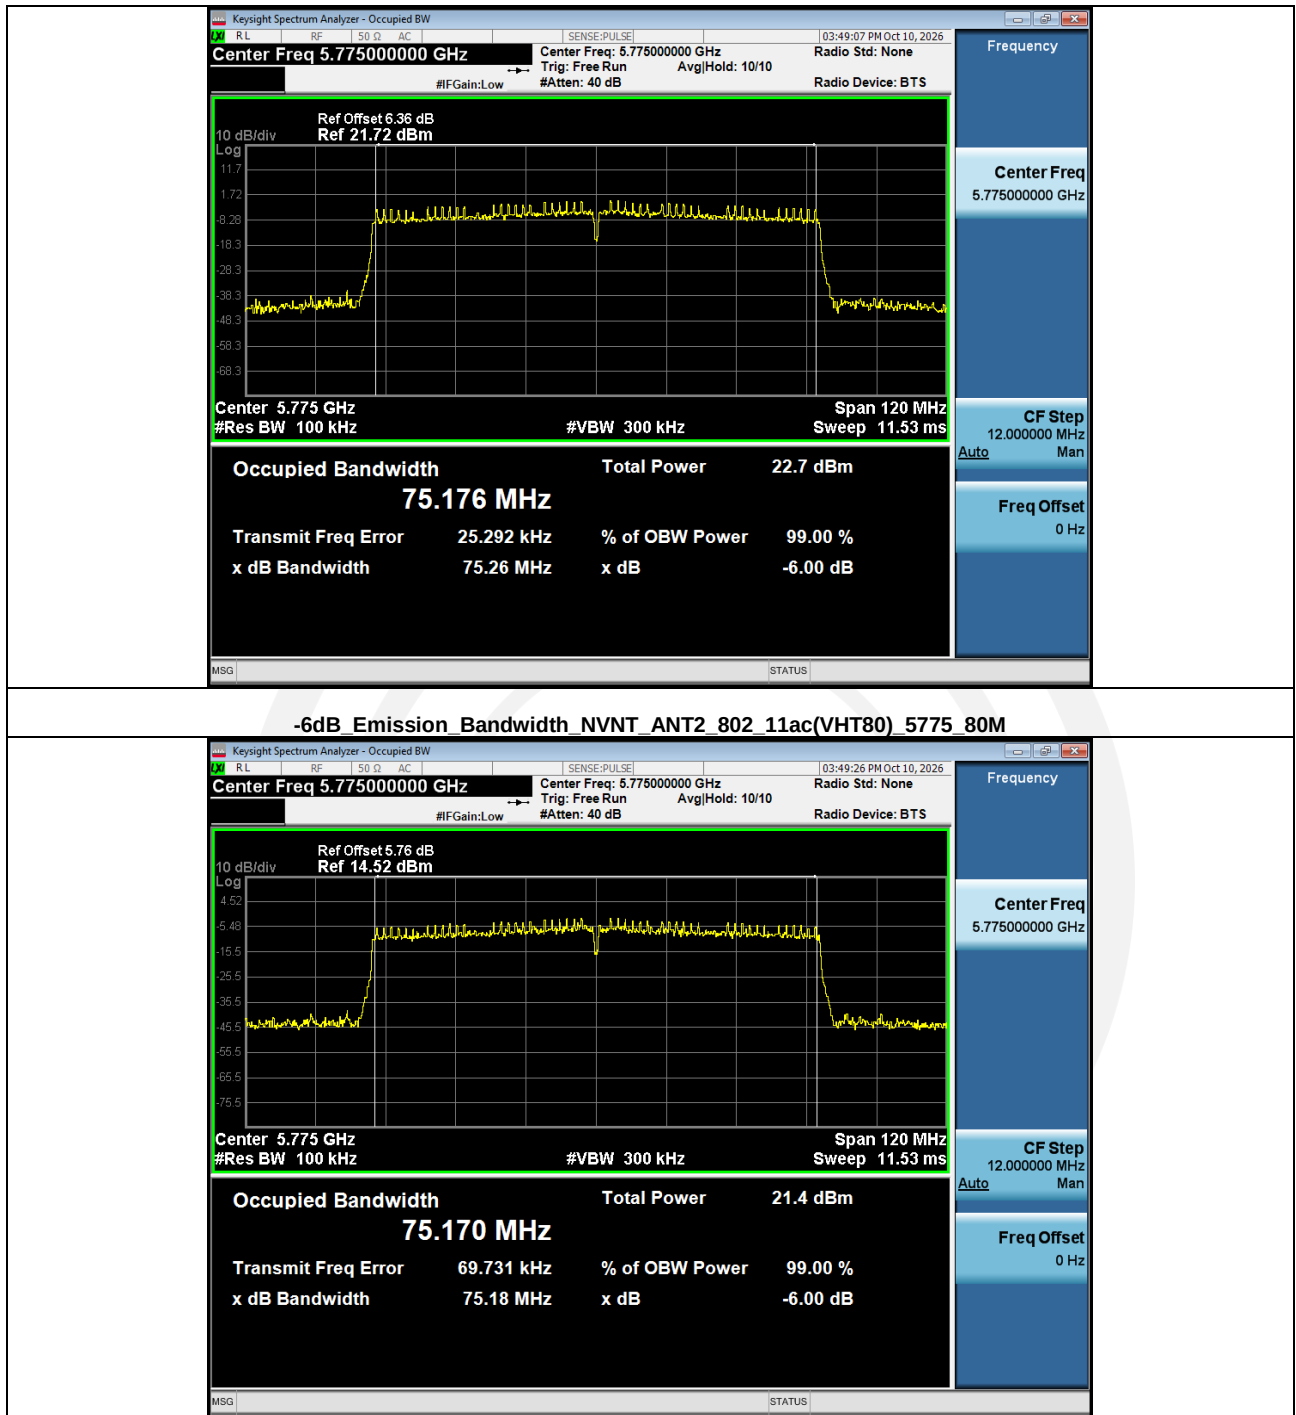


Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	24.31	16.94
NVNT	ANT2	802.11a	5745.00	23.32	16.89
NVNT	ANT1	802.11a	5785.00	20.81	16.78
NVNT	ANT2	802.11a	5785.00	20.71	16.77
NVNT	ANT1	802.11a	5825.00	24.33	16.96
NVNT	ANT2	802.11a	5825.00	23.35	16.91
NVNT	ANT1	802.11n(HT20)	5745.00	31.38	18.43
NVNT	ANT2	802.11n(HT20)	5745.00	30.58	18.16
NVNT	ANT1	802.11n(HT20)	5785.00	21.36	17.93
NVNT	ANT2	802.11n(HT20)	5785.00	21.09	17.85
NVNT	ANT1	802.11n(HT20)	5825.00	27.34	18.13
NVNT	ANT2	802.11n(HT20)	5825.00	24.38	17.94
NVNT	ANT1	802.11ac(VHT20)	5745.00	23.17	18.10
NVNT	ANT2	802.11ac(VHT20)	5745.00	26.83	18.02
NVNT	ANT1	802.11ac(VHT20)	5785.00	21.67	17.99
NVNT	ANT2	802.11ac(VHT20)	5785.00	21.30	17.91
NVNT	ANT1	802.11ac(VHT20)	5825.00	26.66	18.15
NVNT	ANT2	802.11ac(VHT20)	5825.00	27.24	18.03
NVNT	ANT1	802.11n(HT40)	5755.00	48.20	36.61
NVNT	ANT2	802.11n(HT40)	5755.00	46.74	36.40
NVNT	ANT1	802.11n(HT40)	5795.00	40.28	36.30
NVNT	ANT2	802.11n(HT40)	5795.00	40.03	36.21
NVNT	ANT1	802.11ac(VHT40)	5755.00	49.79	36.47
NVNT	ANT2	802.11ac(VHT40)	5755.00	48.95	36.57
NVNT	ANT1	802.11ac(VHT40)	5795.00	40.31	36.23
NVNT	ANT2	802.11ac(VHT40)	5795.00	40.25	36.37
NVNT	ANT1	802.11ac(VHT80)	5775.00	79.79	75.41
NVNT	ANT2	802.11ac(VHT80)	5775.00	79.38	75.39



99%_OCB_NVNT_ANT1_802_11a_5745

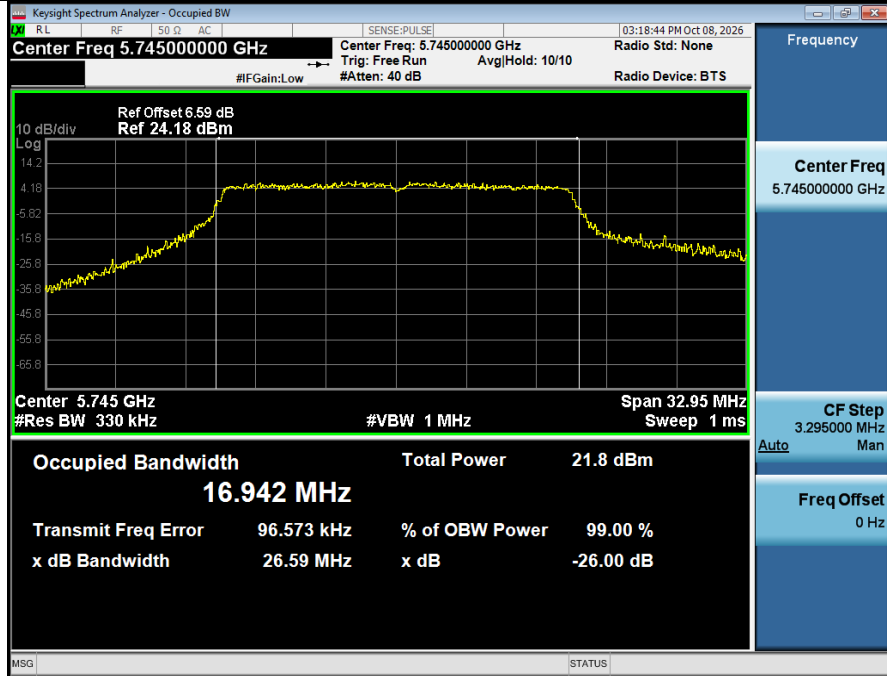




-26BW_NVNT_ANT1_802_11a_5745

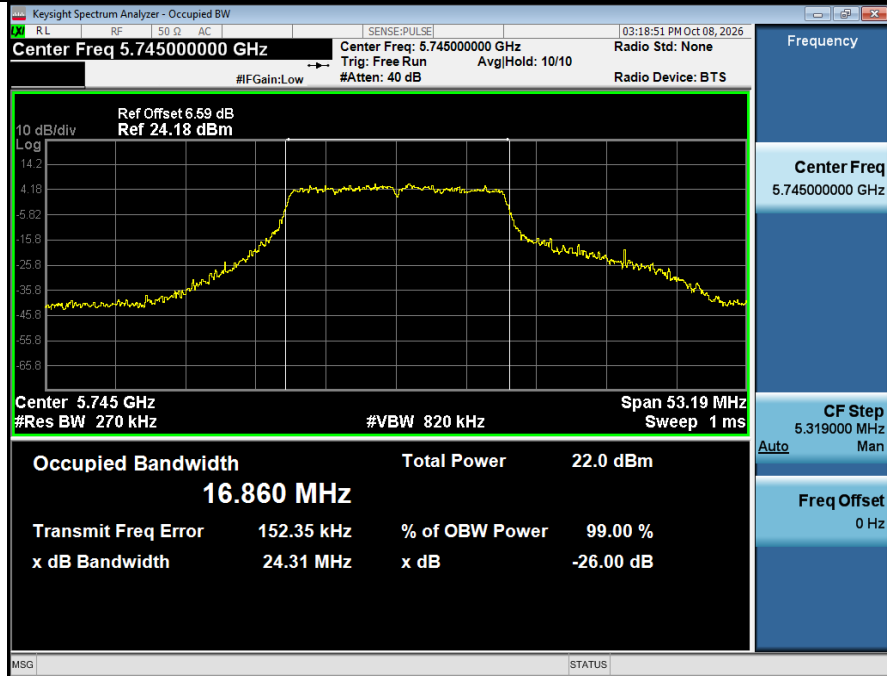




99%_OCB_NVNT_ANT2_802_11a_5745

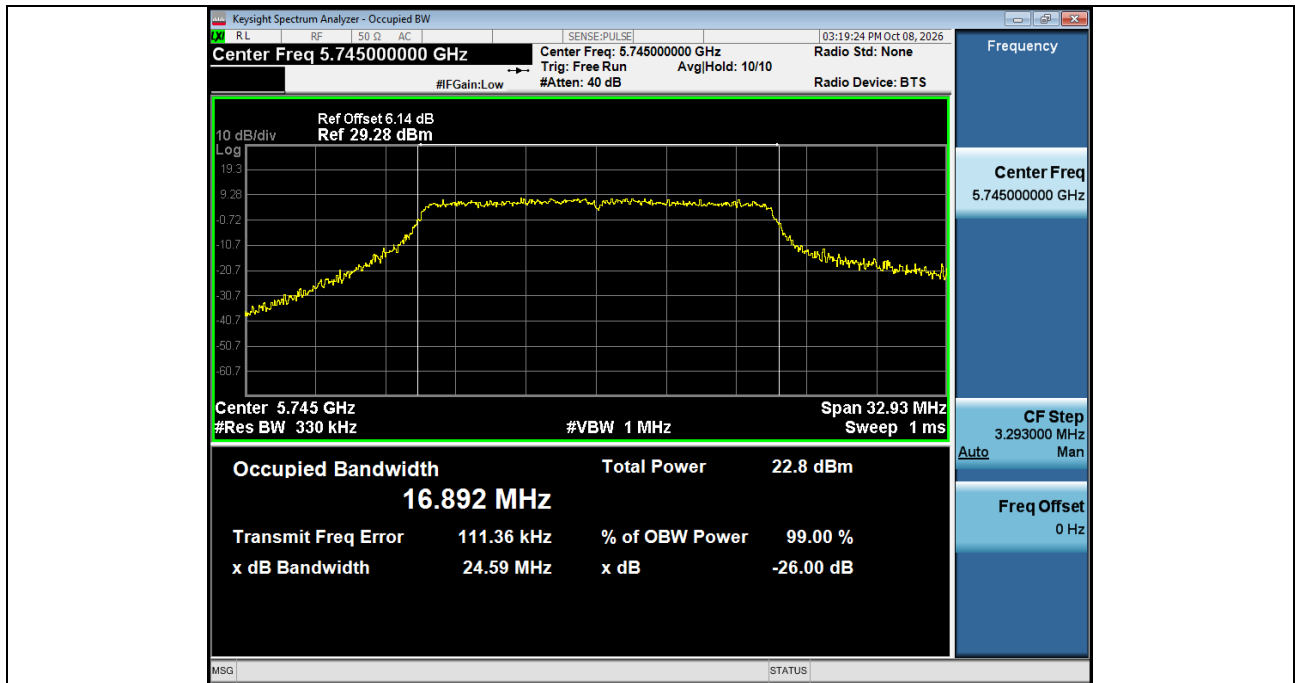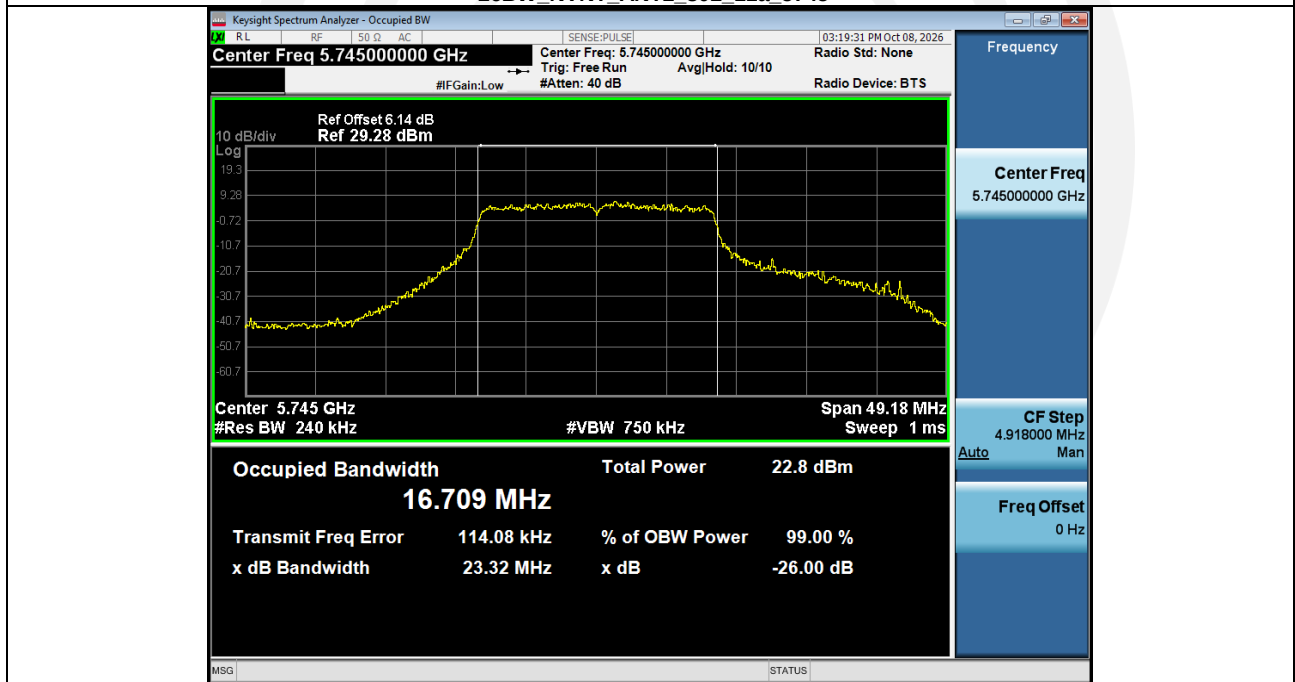
**-26BW_NVNT_ANT2_802_11a_5745****99%_OCB_NVNT_ANT1_802_11a_5785**

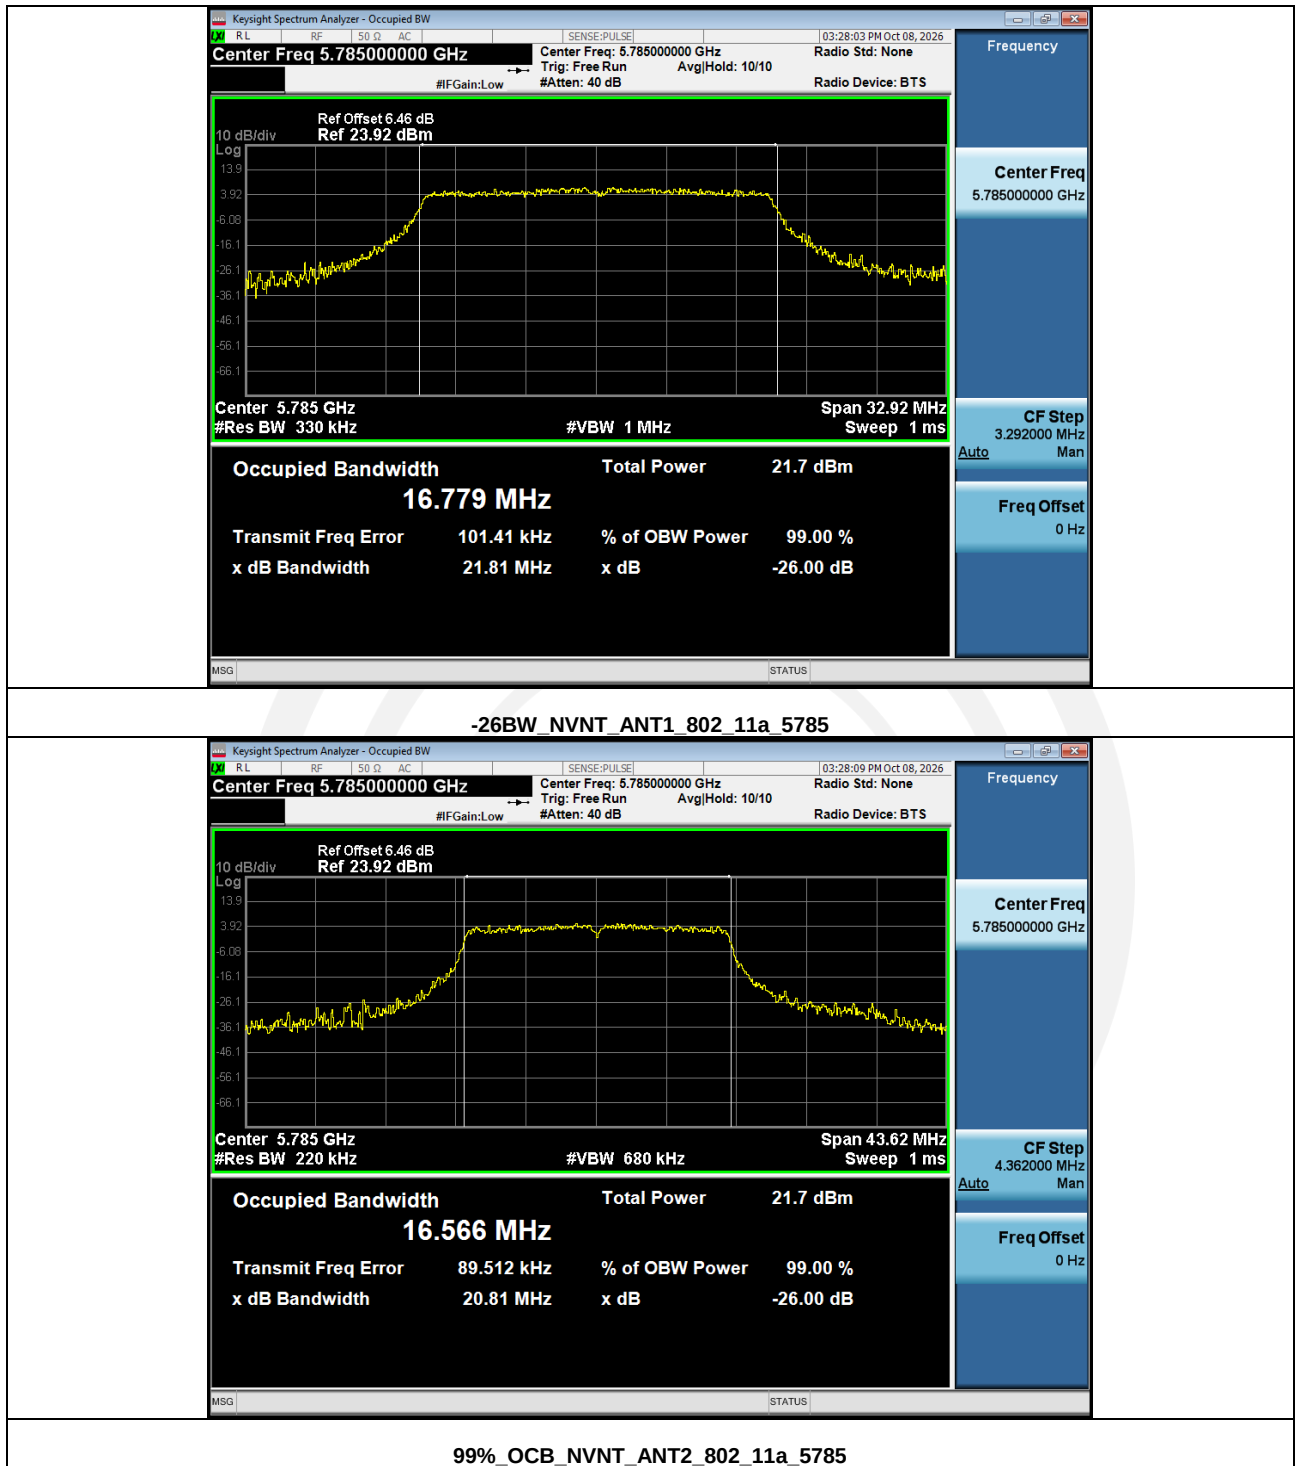


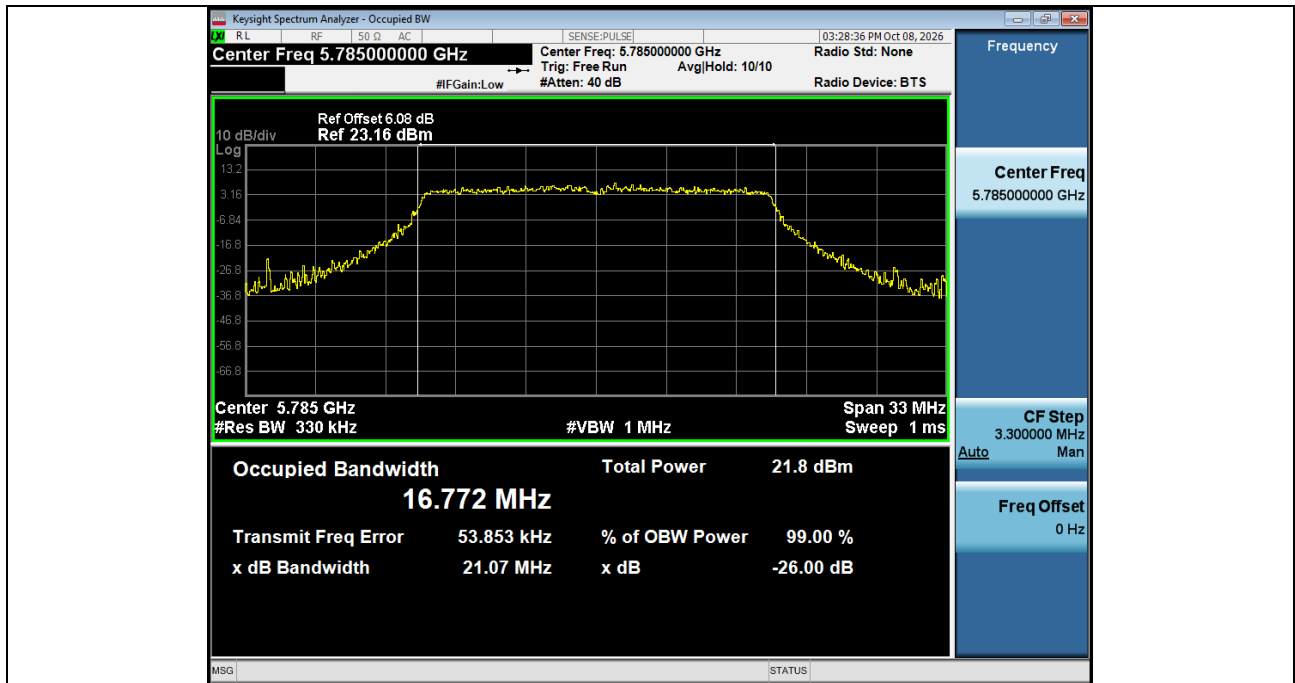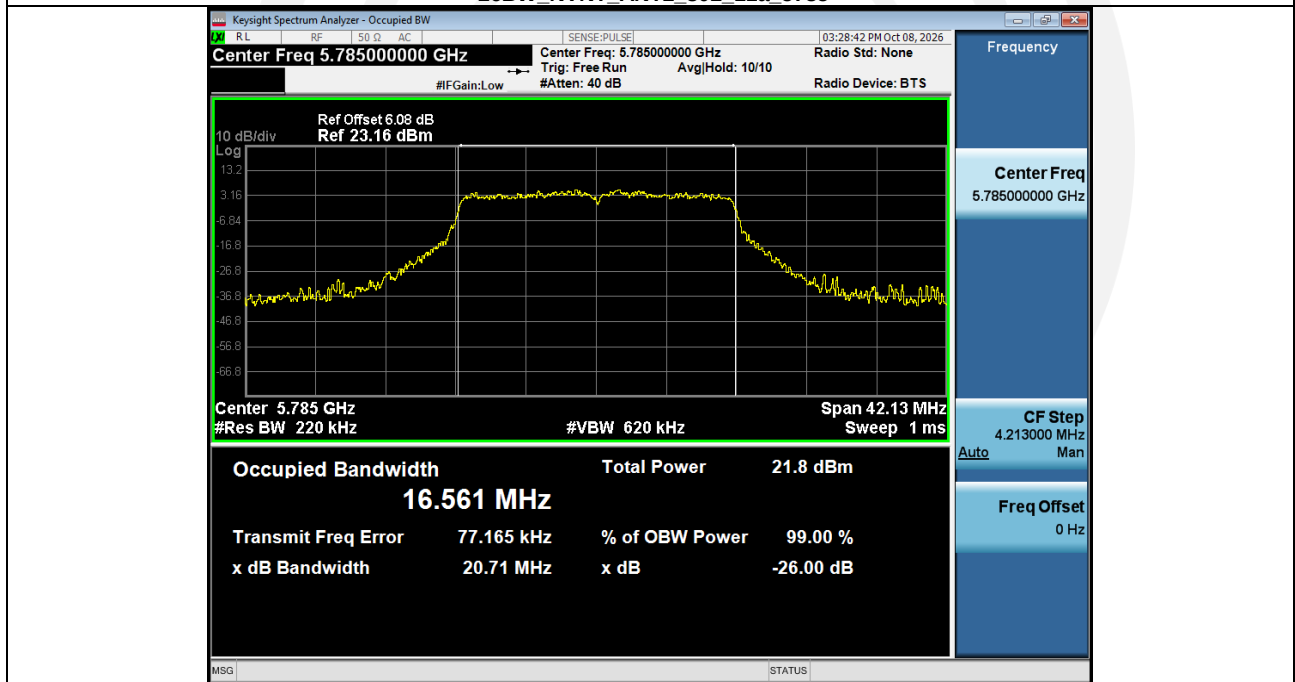**-26BW_NVNT_ANT2_802_11a_5785****99%_OCB_NVNT_ANT1_802_11a_5825**

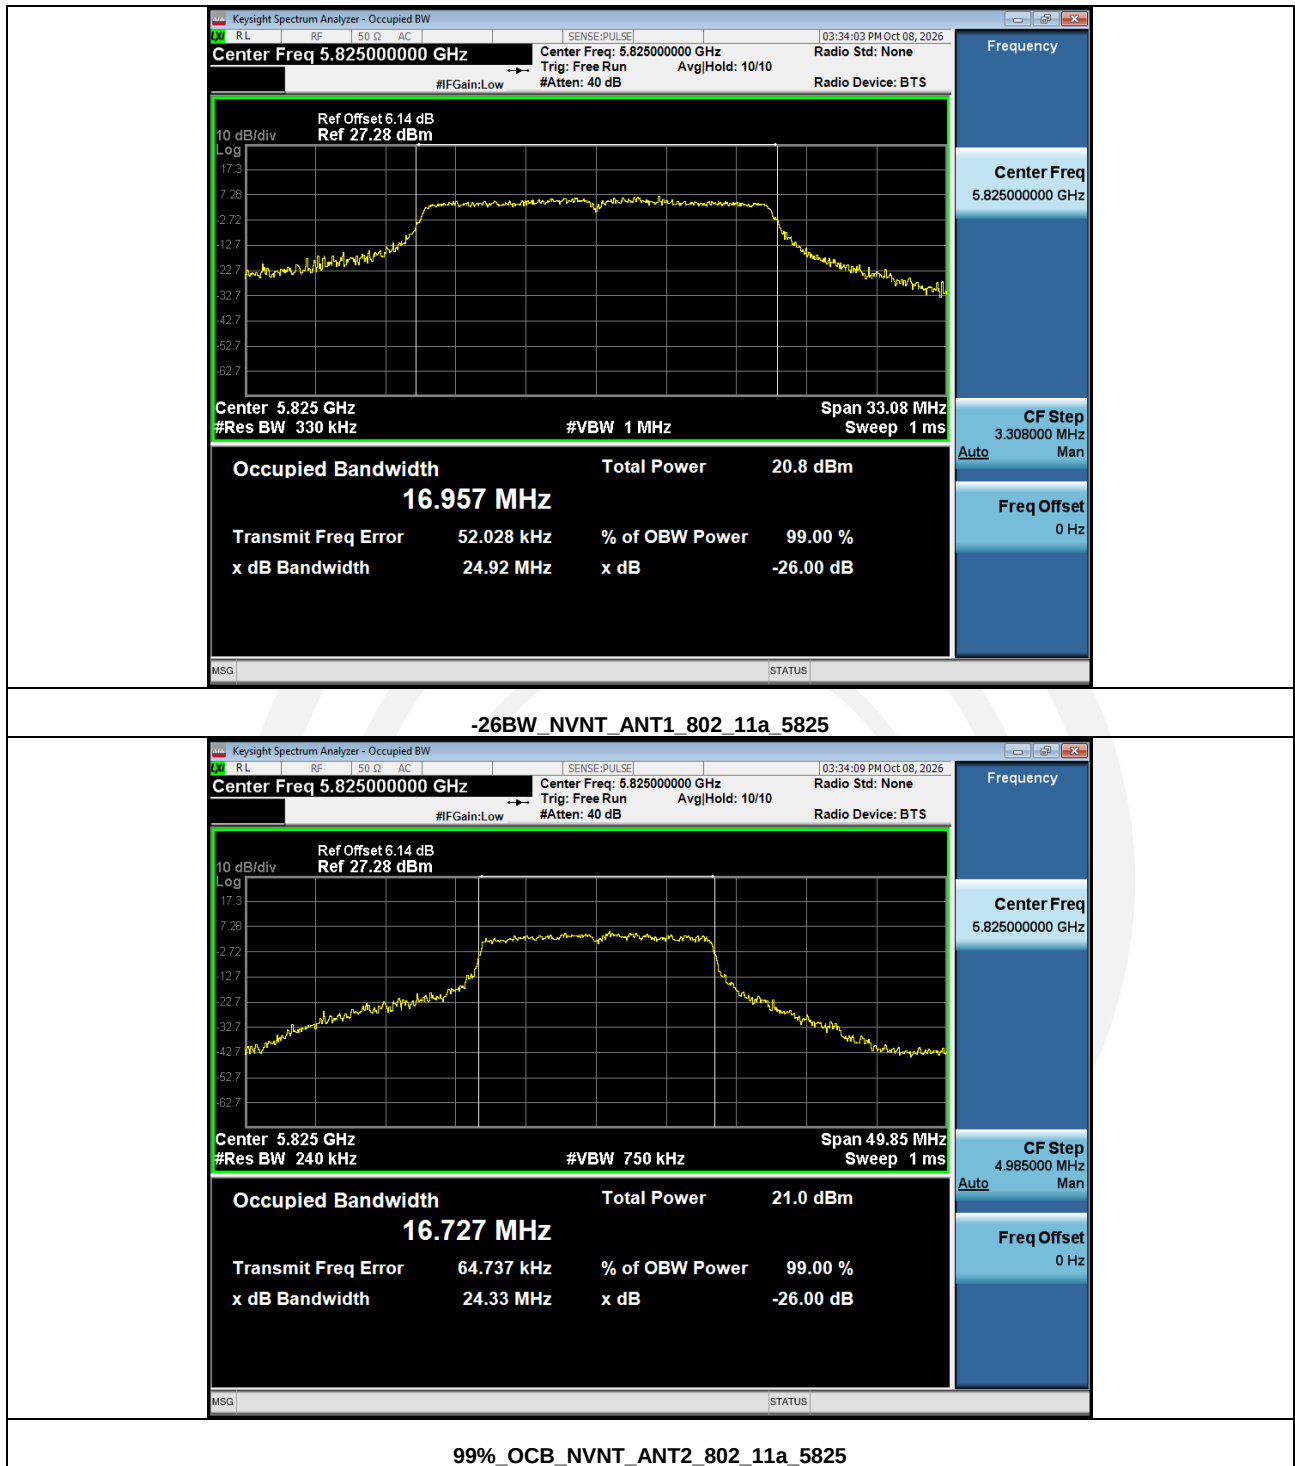


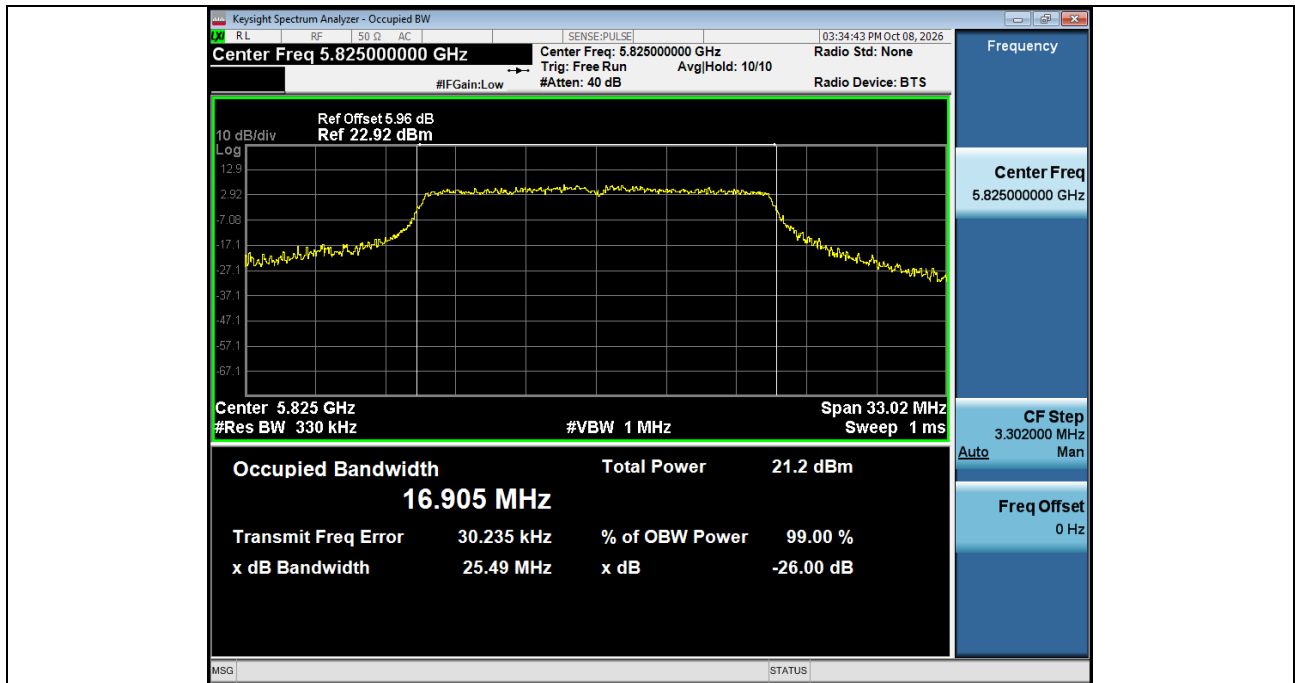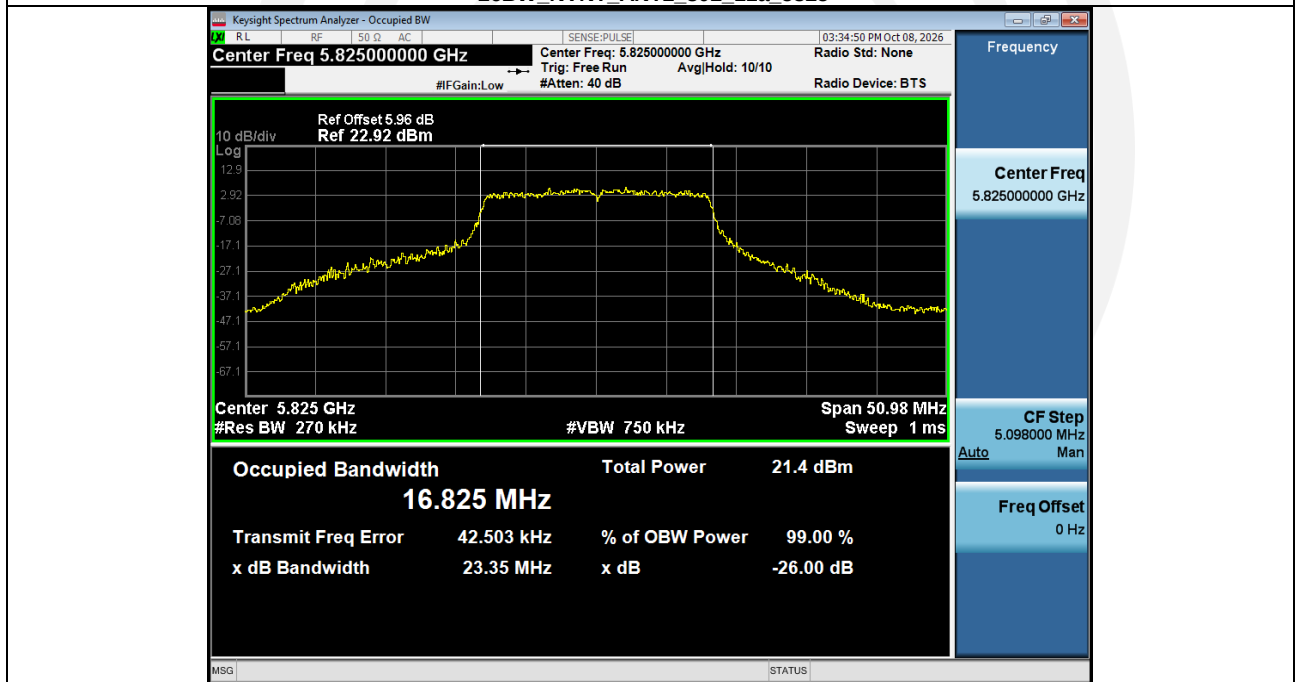**-26BW_NVNT_ANT2_802_11a_5825****99%_OCB_NVNT_ANT1_802_11n(HT20)_5745**

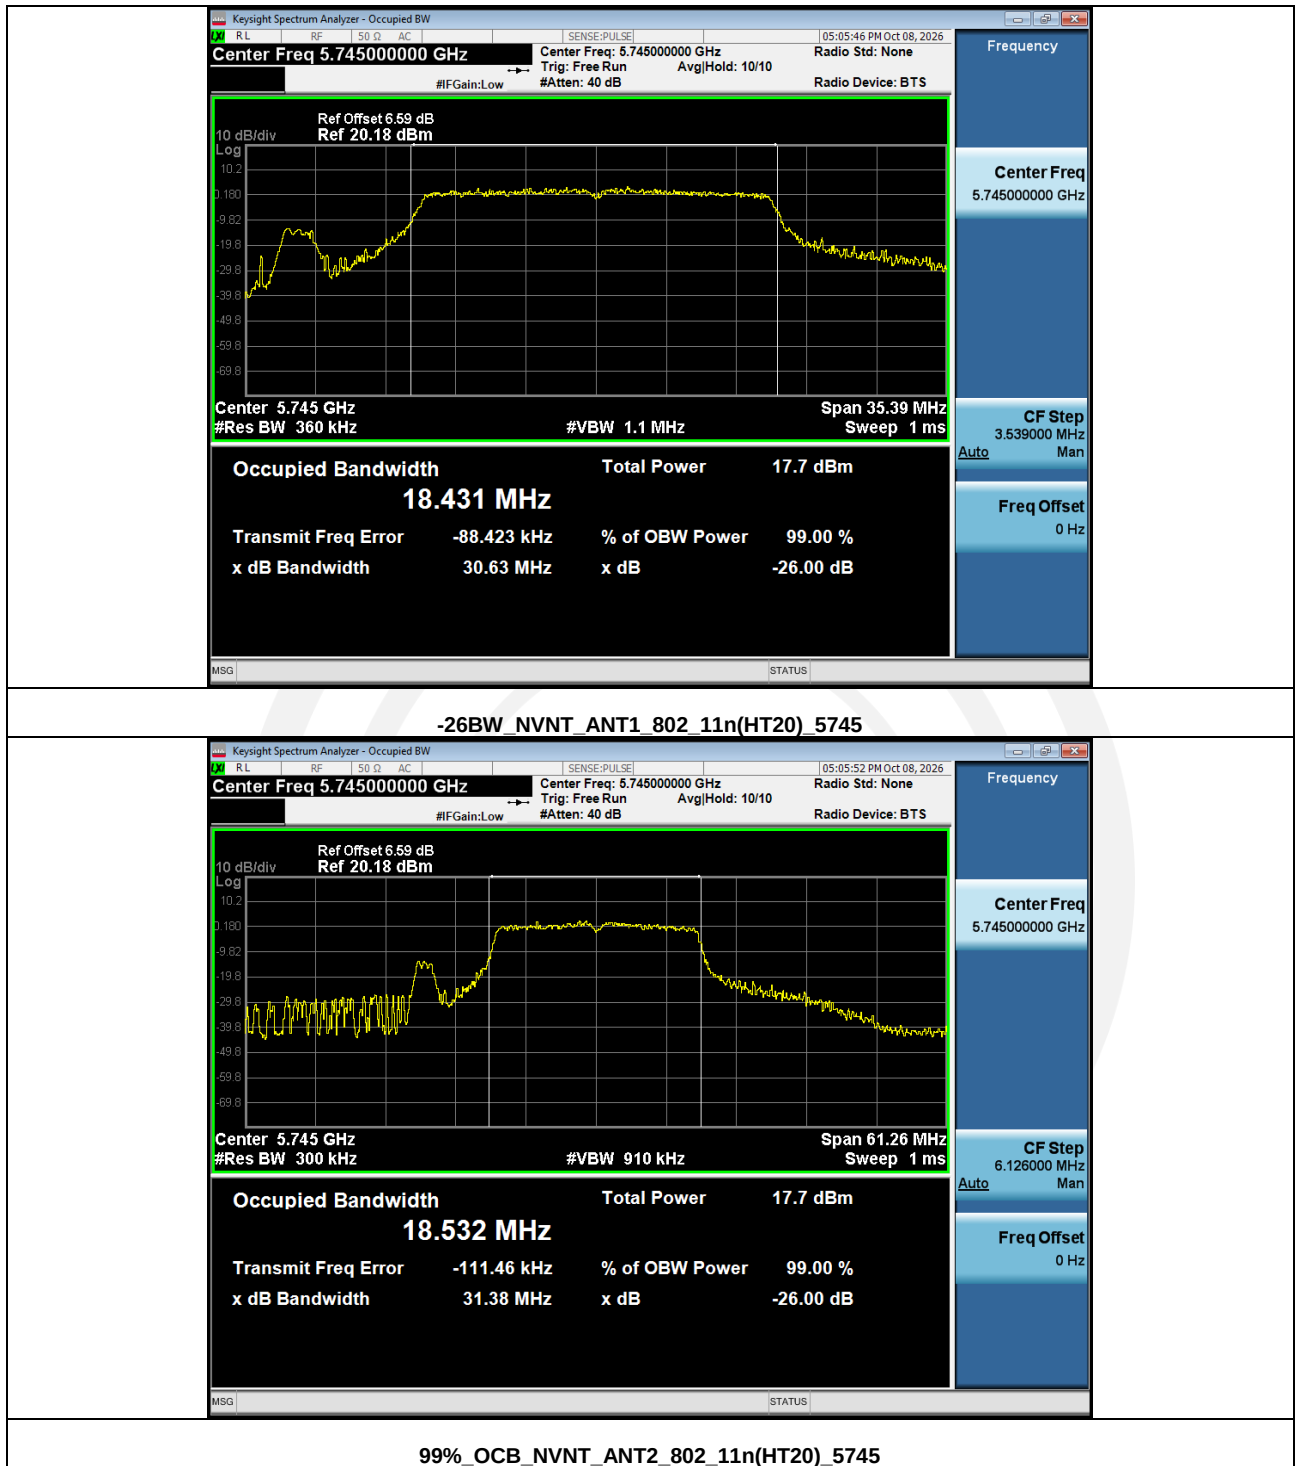



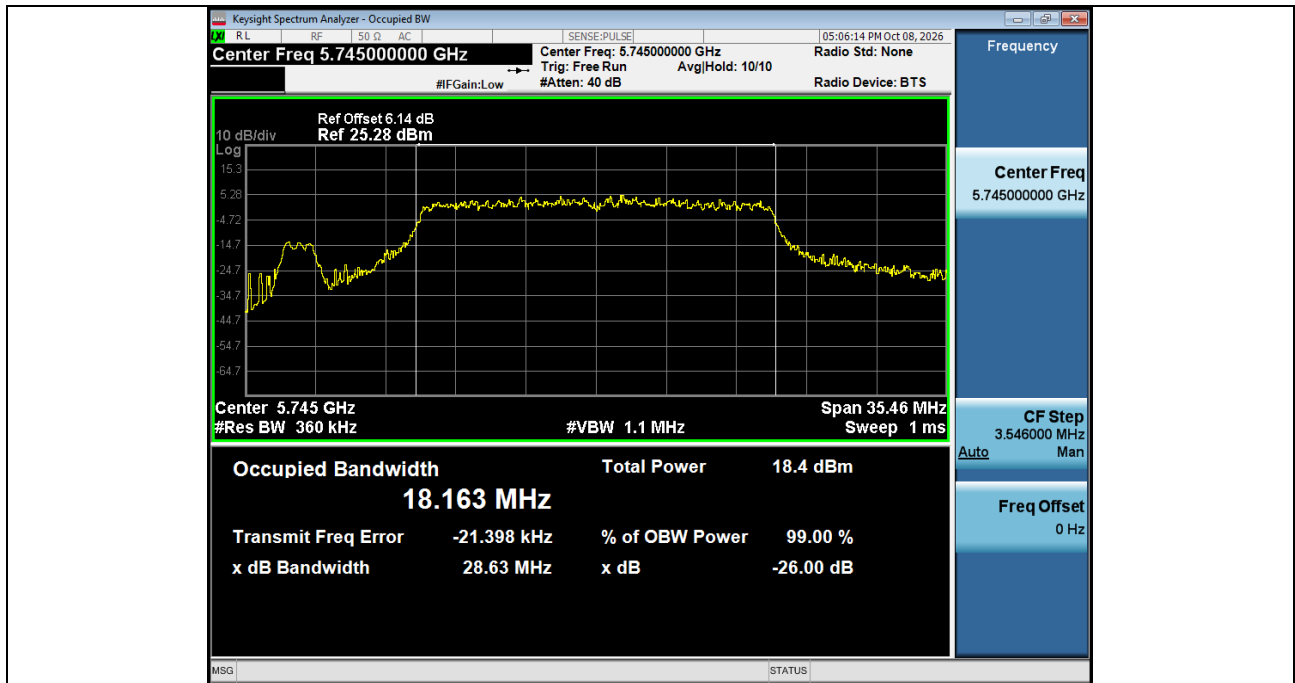


-26BW_NVNT_ANT2_802_11n(HT20)_5745

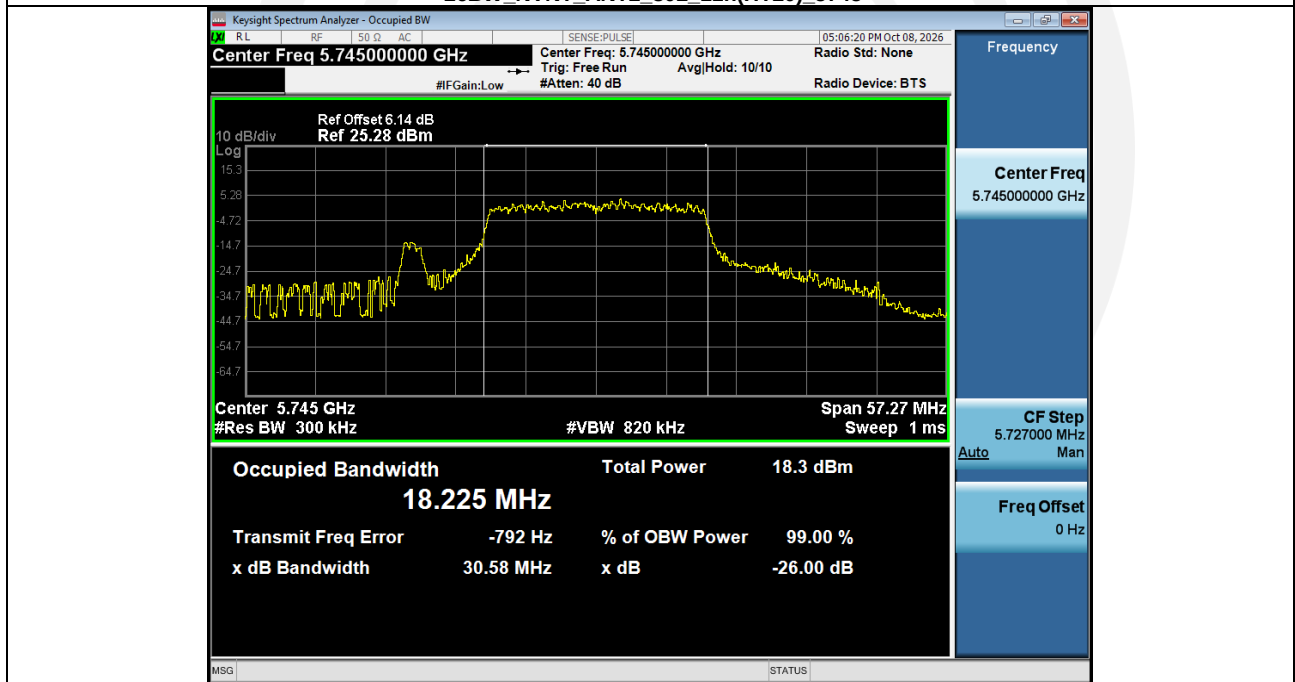

99%_OCB_NVNT_ANT1_802_11n(HT20)_5785

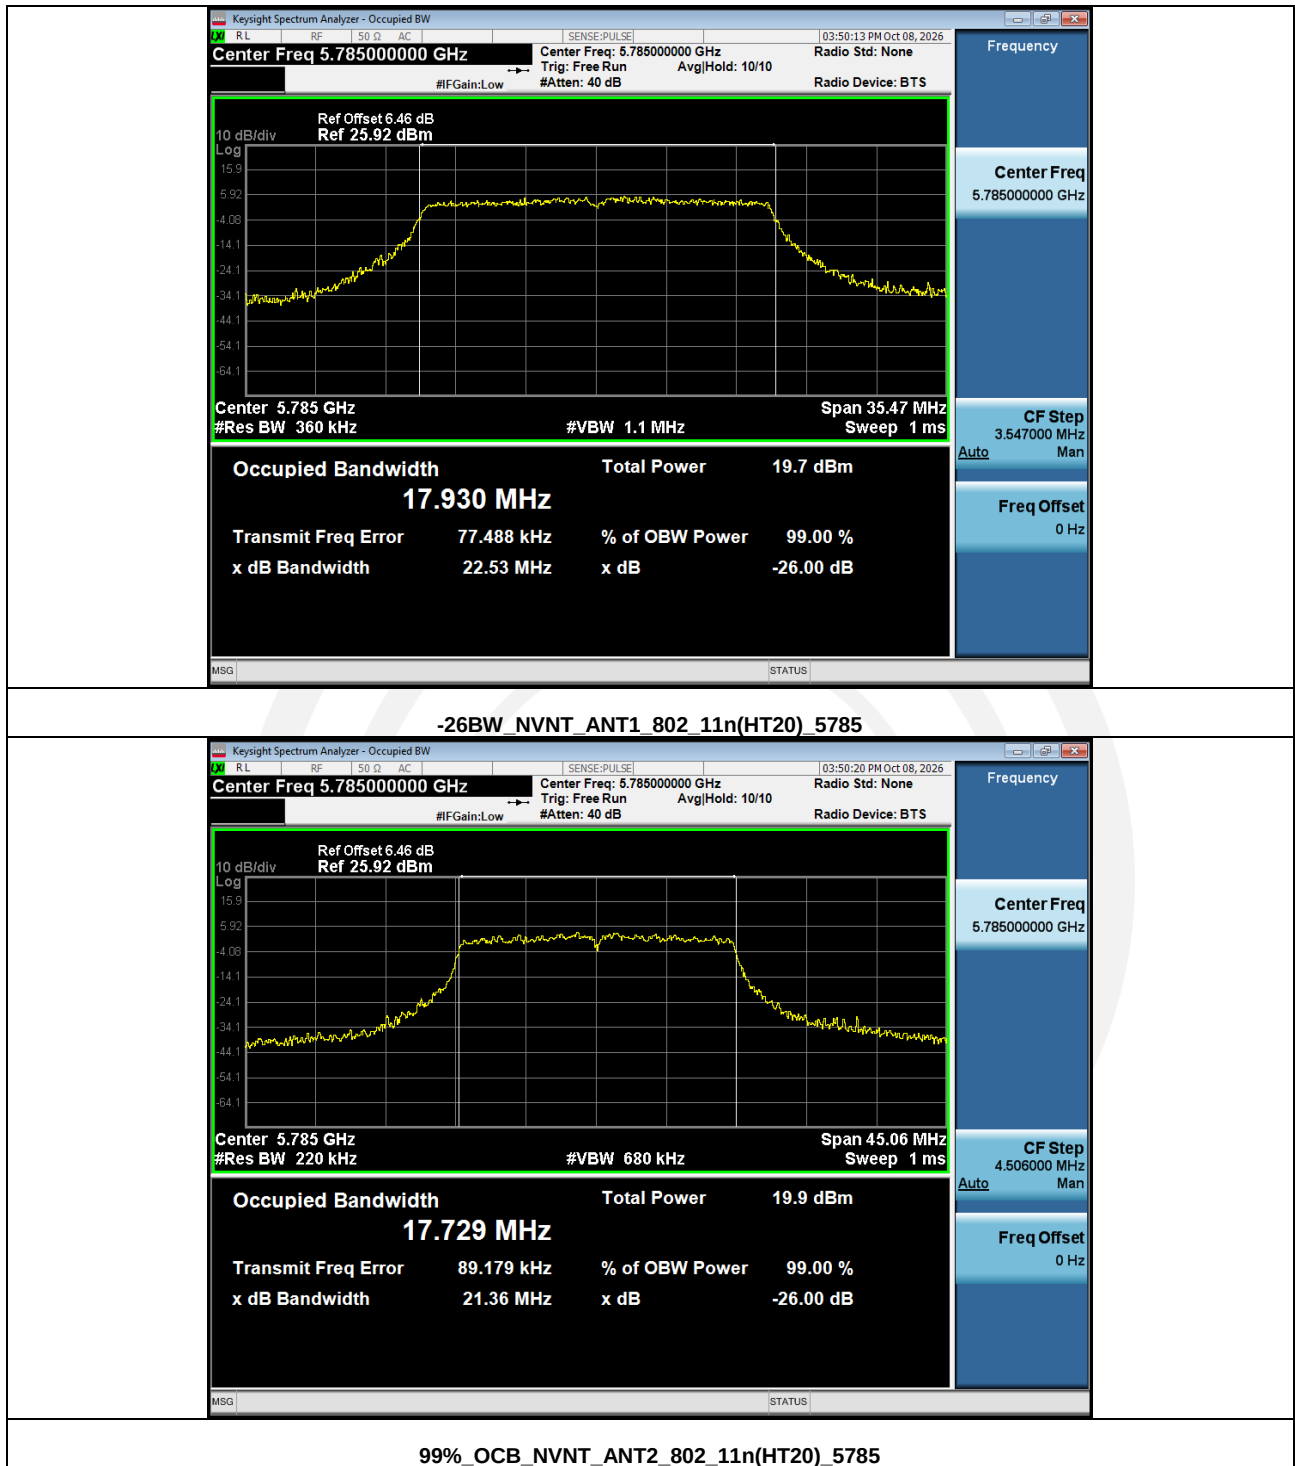

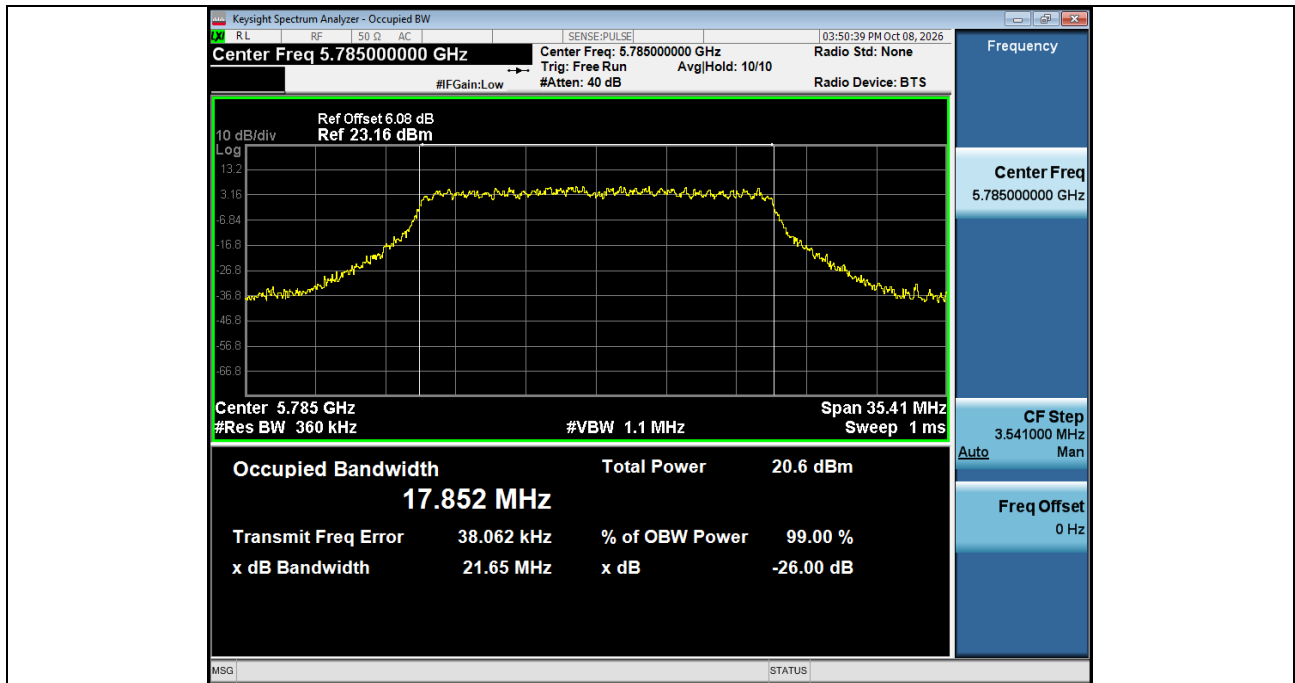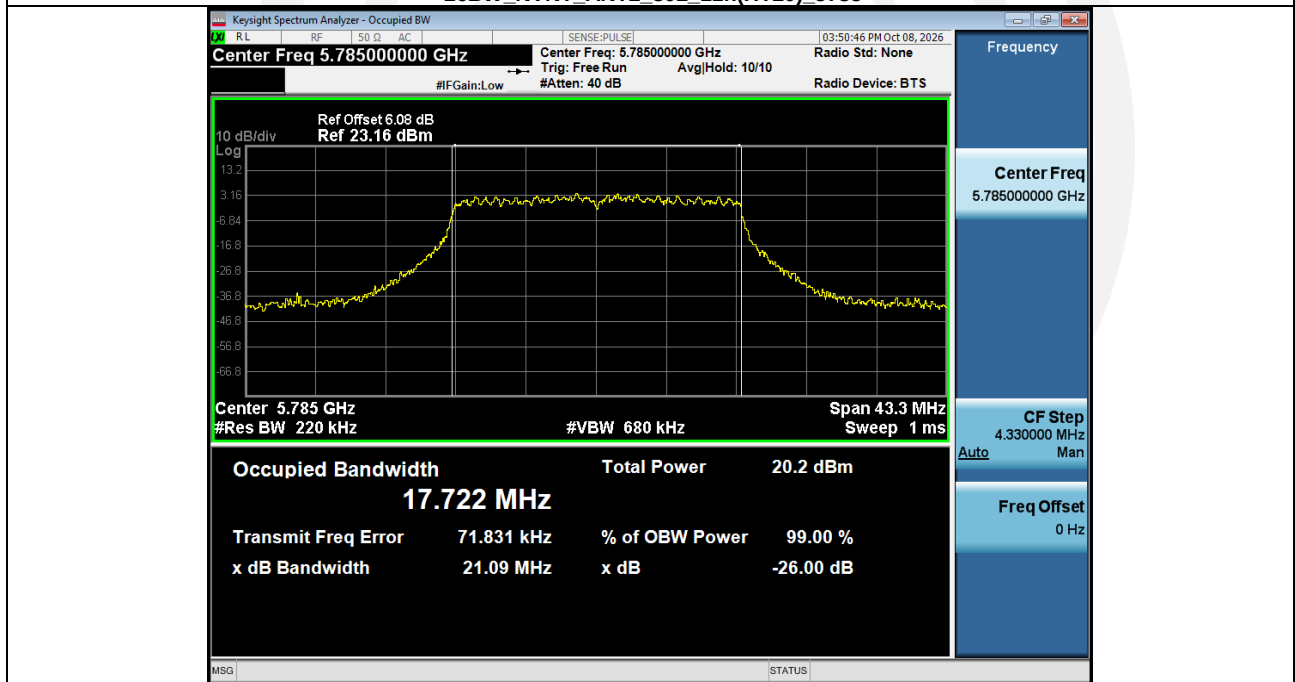**-26BW_NVNT_ANT2_802_11n(HT20)_5785****99%_OCB_NVNT_ANT1_802_11n(HT20)_5825**

