


REV	DESCRIPTION	No.	ENGR	DATE
1	pre releases	/	LIU WEN WEN	26.07.29


Left



Black gun body for vehicle communication end (One-Touch Open Button)



5000±100mm

φ14.5±0.5



Bottom surface

Right





[QR code content:
SN: HOTRON2609700001
(26097 represents the 97th day of the 26th year, and
00001 increases sequentially)]

The main parameters:


1. Rated current: 50A; Rated voltage: AC 240V;
2. Insulation resistance: >500MΩ (DC500V 1Min)
Withstand Voltage: AC 2500V
3. Protection Level: Type4、UL94-V0
4. Durability: more than 10,000 mating cycles
5. Operating Temperature Range: -30°C~50°C

EV CABLE:

Hotron E516181 EVH2001 2×8.37mm²(8AWG)+1×5.26mm²
(10AWG)+4×0.325mm²(22AWG) -50°C~105°C 1000V VW-1

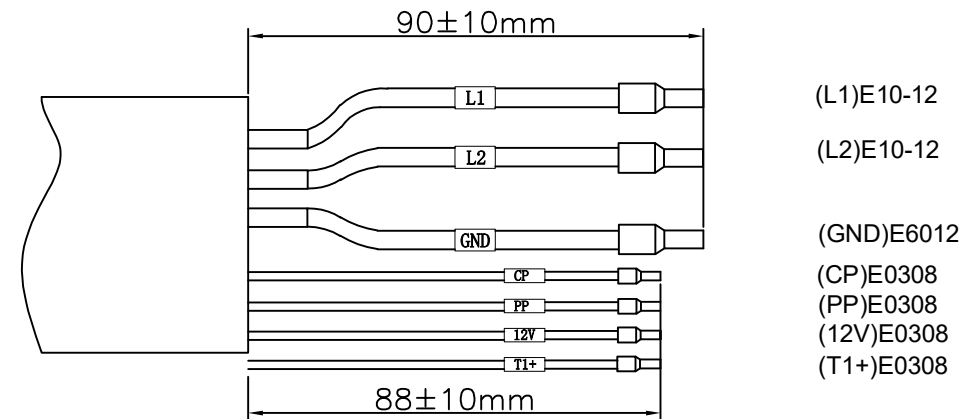

METHOD OF CONNECTING WIRE

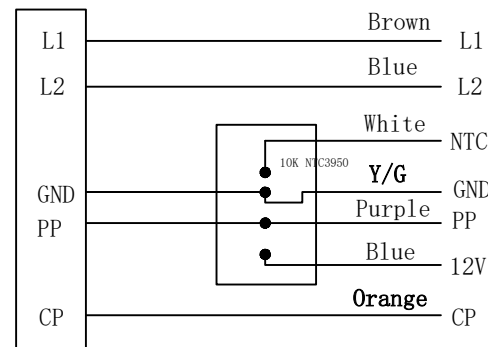

PROPRIETARY NOTE:

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD

APPD:



鸿硕精密电工股份有限公司

HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD

CHKD:


TITLE:

NACS AC 50A with UHF 5000mm

ENGR:

Customer NO.:

HOTRON NO.:



Page 1 OF 2

REV: 1