

SPECIFICATION FOR APPROVAL

CUSTOMER : _____

CUSTOMER'S P/N : _____

PART NUMBER : WAN097030JD251SN03DESCRIPTION : Chip Antenna 7030 M-Ant 2.45G +5G Type 03VERSION : V1.2ISSUE DATE : 2025/03/06

CUSTOMER APPROVED


R&D CENTER		
APPROVAL	CHECKED	DRAWN
Ray	Snow	Snow

**OneWave Electronic Co., Ltd.**

1F, No. 151, Li Gong Street, Beitou District,
Taipei City 112, Taiwan
TEL:+886 2 2898-2220
FAX:+886 2 2898-5055

7030 Chip antenna

For WLAN Dual-Band Applications

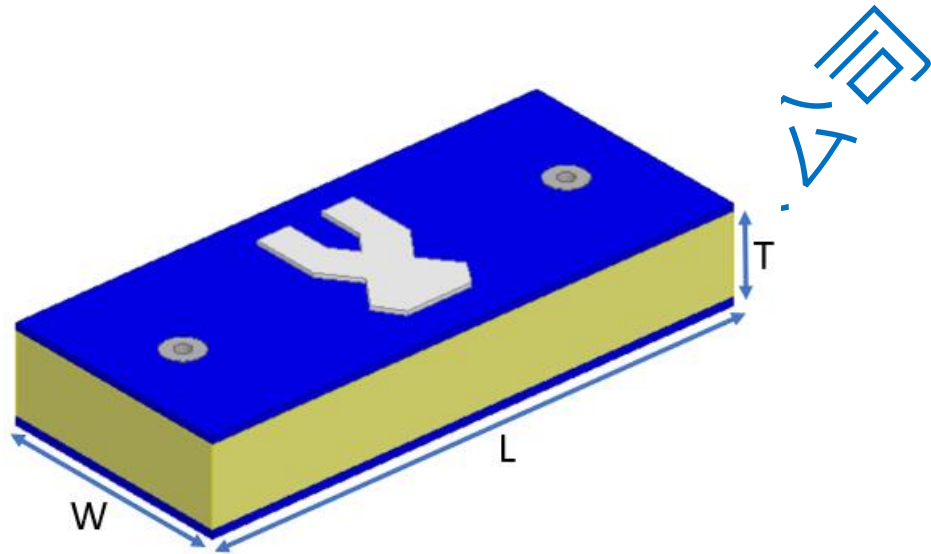

P/N: WAN097030JD251SN03

	Dimension (mm)
L	7.00 ± 0.20
W	3.00 ± 0.20
T	1.15 ± 0.20

Part Number Information

WAN 09 7030 J D25 1S N 03
 A G B C D H E F

A	Product Series	Antenna
B	Dimension L x W	7.0X3.0mm (+0.2mm)
C	Material	High K material
D	Working Frequency	2.4 ~ 2.5GHz + 5.15~5.85GHz
E	Feeding mode	Monopole & Single Feeding
F	Antenna type	Type = 03
G、H	Internal Code	

1. Electrical Specification


Specification		
Part Number	WAN097030JD251SN03	
Central Frequency	2450 / 5500	MHz
Bandwidth	100 / 800 (Min.)	MHz
Return Loss	-10 (Max)	dB
Peak Gain	2.95 / 5.40	dBi
Impedance	50	Ohm
Operating Temperature	-40~+110	°C
Maximum Power	4	W
Resistance to Soldering Heats	10 (@ 260°C)	sec.
Polarization	Linear	
Azimuth Beamwidth	Omni-directional	
Termination	Cu / Sn (Leadless)	

Remark : Bandwidth & Peak Gain was measured under evaluation board of next page

紅色方塊：ANT

綠色圓形與方形：PCB


黑色線：淨空區

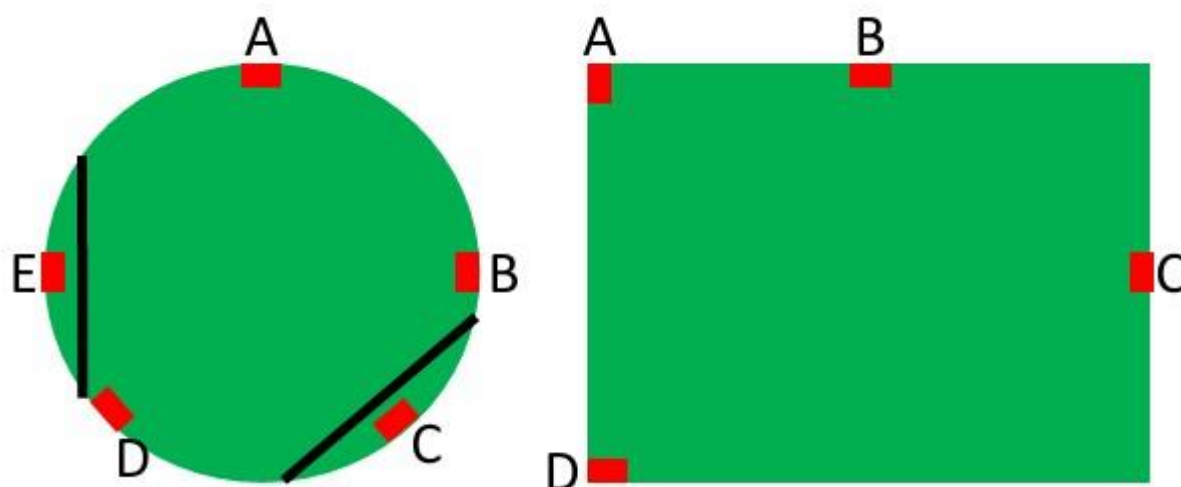

天線位置


板型	天線位置	使用頻段	建議使用天線
圓形	A	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	雙極 3216 / 雙極 5320 / 側立 1007、8070
圓形	B	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	雙極 3216 / 雙極 5320 / 側立 1007、8070
圓形	C	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	單極 5010 / 單極 7020 / 單極 7030 / 側立 1007、8070
圓形	D	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	雙極 3216 / 雙極 5320 / 側立 1007、8070
圓形	E	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	單極 5010 / 單極 7020 / 單極 7030 / 側立 1007、8070
方形	A	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	單極 5010 / 單極 7020 / 單極 7030 / 側立 1007、8070
方形	B	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	雙極 3216 / 雙極 5320 / 側立 1007、8070
方形	C	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	雙極 3216 / 雙極 5320 / 側立 1007、8070
方形	D	2.4G / 5G / 2.4G+5G / 2.4G+5G+7G	單極 5010 / 單極 7020 / 單極 7030 / 側立 1007、8070

2. Recommended PCB Pattern Evaluation Board Dimension

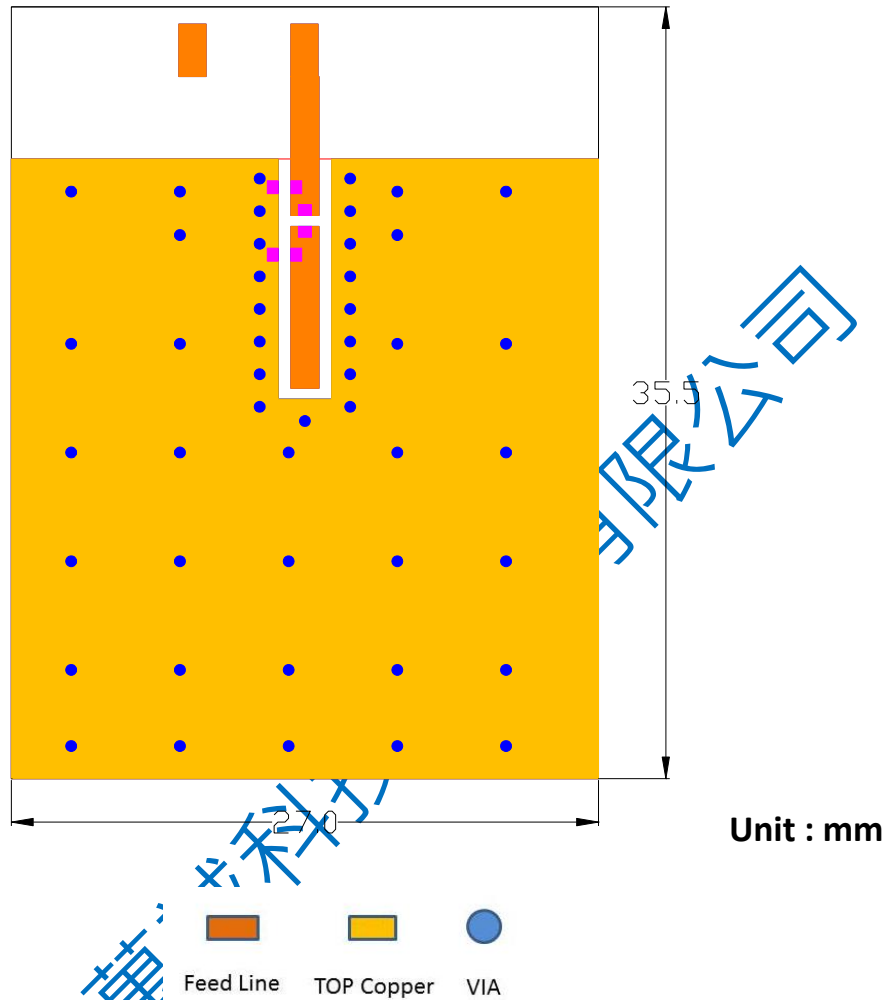


Suggested Matching Circuit important information:


It is recommended to use highly accurate inductors $\pm 0.1 \sim 0.3 \text{ nH}$ and capacitance $\pm 0.1 \text{ pF}$ for matching components.

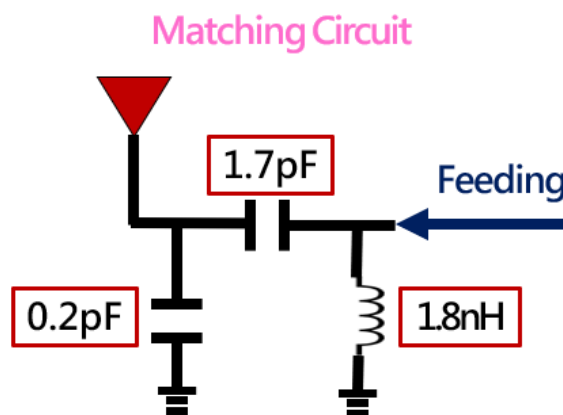

◆ Layout Dimensions in Clearance area(Size=27.0*7.0mm)

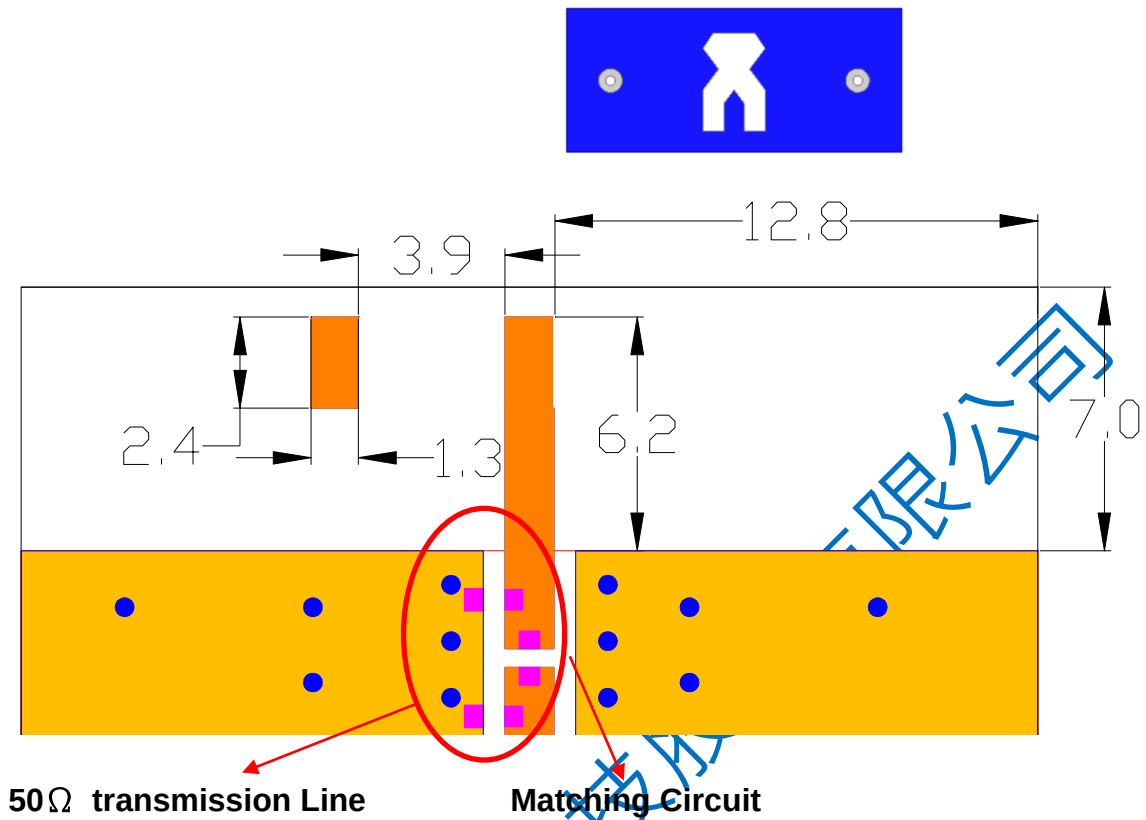


FootPrint (Unit : mm)

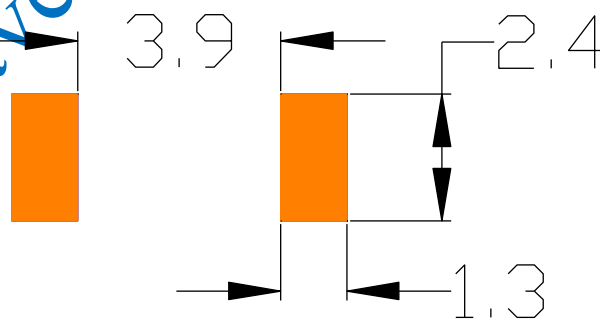



3. Measurement Results

Return Loss


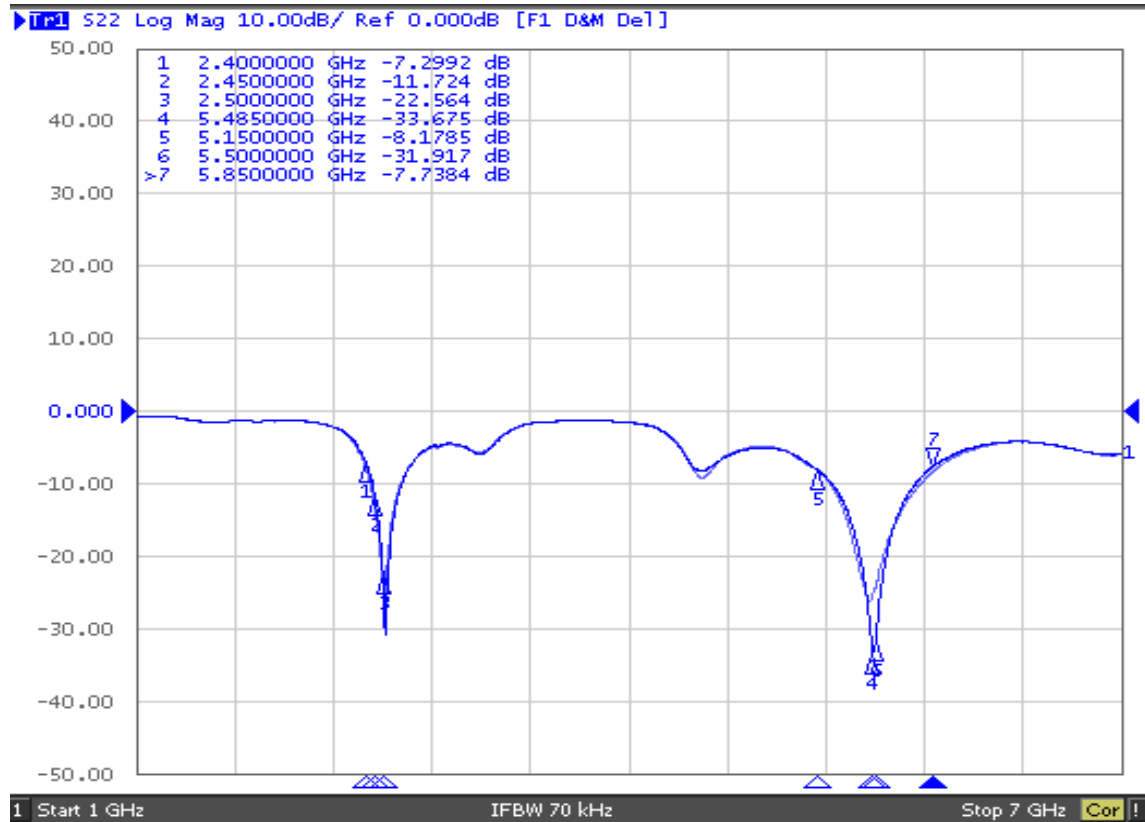


OneWave 萬誠

Radiation Pattern

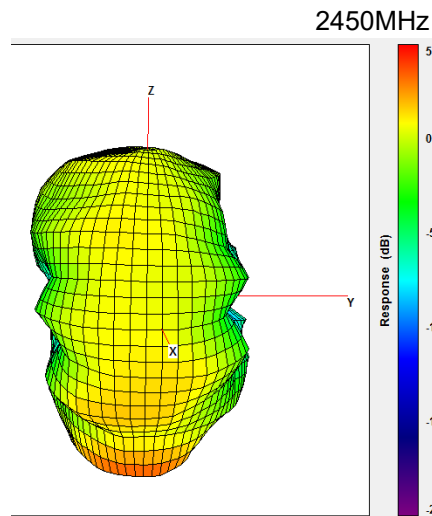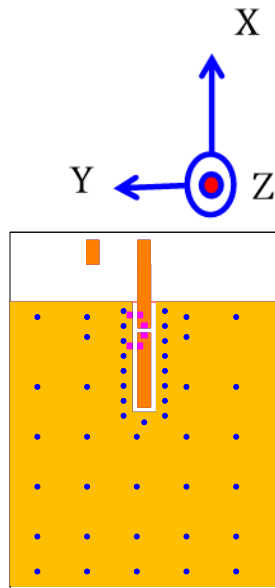


	Efficiency	Peak Gain	Directivity
2400MHz	70.69 %	2.83 dBi	4.33 dBi
2450MHz	72.86 %	2.95 dBi	4.32 dBi
2500MHz	71.46 %	2.89 dBi	4.34 dBi

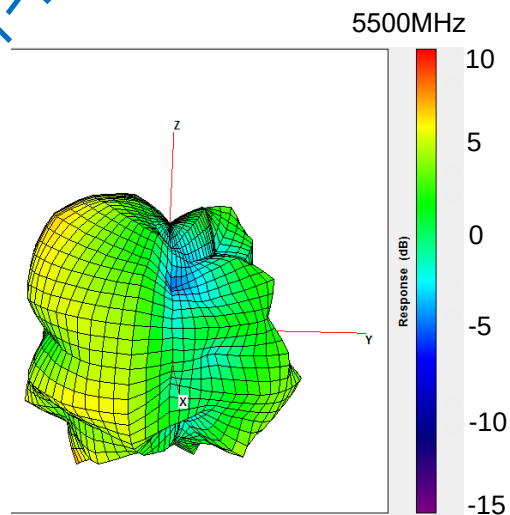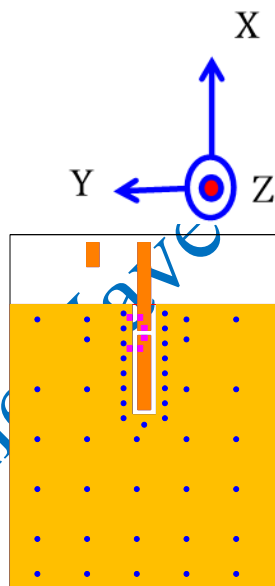



	Efficiency	Peak Gain	Directivity
5150MHz	75.83 %	5.28 dBi	6.48 dBi
5500MHz	78.80 %	5.40 dBi	6.43 dBi
5850MHz	76.44 %	5.34 dBi	6.50 dBi

Chamber Coordinate System

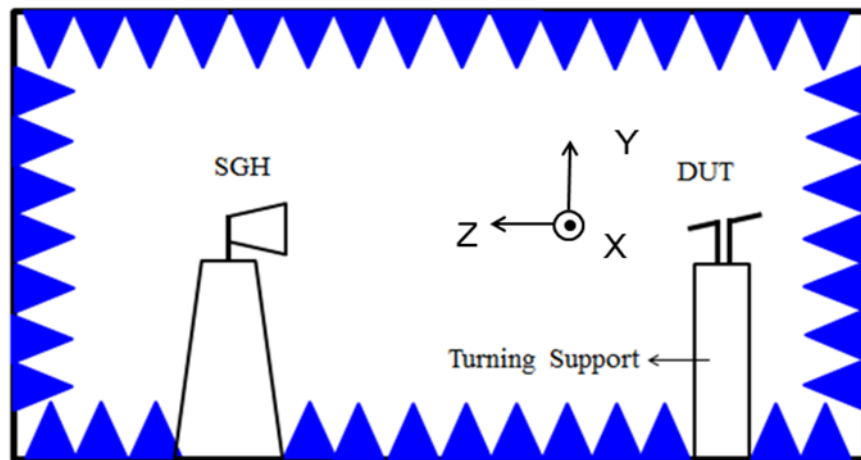


OneWave 萬誠科技股份有限公司

4. Reliability and Test Conditions

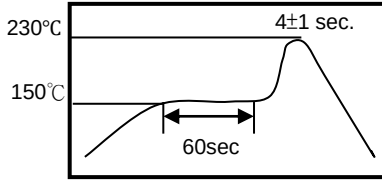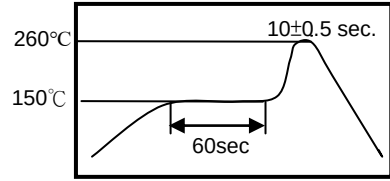ITEM	REQUIREMENTS	TEST CONDITION															
Solderability	1. Wetting shall exceed 90% coverage 2. No visible mechanical damage TEMP (°C) 	Pre-heating temperature:150°C/60sec. Solder temperature:230±5°C Duration:4±1sec. Solder:Sn-Ag3.0-Cu0.5 Flux for lead free: rosin															
Solder heat Resistance	1. No visible mechanical damage 2. Central Freq. change :within ± 6% TEMP (°C) 	Pre-heating temperature:150°C/60sec. Solder temperature:260±5°C Duration:10±0.5sec. Solder:Sn-Ag3.0-Cu0.5 Flux for lead free: rosin															
Component Adhesion (Push test)	1. No visible mechanical damage	The device should be reflow soldered(230±5°C for 10sec) to a tinned copper substrate A dynamometer force gauge should be applied the side of the component. The device must with-ST-F 0.5 Kg without failure of the termination attached to component.															
Component Adhesion (Pull test)	1. No visible mechanical damage	Insert 10cm wire into the remaining open eye bend ,the ends of even wire lengths upward and wind together. Terminal shall not be remarkably damaged.															
Thermal shock	1. No visible mechanical damage 2. Central Freq. change :within ±6% <table border="1" data-bbox="359 1176 790 1433"> <thead> <tr> <th>Phase</th><th>Temperature(°C)</th><th>Time(min)</th></tr> </thead> <tbody> <tr> <td>1</td><td>+110±5°C</td><td>30±3</td></tr> <tr> <td>2</td><td>Room Temperature</td><td>Within 3sec</td></tr> <tr> <td>3</td><td>-40±2°C</td><td>30±3</td></tr> <tr> <td>4</td><td>Room Temperature</td><td>Within 3sec</td></tr> </tbody> </table>	Phase	Temperature(°C)	Time(min)	1	+110±5°C	30±3	2	Room Temperature	Within 3sec	3	-40±2°C	30±3	4	Room Temperature	Within 3sec	+110°C =>30±3min -40°C =>30±3min Test cycle:10 cycles The chip shall be stabilized at normal condition for 2~3 hours before measuring.
Phase	Temperature(°C)	Time(min)															
1	+110±5°C	30±3															
2	Room Temperature	Within 3sec															
3	-40±2°C	30±3															
4	Room Temperature	Within 3sec															
Resistance to High Temperature	1. No visible mechanical damage 2. Central Freq. change :within ±6% 3. No disconnection or short circuit.	Temperature: +110±5°C Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.															
Resistance to Low Temperature	1. No visible mechanical damage 2. Central Freq. change :within ±6% 3. No disconnection or short circuit.	Temperature:-40±5°C Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.															
Humidity	1. No visible mechanical damage 2. Central Freq. change :within ±6% 3. No disconnection or short circuit.	Temperature: 40±2°C Humidity: 90% to 95% RH Duration: 1000±12hrs The chip shall be stabilized at normal condition for 2~3 hours before measuring.															

5. Soldering and Mounting

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

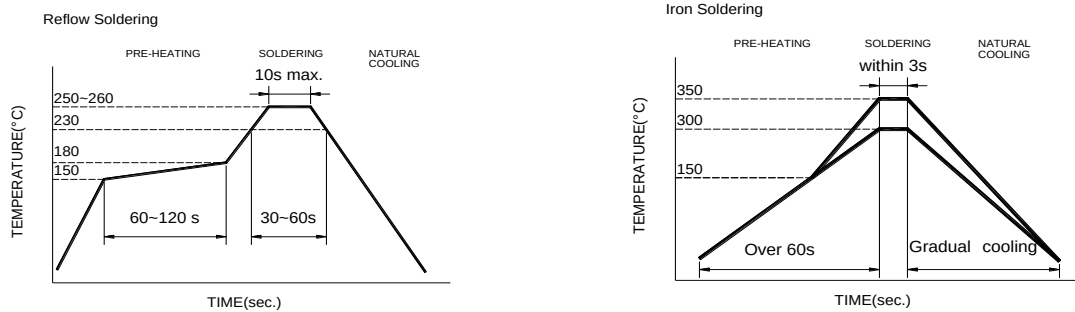


Recommended temperature profiles for re-flow soldering in Figure 1.

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.


- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 3 sec.

6. Packaging Information

◆ Tape Specification:

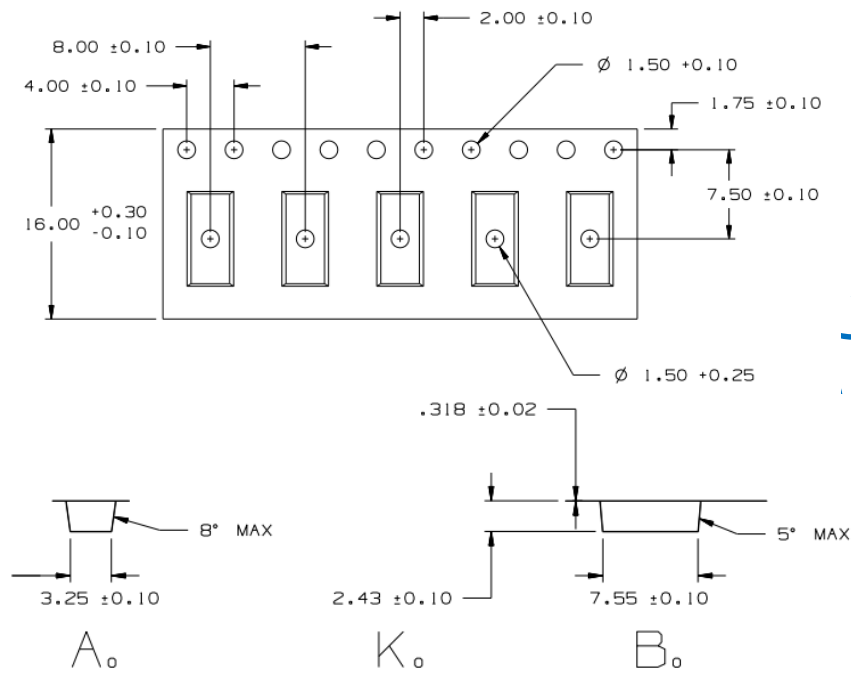

Reel Specification: (7", $\phi 180$ mm)

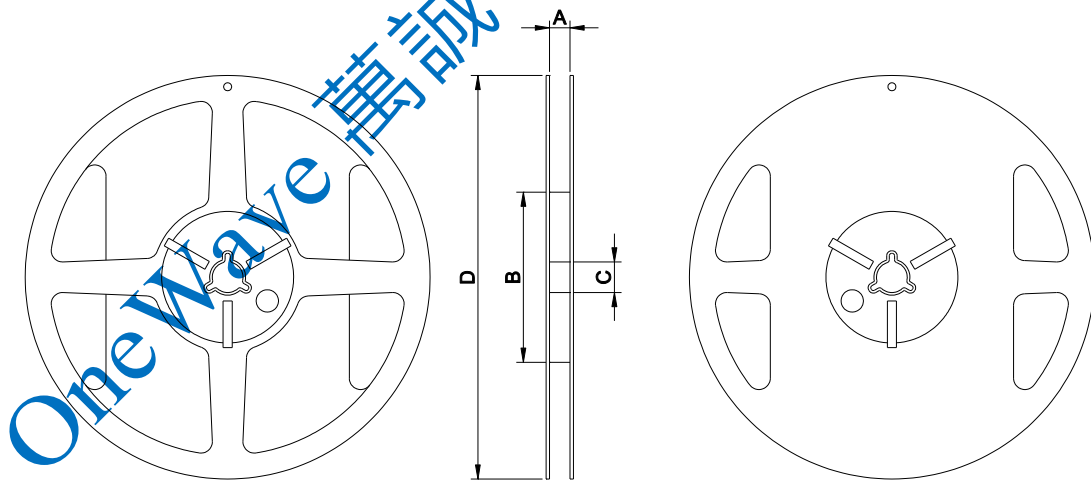

7" x 16 mm

Tape Width(mm)	A(mm)	B(mm)	C(mm)	D(mm)	Chip/Reel(pcs)
16	16 ± 1.0	60 ± 2	13.5 ± 0.5	178 ± 2	3000

7.Storage and Transportation Information

Storage Conditions

To maintain the solderability of terminal electrodes:

1. Temperature and humidity conditions: -10~ 40℃ and 30~70% RH.
2. Recommended products should be used within 6 months from the time of delivery.
3. The packaging material should be kept where no chlorine or sulfur exists in the air.

Transportation Conditions

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

OneWave 萬誠科技股份有限公司