


Operation Instructions for Control Panel

1. Control Panel as shown below

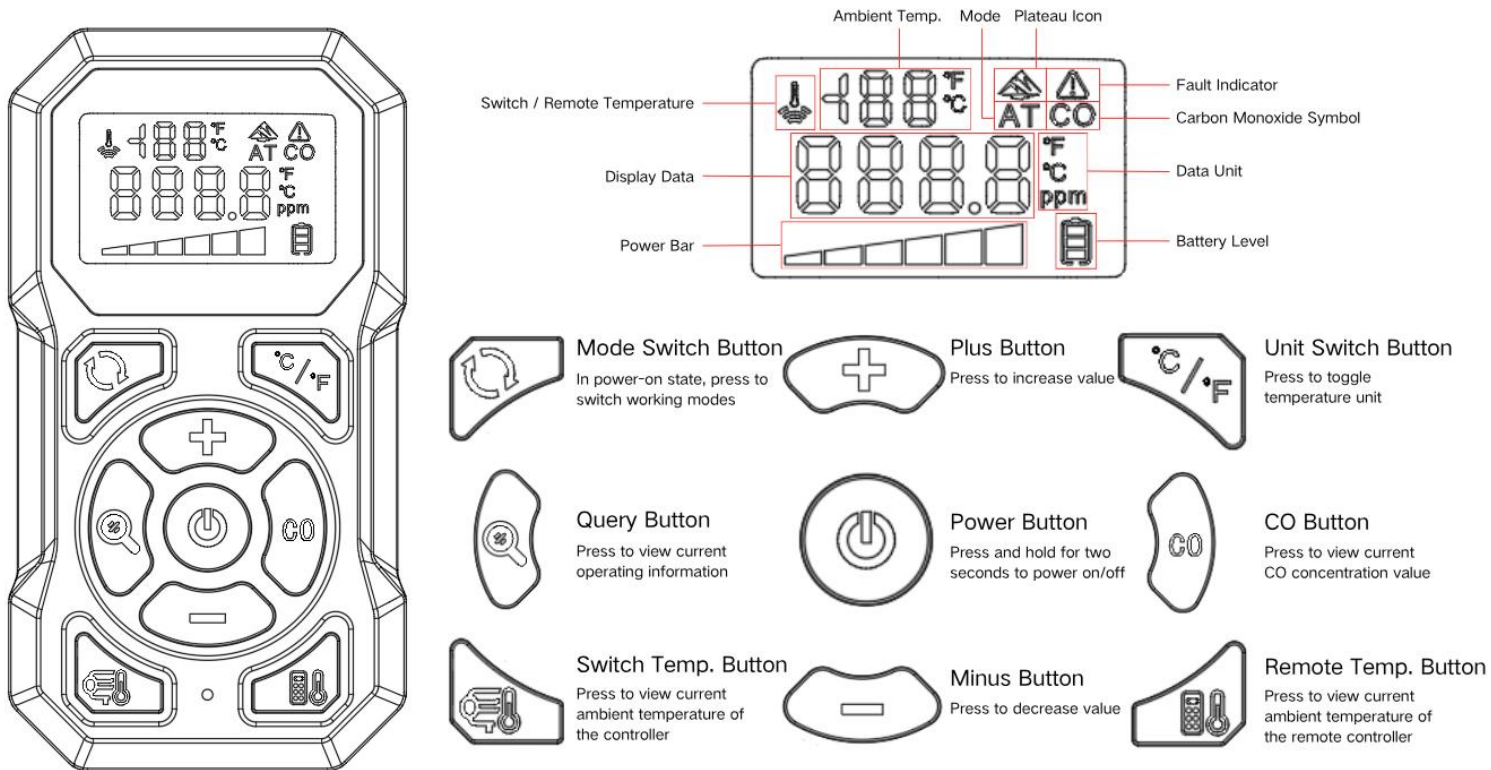

2. Battery Usage Requirements

Battery type: Use two AAA alkaline batteries. Do not mix old and new batteries or use different types of batteries together.

Installation: Insert the batteries correctly according to the polarity markings (+/-) in the battery compartment. If the remote controller will not be used for a long period, remove the batteries to prevent leakage that may damage the remote controller.

Low battery indication: When the remote control range becomes noticeably shorter or the response is sluggish, replace the batteries promptly.

*Damage caused by battery leakage is not covered under warranty.

*This remote controller features wireless two-way communication, allowing real-time monitoring of the device's operating status from a distance. It supports one-to-one operation only; simultaneous use of multiple remote controllers may cause data errors.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction