

TEST REPORT

Report No.: BCTC2606460665E

Applicant: Yanaytech Smart Innovations.

Product Name: TagWeigh Reader


Test Model: TW-R120

Tested Date: 2026-06-23 to 2026-09-23

Issued Date: 2026-09-23



Shenzhen BCTC Technology Co., Ltd.



FCC ID: 2BYCG-TW-R120

Product Name: TagWeigh Reader

Trademark: Yanaytech

Model/Type Reference: TW-R120

Prepared For: Yanaytech Smart Innovations.

Address: Balfur 44, Nahariya, 2242527, ISRAEL

Manufacturer: Yanaytech Smart Innovations.

Address: Balfur 44, Nahariya, 2242527, ISRAEL

Prepared By: Shenzhen BCTC Technology Co., Ltd.

Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.

Sample Received Date: 2026-06-23

Sample Tested Date: 2026-06-23 to 2026-09-23


Report No.: BCTC2606460665E

Test Standards: 47 CFR Part 15 Subpart C
ANSI C63.10-2020 + Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Results: PASS

Remark: This is RFID radio test report.

Prepared by :




Louis Zeng /Editor

Reviewer by :



Mike Zheng / Supervisor

Approved by:



Sewen Guo/Manager

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Technology Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	8
5. Test Facility And Test Instrument Used	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. Conducted Emissions	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test Procedure	11
6.4 EUT operating Conditions	11
7. Radiated Emissions	12
7.1 Block Diagram Of Test Setup	12
7.2 Limit	13
7.3 EUT Operating Conditions	14
7.4 Test Result	15
8. Bandwidth Test	19
8.1 Block Diagram Of Test Setup	19
8.2 Test Procedure	19
8.3 EUT Operation Conditions	19
8.4 Test Result	20
9. Antenna Requirement	21
9.1 Standard Requirement	21
9.2 EUT Antenna	21
10. EUT Test Setup Photographs	22

(Note: N/A Means Not Applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2606460665E	2026-09-23	Original	Valid

TECHNICAL
STANDARD
OVERVIEW
t se

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted Emission	15.207	N/A
2	Radiated Spurious Emission	Part 15.209(a)	PASS*
3	20dB Occupied Bandwidth	15.215	PASS*
4	Antenna Requirement	15.203	PASS

NOTE1: N/A (Not Applicable)

NOTE2:"*" indicates that the test results are determined base on 47 CFR Part 15 Subpart C. And the test results are took into account measurement uncertainty (see section 3 for measurement uncertainty information)



3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2:2011/AMD2:2018. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=5.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=5.0dB
5	Conducted Emission(150kHz-30MHz)	U=3.0dB
6	Power Spectral Density	U=3.46dB
7	Peak Power	U=0.31dB
8	Occupied Bandwidth/Frequency Range	U=3.46%
9	Conducted output power uncertainty	U=0.55dB
10	Frequency Error	U= 53.50 Hz
11	Frequency Drift	U=0.64 KHz
12	Temperature	U= 0.59 °C
13	Humidity	U= 5.3 %

4. Product Information And Test Setup


4.1 Product Information

Model/Type Reference:	TW-R120
Model Differences:	N/A
Operation Frequency:	134.2kHz
Modulation Type:	ASK
Number Of Channel	1 CH
Antenna installation:	Coil antenna Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity.
Ratings:	DC 12-36V

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	TagWeigh Reader	Yanaytech	TW-R120	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List	
Channel	Frequency(KHz)
01	134.2

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description
Mode 1	TX Mode

Link mode (Conducted emission and Radiated emission)	
Final Test Mode	Description
Mode 1	TX Mode

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Technology Co., Ltd.

Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.

The site and apparatus are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-1:2019 other equivalent standards.

FCC Test Firm Registration Number: 754702

ANAB certificate registration number is: CN3479

5.2 Test Instrument Used


Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	2023.09.25	2026.09.24
Loop Antenna	Schwarzbeck	FMZB1519B	00014	2026.01.05	2027.01.04
Broadband antenna	SCHWHRZBE CK	VULB9168	01620	2025.08.29	2026.08.28
Horn antenna (1 GHz -18GHz)	SCHWARZBE CK	BBHA 9120 D	2792	2025.08.29	2026.08.28
Horn antenna (18 GHz -40GHz)	SCHWARZBE CK	BBHA9170	00822	2025.12.29	2026.12.28
Receiver	R&S	ESR	1316	2025.08.30	2026.08.29
Spectrum Analyzer	R&S	FSV40	101328	2026.01.22	2027.01.21
Amplifier	SCHWHRZBE CK	BBV9744	568	2025.08.30	2026.08.29
Amplifier	EMC INSTRUMENT S CORPORATION	EMC0518A45 SEE	EMT-SZ2233	2025.08.30	2026.08.29
Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	2026.05.09	2027.05.08
Band 2.4G-2.5G Filter	COM-MW	ZBSF6-C5150 -5350-1117	2220980	2025.08.30	2026.08.29
RF cable 3# (9kHz-6GHz)	Yunyi	10M	/	2025.08.30	2026.08.29
RF cable 9# (9kHz-1GHz)	Yunyi	2M	/	2025.10.28	2026.10.27
RF cable 5# (1GHz -18GHz)	SKET	9M	18038626	2025.08.30	2026.08.29
RF cable 6# (1GHz -18GHz)	SKET	5M	#10	2025.09.05	2026.09.04

RF cable 10# (18GHz-40GHz)	/	2M	2M	2026.05.09	2027.05.08
RF cable 11# (18GHz-40GHz)	/	2.5M	2.5M	2026.05.09	2027.05.08
Temperature & Humidity	Wetest	HTC-1	/	2025.09.05	2026.09.04
Communication test set	R&S	CMW500	157483	2025.08.30	2026.08.29
Software	EZ-EMC	Ver.FA-03A2	/	/	/

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Spectrum Analyzer	Keysight	N9020A	MY51287403	2025.08.30	2026.08.29
Signal Generator	Keysight	N5182A	MY50144088	2025.08.30	2026.08.29
Power Sensor	Keysight	U2001	MY51250006	2025.10.28	2026.10.27
Temperature & Humidity	Wetest	HTC-1	/	2025.09.01	2026.08.31
Communication test set	R&S	CMW500	157483	2025.08.30	2026.08.29
Radio frequency control box	MWRFtest	MW100-RFCB	\	\	\
Software	MWRFtest	MTS 8310	V 3.0.0.0	\	\
D.C. Power Supply	Elektro-Automati k GmbH & Co.KG	D-41747 Viersen	6230316	2025.09.30	2026.08.29
Temperature and humidity test chamber	Auchno	OJN-9606-408 L	19120183	2026.07.07	2027.07.06

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

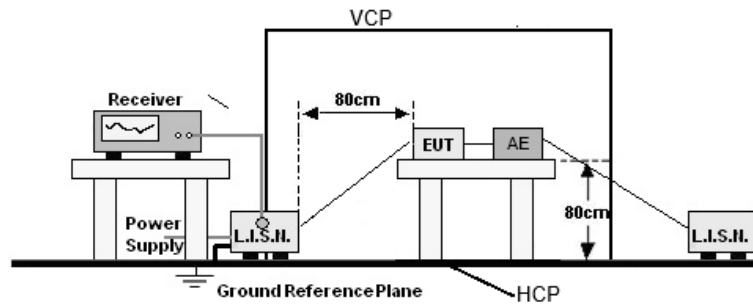

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT is powered by the DC only, the test item is not applicable.


7. Radiated Emissions

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

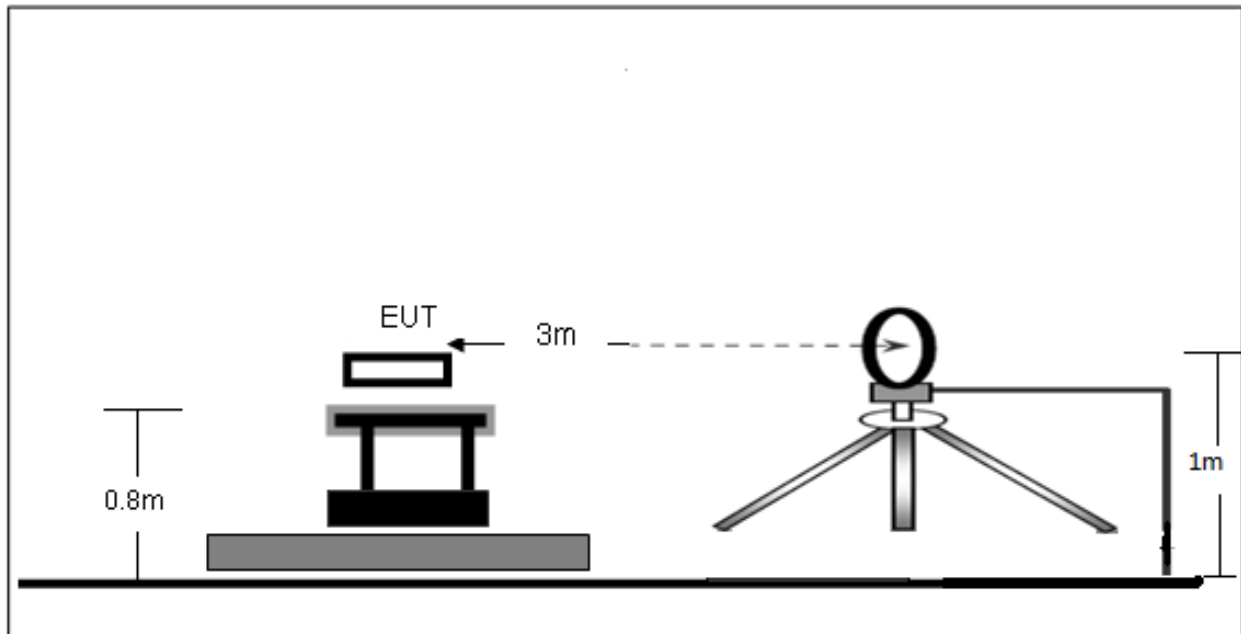

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

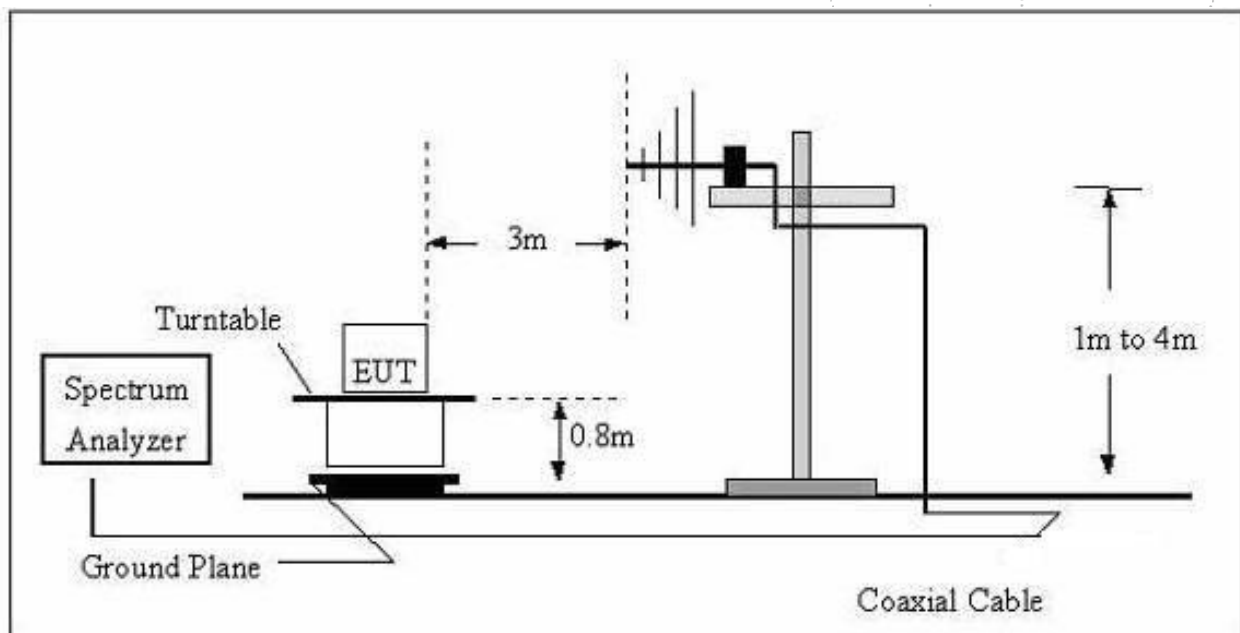

7.2 Limit

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(kHz)$	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(kHz)$	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.


7.3 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.4 Test Result

9kHz – 30MHz

Temperature:	23.1°C	Relative Humidity:	55%RH
Pressure:	101 kpa	Test Voltage:	DC 36V
Test Mode:	Mode 1	Polarization:	Coaxial

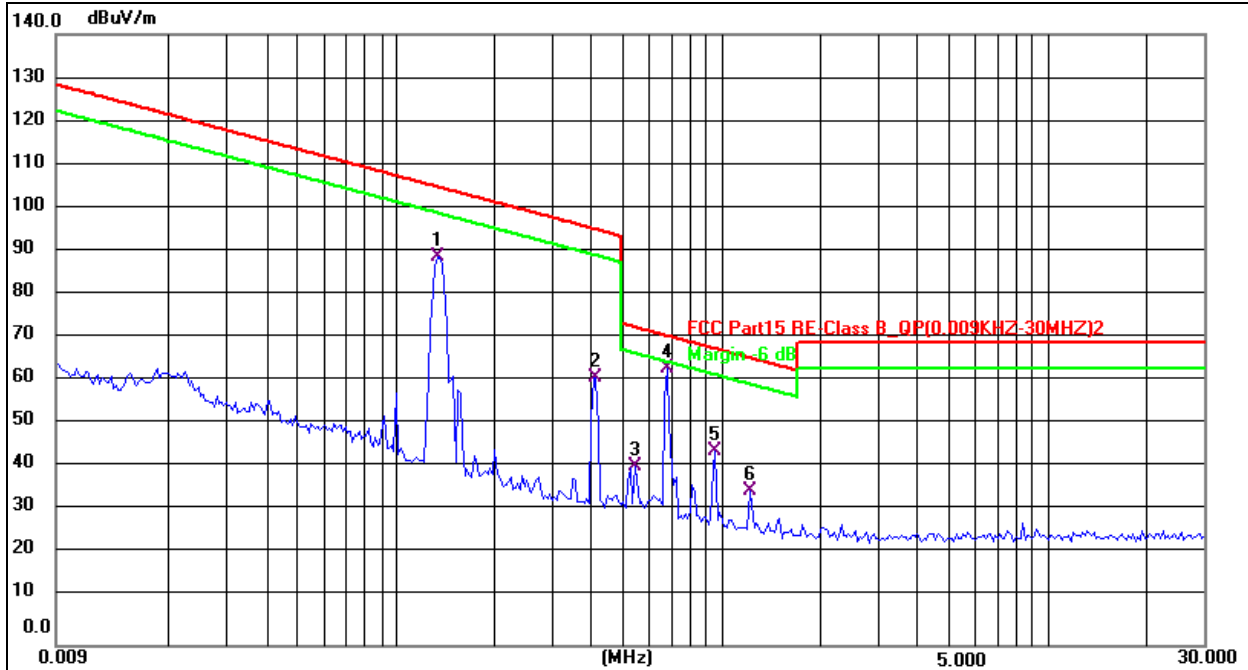


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1342	100.27	-11.23	89.04	105.05	-16.01	QP
2	0.4074	72.80	-11.47	61.33	95.40	-34.07	QP
3	0.5367	52.61	-11.35	41.26	73.01	-31.75	QP
4 *	0.6736	74.82	-11.18	63.64	71.04	-7.40	QP
5	0.9471	55.84	-11.31	44.53	68.09	-23.56	QP
6	1.2080	46.83	-11.45	35.38	65.98	-30.60	QP

Temperature:	23.1°C	Relative Humidity:	55%RH
Pressure:	101 kpa	Test Voltage:	DC 36V
Test Mode:	Mode 1	Polarization:	Coplanar

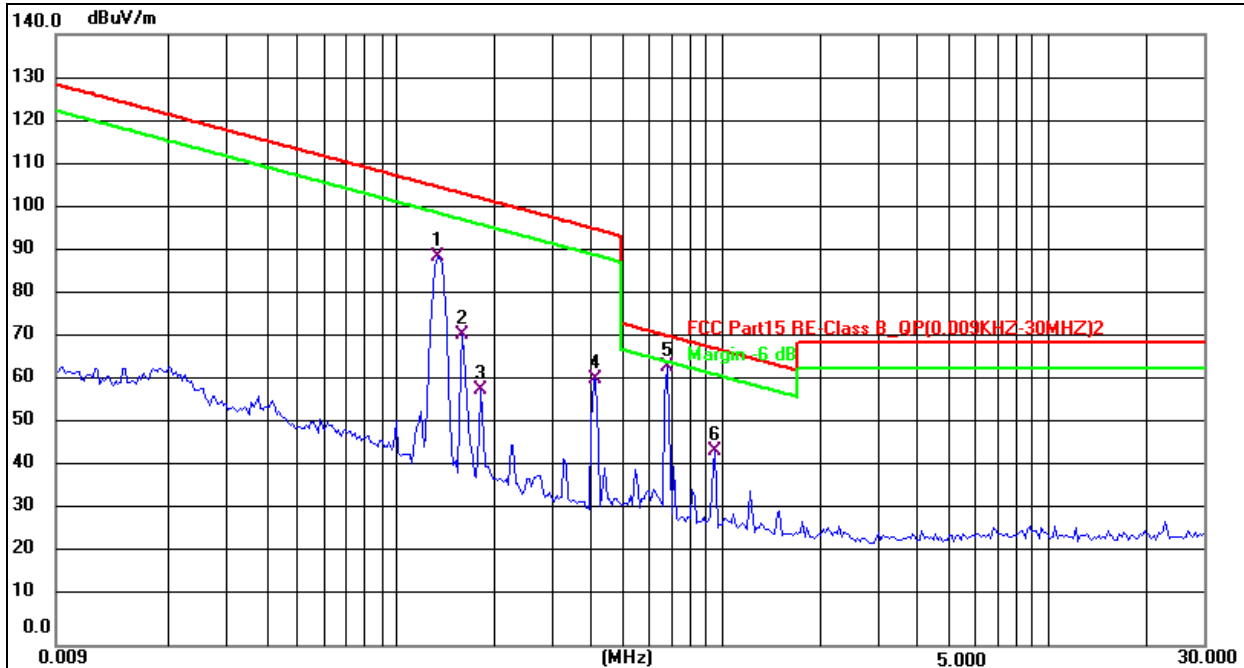

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1342	100.26	-11.23	89.03	105.05	-16.02	QP
2	0.1590	82.41	-11.07	71.34	103.57	-32.23	QP
3	0.1810	69.82	-11.04	58.78	102.45	-43.67	QP
4	0.4074	72.54	-11.47	61.07	95.40	-34.33	QP
5 *	0.6736	74.90	-11.18	63.72	71.04	-7.32	QP
6	0.9471	55.92	-11.31	44.61	68.09	-23.48	QP

Between 30MHz – 1GHz

Temperature:	23.1°C	Relative Humidity:	55%RH
Pressure:	101KPa	Test Voltage:	DC 36V
Test Mode:	Mode 1	Polarization:	Horizontal

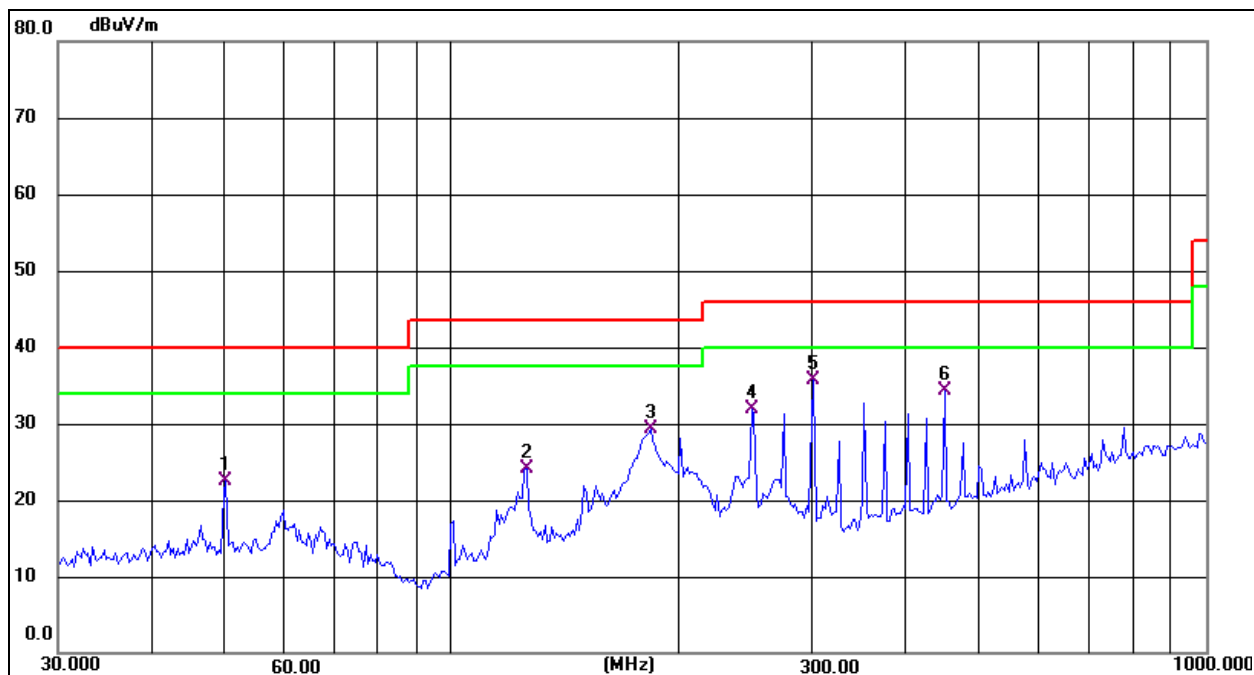


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.0566	34.00	-11.41	22.59	40.00	-17.41	QP
2	125.4457	35.98	-11.92	24.06	43.50	-19.44	QP
3	183.2005	41.65	-12.40	29.25	43.50	-14.25	QP
4	249.4250	43.29	-11.40	31.89	46.00	-14.11	QP
5 *	301.4224	45.80	-10.02	35.78	46.00	-10.22	QP
6	449.5558	40.21	-5.88	34.33	46.00	-11.67	QP

Temperature:	23.1°C	Relative Humidity:	55%RH
Pressure:	101KPa	Test Voltage:	DC 36V
Test Mode:	Mode 1	Polarization:	Vertical

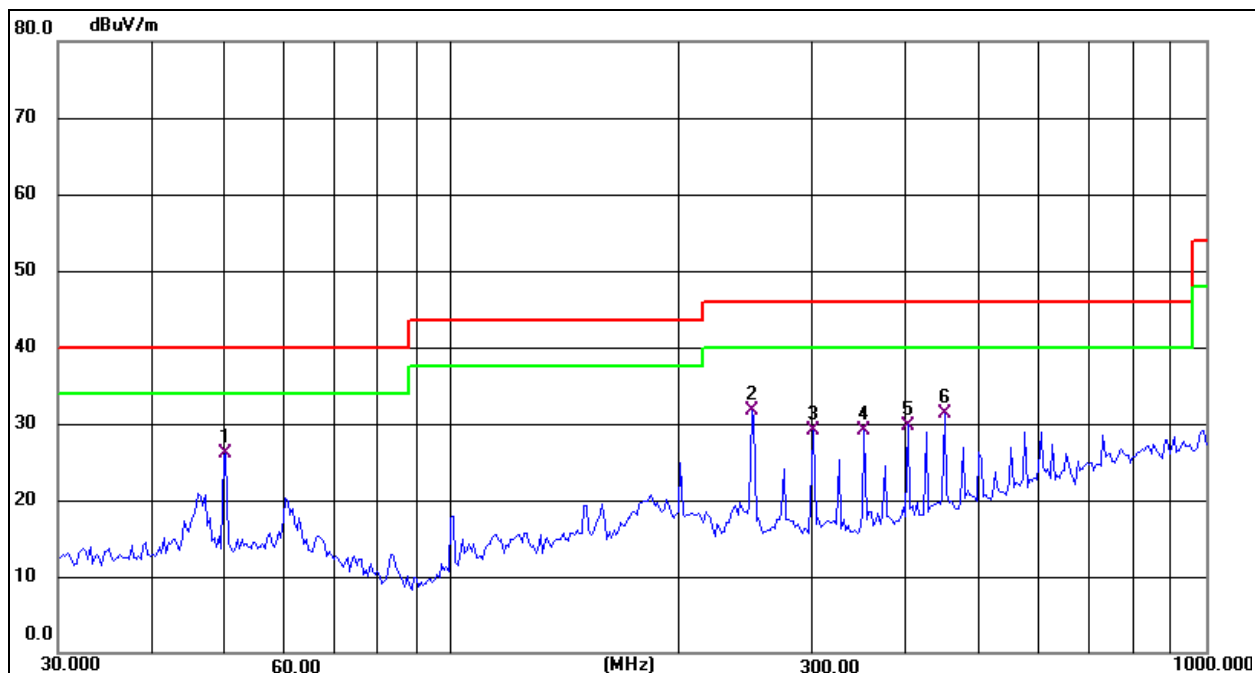

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	50.0566	37.48	-11.41	26.07	40.00	-13.93	QP
2	249.4250	43.14	-11.40	31.74	46.00	-14.26	QP
3	301.4224	39.17	-10.02	29.15	46.00	-16.85	QP
4	351.7079	37.87	-8.86	29.01	46.00	-16.99	QP
5	401.8385	37.34	-7.54	29.80	46.00	-16.20	QP
6	449.5558	37.14	-5.88	31.26	46.00	-14.74	QP

BCTC CO., LTD

8. Bandwidth Test

8.1 Block Diagram Of Test Setup



8.2 Test Procedure

FCC Part 2.1049	
Section	Test Item
2.1049	Bandwidth

1. Set RBW = 1% to 5% of the OBW
2. Set the video bandwidth (VBW) $\geq 3\text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

8.3 EUT Operation Conditions


The EUT tested system was configured as the statements of 4.2 Unless otherwise a special operating condition is specified in the follows during the testing.

8.4 Test Result

Temperature:	26°C	Relative Humidity:	54%RH
Test Mode:	ASK	Test Voltage:	DC 36V

Frequency (KHz)	20dB bandwidth Hz
134.2	441

TX CH 01

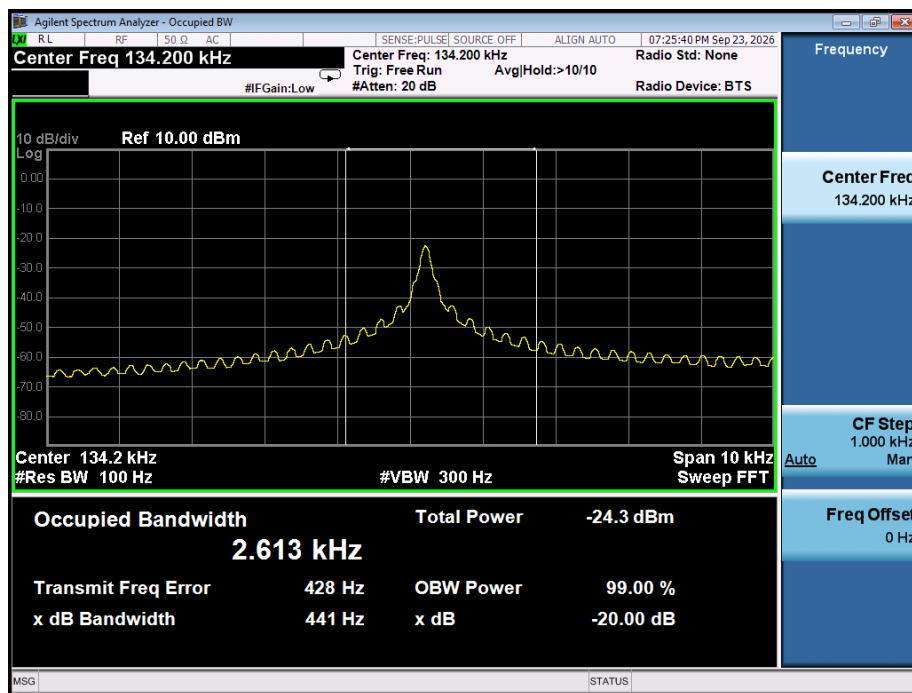

9. Antenna Requirement

9.1 Standard Requirement



An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

9.2 EUT Antenna

The EUT antenna is Coil antenna, It comply with the standard requirement.

10. EUT Test Setup Photographs

Radiated Measurement

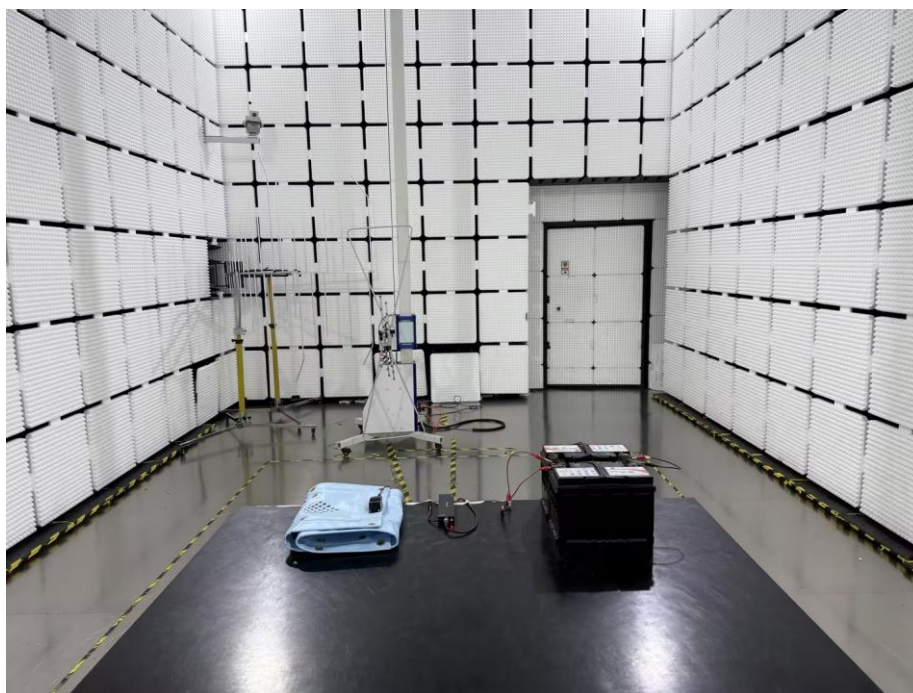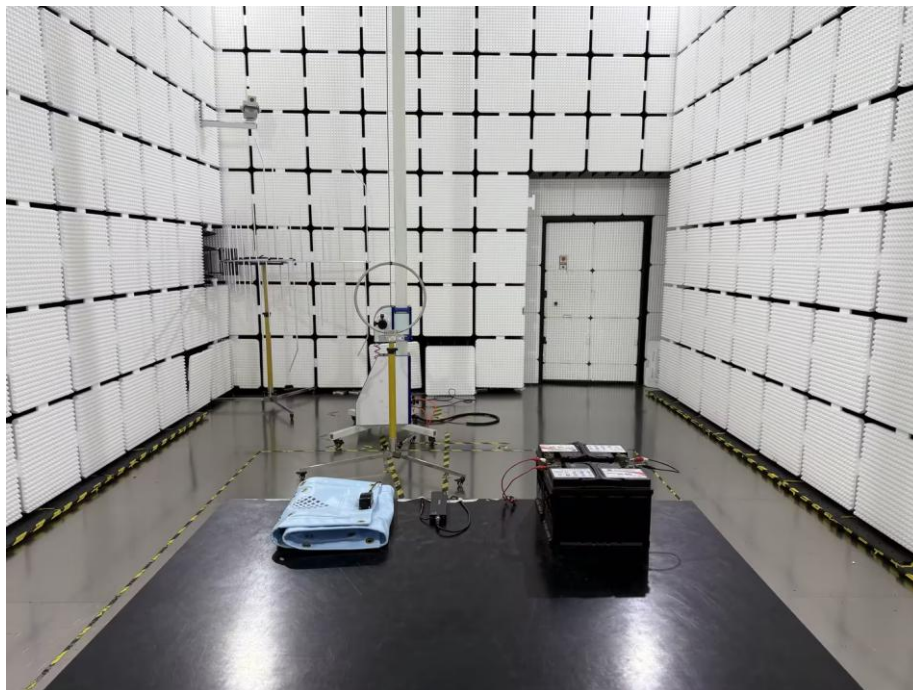

STATEMENT

1. The equipment lists are traceable to the International System of Units (SI)
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC 17025:2017.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

※※※※※ END ※※※※※

CHN CO., LTD