


Health Test Report

For

Applicant name: Ningbo Daxie Development Zone Shangfei Container Co., Ltd.
Address: Building 2, No. 3 Lichang Road, Daxie Development Zone, Ningbo, Zhejiang Province, China
EUT name: wireless charging gunsafe box
Brand name: N/A
Model number: SFWC001
Series model number: N/A
FCC ID: 2BYCY-SFWC001

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Report number: BTF260828R00405
Test standards: 47 CFR Part 1 Subpart I Section 1.1310
Test conclusion: Pass
Date of sample receipt: 2026-08-28
Test date: 2026-08-28 to 2026-09-14
Date of issue: 2026-09-18

Prepared by: 
Zero Zeng / Project engineer

Approved by:



Ryan.CJ / EMC manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue date	Revisions content
R_V0	2026-09-18	Original
<i>Note:</i> <i>Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1 Introduction	4
1.1 Laboratory Location	4
1.2 Laboratory Facility	4
1.3 Announcement	4
2 Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	5
3 Test Equipment List	6
4 Applied Reference Documents	6
5 Test mode	6
6 Test Auxiliary Equipment	6
7 Test Settings	7
8 Reference Levels Limits	8
9 Assessment Results	9
10 Test Setup Photos	9

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Description:	All measurement facilities used to collect the measurement data are located at Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**
BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.
- **CNAS - Registration No.: CNAS L17568**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.
- **A2LA - Registration No.: 6660.01**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2 Product Information

2.1 Application Information

Company name:	Ningbo Daxie Development Zone Shangfei Container Co., Ltd.
Address:	Building 2, No. 3 Lichang Road, Daxie Development Zone, Ningbo, Zhejiang Province, China

2.2 Manufacturer Information

Company name:	Ningbo Daxie Development Zone Shangfei Container Co., Ltd.
Address:	Building 2, No. 3 Lichang Road, Daxie Development Zone, Ningbo, Zhejiang Province, China

2.3 Factory Information

Company name:	Ningbo Daxie Development Zone Shangfei Container Co., Ltd.
Address:	Building 2, No. 3 Lichang Road, Daxie Development Zone, Ningbo, Zhejiang Province, China

2.4 General Description of Equipment under Test (EUT)

EUT name	wireless charging gunsafe box
Under test model name	SFWC001
Series model name	N/A
Description of model name differentiation	N/A
Hardware Version	N/A
Software Version	C4 V0.3
Rating:	Input: 100-240V ~ 50/60Hz 1.5A MAX Output: 24.0V --- 2.0A 48.0W

2.5 Technical Information

Operation frequency:	110 kHz-205kHz
Modulation technology:	ASK
Antenna type:	Coil Antenna

3 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Electric and Magnetic Field Analyzer	Narda	EHP-200A	180ZX11001	2025/11/21	2026/11/20

4 Applied Reference Documents

Identity	Document Title
47 CFR Part 1 Subpart I Section 1.1310	Radiofrequency radiation exposure limits.

5 Test mode


No.	Test Modes	
TM1	EUT stand alone, standby.powered by AC input.	
TM2	Direct contact duringcharging/operating between theEUT& Mobile phone load is poweredby AC input.	Using a mobile phone load (full load)
TM3		Using a mobile phone load (half load)
TM4		Using a mobile phone load (1%load)
TM5	Direct contact duringcharging/operating between theEUT& IWatch load is poweredby AC input.	Using a mobile IWatch load (full load)
TM6		Using a mobile IWatch load (half load)
TM7		Using a mobile IWatch load (1%load)
TM8	Direct contact duringcharging/operating between theEUT& Mobile phone load and IWatch load is poweredby AC input.	Using a mobile phone load and IWatch load(full load)
TM9		Using a mobile phone load and IWatch load(half load)
TM10		Using a mobile phone load and IWatch load(1%load)
Remark: /		

6 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	iPhone	Apple	IPhone 15 pro	/	/

7 Test Settings

Test Setup

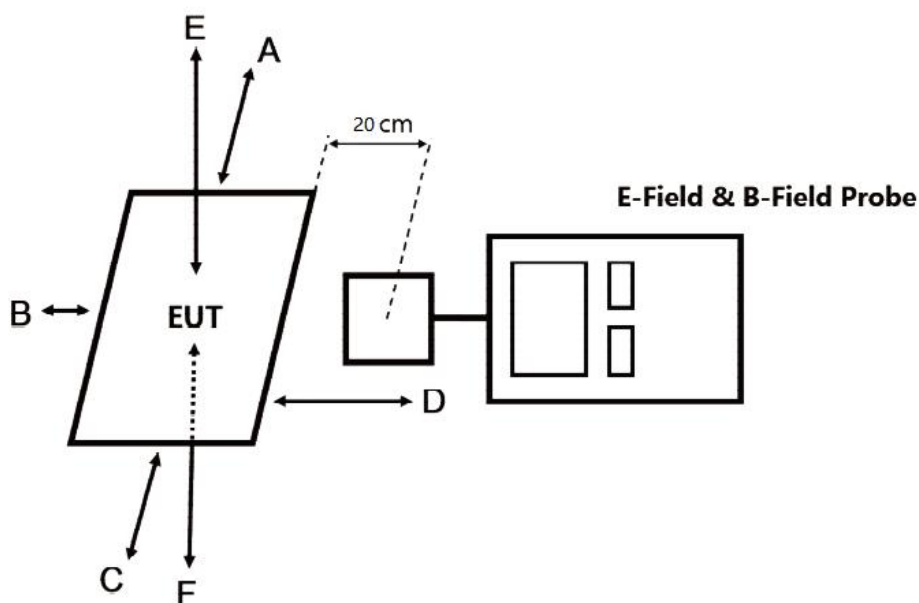

Remrak:

1. The EHP 200AC probe antenna diameter is 8.8cm.
2. A is Front side, B is Back side, C is Left side, D is Right side, E is Top side.
3. The test distance of A, B, C, D, E side is 20cm.

Test Procedure

1. Installing the probe and turn on the EHP 200AC power switch, in the testing software, select the magnetic field test mode and the A/m unit, select the peak detection mode, select the Max-Hold display.
2. Check the background noise.
3. Make DUT work at maximum transmit power.
4. During the measurement, the probe centre of the EHP 200AC is kept in 20cm distance from each test surface of the wireless charging base, and recorded the measured values of the A, B, C, D, E side are separately.
5. In the testing software, Select the electric field test mode and the V/m unit, select the peak detection mode, select the Max-Hold display.

Note1: The sensitive elements are located approximately 8mm below the exxternal surface

Note2: Measurements should be made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device.

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20cm) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

8 Reference Levels Limits

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

9 Assessment Results

➤ MPE Evaluation:

H-Field Strength at 20cm from the edges surrounding the EUT								
Load	Measured Distance (cm)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	FCC E-Field Strength Limits (V/m)
99%	20	1.78	1.65	1.94	2.74	2.17	/	614
50%	20	1.97	1.63	1.90	2.62	2.54	/	614
1%	20	2.12	1.82	1.70	3.02	2.25	/	614
E-Field Strength at 20cm from the edges surrounding the EUT								
Load	Measured Distance (cm)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	FCC H-Field Strength Limits (A/m)
99%	20	0.143	0.127	0.185	0.191	0.188	/	1.63
50%	20	0.177	0.173	0.164	0.204	0.190	/	1.63
1%	20	0.227	0.255	0.206	0.223	0.247	/	1.63

➤ Conclusion:

According to 47 CFR Part 1 Subpart I Section 1.1310, this device complies with human exposure basic restrictions.

10 Test Setup Photos





BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

--END OF REPORT--