


Antenna Describe


1: Antenna Describe


Manufacturer	AIFA TECHNOLOGY CORP.
Antenna:	PCB Antenna
Antenna Gain:	2.41 dBi
Frequency Range:	2412 - 2462MHz

Unit:mm

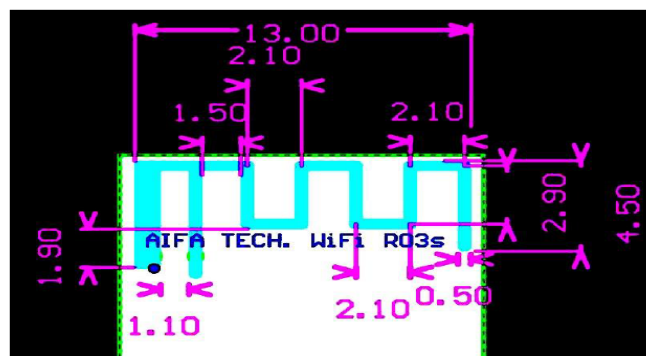


2D Radiation Pattern

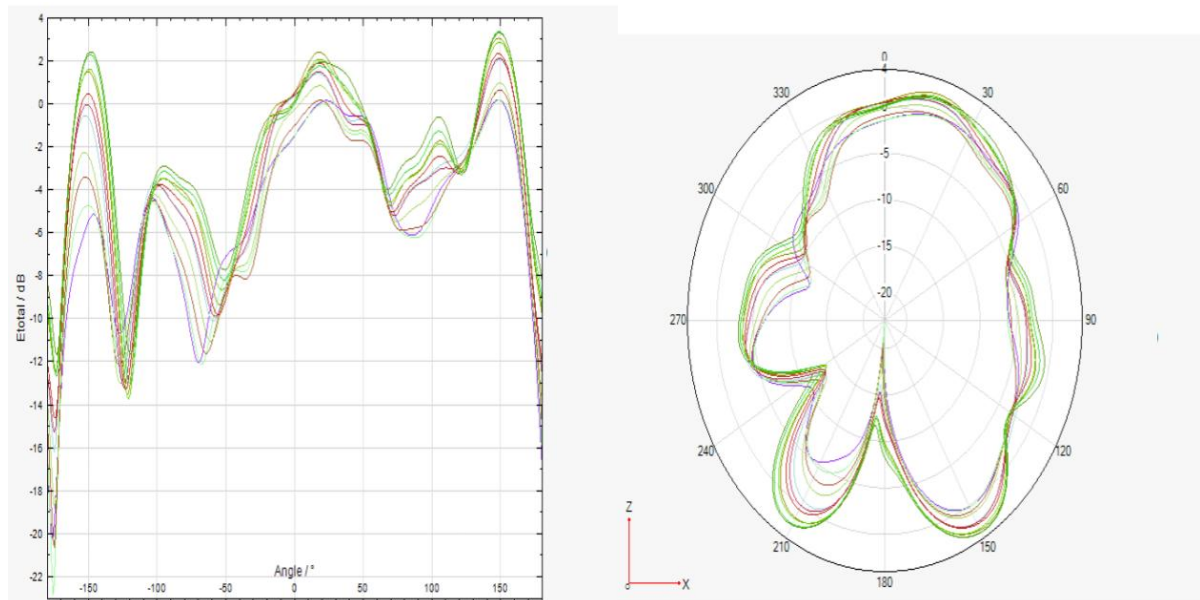

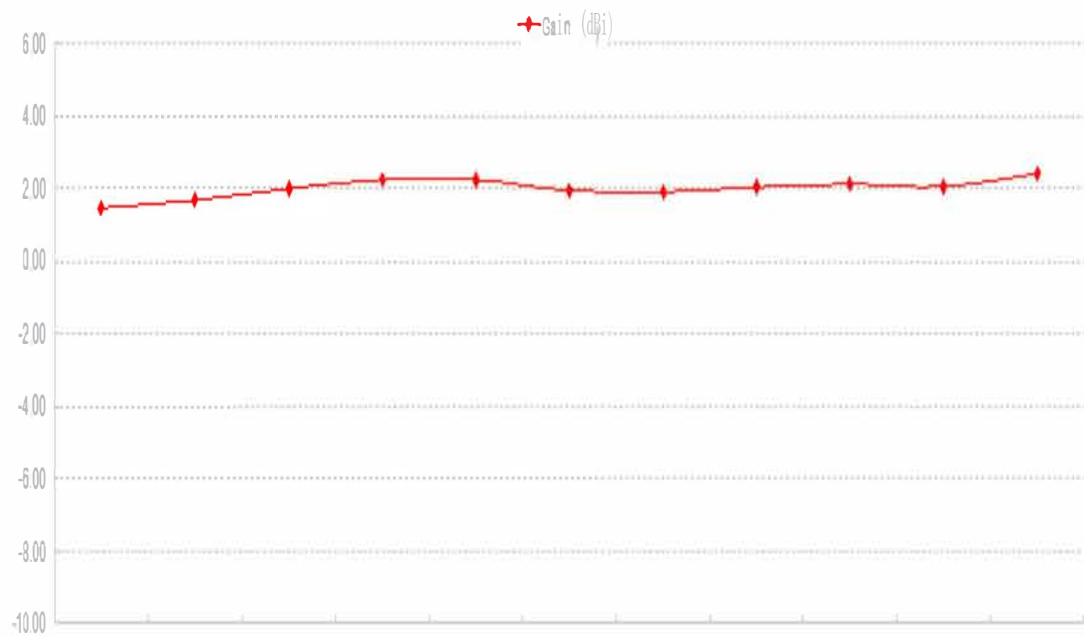

Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.69	-2.52	-2.23	-2.04	-1.95	-2.28	-2.44	-2.49	-2.60	-2.83	-2.45
Peak EIRP (dBm)	1.46	1.67	1.98	2.24	2.24	1.94	1.91	2.04	2.12	2.05	2.41
Directivity (dBi)	4.15	4.19	4.21	4.28	4.19	4.22	4.36	4.52	4.72	4.87	4.86
Efficiency (dB)	-2.69	-2.52	-2.23	-2.04	-1.95	-2.28	-2.44	-2.49	-2.60	-2.83	-2.45
Efficiency (%)	53.80	56.00	59.80	62.50	63.80	59.20	57.00	56.40	55.00	52.20	56.90
Gain (dBi)	1.46	1.67	1.98	2.24	2.24	1.94	1.91	2.04	2.12	2.05	2.41
NHPRP $\pm\pi/4$ (dBm)	-3.69	-3.36	-2.92	-2.52	-2.55	-2.92	-3.24	-3.47	-3.56	-3.59	-2.96
NHPRP $\pm\pi/6$ (dBm)	-4.35	-4.03	-3.59	-3.20	-3.23	-3.60	-3.92	-4.14	-4.22	-4.26	-3.65
NHPRP $\pm\pi/8$ (dBm)	-4.96	-4.64	-4.21	-3.82	-3.85	-4.21	-4.53	-4.75	-4.83	-4.88	-4.29
Upper Hem. PRP (dBm)	-5.17	-4.93	-4.58	-4.35	-4.22	-4.52	-4.66	-4.67	-4.76	-4.96	-4.55
Lower Hem. PRP (dBm)	-6.30	-6.22	-6.01	-5.89	-5.85	-6.22	-6.43	-6.51	-6.65	-6.93	-6.61
Upper Hem. PRP (%)	30.38	32.14	34.79	36.77	37.80	35.31	34.18	34.09	33.41	31.88	35.06
Lower Hem. PRP (%)	23.45	23.85	25.03	25.78	26.03	23.90	22.78	22.33	21.60	20.29	21.82

3D Radiation Pattern

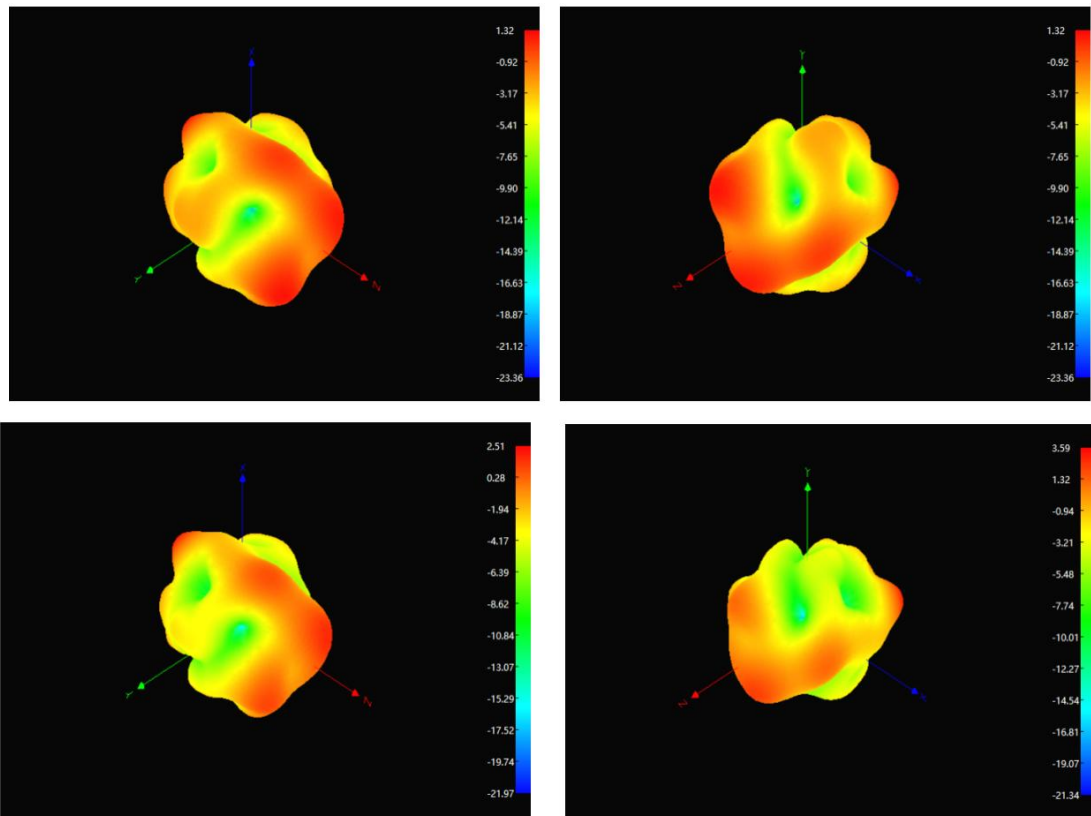

Manufacturer: AIFA TECHNOLOGY CORP.

Address: No.230, Sec. 2, Bade Rd., Fengshan Dist., Kaohsiung City, Taiwan