

TEST REPORT

Product : Digital camera
Trade mark : NBD
Model/Type reference : D100, D110
Serial Number : N/A
Report Number : EED32S821782
FCC ID : 2BYEW-D100
Date of Issue : September 29, 2026
Test Standards : FCC Part 15 C
Test result : PASS

Prepared for:

NingBo New Beam Digital Electronic Technology CO.,LTD
Rm 2003-2, Taikang Bldg, No.42, Ln 818, Qianhe S Rd, Shounan, Yinzhou,
Ningbo, Zhejiang, CHINA

Prepared by:

Centre Testing International Group Co., Ltd.
Building C, Hongwei Industrial Park Block 70, Bao'an District,
Shenzhen, China

TEL: +86-755-3368 3668**FAX: +86-755-3368 3385**

Compiled by:

Frazer Li

Frazer Li

Approved by:

Aaron Ma

Aaron Ma

Reviewed by:

Tom Chen

Tom Chen

Date:

September 29, 2026

Check No.: 8852040926

1 Content

1 CONTENT 2

2 TEST SUMMARY 3

GENERAL INFORMATION 4

2.1 CLIENT INFORMATION 4

2.2 GENERAL DESCRIPTION OF EUT 4

2.3 TEST CONFIGURATION 6

2.4 TEST ENVIRONMENT 7

2.5 DESCRIPTION OF SUPPORT UNITS 7

2.6 TEST LOCATION 7

2.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) 8

3 EQUIPMENT LIST 9

4 TEST RESULTS AND MEASUREMENT DATA 13

4.1 ANTENNA REQUIREMENT 13

4.2 AC POWER LINE CONDUCTED EMISSIONS 14

4.3 MAXIMUM CONDUCTED OUTPUT POWER 17

4.4 DTS BANDWIDTH 18

4.5 MAXIMUM POWER SPECTRAL DENSITY 19

4.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION 20

4.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS 21

5 APPENDIX A 90

6 PHOTOGRAPHS 91

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band edge measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

3 General Information

3.1 Client Information

Applicant:	NingBo New Beam Digital Electronic Technology CO.,LTD
Address of Applicant:	Rm 2003-2, Taikang Bldg, No.42, Ln 818, Qianhe S Rd, Shounan, Yinzhou, Ningbo, Zhejiang, CHINA
Manufacturer:	Shenzhen Xinbo Technology Co., Ltd.
Address of Manufacturer:	Room F610, Building F, Huafeng International Robot Industrial Park, Hangcheng Boulevard, Nanchang Community, Xixiang Sub-district, Bao'an District, Shenzhen City, Guangdong Province, P.R.China
Factory:	Shenzhen Xinbo Technology Co., Ltd.
Address of Factory:	Room F610, Building F, Huafeng International Robot Industrial Park, Hangcheng Boulevard, Nanchang Community, Xixiang Sub-district, Bao'an District, Shenzhen City, Guangdong Province, P.R.China

3.2 General Description of EUT

Product Name:	Digital camera	
Model No.:	D100, D110	
Test Model No.:	D100	
Model difference:	All model numbers have the same electrical design, PCB and layout. The differences are only in model name.	
Trade mark:	NBD	
Product Type:	Portable	
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz	
Modulation Type:	IEEE for 802.11b:DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g:OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40): OFDM (64QAM, 16QAM,QPSK,BPSK)	
Number of Channel:	11	
Channel Separation:	5MHz	
Function	SISO	
Antenna Type:	PCB antenna	
Antenna Gain:	-2.53 dBi	
Power Supply:	Adapter:	Model No.: N/A Input: N/A Output: N/A
	Battery:	DC 3.8V
	USB Port:	DC 5V
Test Voltage:	DC 3.8V	
Sample Received Date:	Sep. 08, 2026	
Sample tested Date:	Sep. 08, 2026 to Sep. 20, 2026	

Operation Frequency each of channel (802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel (802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz		
5	2432MHz	8	2447MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The highest channel	2452MHz

3.3 Test Configuration

EUT Test Software Settings:

Test Software:	sscom5.13.exe
----------------	---------------

EUT Power Grade:	Default
------------------	---------

Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

Test Mode:

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n(HT20), MCS0 for 802.11n(HT40),

3.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

3.5 Description of Support Units

No.	Device Type	Brand	Series No.	Model	Data Cable	Power Cord
1.	Netbook	Dell	P77F	FCC&CE	--	--
2.	Router	Asus	GT-AXE11000	FCC&CE	--	--

3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164, Test Firm Registration No.: 260439

3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Spectrum Analyzer	Keysight	N9020B	MY57110194	2026/4/25	2027/4/24
DC Power	Keysight	E3634A	MY58186018	2026/4/25	2027/4/24
Signal Generator	R&S	SMBV100B	103596	2026/4/25	2027/4/24
Signal Generator	Keysight	N5171B	MY53051074	2026/4/25	2027/4/24
Communication test set	R&S	CMW500	159004	2026/4/25	2027/4/24
Wi-Fi 7GHz Band Extender	TSTPASS	TSTCMWSGEXT 7	SN4522048	2026/4/25	2027/4/24
RF control unit(power unit)	TSTPASS	TSCB562R2	SN2949184	2026/4/25	2027/4/24
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ201506118 79	2025/11/13	2026/11/12
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	2026/05/22	2027/05/21
BT&WI-FI Automatic test system	TSTPASS	---	V2.0.2	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-29-2024	01-28-2027
Receiver	Keysight	N9038A	MY57290136	12-22-2025	12-21-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	12-21-2025	12-20-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	12-21-2025	12-20-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	03-29-2026	03-28-2027
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-03-2026	04-02-2027
Horn Antenna	ETS-LINDGREN	3117	57407	05-10-2026	05-09-2027
Preamplifier	EMCI	EMC001330	980563	02-06-2026	02-05-2027
Preamplifier	EMCI	EMC051845SE	980380	11-25-2025	11-24-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-07-2025 06-22-2026	07-06-2026 06-21-2027
Communication test set	R&S	CMW500	104466	11-25-2025	11-24-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-24-2026	03-23-2027
RSE Automatic test software	JS Tonscend	JS36-RSE	V5.0.0.1	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-29-2024	01-28-2027
Cable line	Times	EMC104-NMNM-1000	SN160710	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-29-2024	01-28-2027
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-29-2024	01-28-2027

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESCI7	100938-003	09/03/2025 08-31-2026	09/02/2026 08-30-2027
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/11/2026	05/10/2027
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	03/29/2026	03/28/2027
Microwave Preamplifier	Tonscend	EMC051845SE	980380	11/25/2025	11/24/2026
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023 05-16-2026	07/01/2026 05-15-2027
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	03/31/2026	03/30/2027
Preamplifier	Agilent	11909A	12-1	02/06/2026	02/05/2027
Preamplifier	CD	PAP-1840-60	6041.6042	05/16/2026	05/15/2027
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	01/13/2024	01/12/2027
Cable line	Fulai(6M)	SF106	5220/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5216/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5217/6A	01/13/2024	01/12/2027


Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-07-2026	04-06-2027
Temperature/ Humidity Indicator	Defu	TH128	/	03-24-2026	03-23-2027
LISN	R&S	ENV216	100098	09-13-2025 09-04-2026	09-12-2026 09-03-2027
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
The antenna is PCB antenna. The best case gain of the antenna is -2.53 dBi.	


5.2 AC Power Line Conducted Emissions

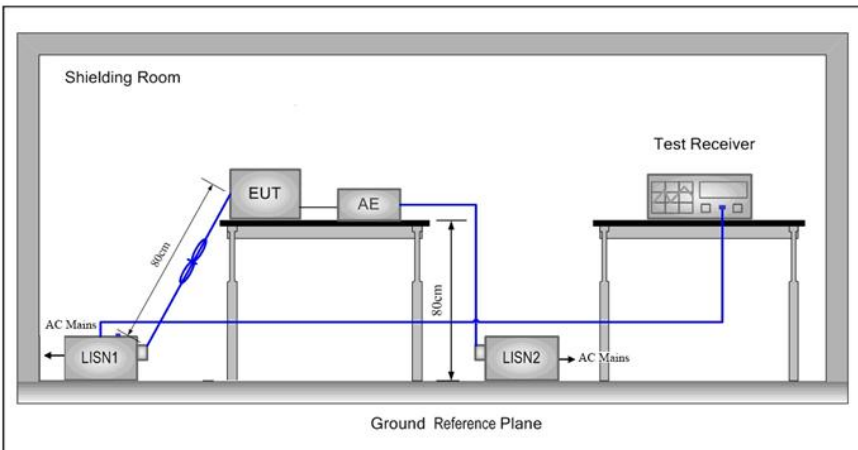Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10-2020		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020 on conducted measurement.		
Test Mode:	All modes were tested, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.		
Test Results:	Pass		

Measurement Data

Live line:

80.0 dBuV

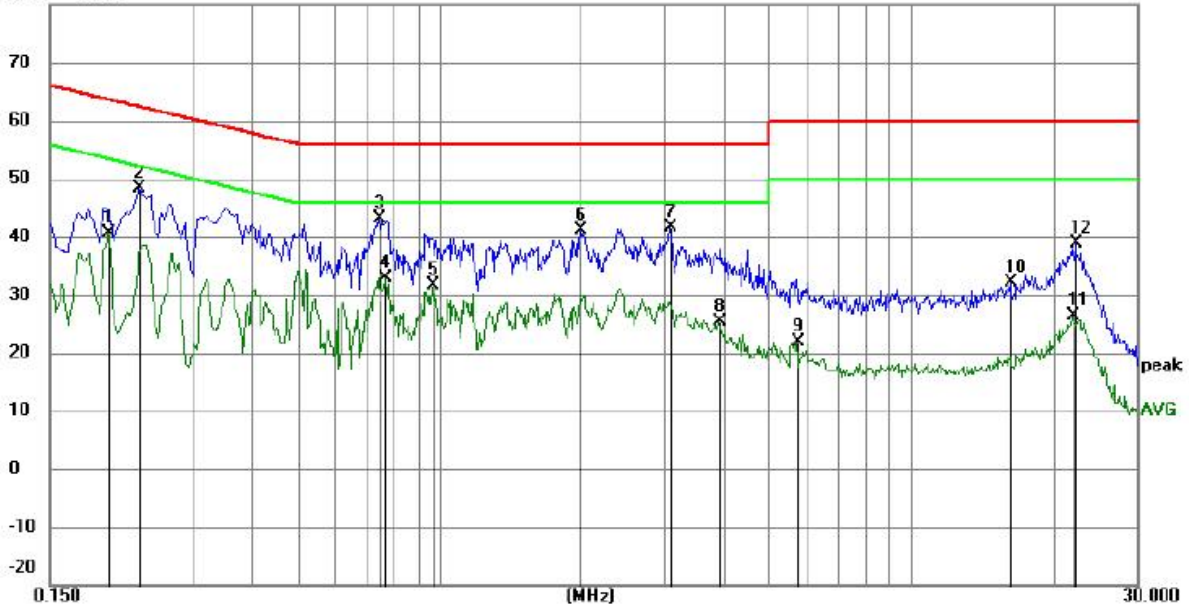


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1995	30.48	10.27	40.75	53.63	-12.88	AVG	
2		0.2310	38.27	10.20	48.47	62.41	-13.94	QP	
3		0.7440	32.82	10.24	43.06	56.00	-12.94	QP	
4		0.7710	22.63	10.22	32.85	46.00	-13.15	AVG	
5		0.9690	21.29	10.22	31.51	46.00	-14.49	AVG	
6		1.9905	31.01	10.14	41.15	56.00	-14.85	QP	
7		3.0840	31.55	10.08	41.63	56.00	-14.37	QP	
8		3.9030	15.37	10.04	25.41	46.00	-20.59	AVG	
9		5.7210	11.85	9.94	21.79	50.00	-28.21	AVG	
10		16.2870	22.49	9.67	32.16	60.00	-27.84	QP	
11		21.9525	16.67	9.81	26.48	50.00	-23.52	AVG	
12		22.3125	28.96	9.81	38.77	60.00	-21.23	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. Margin = Measurement - Limit.
4. Measurement = Reading Level + Correct Factor.
5. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit.
6. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

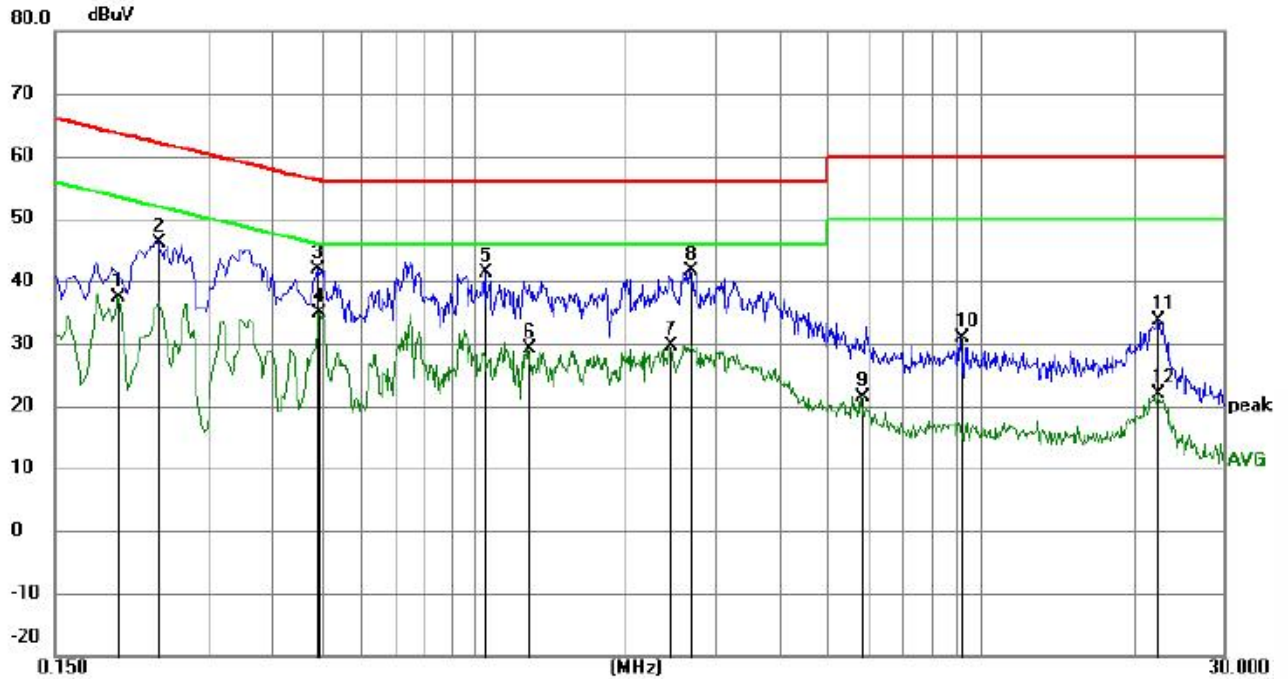


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1995	27.21	10.27	37.48	53.63	-16.15	AVG	
2		0.2400	35.99	10.18	46.17	62.10	-15.93	QP	
3		0.4920	31.88	10.08	41.96	56.13	-14.17	QP	
4	*	0.4965	24.74	10.07	34.81	46.06	-11.25	AVG	
5		1.0590	31.09	10.22	41.31	56.00	-14.69	QP	
6		1.2839	19.00	10.20	29.20	46.00	-16.80	AVG	
7		2.4360	19.59	10.12	29.71	46.00	-16.29	AVG	
8		2.6745	31.45	10.10	41.55	56.00	-14.45	QP	
9		5.8065	11.49	9.93	21.42	50.00	-28.58	AVG	
10		9.1320	20.93	9.85	30.78	60.00	-29.22	QP	
11		22.3440	23.83	9.81	33.64	60.00	-26.36	QP	
12		22.3440	12.13	9.81	21.94	50.00	-28.06	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. Margin=Measurement-Limit.
4. Measurement=Reading Level+Correct Factor.
5. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit.
6. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

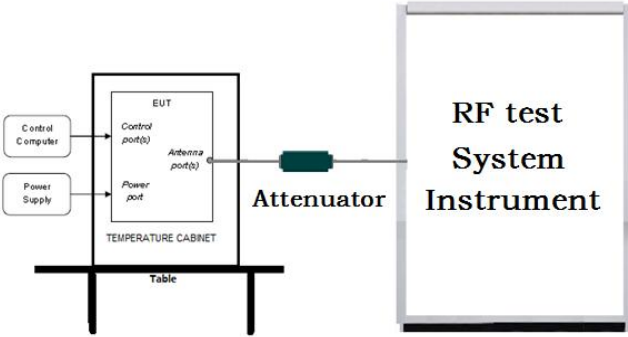Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020
Test Setup:	
Test Procedure:	1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector. 2.For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01. Method (a): Measure and sum the spectra across the outputs.The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.
Limit:	30dBm
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A


5.4 DTS Bandwidth

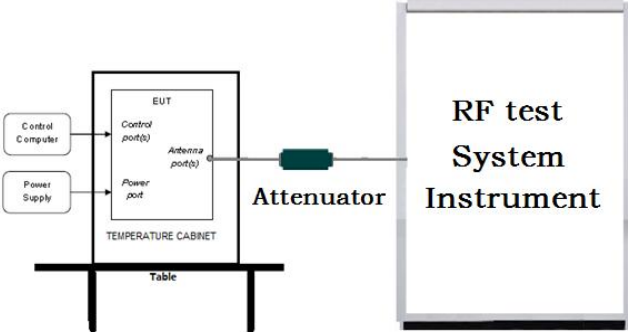Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.5 Maximum Power Spectral Density

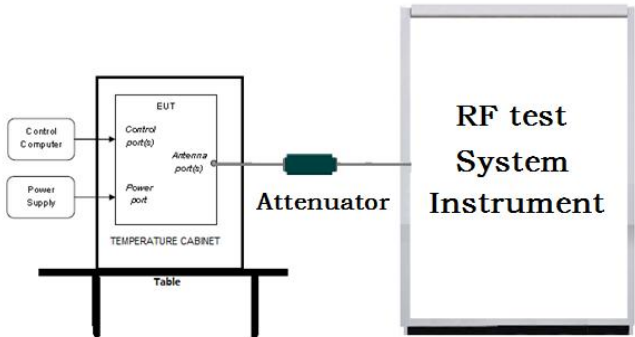Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. d) Set the VBW $> [3 \times \text{RBW}]$. e) Detector = power averaging (rms) or sample detector (when rms not available). f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$. g) Sweep time = auto couple. h) Employ trace averaging (rms) mode over a minimum of 100 traces.. i) Use the peak marker function to determine the maximum amplitude level. j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced). K) For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01. Method (a): Measure and sum the spectra across the outputs. The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.
Limit:	$\leq 8.00 \text{ dBm}/3 \text{ kHz}$
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.6 Band Edge Measurements and Conducted Spurious Emission

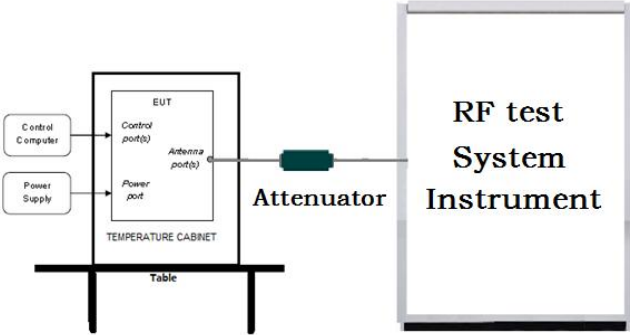Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

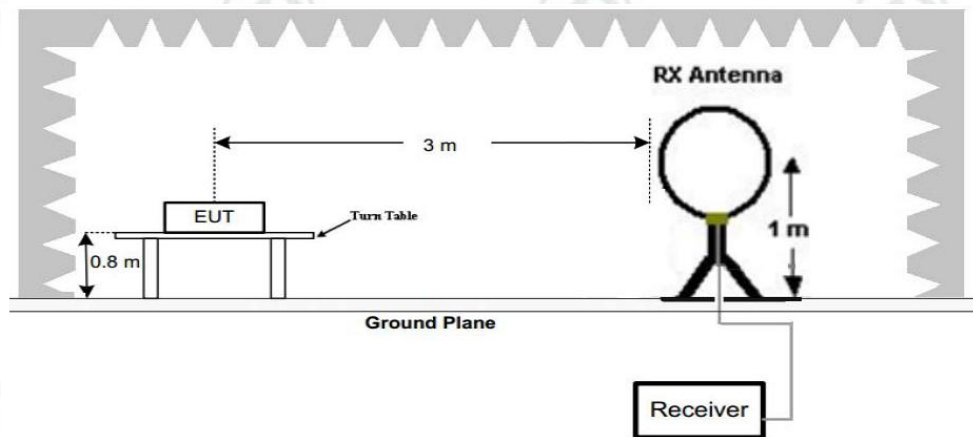


Figure 1. Below 30MHz

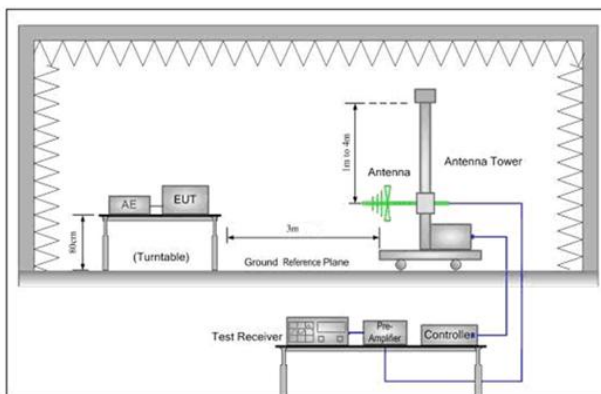


Figure 2. 30MHz to 1GHz

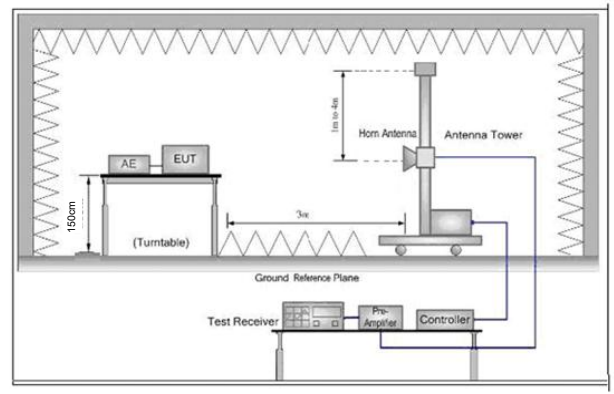


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case


	and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 3.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

Test Graph

Horizontal:

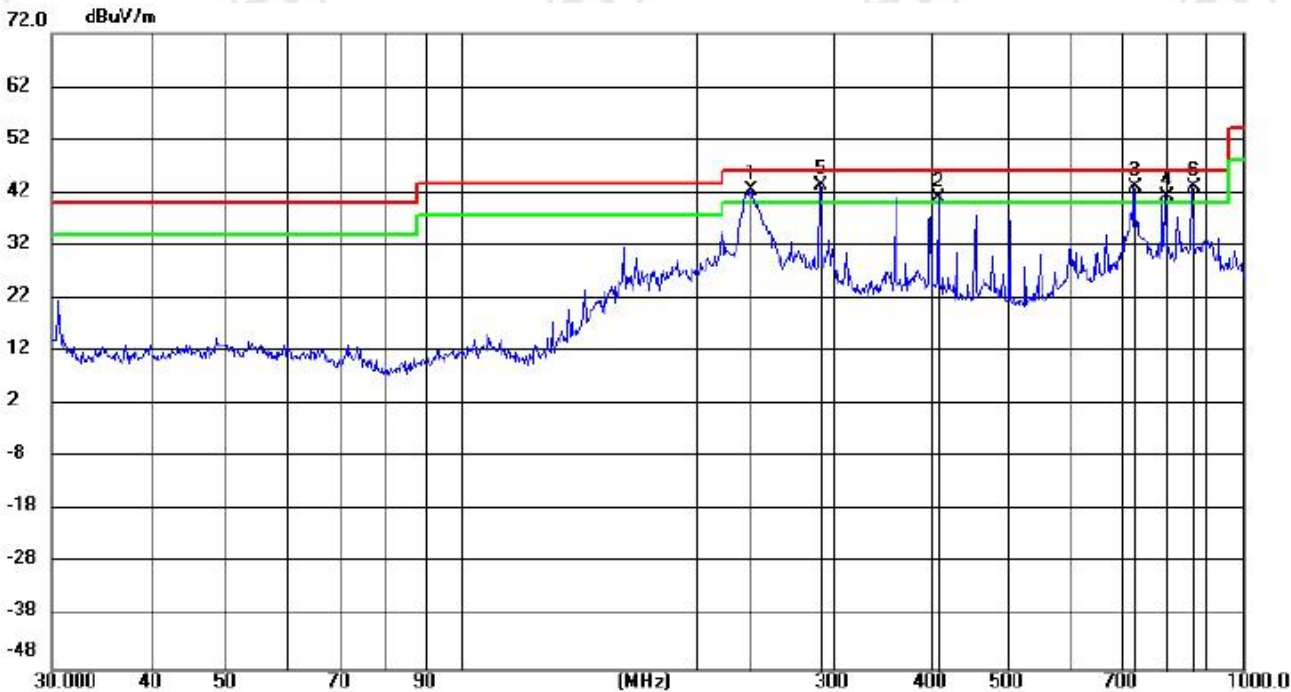


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	!	234.2504	28.57	13.84	42.41	46.00	-3.59	QP	100	14
2	!	408.0149	21.53	19.57	41.10	46.00	-4.90	QP	100	300
3	!	728.9747	18.66	24.25	42.91	46.00	-3.09	QP	100	277
4	!	797.9997	16.61	24.69	41.30	46.00	-4.70	QP	100	246
5	*	288.0409	27.40	15.83	43.23	46.00	-2.77	QP	100	125
6	!	864.1160	17.05	26.12	43.17	46.00	-2.83	QP	200	1

Remark:

1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Vertical:

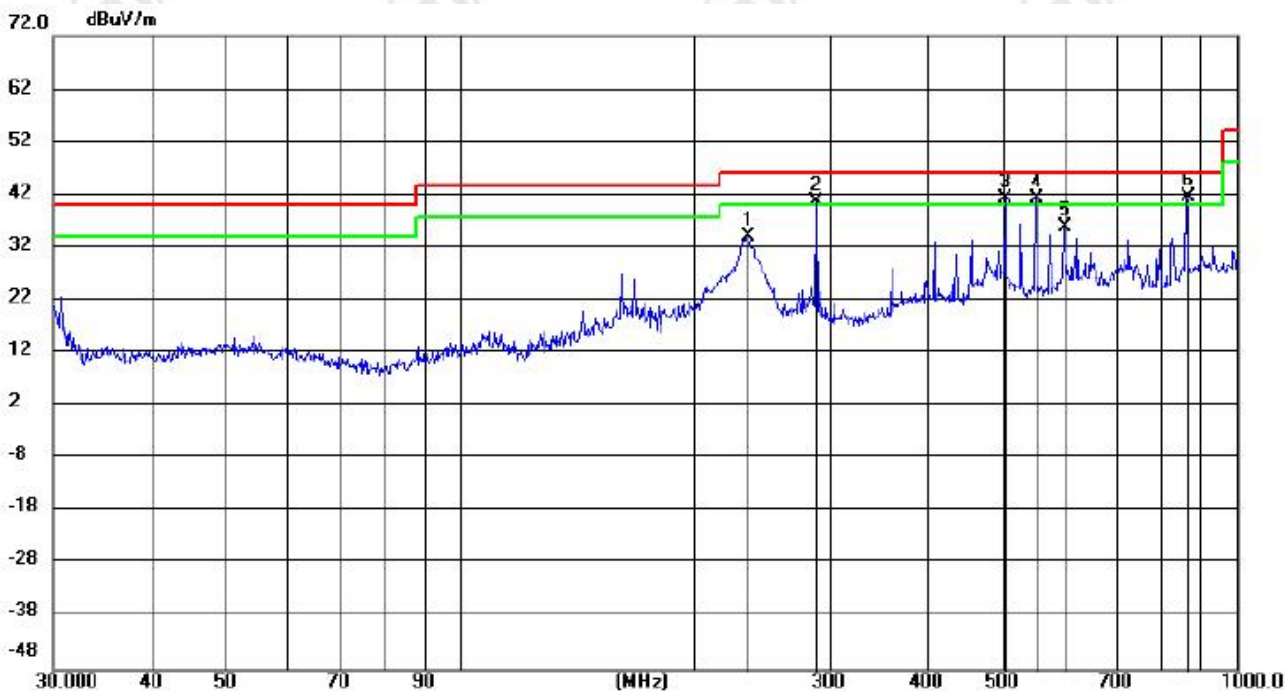

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		234.3326	20.25	13.84	34.09	46.00	-11.91	QP	100	160
2	!	287.9904	24.81	15.82	40.63	46.00	-5.37	QP	100	91
3	!	503.9988	20.66	20.67	41.33	46.00	-4.67	QP	100	6
4	!	552.0116	19.44	21.90	41.34	46.00	-4.66	QP	100	355
5		600.0573	12.89	22.97	35.86	46.00	-10.14	QP	100	331
6	*	864.1160	15.47	26.12	41.59	46.00	-4.41	QP	1000	125


Remark:

1. Margin=Measurement(Level)-Limit.
2. Measurement(Level)=Reading Level+Correct Factor.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Radiated Spurious Emission above 1GHz:

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

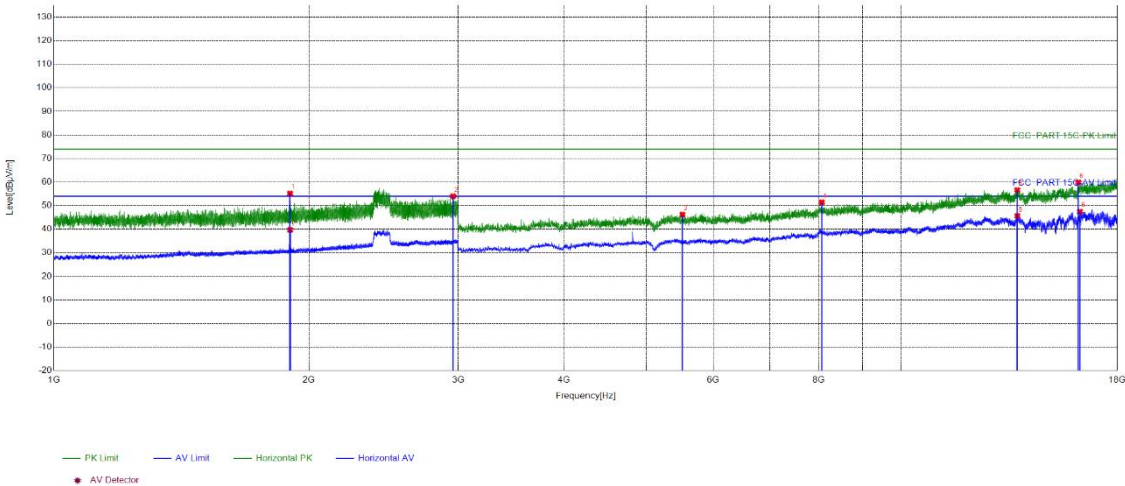

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1899.66	14.59	40.58	55.17	74.00	18.83	PASS	Horizontal	PK
2	2959.464	17.74	36.24	53.98	74.00	20.02	PASS	Horizontal	PK
3	5519.1679	-6.42	52.67	46.25	74.00	27.75	PASS	Horizontal	PK
4	8061.3374	-1.01	52.45	51.44	74.00	22.56	PASS	Horizontal	PK
5	13713.7142	7.24	49.37	56.61	74.00	17.39	PASS	Horizontal	PK
6	16193.8796	10.42	49.44	59.86	74.00	14.14	PASS	Horizontal	PK
7	1900.3267	14.61	25.12	39.73	54.00	14.27	PASS	Horizontal	AV
8	13715.7144	7.23	38.40	45.63	54.00	8.37	PASS	Horizontal	AV
9	16261.8841	10.56	36.90	47.46	54.00	6.54	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

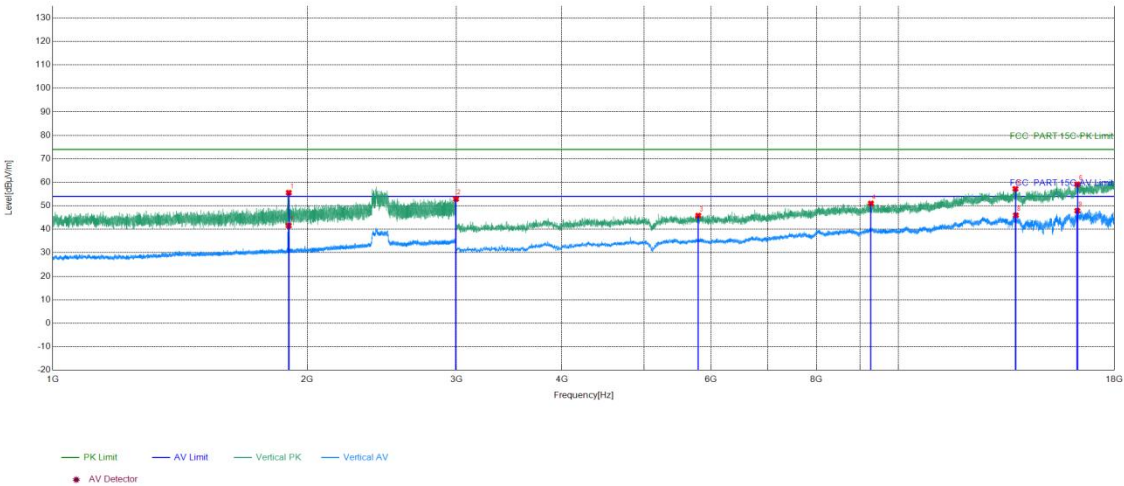

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1901.1267	14.62	40.94	55.56	74.00	18.44	PASS	Vertical	PK
2	2997.4665	17.85	35.06	52.91	74.00	21.09	PASS	Vertical	PK
3	5797.1865	-5.79	51.60	45.81	74.00	28.19	PASS	Vertical	PK
4	9276.4184	0.72	50.30	51.02	74.00	22.98	PASS	Vertical	PK
5	13744.7163	7.18	50.03	57.21	74.00	16.79	PASS	Vertical	PK
6	16275.8851	10.71	48.39	59.10	74.00	14.90	PASS	Vertical	PK
7	1900.7267	14.61	26.93	41.54	54.00	12.46	PASS	Vertical	AV
8	13762.7175	7.31	38.65	45.96	54.00	8.04	PASS	Vertical	AV
9	16270.8847	10.66	37.22	47.88	54.00	6.12	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

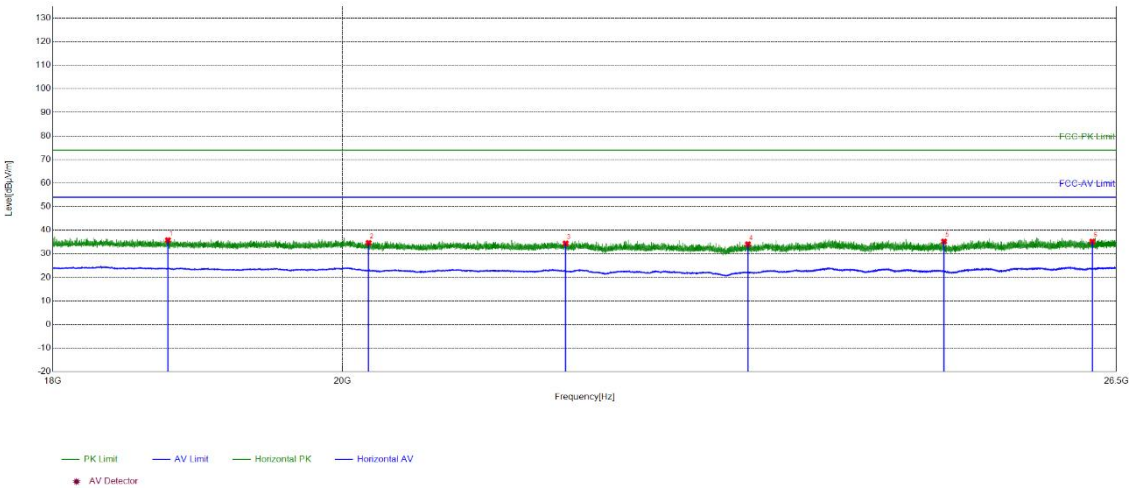

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18768.4307	-26.35	62.14	35.79	74.00	38.21	PASS	Horizontal	PK
2	20190.0276	-25.47	60.12	34.65	74.00	39.35	PASS	Horizontal	PK
3	21690.1676	-25.64	60.06	34.42	74.00	39.58	PASS	Horizontal	PK
4	23177.0471	-24.43	58.49	34.06	74.00	39.94	PASS	Horizontal	PK
5	24890.7156	-22.04	57.27	35.23	74.00	38.77	PASS	Horizontal	PK
6	26269.1308	-21.29	56.51	35.22	74.00	38.78	PASS	Horizontal	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

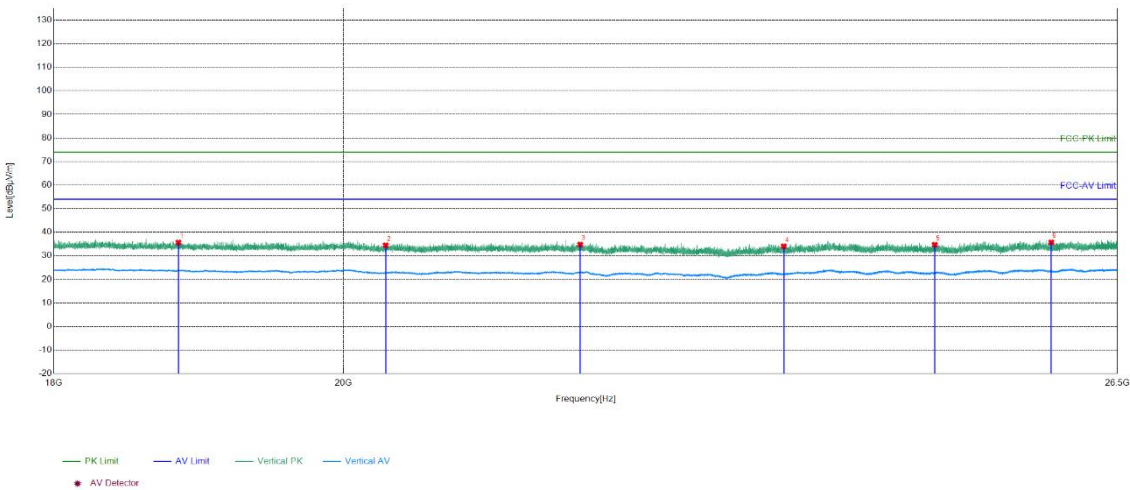

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18833.3733	-26.29	61.90	35.61	74.00	38.39	PASS	Vertical	PK
2	20308.0123	-25.49	59.93	34.44	74.00	39.56	PASS	Vertical	PK
3	21797.2719	-25.53	60.30	34.77	74.00	39.23	PASS	Vertical	PK
4	23472.1789	-23.38	57.39	34.01	74.00	39.99	PASS	Vertical	PK
5	24797.5519	-21.96	56.64	34.68	74.00	39.32	PASS	Vertical	PK
6	25871.6549	-20.85	56.53	35.68	74.00	38.32	PASS	Vertical	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

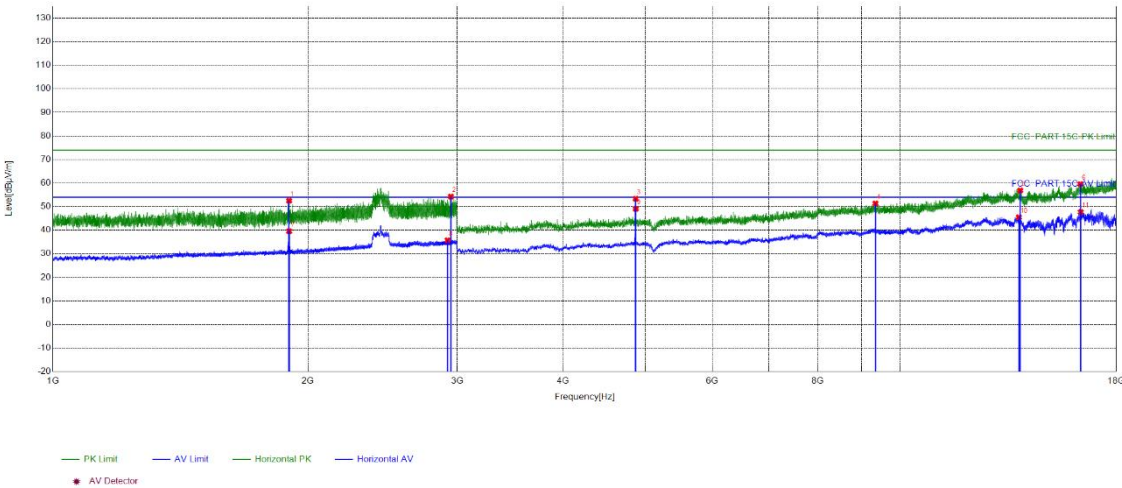

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1900.06	14.60	37.92	52.52	74.00	21.48	PASS	Horizontal	PK
2	2948.9299	17.62	36.66	54.28	74.00	19.72	PASS	Horizontal	PK
3	4874.1249	-8.39	61.76	53.37	74.00	20.63	PASS	Horizontal	PK
4	9352.4235	1.07	50.29	51.36	74.00	22.64	PASS	Horizontal	PK
5	13861.7241	7.15	49.71	56.86	74.00	17.14	PASS	Horizontal	PK
6	16322.8882	11.25	48.32	59.57	74.00	14.43	PASS	Horizontal	PK
7	1900.1933	14.60	24.97	39.57	54.00	14.43	PASS	Horizontal	AV
8	2922.9282	17.61	18.14	35.75	54.00	18.25	PASS	Horizontal	AV
9	4875.125	-8.37	57.45	49.08	54.00	4.92	PASS	Horizontal	AV
10	13810.7207	7.62	37.89	45.51	54.00	8.49	PASS	Horizontal	AV
11	16339.8893	11.46	36.25	47.71	54.00	6.29	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

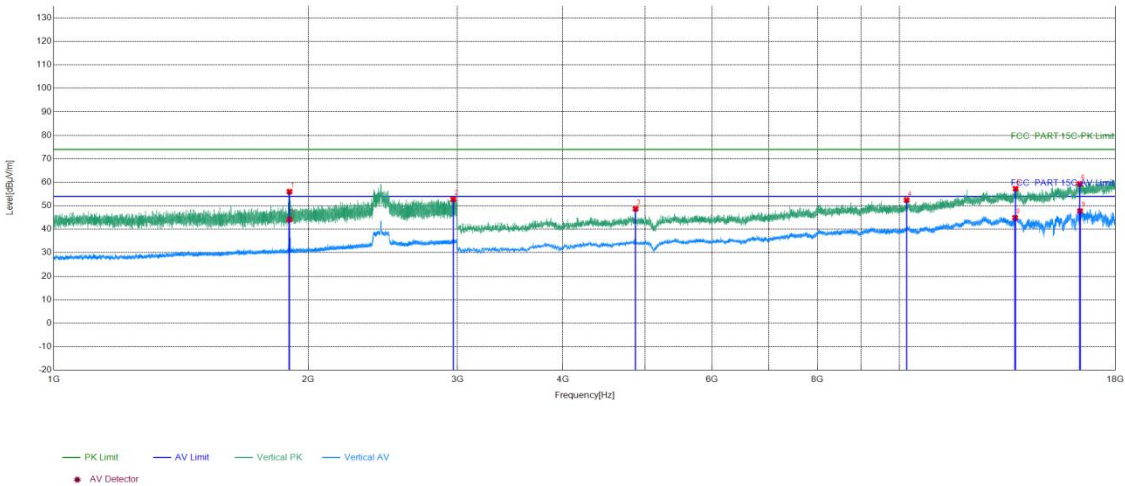

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1899.66	14.59	41.42	56.01	74.00	17.99	PASS	Vertical	PK
2	2966.6644	17.88	34.83	52.71	74.00	21.29	PASS	Vertical	PK
3	4874.1249	-8.39	57.06	48.67	74.00	25.33	PASS	Vertical	PK
4	10196.4798	1.52	50.90	52.42	74.00	21.58	PASS	Vertical	PK
5	13716.7144	7.22	50.05	57.27	74.00	16.73	PASS	Vertical	PK
6	16326.8885	11.30	48.04	59.34	74.00	14.66	PASS	Vertical	PK
7	1899.66	14.59	29.53	44.12	54.00	9.88	PASS	Vertical	AV
8	13698.7132	7.26	37.65	44.91	54.00	9.09	PASS	Vertical	AV
9	16348.8899	11.57	36.18	47.75	54.00	6.25	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

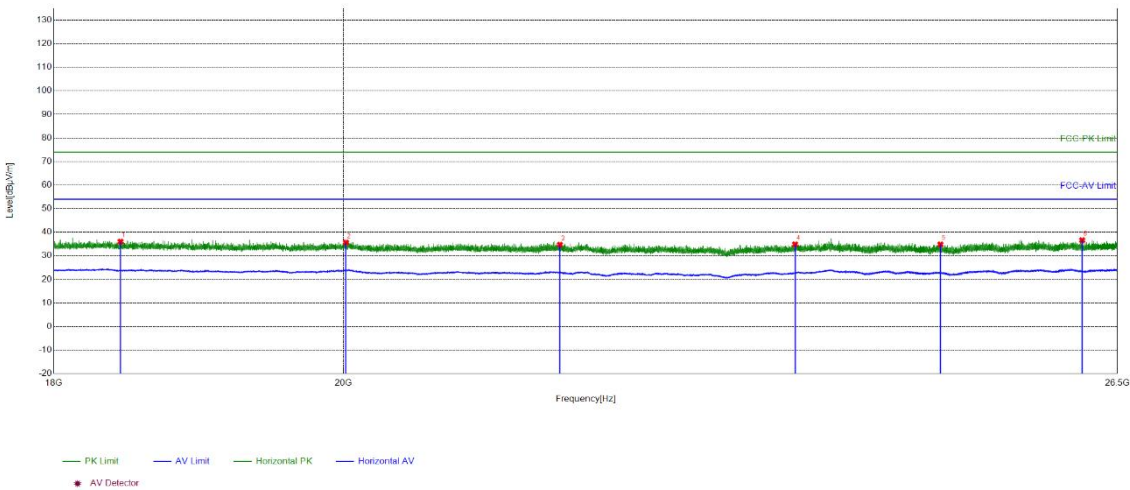

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18440.9976	-26.70	62.70	36.00	74.00	38.00	PASS	Horizontal	PK
2	20017.3007	-24.70	60.31	35.61	74.00	38.39	PASS	Horizontal	PK
3	21636.7855	-25.70	60.41	34.71	74.00	39.29	PASS	Horizontal	PK
4	23569.0828	-23.13	57.99	34.86	74.00	39.14	PASS	Horizontal	PK
5	24848.5539	-22.00	56.82	34.82	74.00	39.18	PASS	Horizontal	PK
6	26163.0465	-21.28	57.91	36.63	74.00	37.37	PASS	Horizontal	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

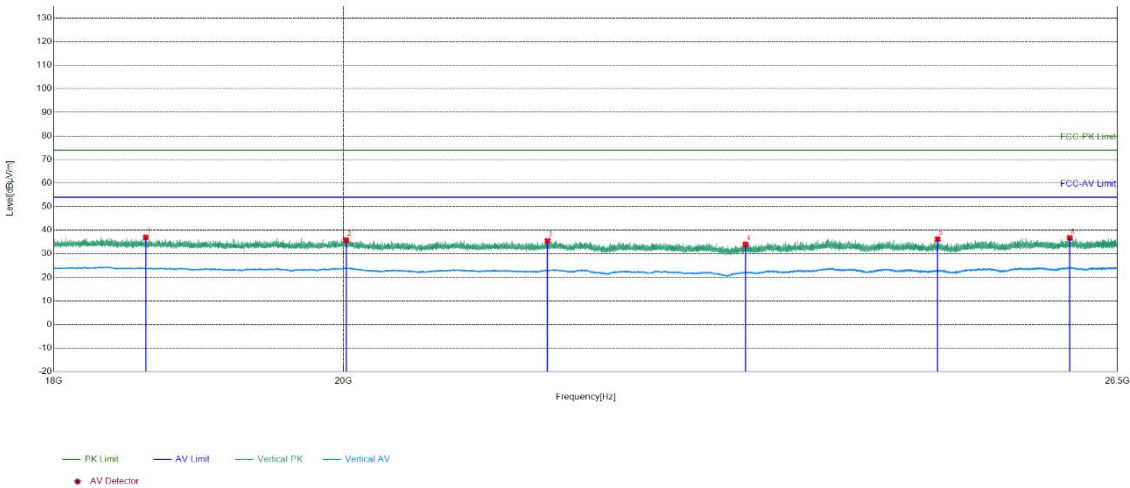

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18611.6845	-26.67	63.65	36.98	74.00	37.02	PASS	Vertical	PK
2	20018.3207	-24.70	60.55	35.85	74.00	38.15	PASS	Vertical	PK
3	21539.8816	-25.78	61.24	35.46	74.00	38.54	PASS	Vertical	PK
4	23147.4659	-24.64	58.61	33.97	74.00	40.03	PASS	Vertical	PK
5	24823.3929	-21.98	58.19	36.21	74.00	37.79	PASS	Vertical	PK
6	26045.4018	-21.00	57.76	36.76	74.00	37.24	PASS	Vertical	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

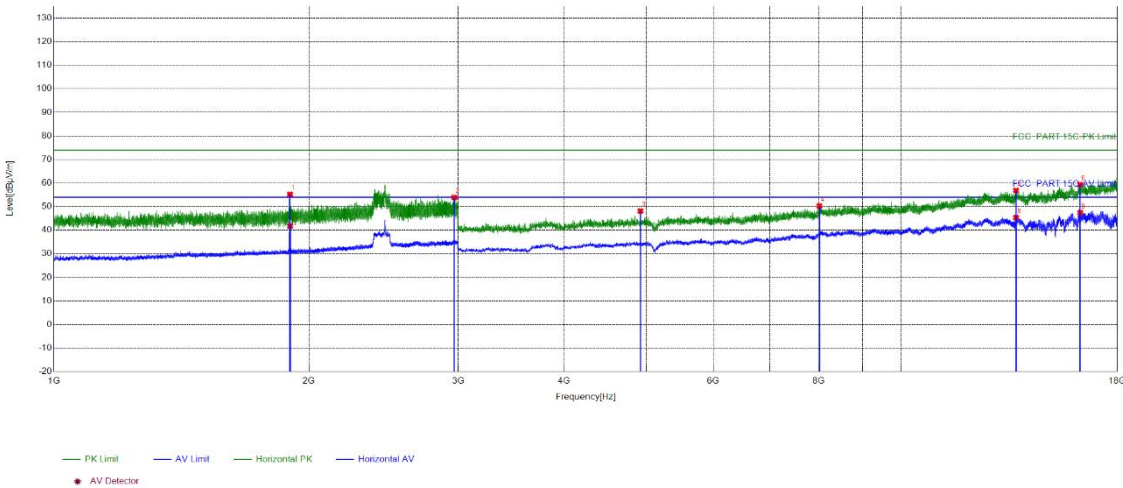

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1899.66	14.59	40.61	55.20	74.00	18.80	PASS	Horizontal	PK
2	2969.1979	17.93	35.97	53.90	74.00	20.10	PASS	Horizontal	PK
3	4924.1283	-8.16	56.31	48.15	74.00	25.85	PASS	Horizontal	PK
4	8008.3339	-1.30	51.60	50.30	74.00	23.70	PASS	Horizontal	PK
5	13666.7111	7.38	49.49	56.87	74.00	17.13	PASS	Horizontal	PK
6	16270.8847	10.66	48.71	59.37	74.00	14.63	PASS	Horizontal	PK
7	1900.3267	14.61	27.14	41.75	54.00	12.25	PASS	Horizontal	AV
8	13667.7112	7.38	37.95	45.33	54.00	8.67	PASS	Horizontal	AV
9	16271.8848	10.67	36.76	47.43	54.00	6.57	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

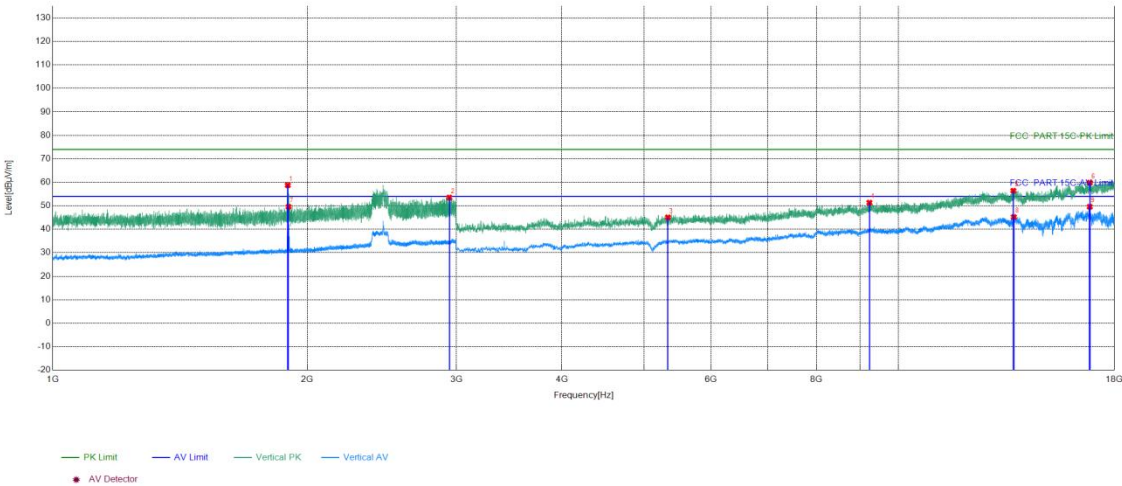

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1895.9264	14.50	44.26	58.76	74.00	15.24	PASS	Vertical	PK
2	2943.1962	17.64	35.90	53.54	74.00	20.46	PASS	Vertical	PK
3	5337.1558	-6.98	52.06	45.08	74.00	28.92	PASS	Vertical	PK
4	9237.4158	0.53	50.81	51.34	74.00	22.66	PASS	Vertical	PK
5	13669.7113	7.37	49.07	56.44	74.00	17.56	PASS	Vertical	PK
6	16834.9223	12.65	47.23	59.88	74.00	14.12	PASS	Vertical	PK
7	1900.06	14.60	34.97	49.57	54.00	4.43	PASS	Vertical	AV
8	13684.7123	7.31	37.91	45.22	54.00	8.78	PASS	Vertical	AV
9	16829.922	12.44	37.14	49.58	54.00	4.42	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

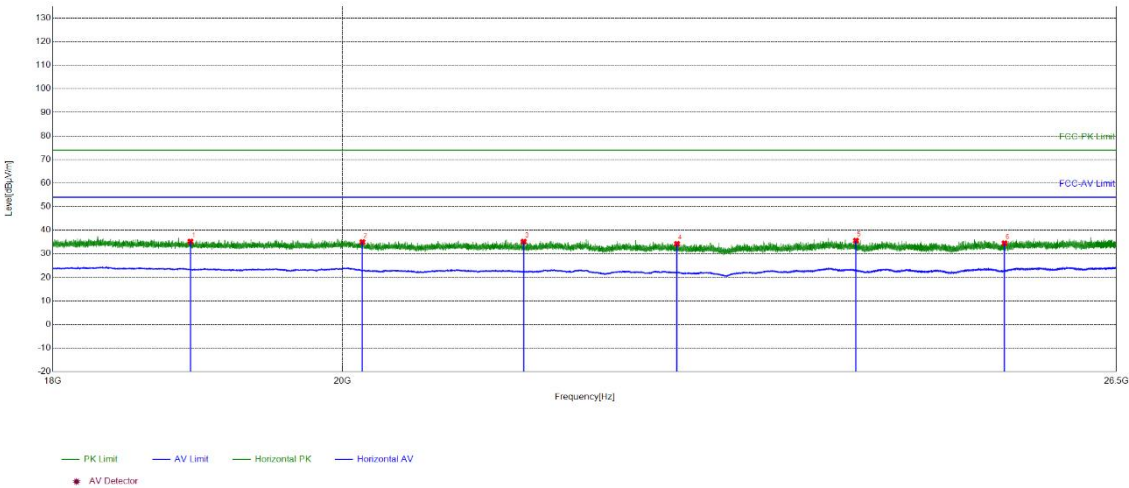

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18922.7969	-26.28	61.49	35.21	74.00	38.79	PASS	Horizontal	PK
2	20144.4658	-25.26	60.23	34.97	74.00	39.03	PASS	Horizontal	PK
3	21361.3745	-25.86	61.02	35.16	74.00	38.84	PASS	Horizontal	PK
4	22586.7835	-25.01	59.21	34.20	74.00	39.80	PASS	Horizontal	PK
5	24105.6242	-22.31	57.88	35.57	74.00	38.43	PASS	Horizontal	PK
6	25444.2578	-21.28	55.76	34.48	74.00	39.52	PASS	Horizontal	PK

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

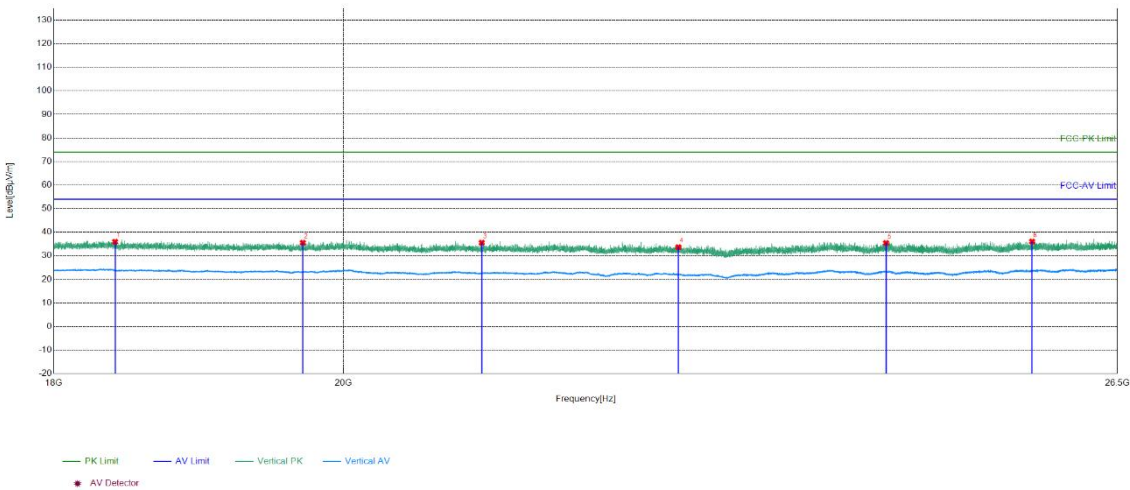

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18404.6162	-26.70	62.64	35.94	74.00	38.06	PASS	Vertical	PK
2	19705.1682	-25.40	60.94	35.54	74.00	38.46	PASS	Vertical	PK
3	21030.5412	-25.96	61.52	35.56	74.00	38.44	PASS	Vertical	PK
4	22589.8436	-25.01	58.67	33.66	74.00	40.34	PASS	Vertical	PK
5	24361.6545	-21.86	57.29	35.43	74.00	38.57	PASS	Vertical	PK
6	25690.7676	-20.76	56.81	36.05	74.00	37.95	PASS	Vertical	PK

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

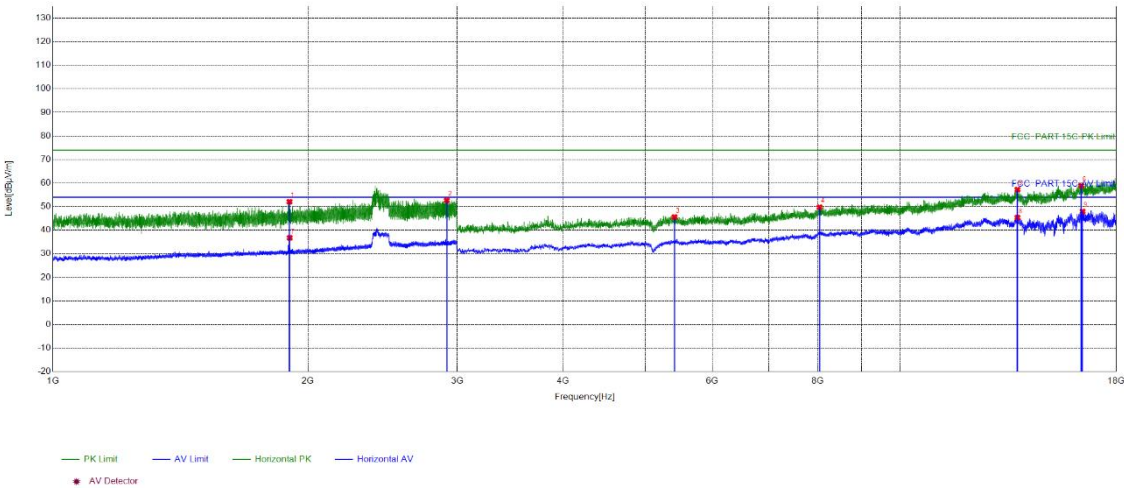

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1901.9268	14.64	37.45	52.09	74.00	21.91	PASS	Horizontal	PK
2	2916.9278	17.62	35.04	52.66	74.00	21.34	PASS	Horizontal	PK
3	5416.1611	-6.63	52.22	45.59	74.00	28.41	PASS	Horizontal	PK
4	8035.3357	-1.10	50.86	49.76	74.00	24.24	PASS	Horizontal	PK
5	13757.7172	7.25	49.98	57.23	74.00	16.77	PASS	Horizontal	PK
6	16362.8909	11.16	47.76	58.92	74.00	15.08	PASS	Horizontal	PK
7	1902.9935	14.66	22.11	36.77	54.00	17.23	PASS	Horizontal	AV
8	13758.7172	7.26	38.09	45.35	54.00	8.65	PASS	Horizontal	AV
9	16421.8948	10.41	37.53	47.94	54.00	6.06	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

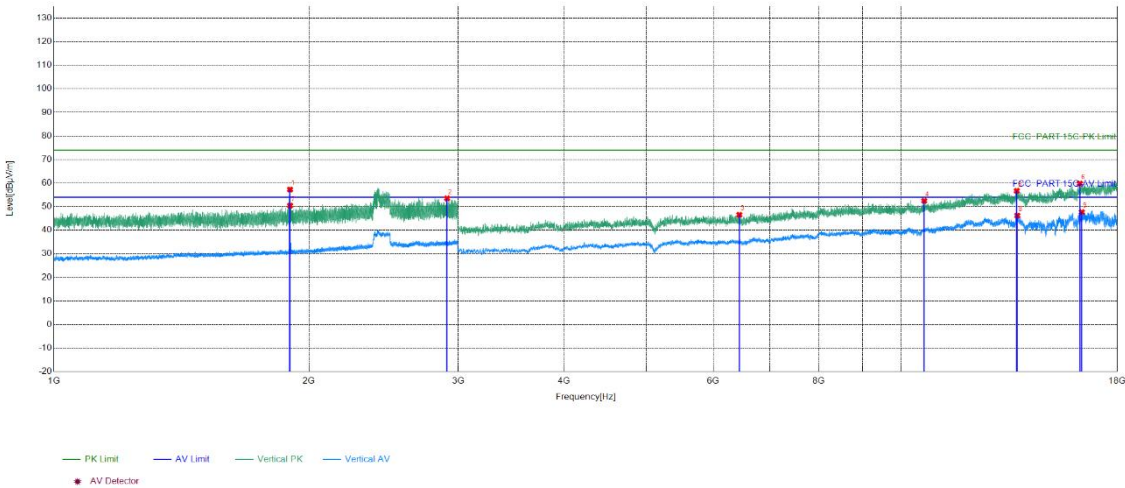

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1899.66	14.59	42.67	57.26	74.00	16.74	PASS	Vertical	PK
2	2911.3274	17.75	35.77	53.52	74.00	20.48	PASS	Vertical	PK
3	6442.2295	-4.27	50.82	46.55	74.00	27.45	PASS	Vertical	PK
4	10649.51	2.26	50.21	52.47	74.00	21.53	PASS	Vertical	PK
5	13695.713	7.27	49.45	56.72	74.00	17.28	PASS	Vertical	PK
6	16254.8837	10.49	49.32	59.81	74.00	14.19	PASS	Vertical	PK
7	1899.9267	14.60	35.84	50.44	54.00	3.56	PASS	Vertical	AV
8	13714.7143	7.24	38.97	46.21	54.00	7.79	PASS	Vertical	AV
9	16341.8895	11.48	36.20	47.68	54.00	6.32	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

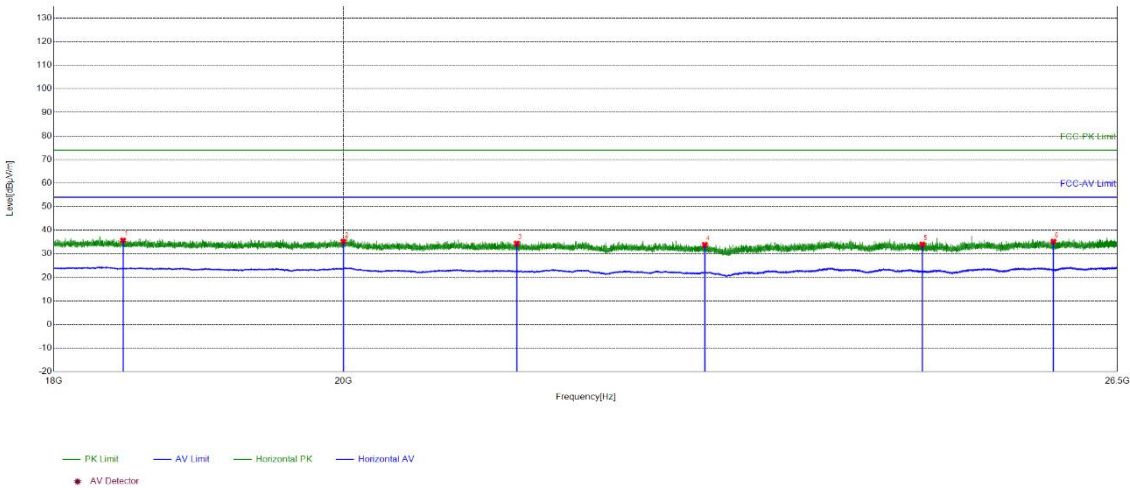

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18457.9983	-26.70	62.38	35.68	74.00	38.32	PASS	Horizontal	PK
2	19997.9199	-24.63	59.83	35.20	74.00	38.80	PASS	Horizontal	PK
3	21299.832	-25.81	60.17	34.36	74.00	39.64	PASS	Horizontal	PK
4	22808.1323	-25.08	58.88	33.80	74.00	40.20	PASS	Horizontal	PK
5	24685.3474	-21.91	55.87	33.96	74.00	40.04	PASS	Horizontal	PK
6	25891.3757	-20.85	56.04	35.19	74.00	38.81	PASS	Horizontal	PK

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

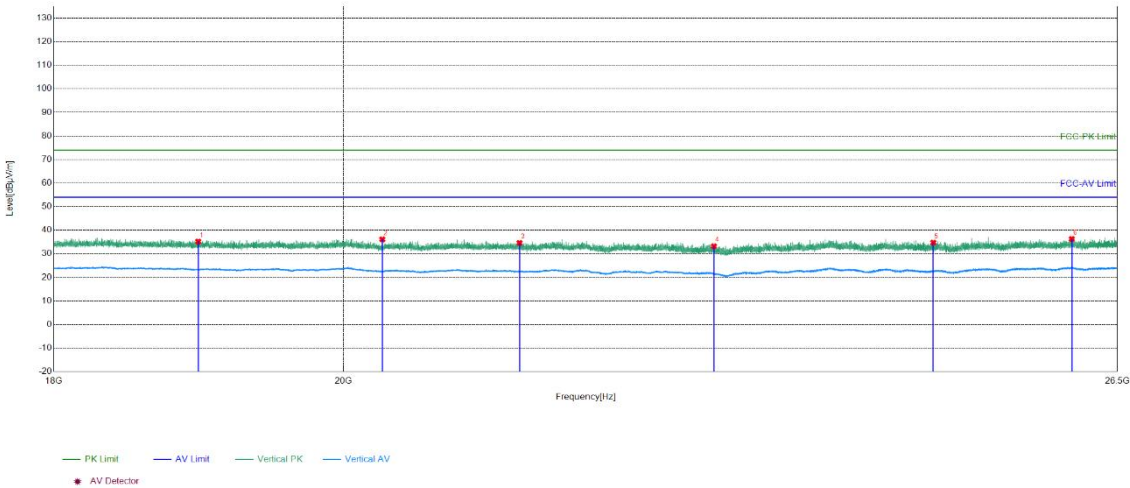

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18969.3788	-26.27	61.46	35.19	74.00	38.81	PASS	Vertical	PK
2	20283.1913	-25.50	61.62	36.12	74.00	37.88	PASS	Vertical	PK
3	21320.9128	-25.83	60.46	34.63	74.00	39.37	PASS	Vertical	PK
4	22883.6153	-25.31	58.50	33.19	74.00	40.81	PASS	Vertical	PK
5	24784.6314	-21.96	56.72	34.76	74.00	39.24	PASS	Vertical	PK
6	26064.7826	-21.05	57.33	36.28	74.00	37.72	PASS	Vertical	PK

Test_Mode	802.11 g Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

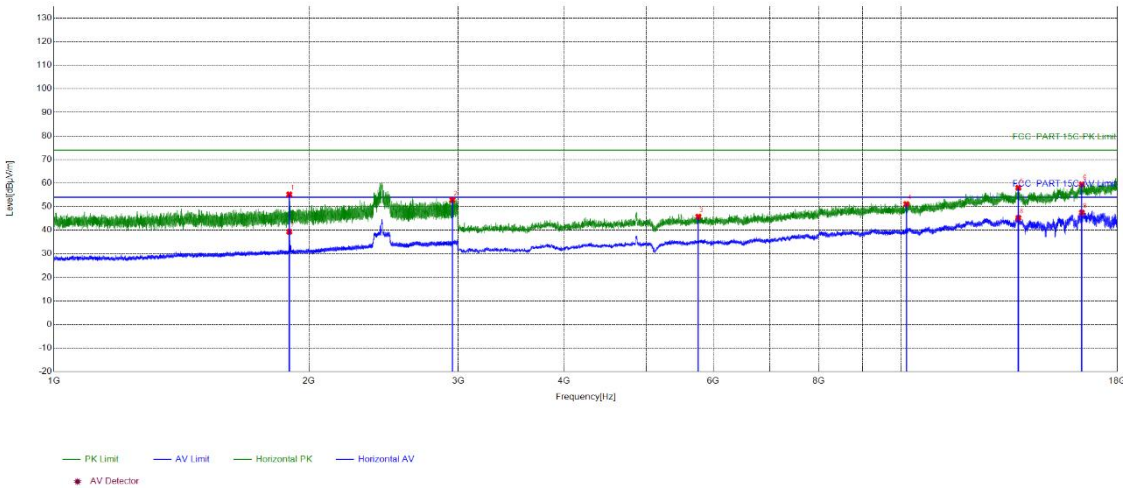

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1895.6597	14.49	40.73	55.22	74.00	18.78	PASS	Horizontal	PK
2	2953.7302	17.66	35.20	52.86	74.00	21.14	PASS	Horizontal	PK
3	5763.1842	-5.86	51.62	45.76	74.00	28.24	PASS	Horizontal	PK
4	10145.4764	1.56	49.54	51.10	74.00	22.90	PASS	Horizontal	PK
5	13754.717	7.22	50.80	58.02	74.00	15.98	PASS	Horizontal	PK
6	16340.8894	11.47	47.99	59.46	74.00	14.54	PASS	Horizontal	PK
7	1895.7931	14.49	24.86	39.35	54.00	14.65	PASS	Horizontal	AV
8	13756.7171	7.24	37.99	45.23	54.00	8.77	PASS	Horizontal	AV
9	16344.8897	11.52	35.99	47.51	54.00	6.49	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

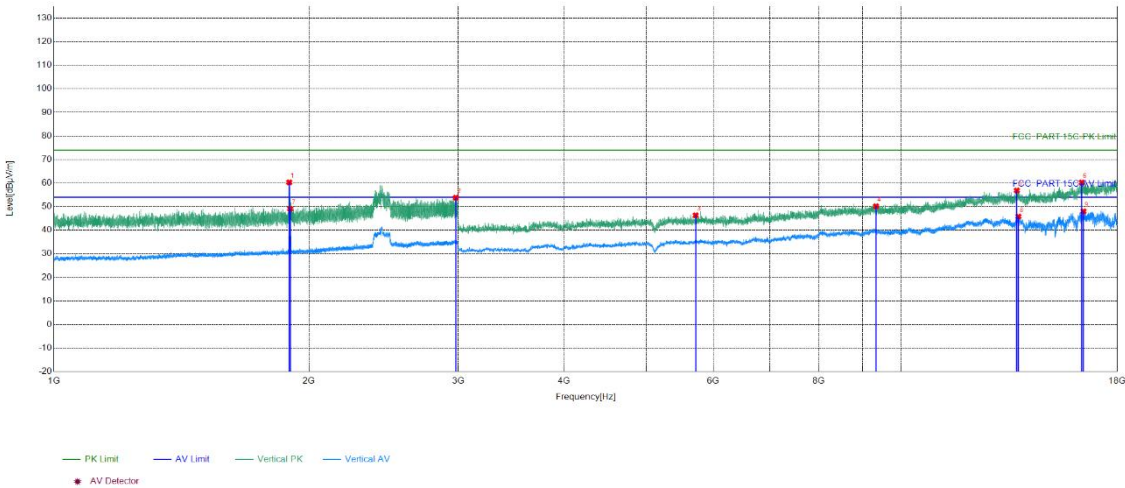

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1895.5264	14.49	45.82	60.31	74.00	13.69	PASS	Vertical	PK
2	2980.6654	17.87	35.92	53.79	74.00	20.21	PASS	Vertical	PK
3	5721.1814	-6.00	52.34	46.34	74.00	27.66	PASS	Vertical	PK
4	9341.4228	1.02	49.16	50.18	74.00	23.82	PASS	Vertical	PK
5	13697.7132	7.27	49.59	56.86	74.00	17.14	PASS	Vertical	PK
6	16343.8896	11.51	48.75	60.26	74.00	13.74	PASS	Vertical	PK
7	1900.3267	14.61	34.50	49.11	54.00	4.89	PASS	Vertical	AV
8	13755.717	7.23	38.57	45.80	54.00	8.20	PASS	Vertical	AV
9	16418.8946	10.35	37.66	48.01	54.00	5.99	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

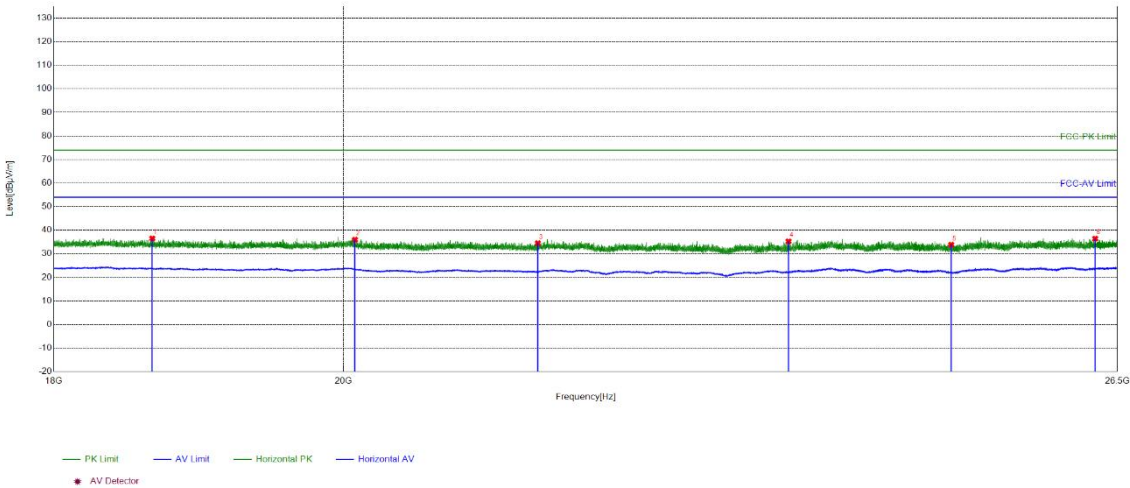

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18655.2062	-26.58	63.09	36.51	74.00	37.49	PASS	Horizontal	PK
2	20082.9233	-24.99	60.97	35.98	74.00	38.02	PASS	Horizontal	PK
3	21463.7185	-25.84	60.36	34.52	74.00	39.48	PASS	Horizontal	PK
4	23512.9805	-23.27	58.53	35.26	74.00	38.74	PASS	Horizontal	PK
5	24946.4779	-22.09	55.94	33.85	74.00	40.15	PASS	Horizontal	PK
6	26287.4915	-21.28	57.71	36.43	74.00	37.57	PASS	Horizontal	PK

Test_Mode	802.11 g Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

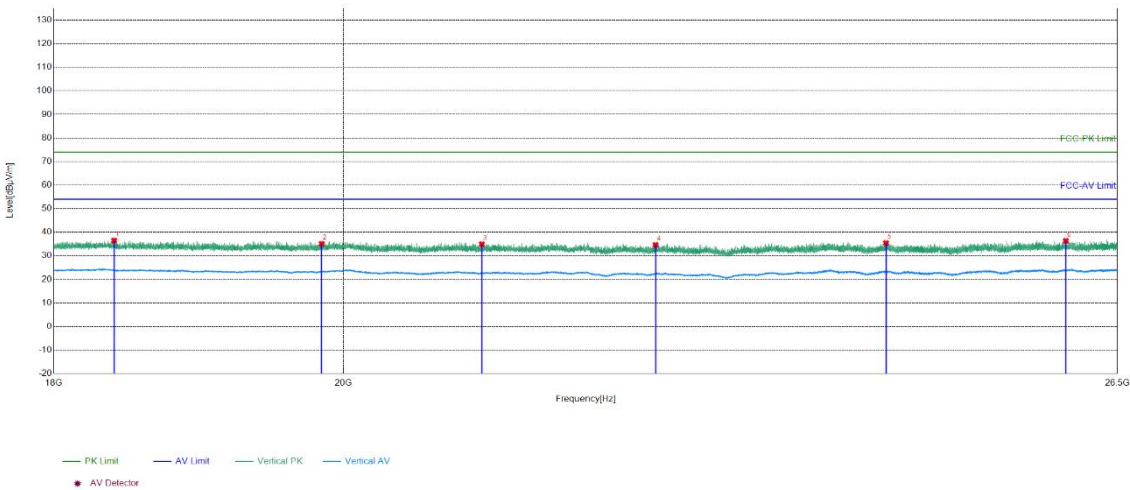

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18398.1559	-26.70	63.19	36.49	74.00	37.51	PASS	Vertical	PK
2	19840.8336	-25.10	60.20	35.10	74.00	38.90	PASS	Vertical	PK
3	21030.8812	-25.96	60.89	34.93	74.00	39.07	PASS	Vertical	PK
4	22402.4961	-25.10	59.72	34.62	74.00	39.38	PASS	Vertical	PK
5	24360.9744	-21.87	57.28	35.41	74.00	38.59	PASS	Vertical	PK
6	26008.3403	-20.92	57.26	36.34	74.00	37.66	PASS	Vertical	PK

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

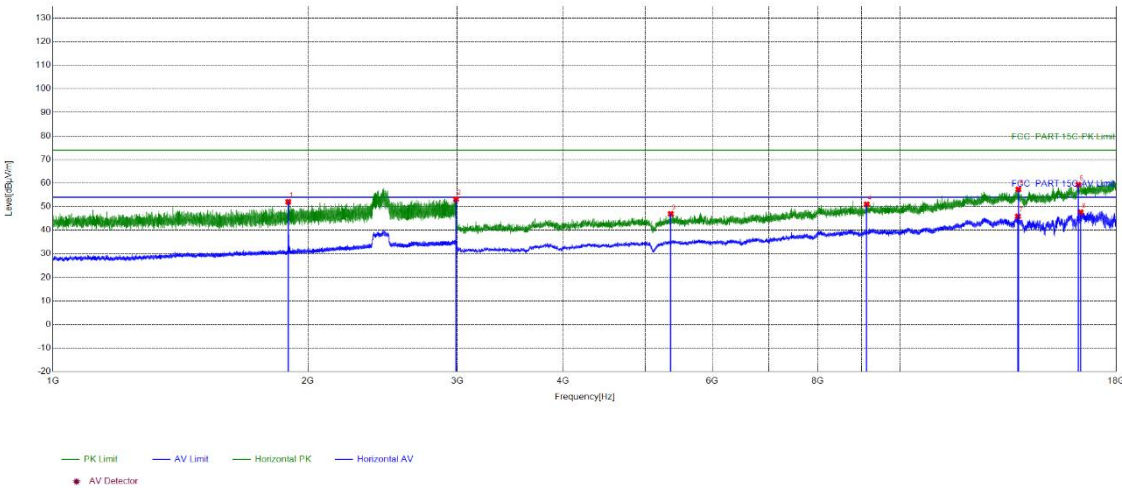

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1895.6597	14.49	37.56	52.05	74.00	21.95	PASS	Horizontal	PK
2	2990.5327	17.90	35.25	53.15	74.00	20.85	PASS	Horizontal	PK
3	5362.1575	-6.89	53.86	46.97	74.00	27.03	PASS	Horizontal	PK
4	9133.4089	0.10	50.89	50.99	74.00	23.01	PASS	Horizontal	PK
5	13790.7194	7.64	49.70	57.34	74.00	16.66	PASS	Horizontal	PK
6	16236.8825	10.43	48.90	59.33	74.00	14.67	PASS	Horizontal	PK
7	13772.7182	7.43	38.44	45.87	54.00	8.13	PASS	Horizontal	AV
8	16335.8891	11.41	36.20	47.61	54.00	6.39	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

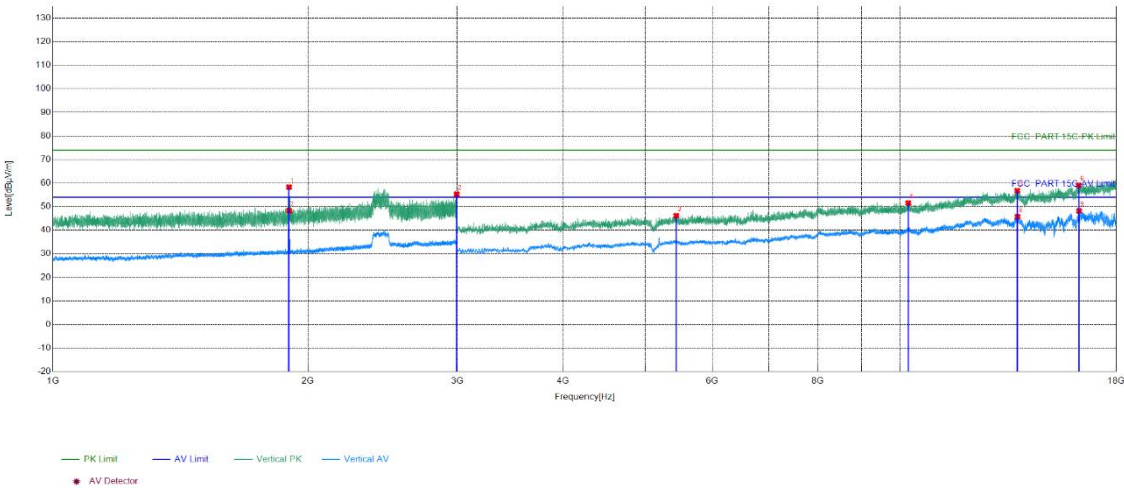

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1899.7933	14.60	43.70	58.30	74.00	15.70	PASS	Vertical	PK
2	2996.1331	17.85	37.46	55.31	74.00	18.69	PASS	Vertical	PK
3	5442.1628	-6.48	52.64	46.16	74.00	27.84	PASS	Vertical	PK
4	10224.4816	1.75	49.79	51.54	74.00	22.46	PASS	Vertical	PK
5	13750.7167	7.17	49.59	56.76	74.00	17.24	PASS	Vertical	PK
6	16247.8832	10.43	48.63	59.06	74.00	14.94	PASS	Vertical	PK
7	1899.9267	14.60	33.72	48.32	54.00	5.68	PASS	Vertical	AV
8	13761.7174	7.30	38.42	45.72	54.00	8.28	PASS	Vertical	AV
9	16267.8845	10.62	37.55	48.17	54.00	5.83	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

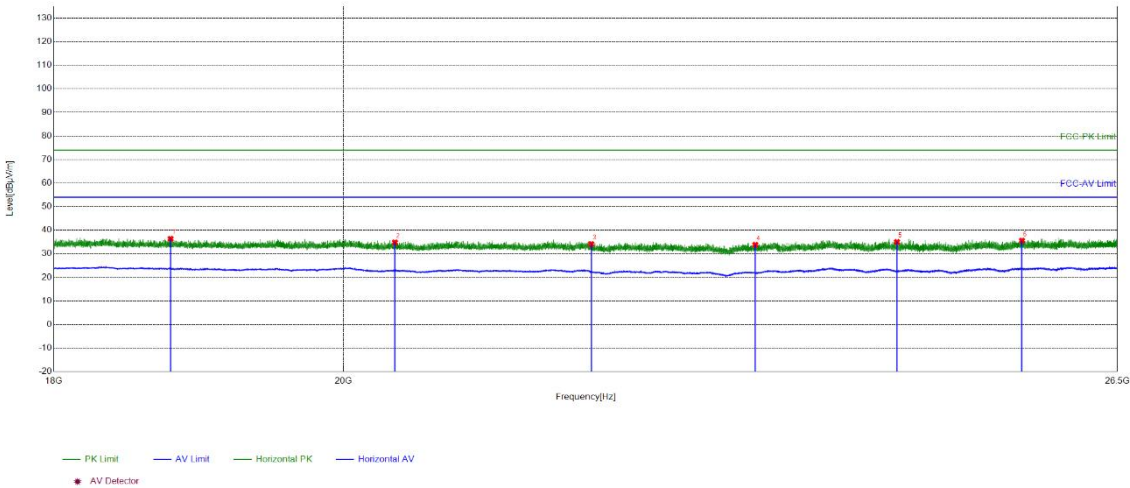

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18779.9912	-26.33	62.68	36.35	74.00	37.65	PASS	Horizontal	PK
2	20376.6951	-25.48	60.30	34.82	74.00	39.18	PASS	Horizontal	PK
3	21884.9954	-25.65	59.78	34.13	74.00	39.87	PASS	Horizontal	PK
4	23230.7692	-24.16	57.98	33.82	74.00	40.18	PASS	Horizontal	PK
5	24459.2384	-21.73	56.75	35.02	74.00	38.98	PASS	Horizontal	PK
6	25596.9239	-20.72	56.31	35.59	74.00	38.41	PASS	Horizontal	PK

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

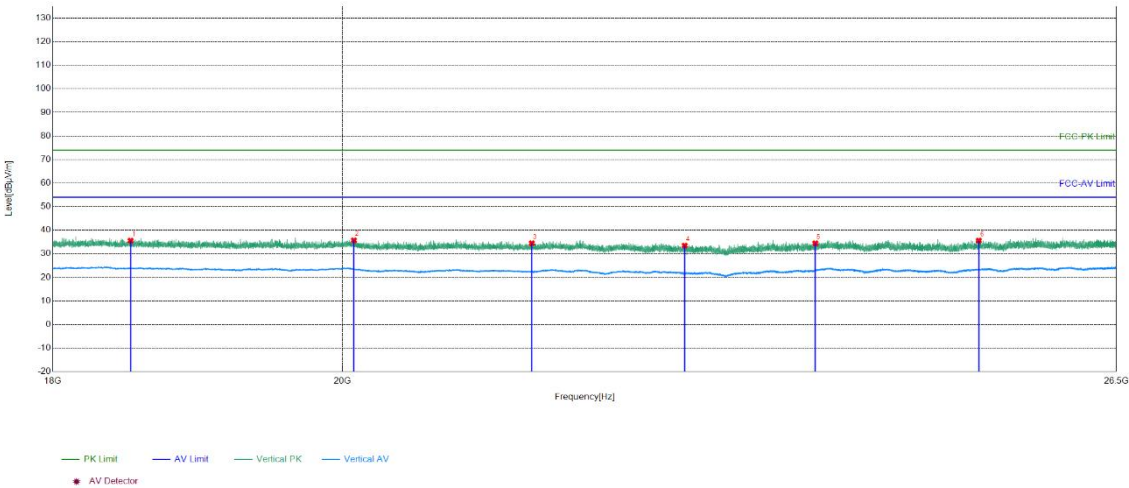

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18515.4606	-26.69	62.27	35.58	74.00	38.42	PASS	Vertical	PK
2	20082.2433	-24.99	60.70	35.71	74.00	38.29	PASS	Vertical	PK
3	21424.277	-25.87	60.35	34.48	74.00	39.52	PASS	Vertical	PK
4	22650.026	-25.01	58.48	33.47	74.00	40.53	PASS	Vertical	PK
5	23752.0101	-22.51	56.95	34.44	74.00	39.56	PASS	Vertical	PK
6	25207.2683	-21.06	56.68	35.62	74.00	38.38	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

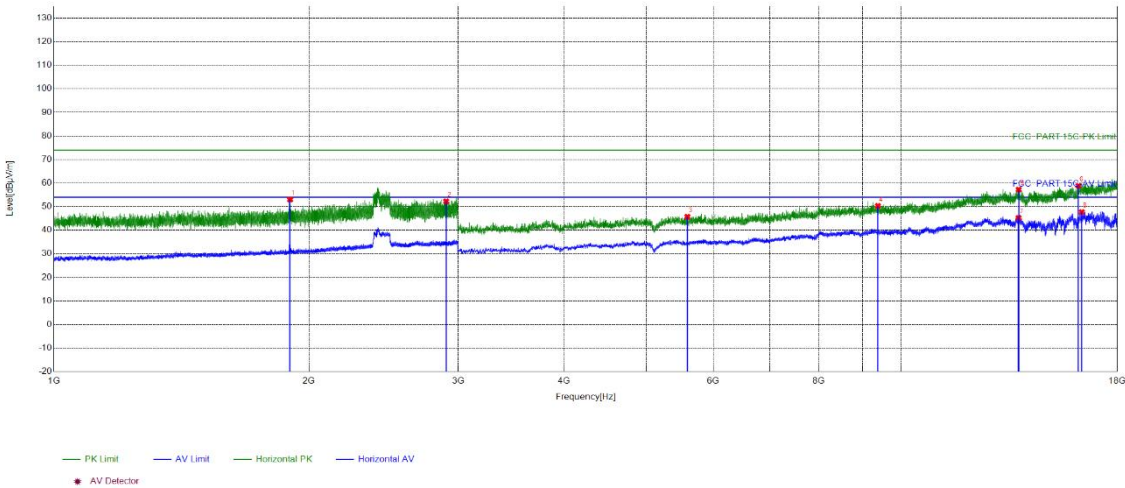

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1900.06	14.60	38.43	53.03	74.00	20.97	PASS	Horizontal	PK
2	2903.7269	17.74	34.54	52.28	74.00	21.72	PASS	Horizontal	PK
3	5594.1729	-6.29	52.00	45.71	74.00	28.29	PASS	Horizontal	PK
4	9389.426	1.02	49.31	50.33	74.00	23.67	PASS	Horizontal	PK
5	13765.7177	7.35	49.89	57.24	74.00	16.76	PASS	Horizontal	PK
6	16195.8797	10.42	48.40	58.82	74.00	15.18	PASS	Horizontal	PK
7	13761.7174	7.30	37.92	45.22	54.00	8.78	PASS	Horizontal	AV
8	16339.8893	11.46	36.23	47.69	54.00	6.31	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

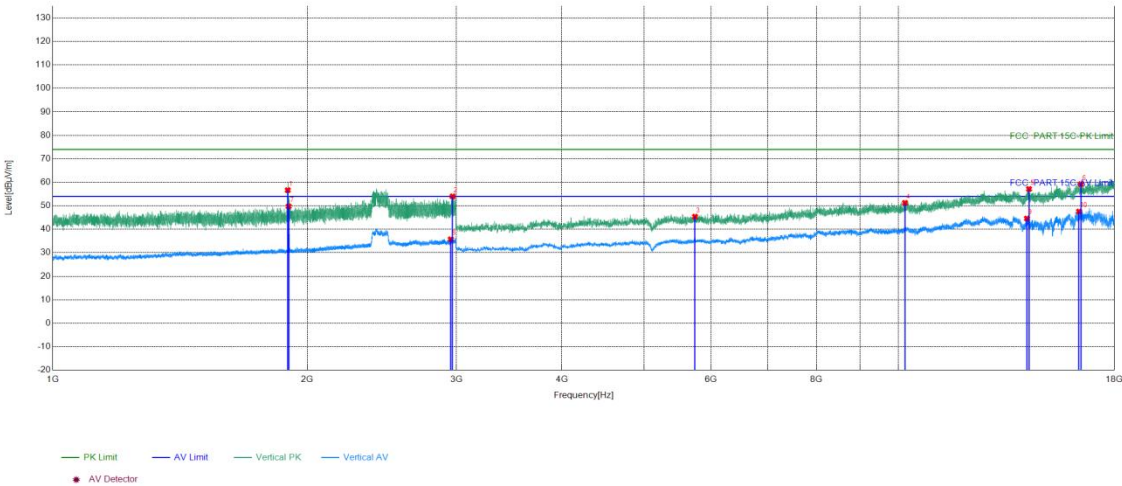

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1895.9264	14.50	42.16	56.66	74.00	17.34	PASS	Vertical	PK
2	2969.598	17.93	36.08	54.01	74.00	19.99	PASS	Vertical	PK
3	5745.183	-5.90	51.28	45.38	74.00	28.62	PASS	Vertical	PK
4	10177.4785	1.53	49.71	51.24	74.00	22.76	PASS	Vertical	PK
5	14266.7511	8.81	48.35	57.16	74.00	16.84	PASS	Vertical	PK
6	16430.8954	10.60	48.62	59.22	74.00	14.78	PASS	Vertical	PK
7	1900.3267	14.61	35.12	49.73	54.00	4.27	PASS	Vertical	AV
8	2955.3304	17.68	18.05	35.73	54.00	18.27	PASS	Vertical	AV
9	14183.7456	8.22	36.36	44.58	54.00	9.42	PASS	Vertical	AV
10	16346.8898	11.54	36.02	47.56	54.00	6.44	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

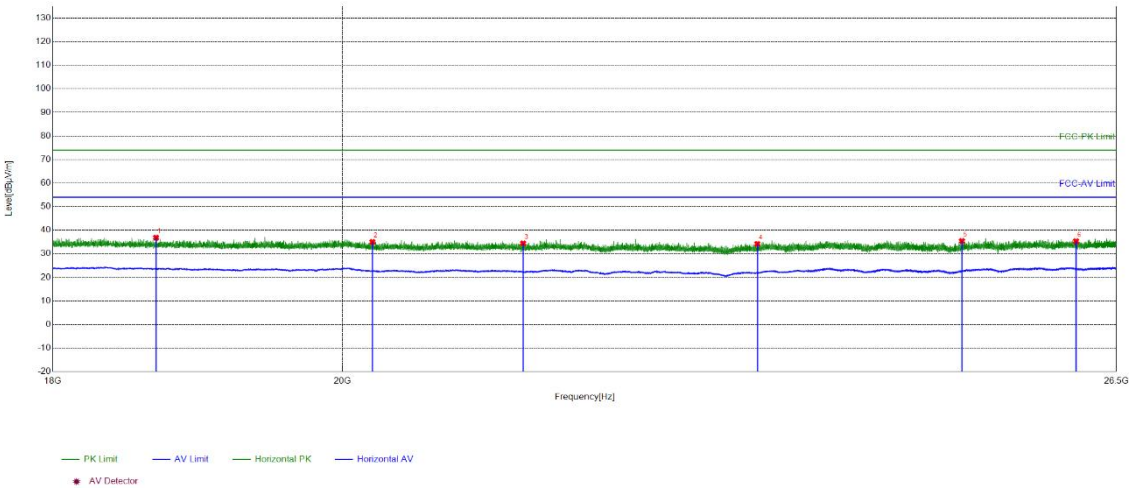

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18687.5075	-26.51	63.35	36.84	74.00	37.16	PASS	Horizontal	PK
2	20217.5687	-25.51	60.53	35.02	74.00	38.98	PASS	Horizontal	PK
3	21356.9543	-25.85	60.28	34.43	74.00	39.57	PASS	Horizontal	PK
4	23255.9302	-24.07	58.26	34.19	74.00	39.81	PASS	Horizontal	PK
5	25052.5621	-21.85	57.28	35.43	74.00	38.57	PASS	Horizontal	PK
6	26114.4246	-21.16	56.50	35.34	74.00	38.66	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

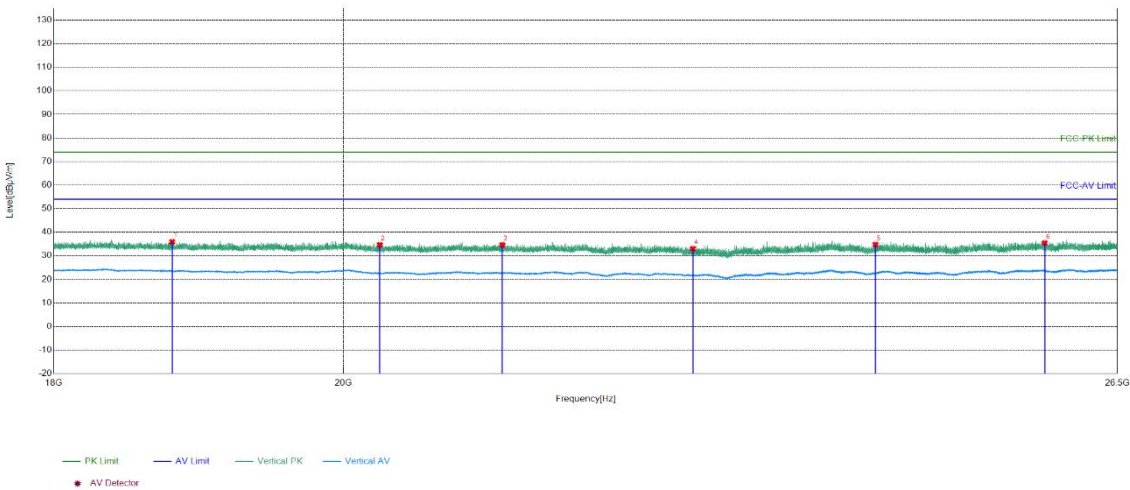

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18790.5316	-26.31	62.21	35.90	74.00	38.10	PASS	Vertical	PK
2	20263.8106	-25.50	60.15	34.65	74.00	39.35	PASS	Vertical	PK
3	21188.6475	-25.76	60.40	34.64	74.00	39.36	PASS	Vertical	PK
4	22708.8484	-25.02	58.01	32.99	74.00	41.01	PASS	Vertical	PK
5	24268.1507	-22.31	57.05	34.74	74.00	39.26	PASS	Vertical	PK
6	25809.0924	-20.83	56.21	35.38	74.00	38.62	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

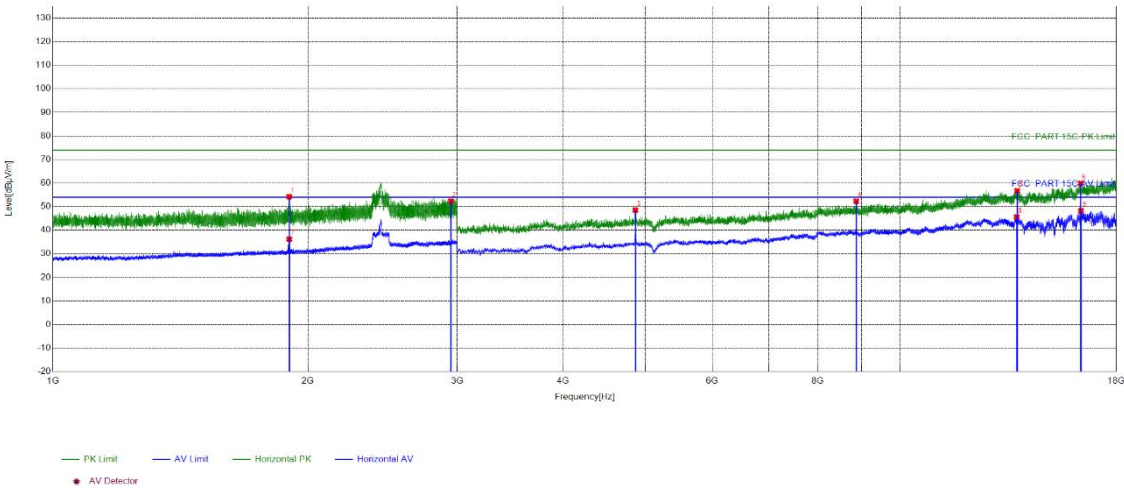

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1900.3267	14.61	39.62	54.23	74.00	19.77	PASS	Horizontal	PK
2	2948.9299	17.62	34.74	52.36	74.00	21.64	PASS	Horizontal	PK
3	4870.1247	-8.40	56.97	48.57	74.00	25.43	PASS	Horizontal	PK
4	8875.3917	0.07	52.22	52.29	74.00	21.71	PASS	Horizontal	PK
5	13746.7164	7.18	49.54	56.72	74.00	17.28	PASS	Horizontal	PK
6	16340.8894	11.47	48.40	59.87	74.00	14.13	PASS	Horizontal	PK
7	1900.7267	14.61	21.59	36.20	54.00	17.80	PASS	Horizontal	AV
8	13727.7152	7.21	38.37	45.58	54.00	8.42	PASS	Horizontal	AV
9	16348.8899	11.57	36.66	48.23	54.00	5.77	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

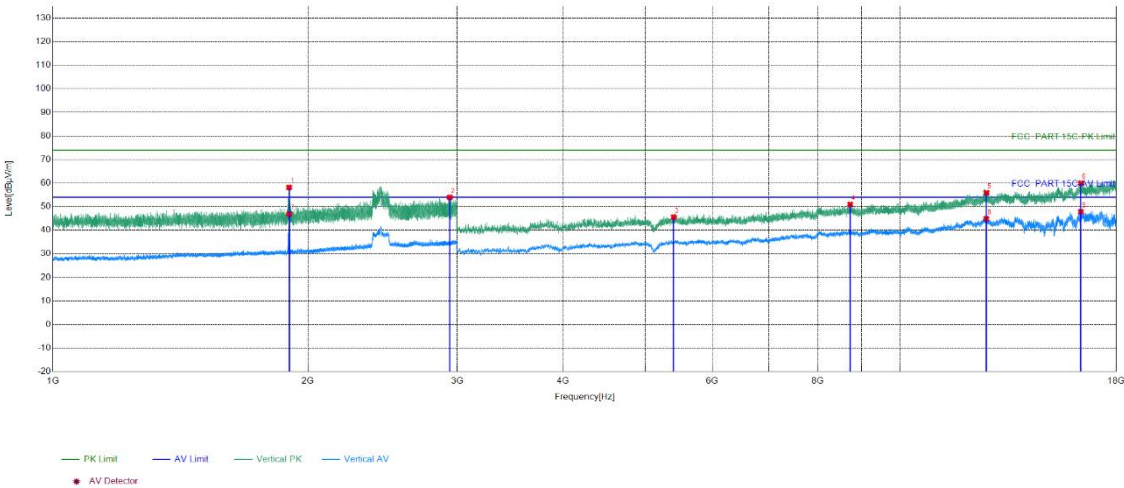

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1900.1933	14.60	43.55	58.15	74.00	15.85	PASS	Vertical	PK
2	2939.7293	17.65	36.29	53.94	74.00	20.06	PASS	Vertical	PK
3	5404.1603	-6.69	52.23	45.54	74.00	28.46	PASS	Vertical	PK
4	8731.3821	-0.33	51.27	50.94	74.00	23.06	PASS	Vertical	PK
5	12648.6432	4.46	51.41	55.87	74.00	18.13	PASS	Vertical	PK
6	16346.8898	11.54	48.39	59.93	74.00	14.07	PASS	Vertical	PK
7	1900.3267	14.61	32.26	46.87	54.00	7.13	PASS	Vertical	AV
8	12640.6427	4.50	40.36	44.86	54.00	9.14	PASS	Vertical	AV
9	16345.8897	11.53	36.28	47.81	54.00	6.19	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

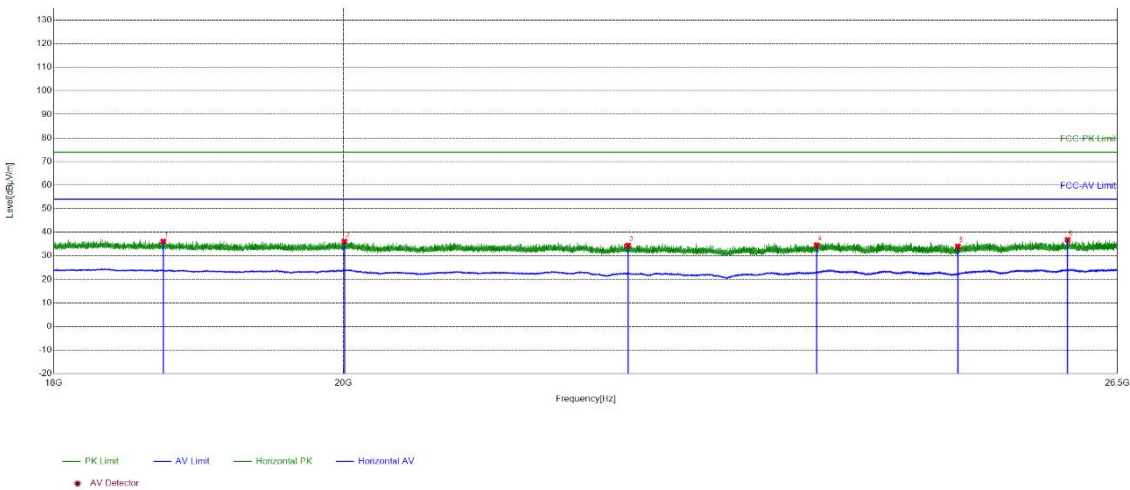

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18730.3492	-26.43	62.52	36.09	74.00	37.91	PASS	Horizontal	PK
2	20005.4002	-24.64	60.71	36.07	74.00	37.93	PASS	Horizontal	PK
3	22178.7672	-25.44	59.81	34.37	74.00	39.63	PASS	Horizontal	PK
4	23754.3902	-22.50	57.04	34.54	74.00	39.46	PASS	Horizontal	PK
5	25007.3403	-22.10	56.08	33.98	74.00	40.02	PASS	Horizontal	PK
6	26024.661	-20.96	57.73	36.77	74.00	37.23	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

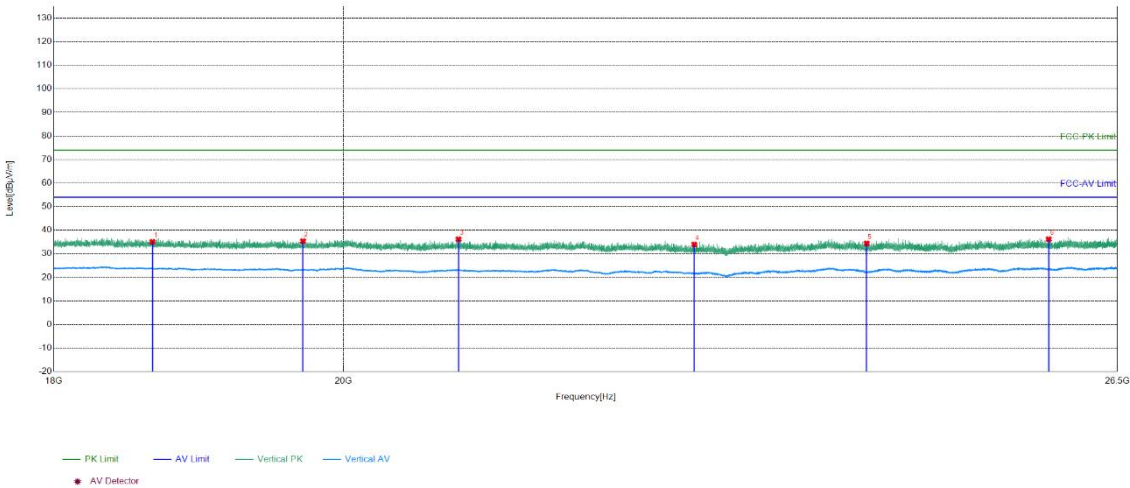

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18656.2262	-26.58	61.67	35.09	74.00	38.91	PASS	Vertical	PK
2	19706.5283	-25.40	60.78	35.38	74.00	38.62	PASS	Vertical	PK
3	20853.3941	-25.74	61.89	36.15	74.00	37.85	PASS	Vertical	PK
4	22720.4088	-25.03	58.97	33.94	74.00	40.06	PASS	Vertical	PK
5	24190.9676	-22.61	57.01	34.40	74.00	39.60	PASS	Vertical	PK
6	25846.8339	-20.84	57.02	36.18	74.00	37.82	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

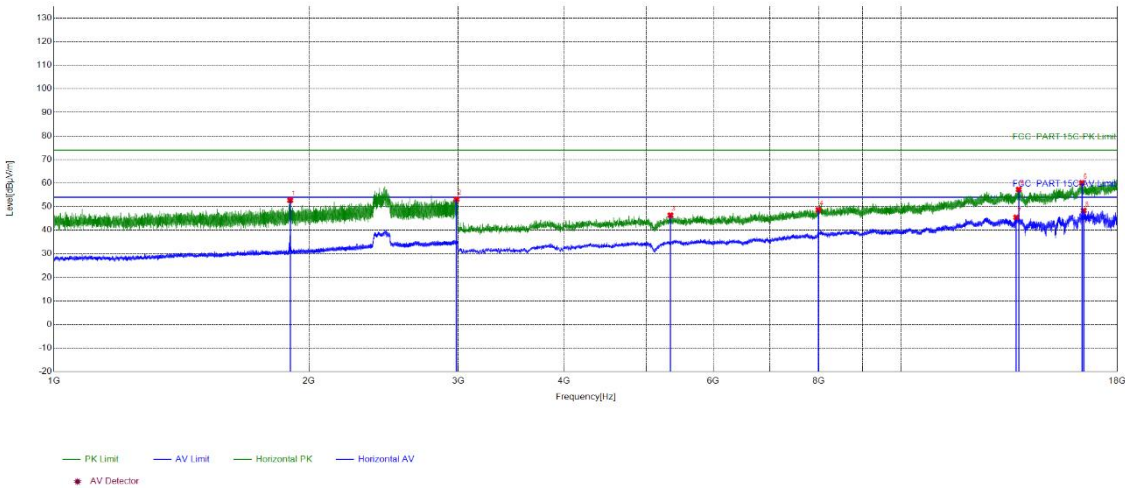

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1900.46	14.61	38.09	52.70	74.00	21.30	PASS	Horizontal	PK
2	2987.0658	17.90	35.22	53.12	74.00	20.88	PASS	Horizontal	PK
3	5343.1562	-6.96	53.34	46.38	74.00	27.62	PASS	Horizontal	PK
4	7988.3326	-1.37	49.99	48.62	74.00	25.38	PASS	Horizontal	PK
5	13766.7178	7.36	49.92	57.28	74.00	16.72	PASS	Horizontal	PK
6	16349.89	11.58	48.52	60.10	74.00	13.90	PASS	Horizontal	PK
7	13677.7118	7.35	38.09	45.44	54.00	8.56	PASS	Horizontal	AV
8	16426.8951	10.51	37.84	48.35	54.00	5.65	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

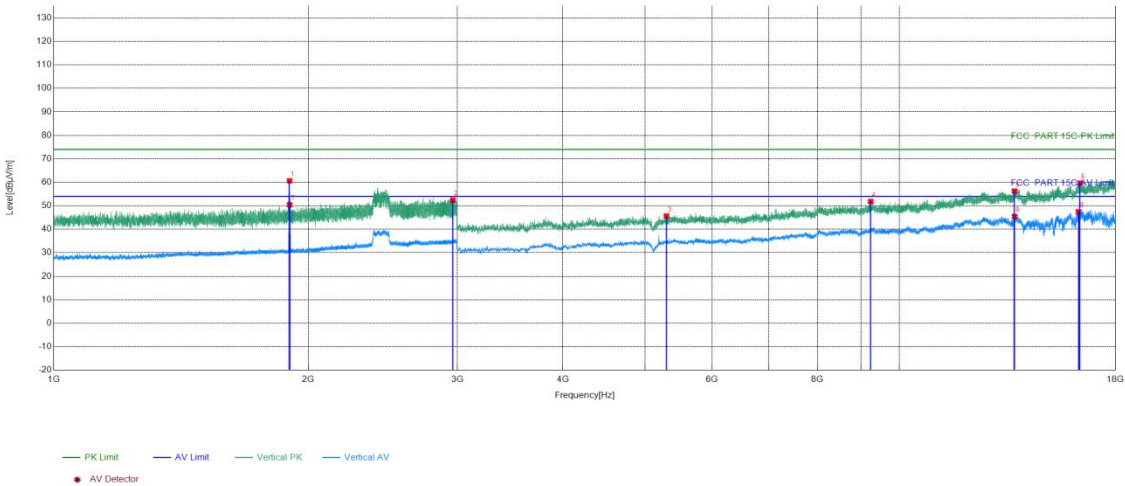

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1900.06	14.60	46.02	60.62	74.00	13.38	PASS	Vertical	PK
2	2963.5976	17.81	34.62	52.43	74.00	21.57	PASS	Vertical	PK
3	5301.1534	-7.08	52.73	45.65	74.00	28.35	PASS	Vertical	PK
4	9245.4164	0.59	51.24	51.83	74.00	22.17	PASS	Vertical	PK
5	13676.7118	7.35	48.90	56.25	74.00	17.75	PASS	Vertical	PK
6	16346.8898	11.54	48.15	59.69	74.00	14.31	PASS	Vertical	PK
7	1900.1933	14.60	35.83	50.43	54.00	3.57	PASS	Vertical	AV
8	13680.712	7.34	38.09	45.43	54.00	8.57	PASS	Vertical	AV
9	16275.8851	10.71	36.76	47.47	54.00	6.53	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

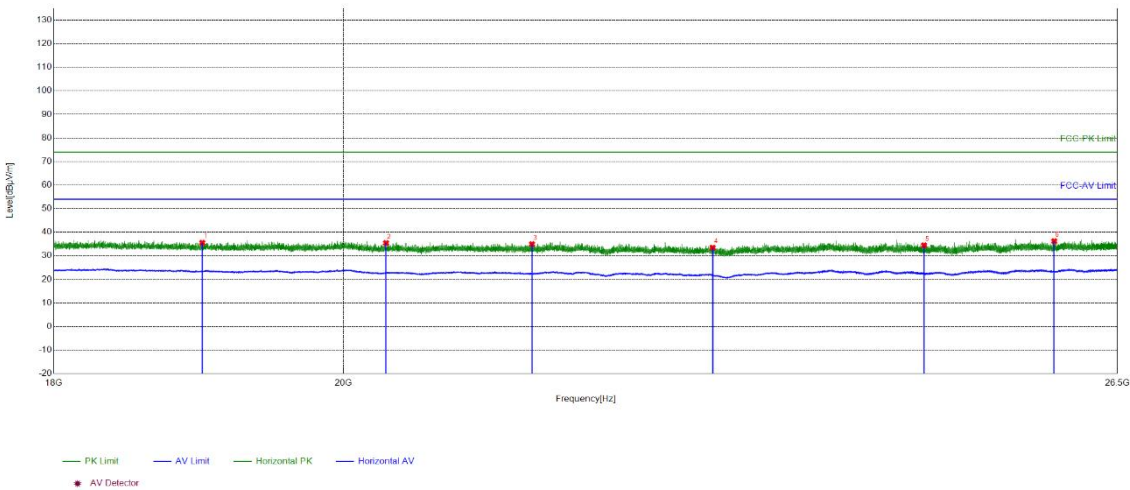

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18997.5999	-26.27	61.80	35.53	74.00	38.47	PASS	Horizontal	PK
2	20310.7324	-25.49	60.92	35.43	74.00	38.57	PASS	Horizontal	PK
3	21418.1567	-25.87	60.83	34.96	74.00	39.04	PASS	Horizontal	PK
4	22873.4149	-25.29	58.71	33.42	74.00	40.58	PASS	Horizontal	PK
5	24700.648	-21.92	56.38	34.46	74.00	39.54	PASS	Horizontal	PK
6	25898.5159	-20.86	57.07	36.21	74.00	37.79	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

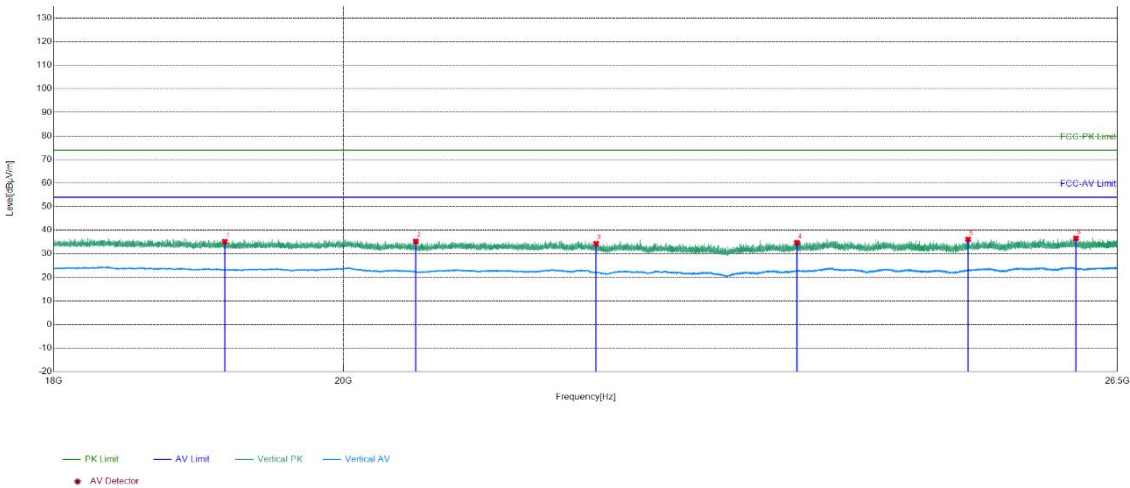

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19154.0062	-26.11	61.25	35.14	74.00	38.86	PASS	Vertical	PK
2	20532.0813	-25.87	61.12	35.25	74.00	38.75	PASS	Vertical	PK
3	21923.4169	-25.71	59.98	34.27	74.00	39.73	PASS	Vertical	PK
4	23584.3834	-23.10	57.85	34.75	74.00	39.25	PASS	Vertical	PK
5	25100.164	-21.59	57.69	36.10	74.00	37.90	PASS	Vertical	PK
6	26104.5642	-21.14	57.70	36.56	74.00	37.44	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

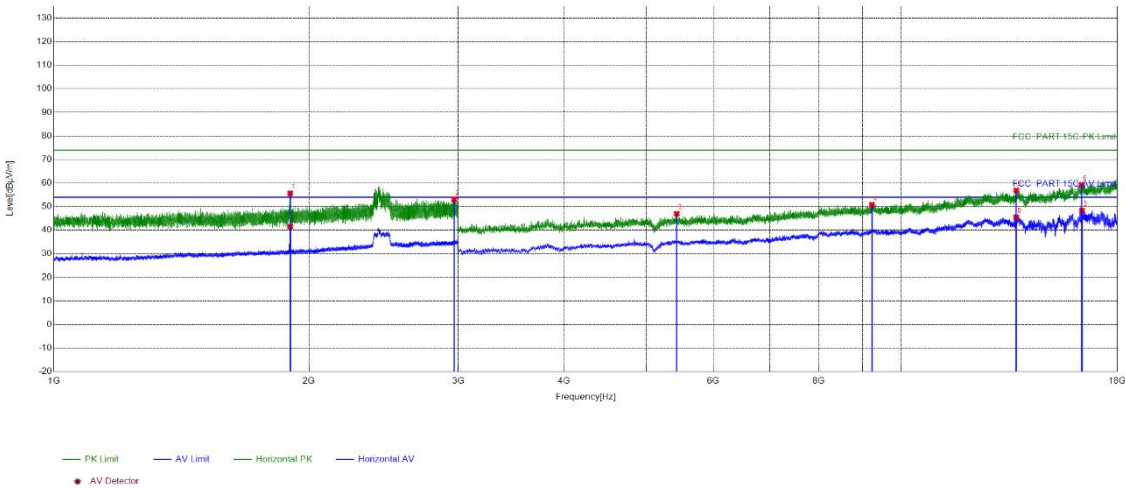

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1900.3267	14.61	41.07	55.68	74.00	18.32	PASS	Horizontal	PK
2	2968.1312	17.91	35.13	53.04	74.00	20.96	PASS	Horizontal	PK
3	5434.1623	-6.52	53.52	47.00	74.00	27.00	PASS	Horizontal	PK
4	9236.4158	0.52	50.31	50.83	74.00	23.17	PASS	Horizontal	PK
5	13679.712	7.34	49.54	56.88	74.00	17.12	PASS	Horizontal	PK
6	16328.8886	11.32	47.94	59.26	74.00	14.74	PASS	Horizontal	PK
7	1900.46	14.61	26.90	41.51	54.00	12.49	PASS	Horizontal	AV
8	13672.7115	7.36	38.14	45.50	54.00	8.50	PASS	Horizontal	AV
9	16349.89	11.58	36.78	48.36	54.00	5.64	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

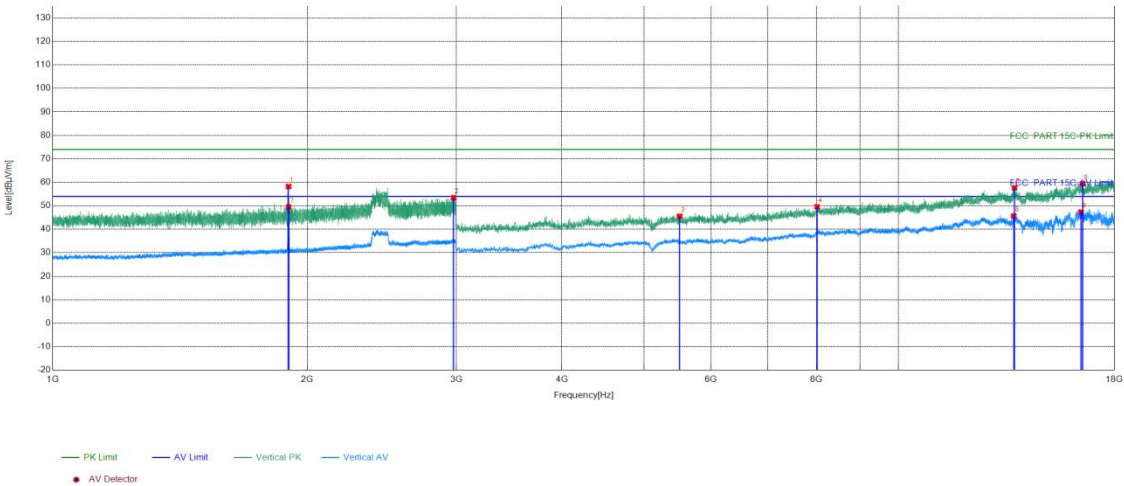

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1899.9267	14.60	43.60	58.20	74.00	15.80	PASS	Vertical	PK
2	2977.3318	17.88	35.59	53.47	74.00	20.53	PASS	Vertical	PK
3	5511.1674	-6.46	52.01	45.55	74.00	28.45	PASS	Vertical	PK
4	8014.3343	-1.25	50.80	49.55	74.00	24.45	PASS	Vertical	PK
5	13713.7142	7.24	50.47	57.71	74.00	16.29	PASS	Vertical	PK
6	16502.9002	11.93	47.48	59.41	74.00	14.59	PASS	Vertical	PK
7	1900.46	14.61	34.86	49.47	54.00	4.53	PASS	Vertical	AV
8	13682.7122	7.33	38.33	45.66	54.00	8.34	PASS	Vertical	AV
9	16436.8958	10.73	36.61	47.34	54.00	6.66	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

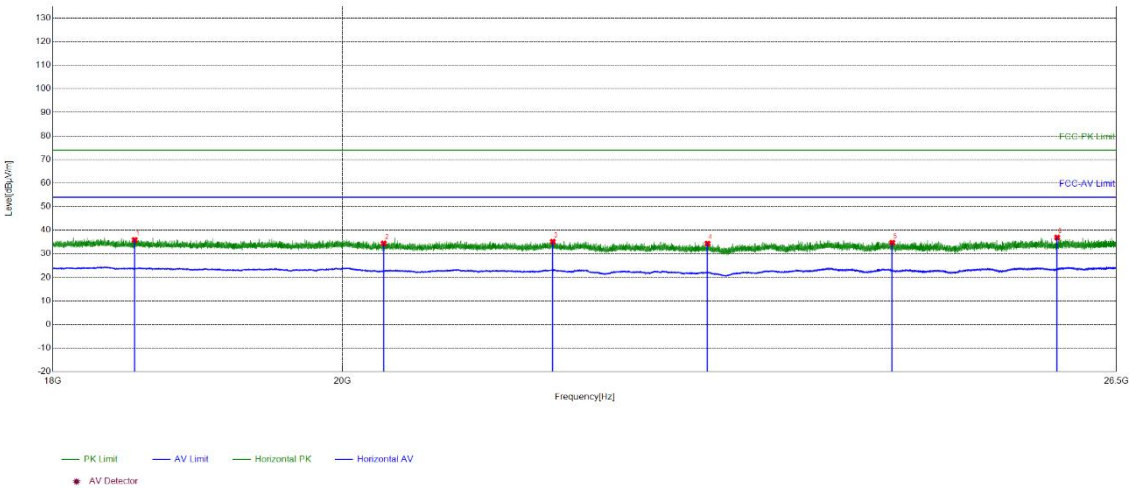

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18543.0017	-26.69	62.57	35.88	74.00	38.12	PASS	Horizontal	PK
2	20300.872	-25.49	59.90	34.41	74.00	39.59	PASS	Horizontal	PK
3	21588.5035	-25.75	60.89	35.14	74.00	38.86	PASS	Horizontal	PK
4	22838.7335	-25.18	59.51	34.33	74.00	39.67	PASS	Horizontal	PK
5	24425.917	-21.71	56.43	34.72	74.00	39.28	PASS	Horizontal	PK
6	25935.9174	-20.87	57.77	36.90	74.00	37.10	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

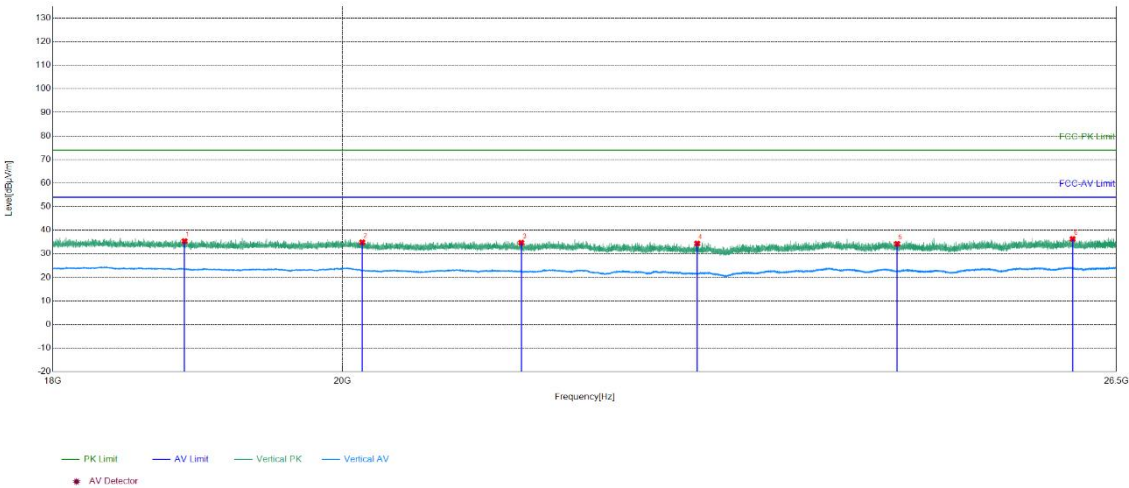

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18882.3353	-26.28	61.65	35.37	74.00	38.63	PASS	Vertical	PK
2	20143.1057	-25.26	60.14	34.88	74.00	39.12	PASS	Vertical	PK
3	21342.3337	-25.84	60.55	34.71	74.00	39.29	PASS	Vertical	PK
4	22753.3901	-25.04	59.41	34.37	74.00	39.63	PASS	Vertical	PK
5	24470.4588	-21.74	55.96	34.22	74.00	39.78	PASS	Vertical	PK
6	26082.1233	-21.09	57.37	36.28	74.00	37.72	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

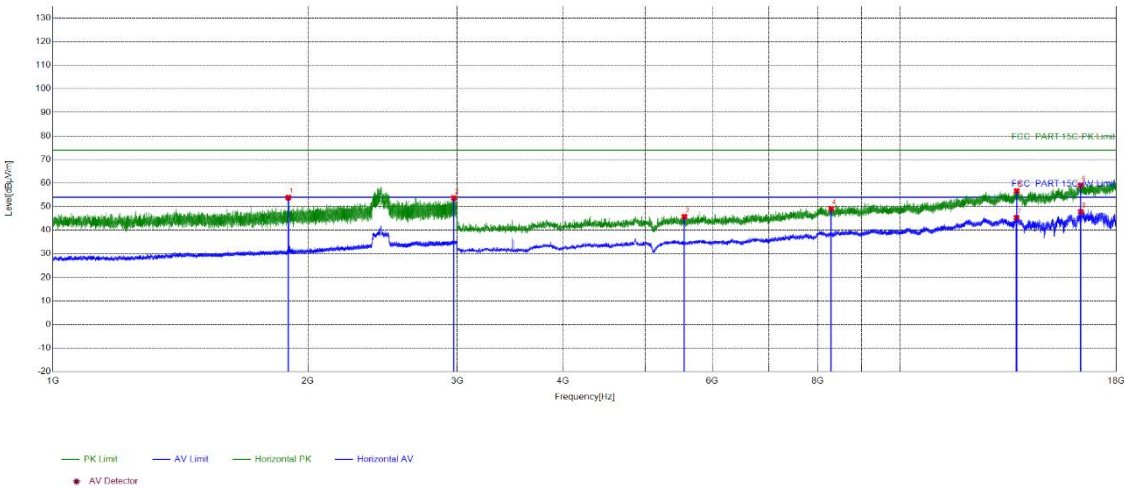

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1896.0597	14.50	39.35	53.85	74.00	20.15	PASS	Horizontal	PK
2	2973.3316	17.92	35.73	53.65	74.00	20.35	PASS	Horizontal	PK
3	5564.1709	-6.29	52.02	45.73	74.00	28.27	PASS	Horizontal	PK
4	8293.3529	-1.01	50.10	49.09	74.00	24.91	PASS	Horizontal	PK
5	13727.7152	7.21	49.45	56.66	74.00	17.34	PASS	Horizontal	PK
6	16339.8893	11.46	47.62	59.08	74.00	14.92	PASS	Horizontal	PK
7	13722.7148	7.21	38.09	45.30	54.00	8.70	PASS	Horizontal	AV
8	16345.8897	11.53	36.26	47.79	54.00	6.21	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

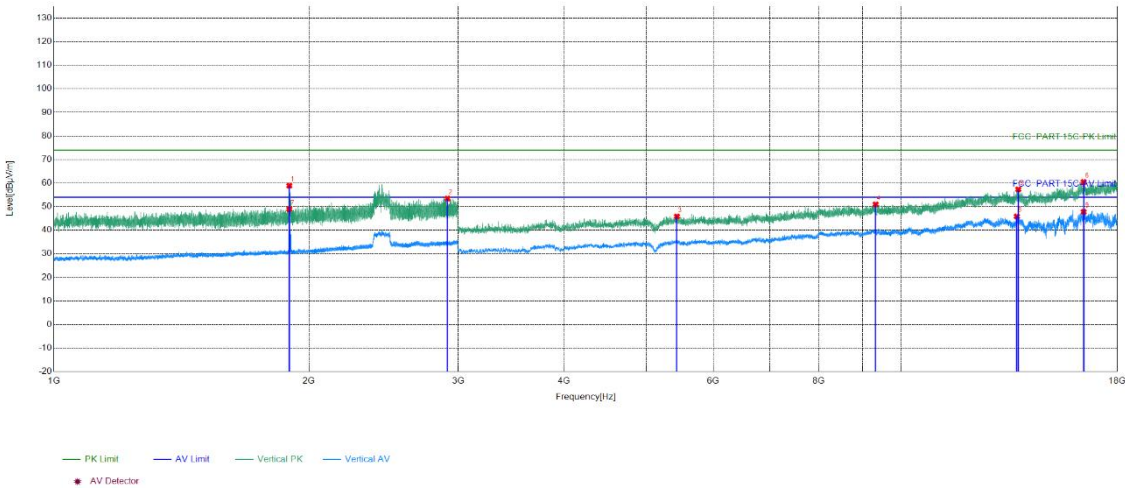

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1895.7931	14.49	44.42	58.91	74.00	15.09	PASS	Vertical	PK
2	2914.661	17.67	35.77	53.44	74.00	20.56	PASS	Vertical	PK
3	5437.1625	-6.51	52.35	45.84	74.00	28.16	PASS	Vertical	PK
4	9331.4221	0.97	49.99	50.96	74.00	23.04	PASS	Vertical	PK
5	13751.7168	7.18	50.15	57.33	74.00	16.67	PASS	Vertical	PK
6	16422.8949	10.43	50.04	60.47	74.00	13.53	PASS	Vertical	PK
7	1895.7931	14.49	34.46	48.95	54.00	5.05	PASS	Vertical	AV
8	13696.7131	7.27	38.60	45.87	54.00	8.13	PASS	Vertical	AV
9	16423.8949	10.45	37.33	47.78	54.00	6.22	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

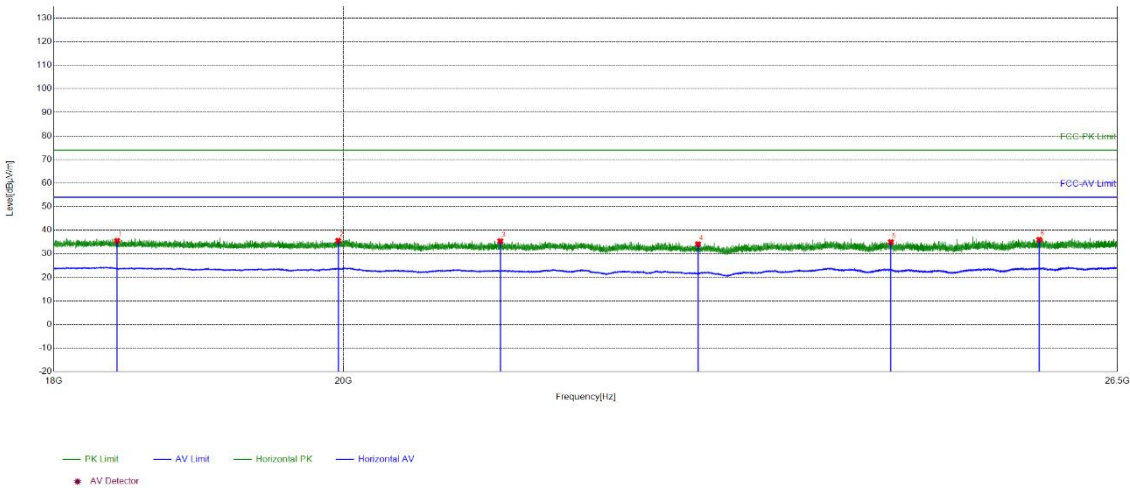

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18418.8968	-26.70	62.23	35.53	74.00	38.47	PASS	Horizontal	PK
2	19960.8584	-24.74	60.28	35.54	74.00	38.46	PASS	Horizontal	PK
3	21173.0069	-25.79	61.17	35.38	74.00	38.62	PASS	Horizontal	PK
4	22751.6901	-25.04	59.12	34.08	74.00	39.92	PASS	Horizontal	PK
5	24404.8362	-21.68	56.66	34.98	74.00	39.02	PASS	Horizontal	PK
6	25757.7503	-20.80	56.76	35.96	74.00	38.04	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Test_Engineer	\	Test_Date	2026/9/14


Test Graph

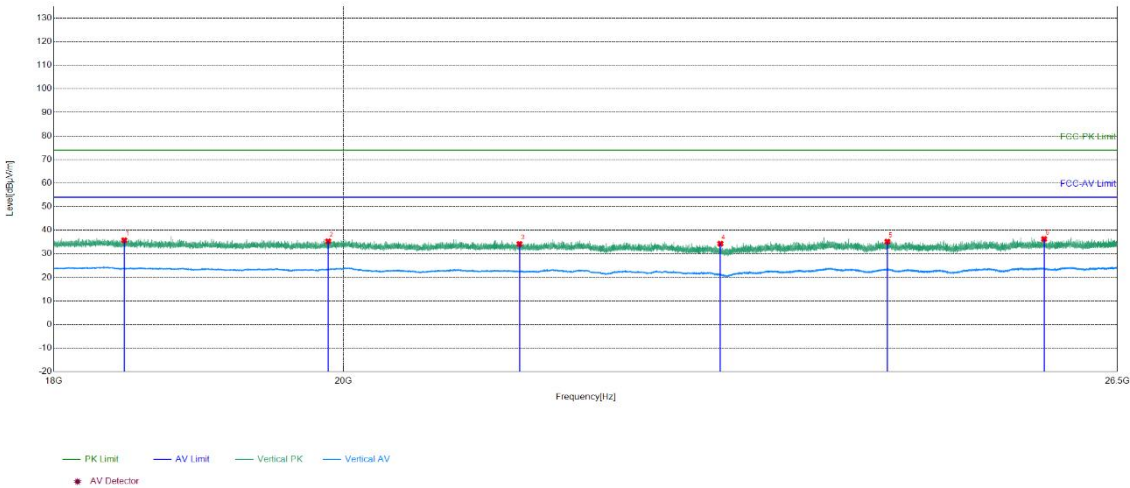

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18466.1586	-26.70	62.44	35.74	74.00	38.26	PASS	Vertical	PK
2	19887.7555	-24.96	60.27	35.31	74.00	38.69	PASS	Vertical	PK
3	21320.5728	-25.83	60.00	34.17	74.00	39.83	PASS	Vertical	PK
4	22937.6775	-25.49	59.79	34.30	74.00	39.70	PASS	Vertical	PK
5	24373.895	-21.80	56.97	35.17	74.00	38.83	PASS	Vertical	PK
6	25803.6521	-20.82	57.07	36.25	74.00	37.75	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Test_Engineer	\	Test_Date	2026/9/14

Test Graph

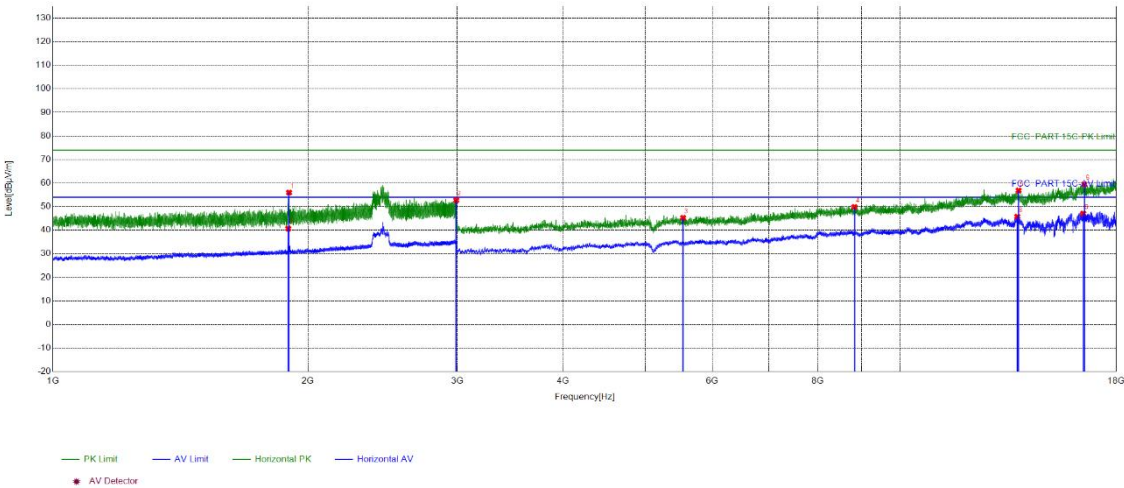

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1899.7933	14.60	41.39	55.99	74.00	18.01	PASS	Horizontal	PK
2	2992.5328	17.89	34.83	52.72	74.00	21.28	PASS	Horizontal	PK
3	5545.1697	-6.30	51.54	45.24	74.00	28.76	PASS	Horizontal	PK
4	8833.3889	0.08	49.79	49.87	74.00	24.13	PASS	Horizontal	PK
5	13799.72	7.75	49.10	56.85	74.00	17.15	PASS	Horizontal	PK
6	16498.8999	11.92	47.55	59.47	74.00	14.53	PASS	Horizontal	PK
7	1895.7931	14.49	26.20	40.69	54.00	13.31	PASS	Horizontal	AV
8	13751.7168	7.18	38.58	45.76	54.00	8.24	PASS	Horizontal	AV
9	16449.8967	10.99	36.11	47.10	54.00	6.90	PASS	Horizontal	AV