


Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

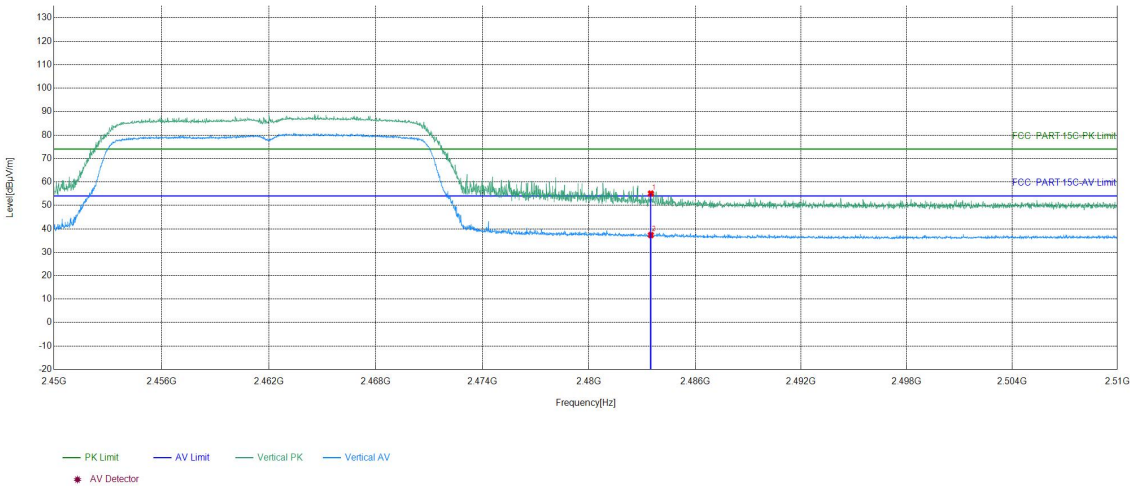

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.77	55.06	74.00	18.94	PASS	Vertical	PK
2	2483.5	16.29	21.03	37.32	54.00	16.68	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

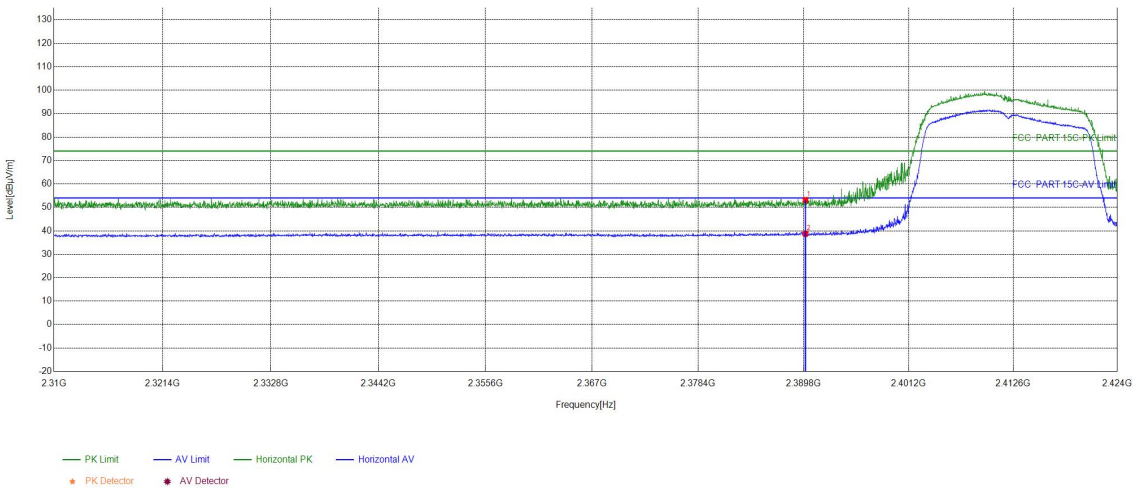

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.17	53.13	74.00	20.87	PASS	Horizontal	PK
2	2390	15.96	22.77	38.73	54.00	15.27	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

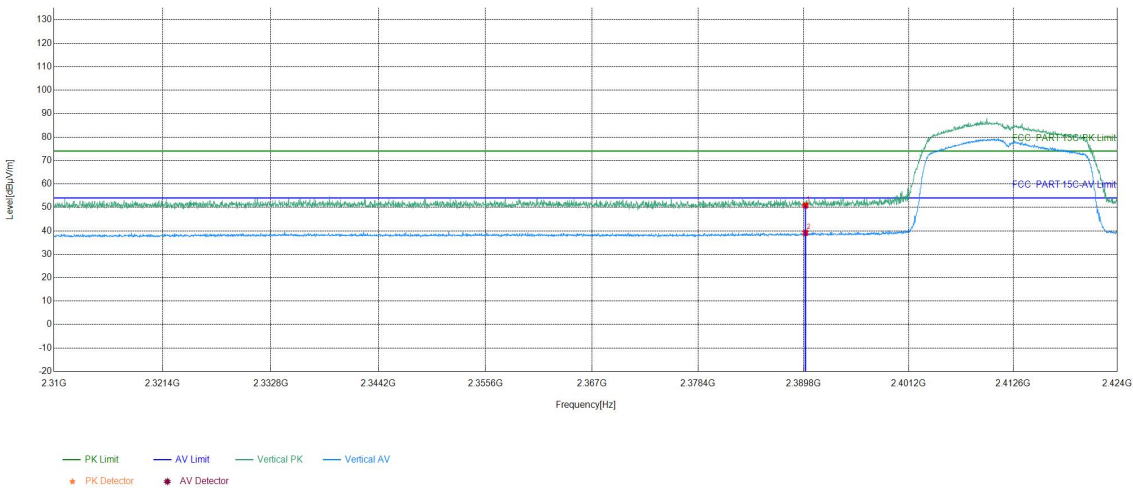

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.83	50.79	74.00	23.21	PASS	Vertical	PK
2	2390	15.96	23.16	39.12	54.00	14.88	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

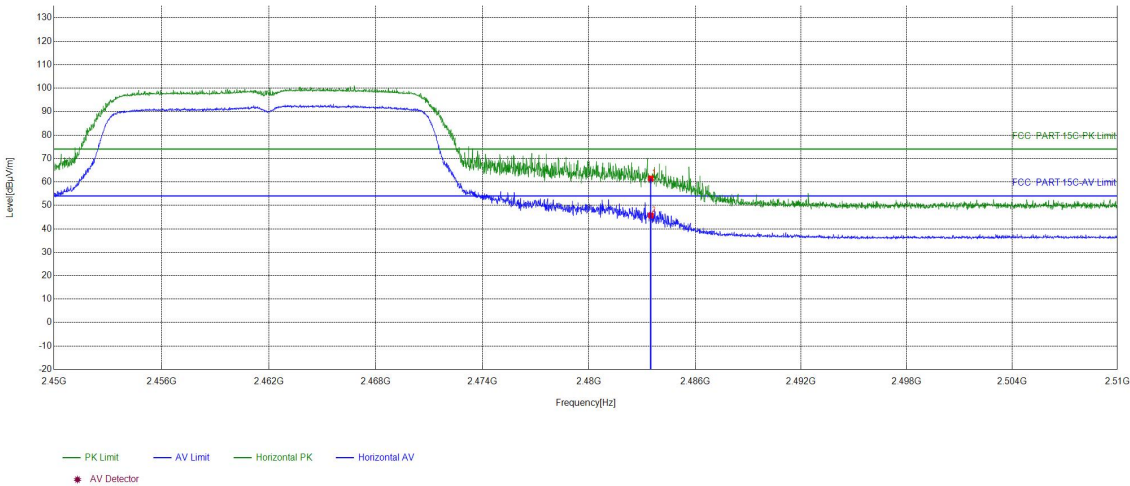

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	45.18	61.47	74.00	12.53	PASS	Horizontal	PK
2	2483.5	16.29	29.41	45.70	54.00	8.30	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

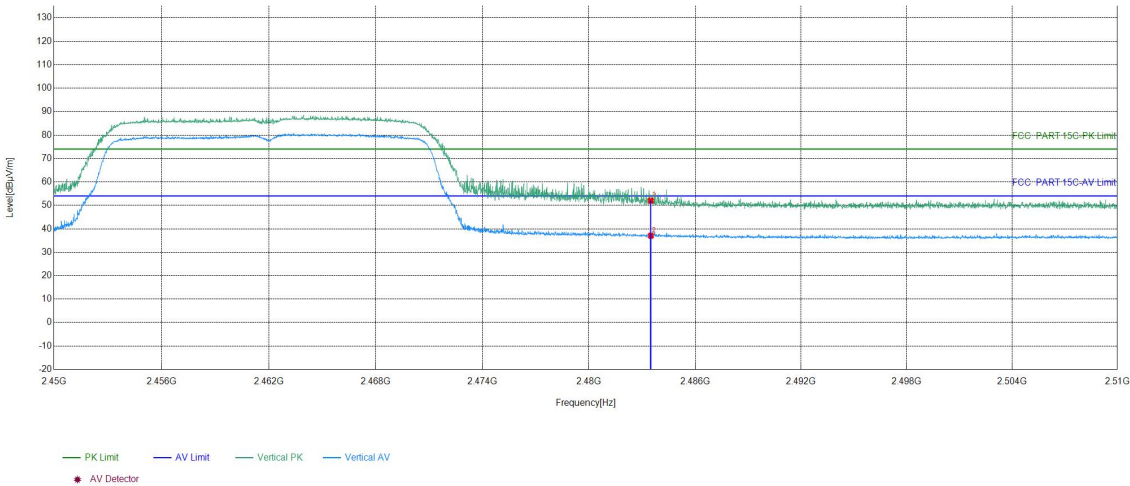

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.72	52.01	74.00	21.99	PASS	Vertical	PK
2	2483.5	16.29	20.75	37.04	54.00	16.96	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

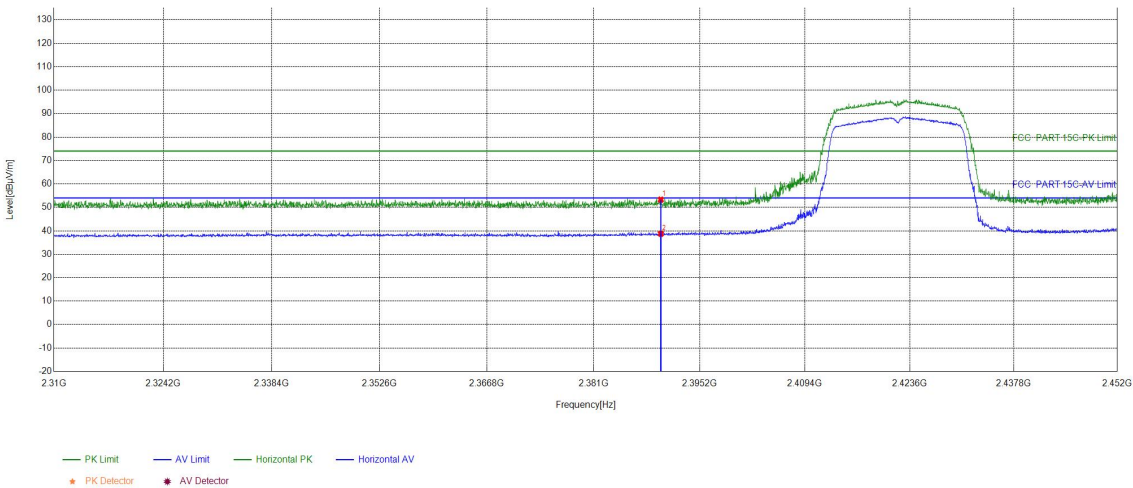

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.33	53.29	74.00	20.71	PASS	Horizontal	PK
2	2390	15.96	22.79	38.75	54.00	15.25	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

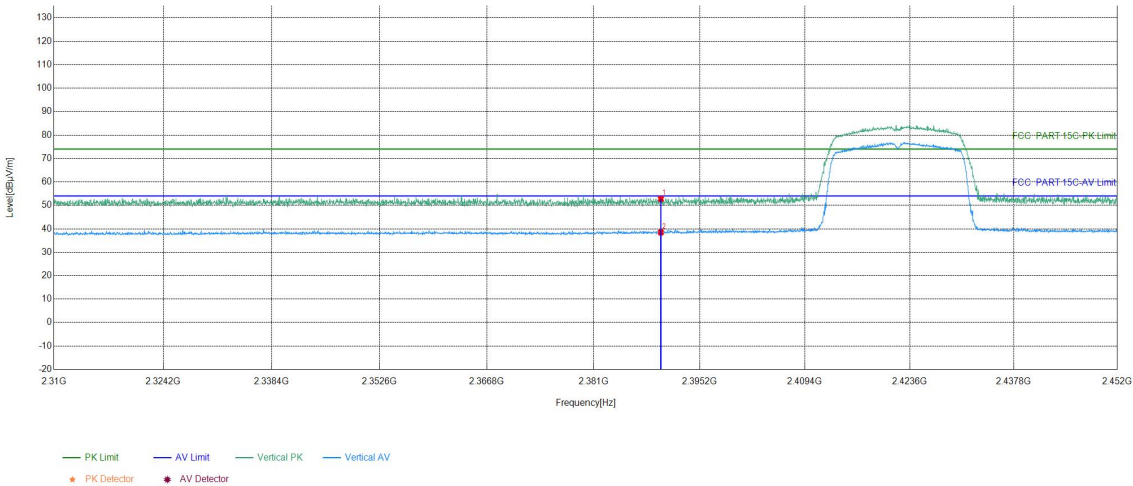

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.79	52.75	74.00	21.25	PASS	Vertical	PK
2	2390	15.96	22.53	38.49	54.00	15.51	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Test_Engineer	\	Test_Date	2026/9/20


Test Graph

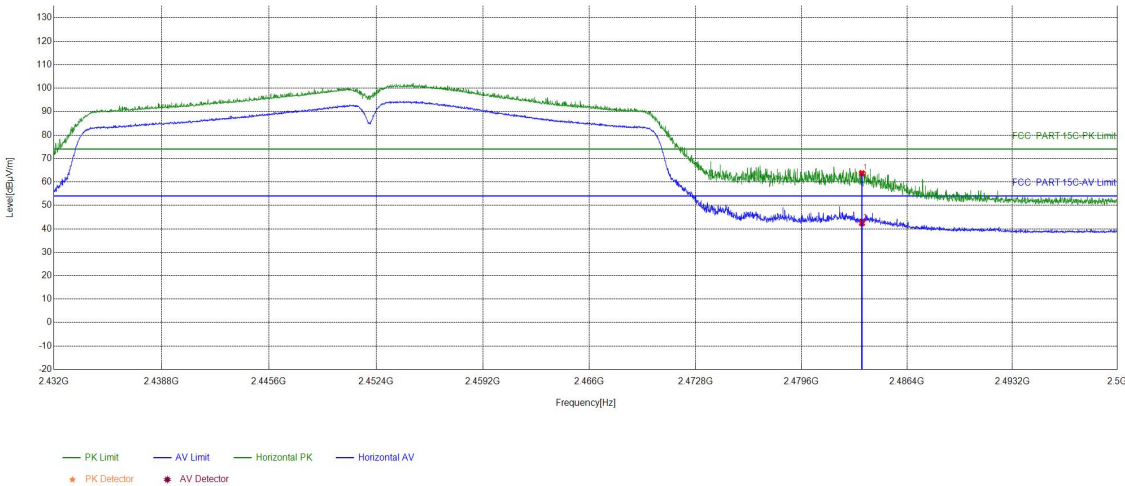

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	47.38	63.67	74.00	10.33	PASS	Horizontal	PK
2	2483.5	16.29	26.14	42.43	54.00	11.57	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Test_Engineer	\	Test_Date	2026/9/20

Test Graph

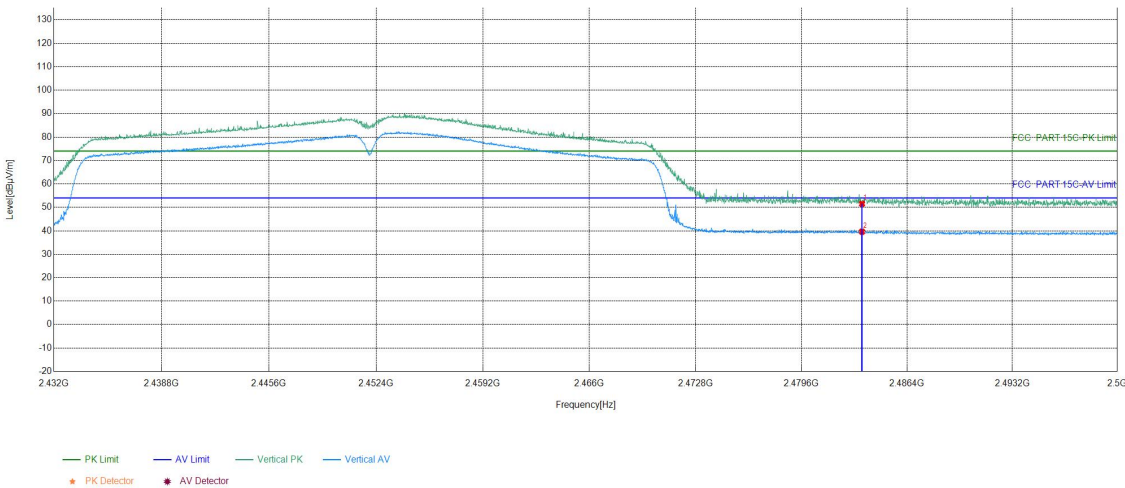

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.23	51.52	74.00	22.48	PASS	Vertical	PK
2	2483.5	16.29	23.32	39.61	54.00	14.39	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S822000

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No.EED32S822000.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***