RADIO TEST REPORT
FCC ID: 2BYKL-BT10

Product: Sound Card Voice Changer
Trade Mark: jinglei
Model No.: BT10
Family Model: N/A
Report No.: N26062504309E
Issue Date: Sept. 17, 2026

Prepared for

Shenzhen KedeYi Technology Co., Ltd.

Room 301, Building 8, Hengji Garden, Heyicun, Shajing Sub-district, Bao'an District, Shenzhen City

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
No. 24 Xinfa East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China
Tel. 0755-23200050 Website: http://www.ntek.org.cn

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION 3

2 SUMMARY OF TEST RESULTS 4

3 FACILITIES AND ACCREDITATIONS 5

3.1 FACILITIES 5
3.2 LABORATORY ACCREDITATIONS AND LISTINGS 5
3.3 MEASUREMENT UNCERTAINTY 5

4 GENERAL DESCRIPTION OF EUT 6

5 DESCRIPTION OF TEST MODES 8

6 SETUP OF EQUIPMENT UNDER TEST 9

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM 9
6.2 SUPPORT EQUIPMENT 10
6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS 11

7 TEST REQUIREMENTS 13

7.1 CONDUCTED EMISSIONS TEST 13
7.2 RADIATED SPURIOUS EMISSION 16
7.3 NUMBER OF HOPPING CHANNEL 38
7.4 HOPPING CHANNEL SEPARATION MEASUREMENT 39
7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME) 40
7.6 20DB BANDWIDTH TEST 42
7.7 PEAK OUTPUT POWER 43
7.8 CONDUCTED BAND EDGE MEASUREMENT 44
7.9 SPURIOUS RF CONDUCTED EMISSION 45
7.10 ANTENNA APPLICATION 46
7.11 FREQUENCY HOPPING SYSTEM (FHSS) EQUIPMENT REQUIREMENTS 47

8 TEST RESULTS 48

8.1 CONDUCTED OUTPUT POWER 48
8.2 99% BANDWIDTH 50
8.3 20DB BANDWIDTH 52
8.4 CARRIER FREQUENCIES SEPARATION 54
8.5 CONDUCTED SPURIOUS & BAND EDGE EMISSION 56
8.6 DUTY CYCLE 61
8.7 DWELL TIME 63
8.8 NUMBER OF HOPPING CHANNEL 66

1 TEST RESULT CERTIFICATION

Applicant's name ..... :	Shenzhen KedeYi Technology Co., Ltd.
Address..... :	Room 301, Building 8, Hengji Garden, Heyicun, Shajing Sub-district, Bao'an District, Shenzhen City
Manufacturer's Name ..... :	Shenzhen KedeYi Technology Co., Ltd.
Address..... :	Room 301, Building 8, Hengji Garden, Heyicun, Shajing Sub-district, Bao'an District, Shenzhen City
Product description	
Product name ..... :	Sound Card Voice Changer
Model and/or type reference ..... :	BT10
Family Model ..... :	N/A
Sample number	S2606250306-1#
Date of Test	Jun. 25, 2026~ Sept. 17, 2026

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Prepared By : Nikki Yang
(Project Engineer)

Reviewed By : Aaron Cheng
(Supervisor)

Approved By : Alex Li
(Manager)

2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	**Test Item**	**Verdict**	**Remark**
15.207	Conducted Emission	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:
1. “N/A” denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
No. 24 Xinfa East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab.	:	The Certificate Registration Number is L5516.
IC-Registration		The Certificate Registration Number is 9270A. CAB identifier:CN0074
FCC- Accredited		Test Firm Registration Number: 463705. Designation Number: CN1184
A2LA-Lab.		The Certificate Registration Number is 4298.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).
Name of Firm	:	Shenzhen NTEK Testing Technology Co., Ltd.
Site Location	:	No. 24 Xinfa East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test(9-150kHz)	3.7dB
2	Conducted Emission Test(0.15-30MHz)	3.3dB
3	RF power, conducted	1.34dB
4	Power Spectral Density, conducted	0.91dB
5	Occupied bandwidth	1.00%
6	Spurious emissions, conducted	2.71dB
7	Radio Frequency	0.21ppm
8	All emissions, radiated(9kHz~30MHz)	5.26dB
9	All emissions, radiated(30MHz~1G)	4.90dB
10	All emissions, radiated(1G~18G)	5.10dB
11	All emissions, radiated(18G~40G)	5.76dB
12	Time	5%
13	Temperature	1°C
14	Humidity	5%

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Sound Card Voice Changer
Trade Mark	jinglei
FCC ID	2BYKL-BT10
Model No.	BT10
Family Model	N/A
Model Difference	N/A
Operating Frequency	2402MHz~2480MHz
Modulation	GFSK, π/4-DQPSK, 8-DPSK
Number of Channels	79 Channels
Antenna Type	Ceramic Antenna
Antenna Gain	2.06 dBi
Adapter	N/A
Battery	DC 3.7V, 2000mAh, 7.4Wh
Power supply	DC 3.7V from battery or DC 5V from Charging port
HW Version	N/A
FW Version	N/A
SW Version	N/A

Note 1: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Note 2: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

Revision History

Report No.	Version	Description	Issued Date
N26062504309E	Rev.01	Initial issue of report	Sept. 17, 2026

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.
The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation; 2Mbps for π/4-DQPSK modulation; 3Mbps for 8-DPSK modulation) were used for all test.
The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2403
…	…
39	2441
40	2442
…	…
77	2479
78	2480

Note: fc=2402MHz+k×1MHz k=0 to 78
The following summary table is showing all test modes to demonstrate in compliance with the standard.

For AC Conducted Emission	
Final Test Mode	Description
Mode 1	normal link mode

Note: AC power line Conducted Emission was tested under maximum output power.

For Radiated Test Cases	
Final Test Mode	Description
Mode 1	normal link mode
Mode 2	CH00(2402MHz)
Mode 3	CH39(2441MHz)
Mode 4	CH78(2480MHz)

Note: For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.

For Conducted Test Cases	
Final Test Mode	Description
Mode 2	CH00(2402MHz)
Mode 3	CH39(2441MHz)
Mode 4	CH78(2480MHz)
Mode 5	Hopping mode

Note: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For AC Conducted Emission Mode

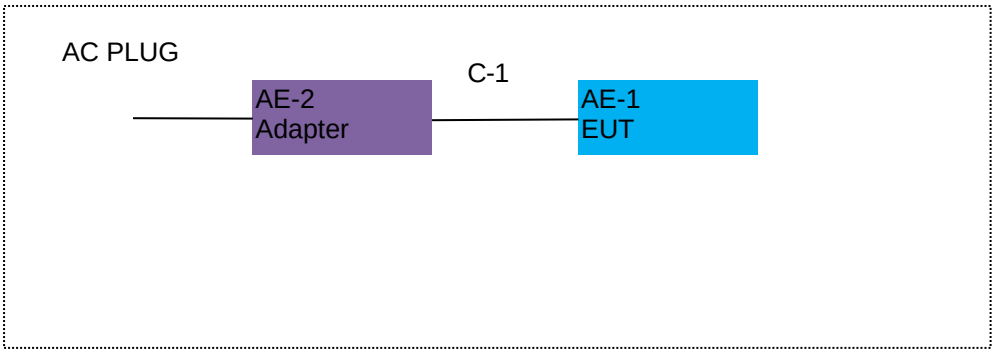

For Radiated Test Cases

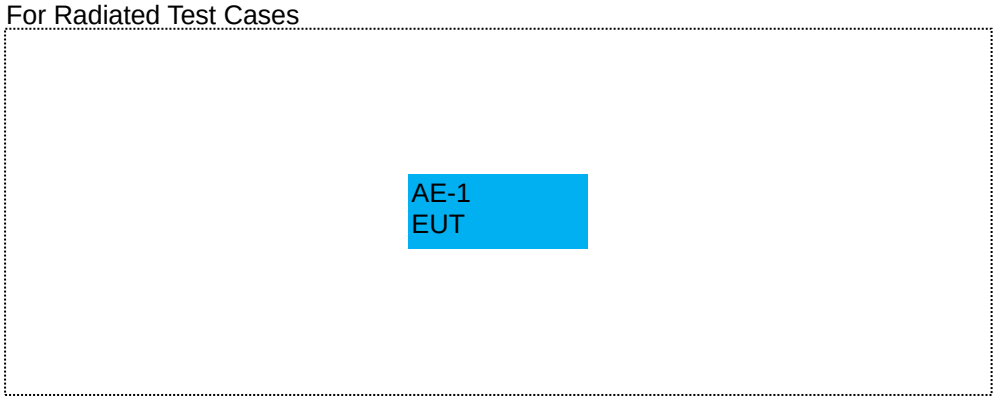

For Conducted Test Cases

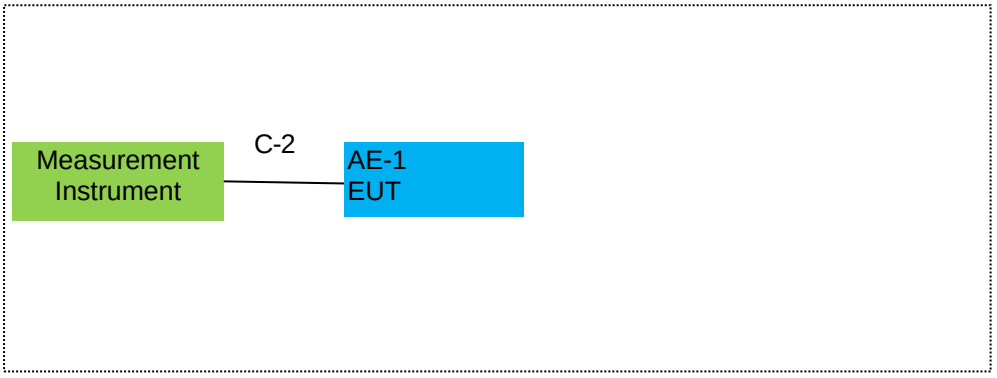

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2. EUT built-in battery-powered, the battery is fully-charged.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Sound Card Voice Changer	BT10	N/A	EUT
AE-2	Adapter	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	DC Cable	NO	NO	1.0m
C-2	RF Cable	YES	NO	0.1m

Notes:

(1) The support equipment was authorized by Declaration of Confirmation.
(2) For detachable type I/O cable should be specified the length in cm in『Length』column.
(3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2026.04.15	2027.04.14	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2026.04.08	2027.04.07	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2026.04.08	2027.04.07	1 year
4	Test Receiver	R&S	ESPI7	101318	N/A	N/A	N/A
5	Bilog Antenna	ETS	3142E	00214344	2024.06.01	2027.05.30	3 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2024.05.12	2027.05.11	3 year
9	Amplifier	EMC	EMC051835SE	980246	2026.04.08	2027.04.07	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519 B	055	2024.05.17	2027.05.16	3 year
11	Power Meter	DARE	RPR3006W	15I00041SNO84	2026.04.08	2027.04.07	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2024.05.06	2027.05.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2024.05.06	2027.05.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2024.05.06	2027.05.05	3 year
15	Filter	TRILTHIC	2400MHz	29	2024.04.26	2027.04.25	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:
We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2026.04.08	2027.04.07	1 year
2	LISN	R&S	ENV216	101313	2026.04.08	2027.04.07	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2026.04.08	2027.04.07	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2024.05.06	2027.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2024.05.06	2027.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2024.05.06	2027.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFtest	MTS 8310 2.4GHz/5GHz	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Test Configuration

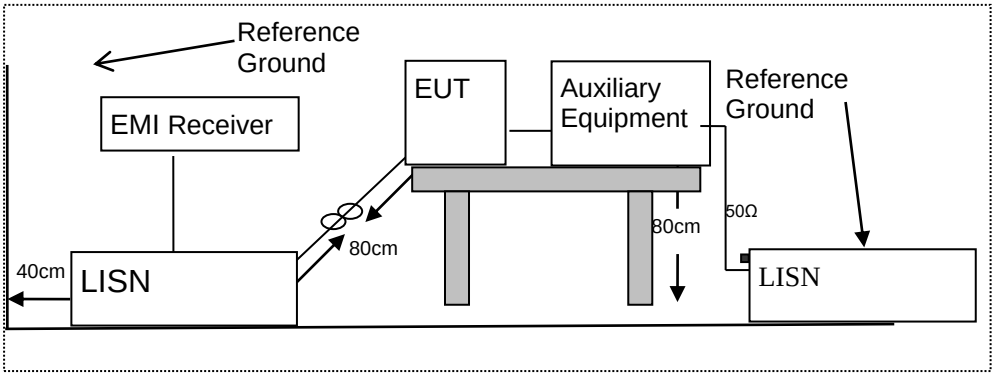

7.1.4 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.5 Test Results

EUT：	Sound Card Voice Changer	Model Name ：	BT10
Temperature：	23.7℃	Relative Humidity：	55.2%
Pressure：	1010hPa	Phase :	L
Test Voltage ：	DC 5V from Adapter AC 120V/60Hz	Test Mode：	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.4940	22.43	20.47	42.90	56.10	-13.20	QP
0.4940	6.46	20.47	26.93	46.10	-19.17	AVG
0.7940	20.35	20.43	40.78	56.00	-15.22	QP
0.7940	3.71	20.43	24.14	46.00	-21.86	AVG
1.7820	14.75	20.27	35.02	56.00	-20.98	QP
1.7820	-1.29	20.27	18.98	46.00	-27.02	AVG
2.8179	10.71	20.28	30.99	56.00	-25.01	QP
2.8179	-6.14	20.28	14.14	46.00	-31.86	AVG
8.2220	8.80	20.33	29.13	60.00	-30.87	QP
8.2220	-3.25	20.33	17.08	50.00	-32.92	AVG
13.4820	13.32	20.44	33.76	60.00	-26.24	QP
13.4820	1.65	20.44	22.09	50.00	-27.91	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

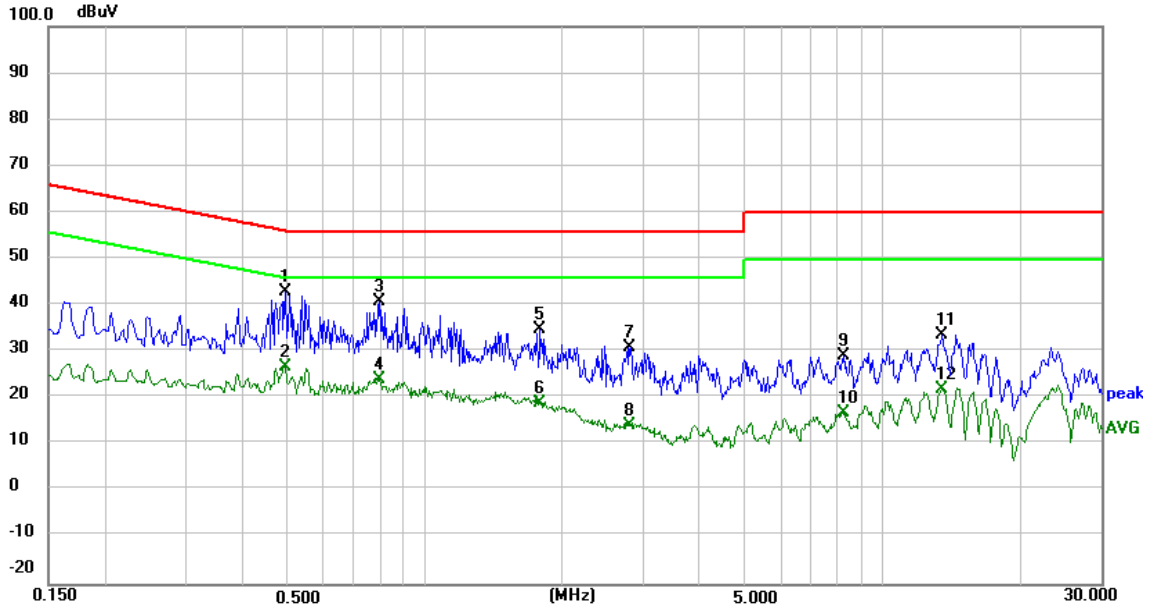

EUT：	Sound Card Voice Changer	Model Name ：	BT10
Temperature：	23.7℃	Relative Humidity：	55.2%
Pressure：	1010hPa	Phase :	N
Test Voltage ：	DC 5V from Adapter AC 120V/60Hz	Test Mode：	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.4900	21.63	20.40	42.03	56.17	-14.14	QP
0.4900	14.06	20.40	34.46	46.17	-11.71	AVG
0.8980	18.44	20.36	38.80	56.00	-17.20	QP
0.8980	7.80	20.36	28.16	46.00	-17.84	AVG
1.5140	13.64	20.26	33.90	56.00	-22.10	QP
1.5140	5.08	20.26	25.34	46.00	-20.66	AVG
3.6300	9.97	20.21	30.18	56.00	-25.82	QP
3.6300	0.15	20.21	20.36	46.00	-25.64	AVG
8.0260	9.73	20.24	29.97	60.00	-30.03	QP
8.0260	-0.10	20.24	20.14	50.00	-29.86	AVG
13.6980	12.84	20.37	33.21	60.00	-26.79	QP
13.6980	2.67	20.37	23.04	50.00	-26.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

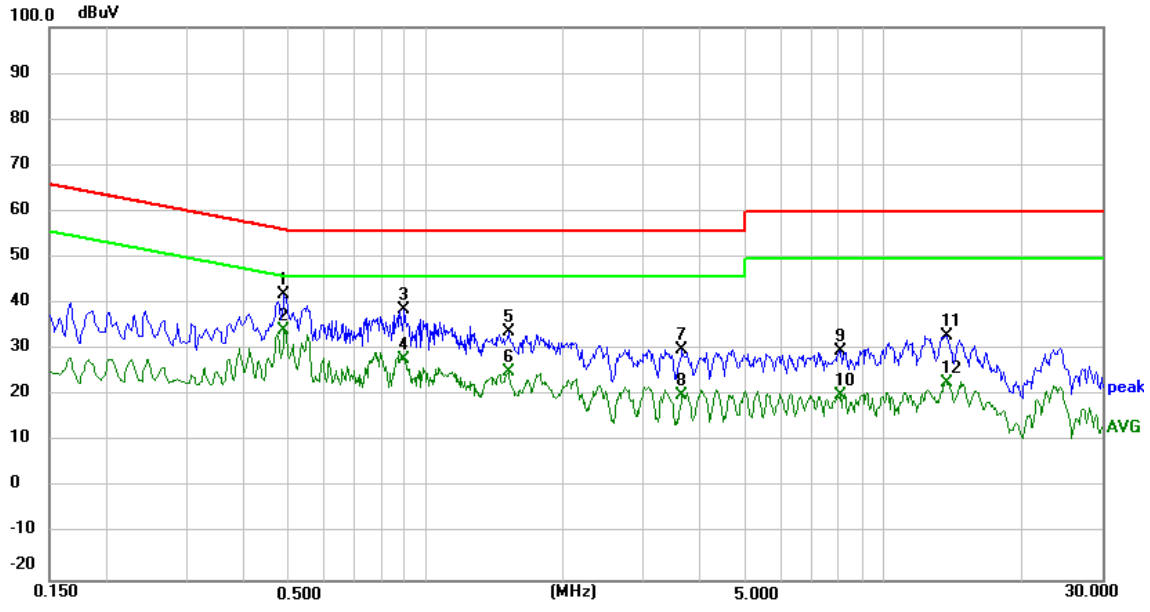

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. For Frequency 9kHz~30MHz:
Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.
For Frequency above 30MHz:
Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

(a) For radiated emissions below 30MHz

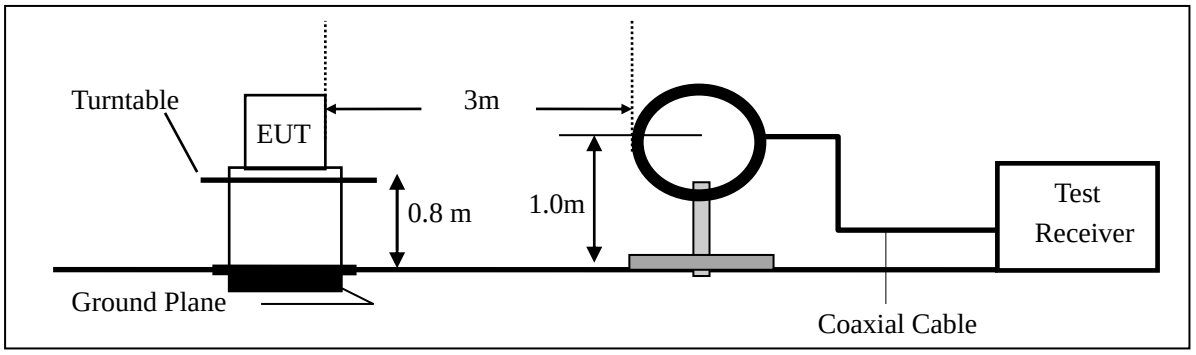

(b) For radiated emissions from 30MHz to 1000MHz

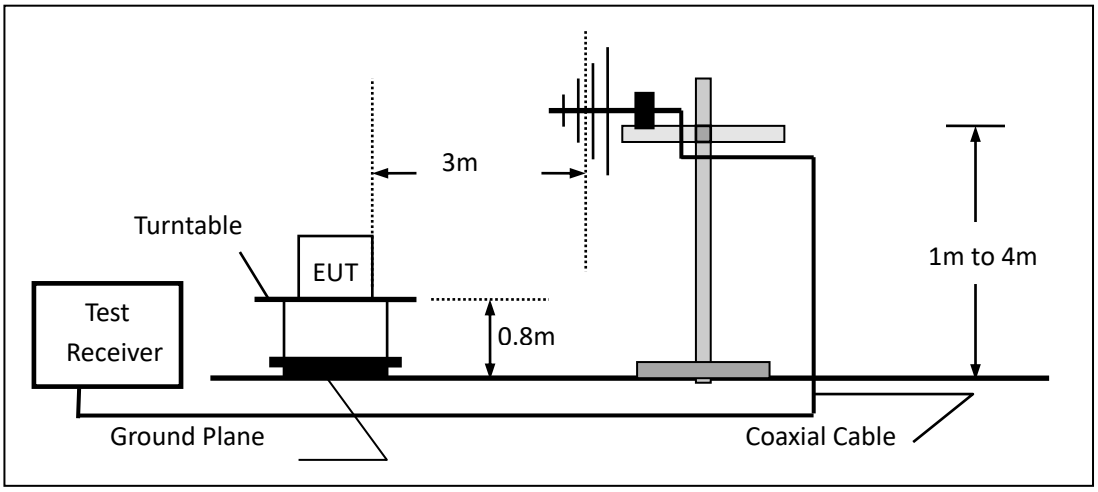

(c) For radiated emissions above 1000MHz

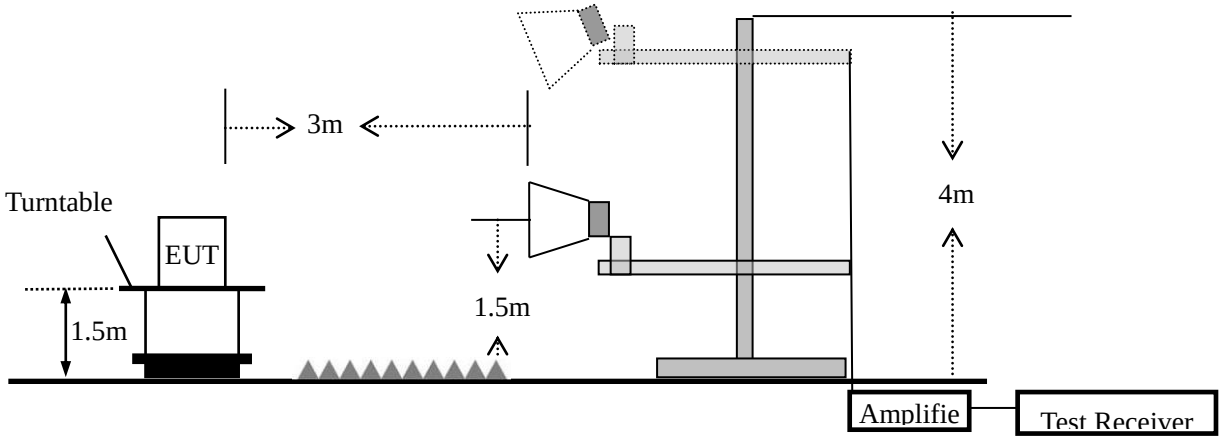

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and CAN/CSA-CEI/IEC CISPR 22.
This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.
Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1 MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Nikki Yang

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission below 1GHz (30MHz to 1GHz)
All the modulation modes have been tested, and the worst result was report as below:

EUT：	Sound Card Voice Changer	Model Name ：	BT10
Temperature：	24.8℃	Relative Humidity：	59.7%
Pressure：	1010hPa	Test Mode：	Mode 3(GFSK)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	40.5591	12.39	18.72	31.11	40.00	-8.89	QP
V	46.6663	9.14	19.93	29.07	40.00	-10.93	QP
V	114.9168	6.47	17.14	23.61	43.50	-19.89	QP
V	212.2694	6.17	18.19	24.36	43.50	-19.14	QP
V	485.6092	6.27	24.17	30.44	46.00	-15.56	QP
V	798.9797	6.66	29.18	35.84	46.00	-10.16	QP

Remark:
Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

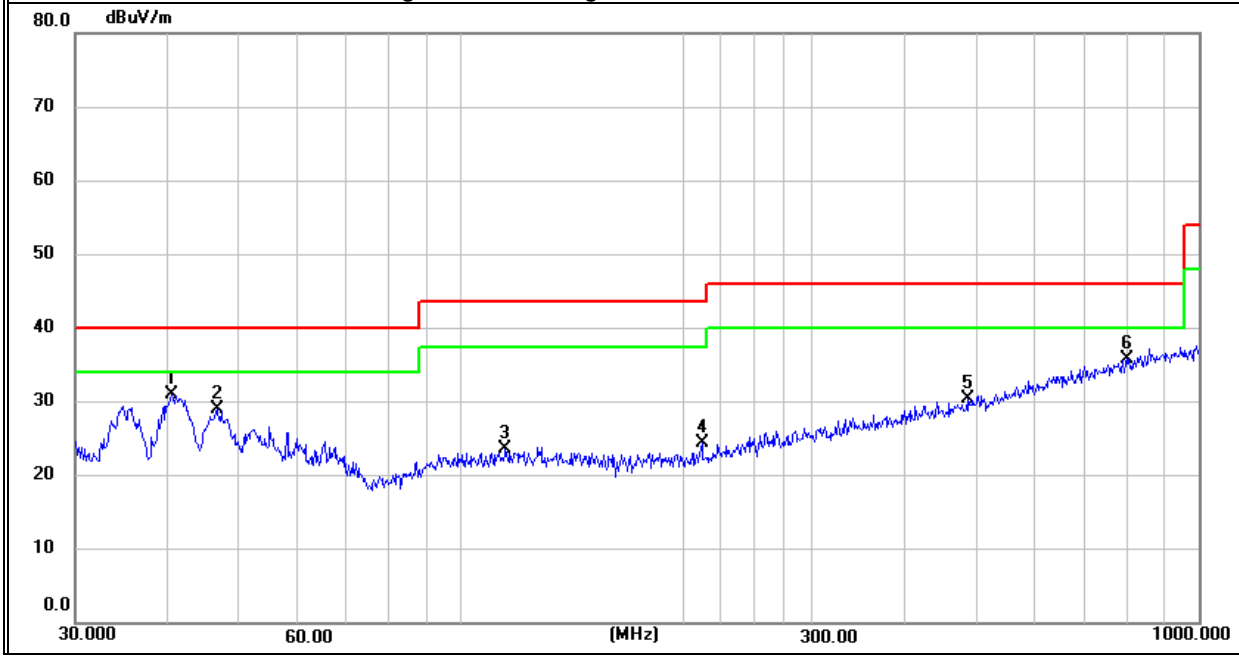

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	67.4382	12.18	17.04	29.22	40.00	-10.78	QP
H	103.0800	6.67	18.27	24.94	43.50	-18.56	QP
H	147.9214	10.94	14.61	25.55	43.50	-17.95	QP
H	203.5227	9.10	18.00	27.10	43.50	-16.40	QP
H	381.2485	9.08	22.29	31.37	46.00	-14.63	QP
H	771.4485	6.96	28.89	35.85	46.00	-10.15	QP

Remark:
Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

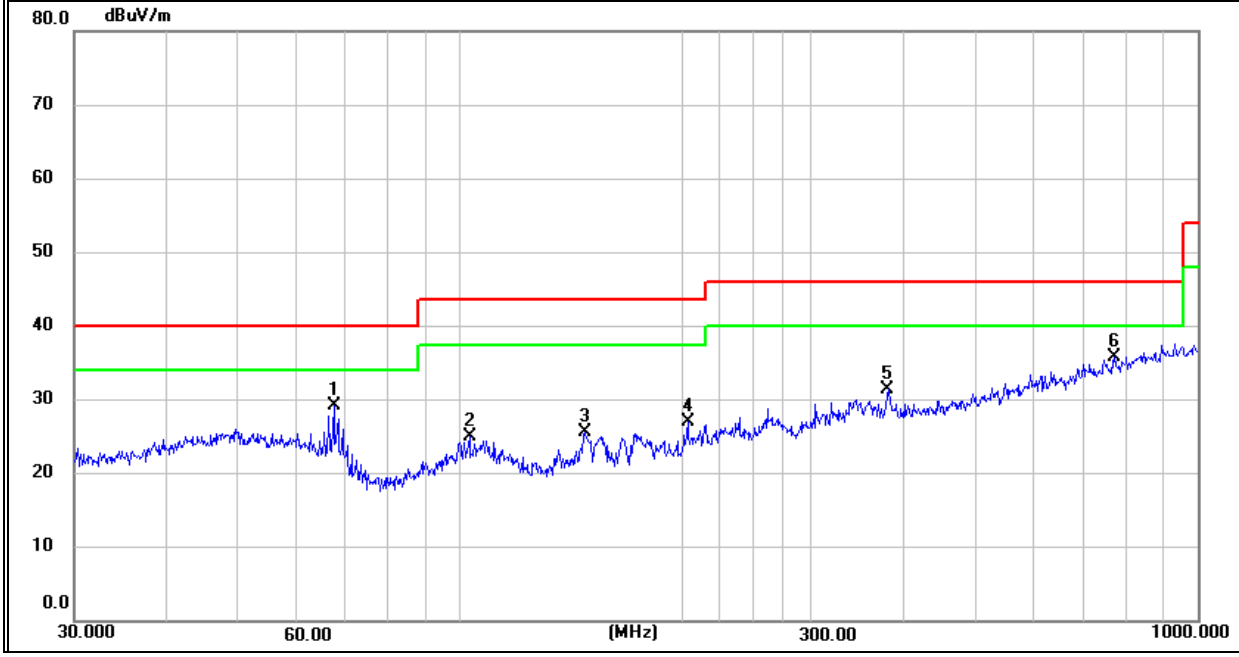

■ Spurious Emission Above 1GHz (1GHz to 18GHz)

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	23.9 ℃	Relative Humidity:	56.5%
Test Mode:	Mode2/Mode3/Mode4-GFSK	Test By:	Nikki Yang

2402

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	1249.900	58.96	-17.88	41.08	74.00	-32.92	peak
V	1249.900	50.64	-17.88	32.76	54.00	-21.24	AVG
V	2004.275	55.49	-13.54	41.95	74.00	-32.05	peak
V	2004.275	47.73	-13.54	34.19	54.00	-19.81	AVG
V	3057.850	54.01	-9.59	44.42	74.00	-29.58	peak
V	3057.850	45.49	-9.59	35.90	54.00	-18.10	AVG
V	5526.675	48.20	-5.50	42.70	74.00	-31.30	peak
V	5526.675	39.60	-5.50	34.10	54.00	-19.90	AVG
V	9608.800	45.43	0.81	46.24	74.00	-27.76	peak
V	9608.800	41.44	0.81	42.25	54.00	-11.75	AVG
V	14363.275	43.89	5.63	49.52	74.00	-24.48	peak
V	14363.275	35.88	5.63	41.51	54.00	-12.49	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

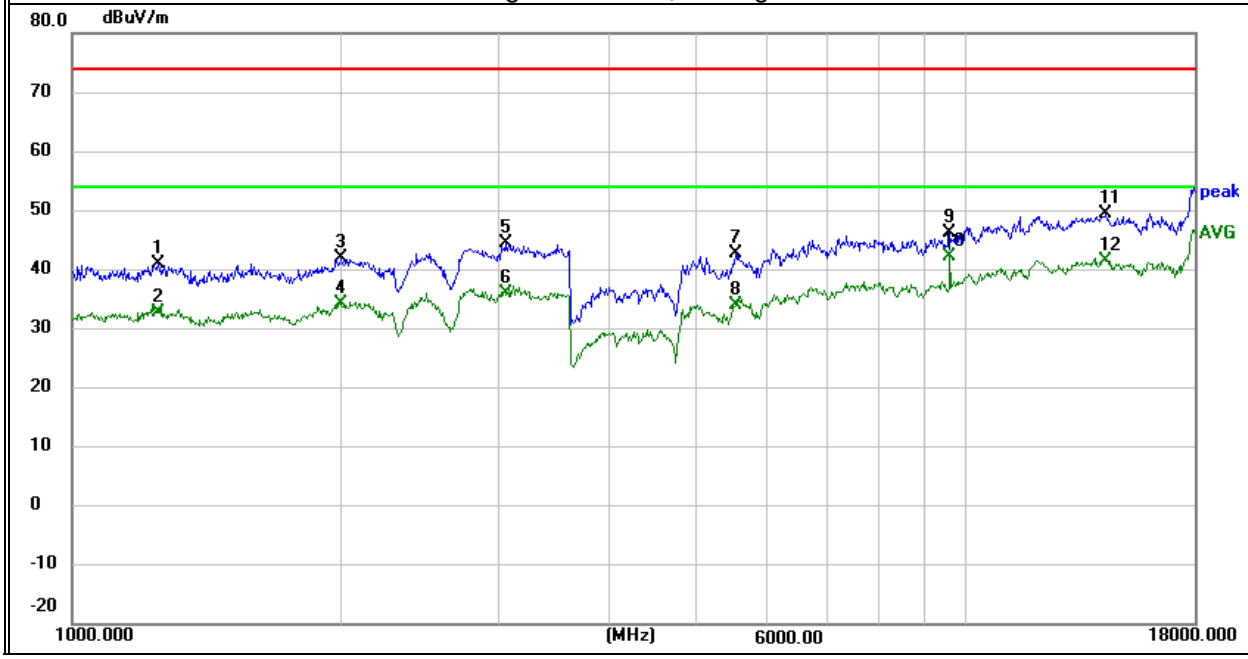

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	1230.775	59.22	-18.08	41.14	74.00	-32.86	peak
H	1230.775	51.37	-18.08	33.29	54.00	-20.71	AVG
H	1600.950	57.76	-16.41	41.35	74.00	-32.65	peak
H	1600.950	48.99	-16.41	32.58	54.00	-21.42	AVG
H	2046.775	55.32	-12.94	42.38	74.00	-31.62	peak
H	2046.775	47.09	-12.94	34.15	54.00	-19.85	AVG
H	6736.650	48.95	-3.48	45.47	74.00	-28.53	peak
H	6736.650	39.85	-3.48	36.37	54.00	-17.63	AVG
H	11049.975	44.56	3.65	48.21	74.00	-25.79	peak
H	11049.975	36.13	3.65	39.78	54.00	-14.22	AVG
H	14202.200	44.98	5.70	50.68	74.00	-23.32	peak
H	14202.200	35.99	5.70	41.69	54.00	-12.31	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

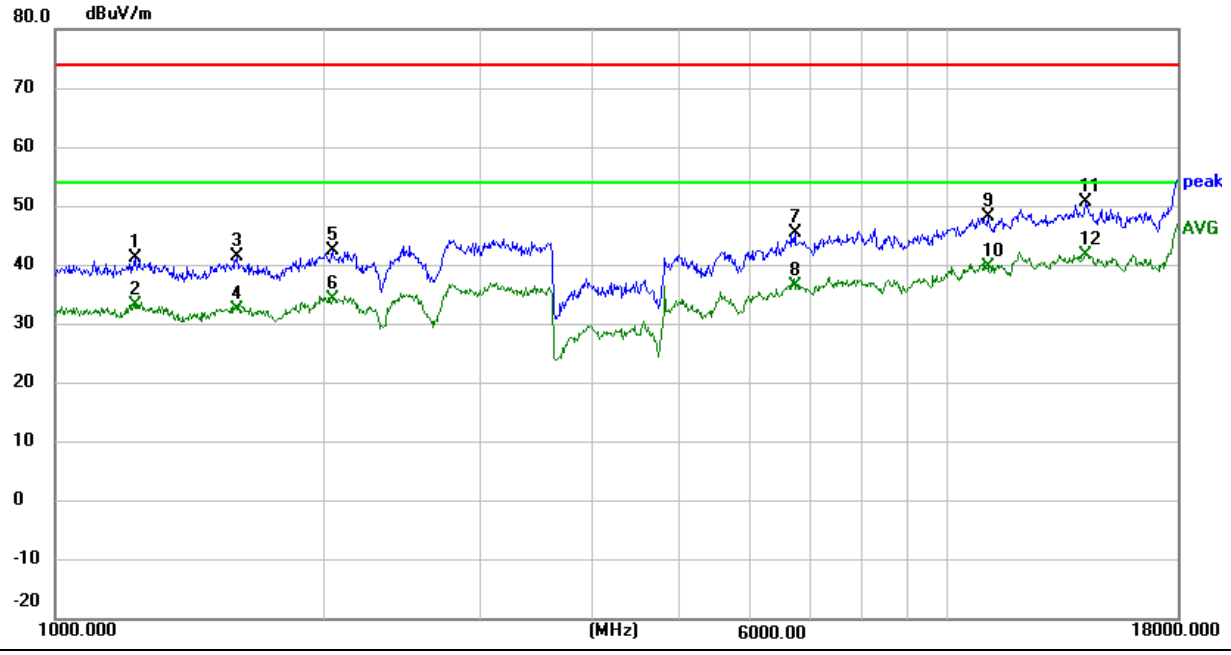

2441

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	1236.300	59.25	-18.02	41.23	74.00	-32.77	peak
V	1236.300	51.15	-18.02	33.13	54.00	-20.87	AVG
V	1999.600	55.42	-13.61	41.81	74.00	-32.19	peak
V	1999.600	47.99	-13.61	34.38	54.00	-19.62	AVG
V	3119.475	54.00	-9.52	44.48	74.00	-29.52	peak
V	3119.475	45.82	-9.52	36.30	54.00	-17.70	AVG
V	6786.375	48.21	-3.35	44.86	74.00	-29.14	peak
V	6786.375	39.99	-3.35	36.64	54.00	-17.36	AVG
V	9760.525	48.92	0.39	49.31	74.00	-24.69	peak
V	9760.525	45.88	0.39	46.27	54.00	-7.73	AVG
V	14249.800	43.59	5.75	49.34	74.00	-24.66	peak
V	14249.800	35.80	5.75	41.55	54.00	-12.45	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

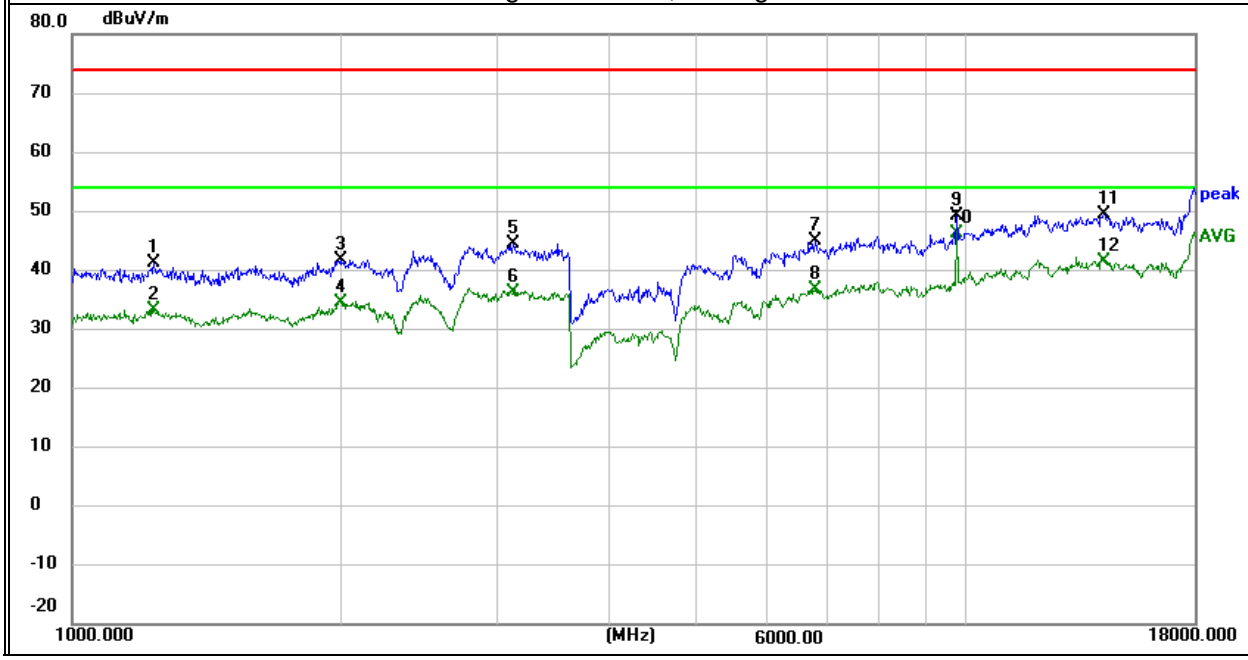

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	1258.400	59.00	-17.88	41.12	74.00	-32.88	peak
H	1258.400	51.32	-17.88	33.44	54.00	-20.56	AVG
H	2141.975	55.11	-12.73	42.38	74.00	-31.62	peak
H	2141.975	46.46	-12.73	33.73	54.00	-20.27	AVG
H	2777.350	55.97	-10.61	45.36	74.00	-28.64	peak
H	2777.350	47.41	-10.61	36.80	54.00	-17.20	AVG
H	4880.675	49.58	-7.24	42.34	74.00	-31.66	peak
H	4880.675	44.57	-7.24	37.33	54.00	-16.67	AVG
H	6797.000	48.44	-3.24	45.20	74.00	-28.80	peak
H	6797.000	39.62	-3.24	36.38	54.00	-17.62	AVG
H	12001.125	44.01	5.27	49.28	74.00	-24.72	peak
H	12001.125	36.13	5.27	41.40	54.00	-12.60	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

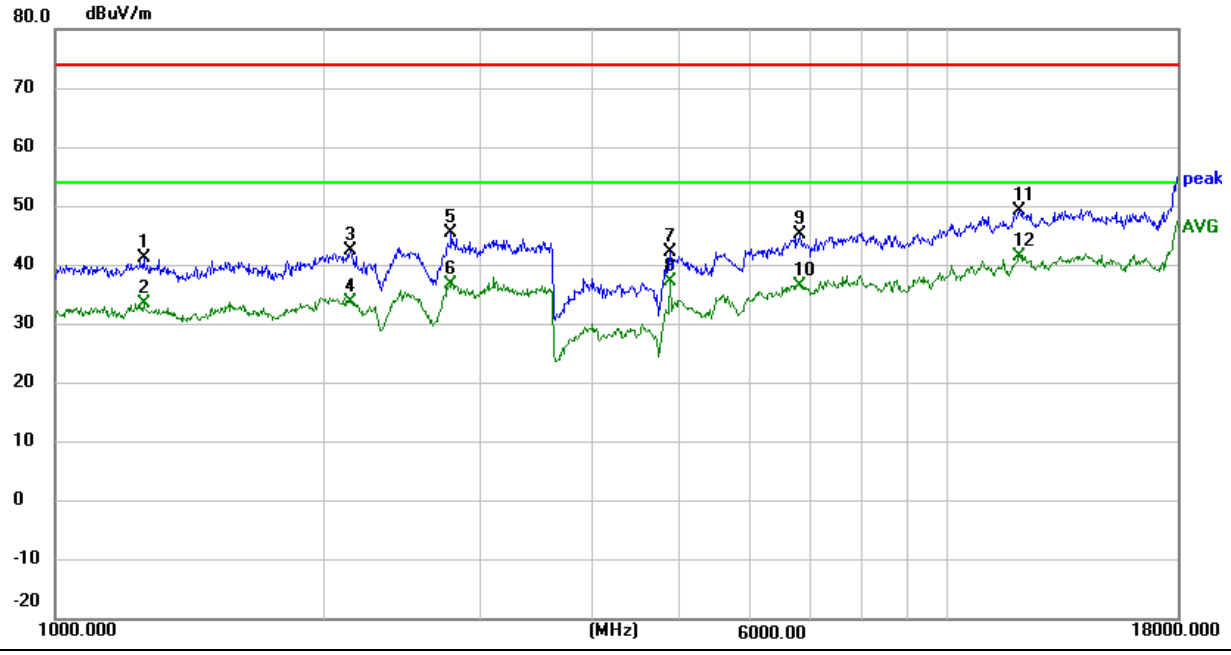

2480

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	1227.375	59.56	-18.11	41.45	74.00	-32.55	peak
V	1227.375	50.84	-18.11	32.73	54.00	-21.27	AVG
V	2146.225	55.98	-12.74	43.24	74.00	-30.76	peak
V	2146.225	46.63	-12.74	33.89	54.00	-20.11	AVG
V	3138.175	53.85	-9.50	44.35	74.00	-29.65	peak
V	3138.175	46.33	-9.50	36.83	54.00	-17.17	AVG
V	5595.100	48.87	-5.87	43.00	74.00	-31.00	peak
V	5595.100	41.01	-5.87	35.14	54.00	-18.86	AVG
V	9920.750	47.34	0.79	48.13	74.00	-25.87	peak
V	9920.750	43.79	0.79	44.58	54.00	-9.42	AVG
V	14289.325	43.86	5.79	49.65	74.00	-24.35	peak
V	14289.325	35.54	5.79	41.33	54.00	-12.67	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

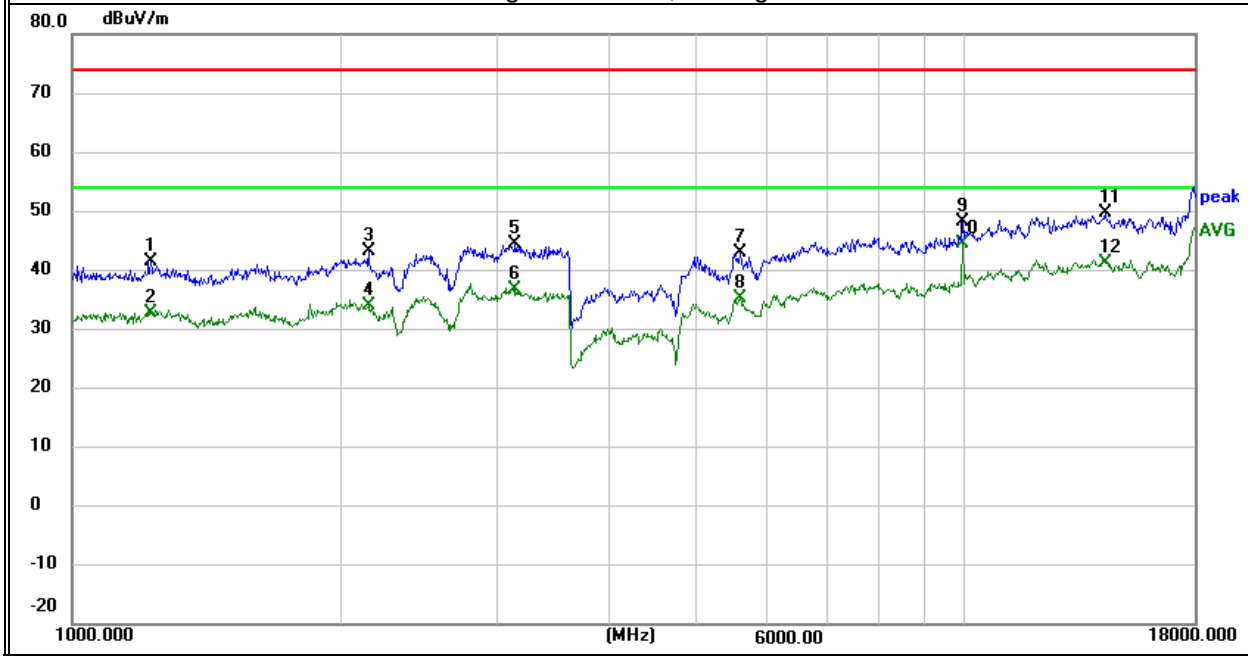

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	1259.250	58.46	-17.88	40.58	74.00	-33.42	peak
H	1259.250	50.61	-17.88	32.73	54.00	-21.27	AVG
H	2076.525	55.58	-12.67	42.91	74.00	-31.09	peak
H	2076.525	46.76	-12.67	34.09	54.00	-19.91	AVG
H	3119.475	53.62	-9.52	44.10	74.00	-29.90	peak
H	3119.475	45.79	-9.52	36.27	54.00	-17.73	AVG
H	5588.725	47.91	-5.84	42.07	74.00	-31.93	peak
H	5588.725	40.49	-5.84	34.65	54.00	-19.35	AVG
H	8681.875	47.34	-1.21	46.13	74.00	-27.87	peak
H	8681.875	38.06	-1.21	36.85	54.00	-17.15	AVG
H	13966.325	43.94	5.55	49.49	74.00	-24.51	peak
H	13966.325	35.17	5.55	40.72	54.00	-13.28	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

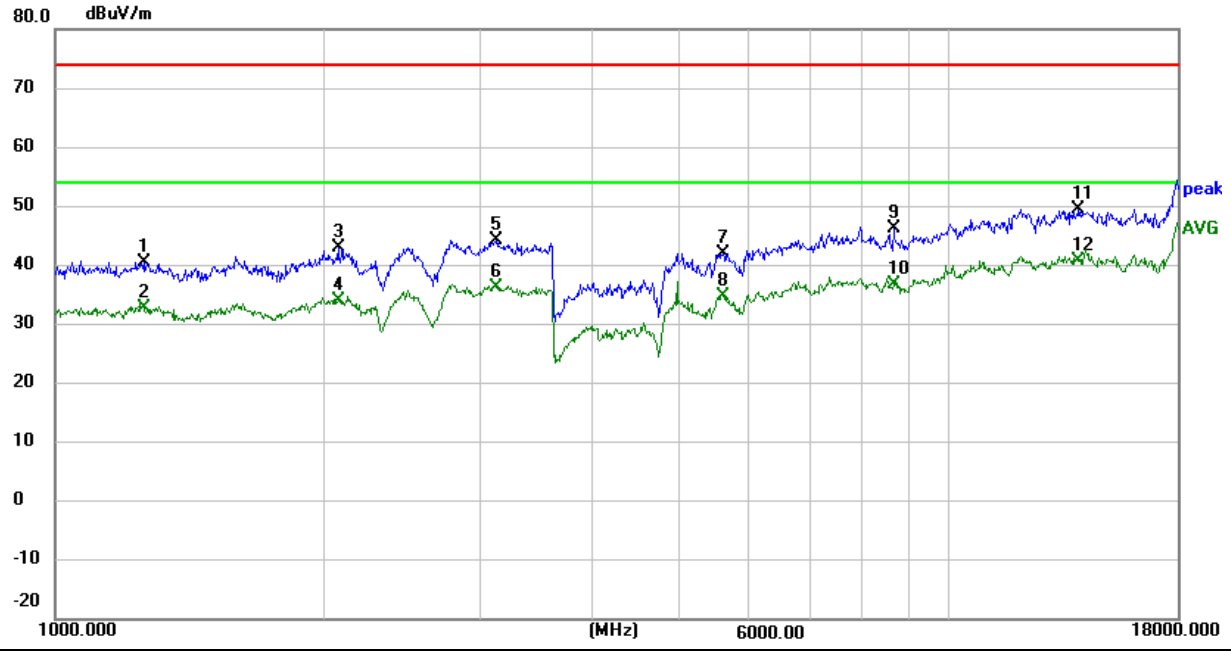

■ Spurious Emission Above 1GHz (18GHz to 25GHz)

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	23.9 ℃	Relative Humidity:	56.5%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Nikki Yang

2402

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	18914.025	59.23	-14.24	44.99	74.00	-29.01	peak
V	18914.025	51.50	-14.24	37.26	54.00	-16.74	AVG
V	20067.975	57.88	-12.57	45.31	74.00	-28.69	peak
V	20067.975	49.06	-12.57	36.49	54.00	-17.51	AVG
V	20983.750	56.73	-12.29	44.44	74.00	-29.56	peak
V	20983.750	49.18	-12.29	36.89	54.00	-17.11	AVG
V	22382.000	56.70	-11.63	45.07	74.00	-28.93	peak
V	22382.000	48.69	-11.63	37.06	54.00	-16.94	AVG
V	23860.050	56.28	-11.33	44.95	74.00	-29.05	peak
V	23860.050	48.66	-11.33	37.33	54.00	-16.67	AVG
V	24462.400	56.72	-11.18	45.54	74.00	-28.46	peak
V	24462.400	49.05	-11.18	37.87	54.00	-16.13	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

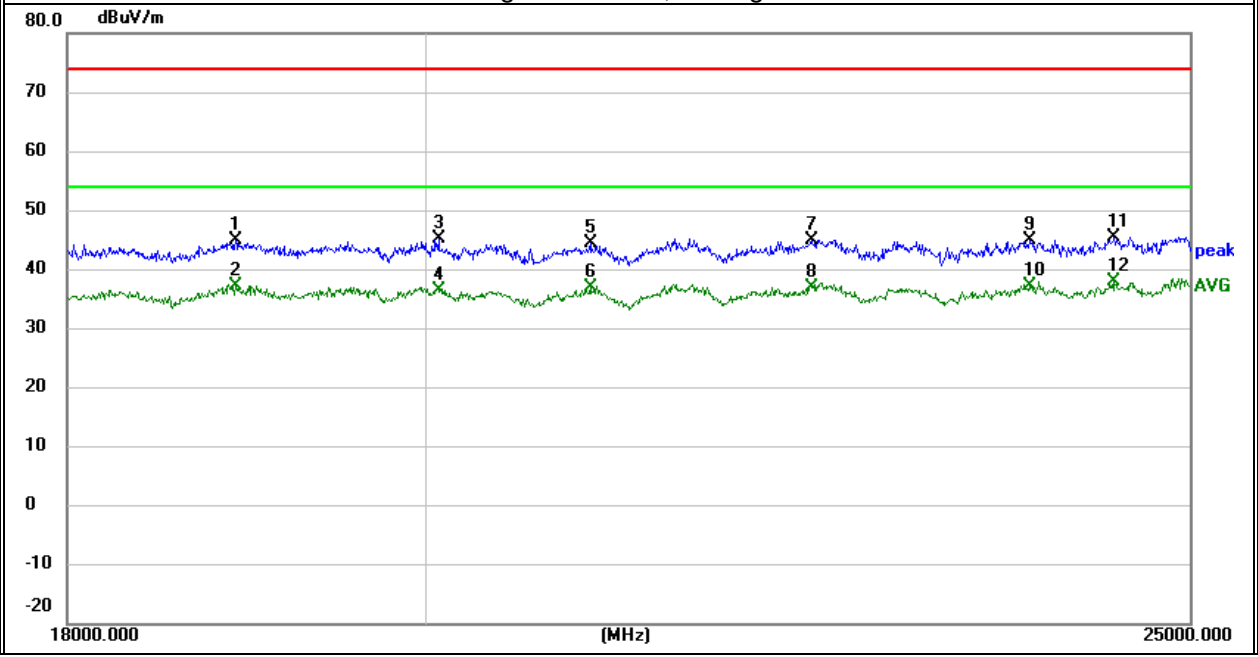

2402

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	18884.625	58.83	-14.29	44.54	74.00	-29.46	peak
H	18884.625	49.97	-14.29	35.68	54.00	-18.32	AVG
H	20067.800	58.31	-12.57	45.74	74.00	-28.26	peak
H	20067.800	49.28	-12.57	36.71	54.00	-17.29	AVG
H	21046.575	57.90	-12.29	45.61	74.00	-28.39	peak
H	21046.575	49.14	-12.29	36.85	54.00	-17.15	AVG
H	22076.975	57.28	-11.93	45.35	74.00	-28.65	peak
H	22076.975	48.71	-11.93	36.78	54.00	-17.22	AVG
H	22991.700	56.47	-11.79	44.68	74.00	-29.32	peak
H	22991.700	47.04	-11.79	35.25	54.00	-18.75	AVG
H	23864.250	55.78	-11.33	44.45	74.00	-29.55	peak
H	23864.250	47.17	-11.33	35.84	54.00	-18.16	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

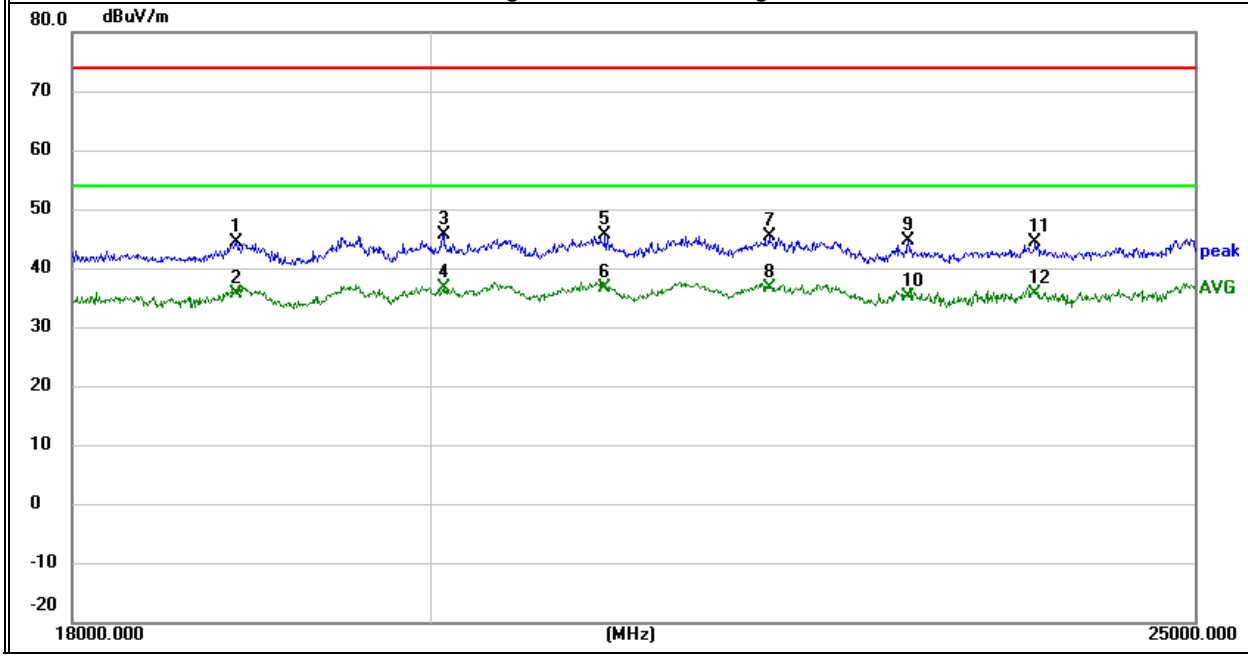

2441

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	18914.025	58.23	-14.24	43.99	74.00	-30.01	peak
V	18914.025	50.50	-14.24	36.26	54.00	-17.74	AVG
V	20067.975	56.88	-12.57	44.31	74.00	-29.69	peak
V	20067.975	48.06	-12.57	35.49	54.00	-18.51	AVG
V	20983.750	58.23	-12.29	45.94	74.00	-28.06	peak
V	20983.750	50.68	-12.29	38.39	54.00	-15.61	AVG
V	21633.000	58.60	-12.26	46.34	74.00	-27.66	peak
V	21633.000	50.02	-12.26	37.76	54.00	-16.24	AVG
V	22382.000	57.20	-11.63	45.57	74.00	-28.43	peak
V	22382.000	49.19	-11.63	37.56	54.00	-16.44	AVG
V	23706.400	56.31	-11.54	44.77	74.00	-29.23	peak
V	23706.400	47.86	-11.54	36.32	54.00	-17.68	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

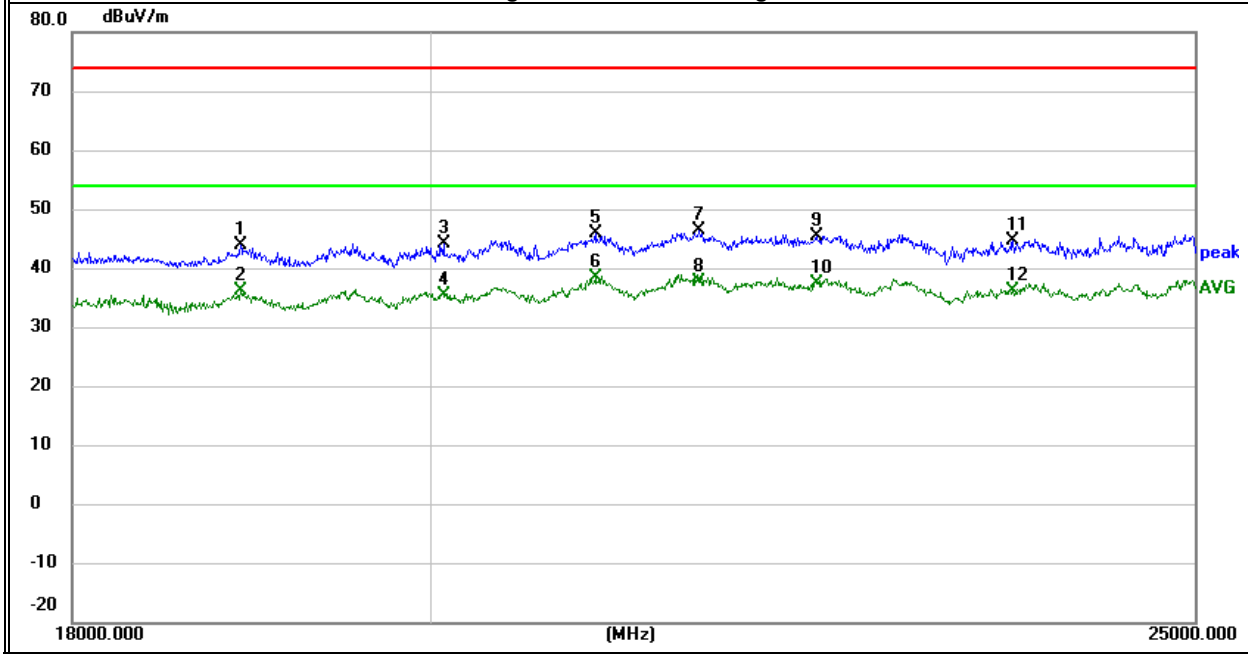

2441

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	18884.625	58.33	-14.29	44.04	74.00	-29.96	peak
H	18884.625	48.97	-14.29	34.68	54.00	-19.32	AVG
H	20067.800	57.31	-12.57	44.74	74.00	-29.26	peak
H	20067.800	47.78	-12.57	35.21	54.00	-18.79	AVG
H	21046.575	57.40	-12.29	45.11	74.00	-28.89	peak
H	21046.575	48.14	-12.29	35.85	54.00	-18.15	AVG
H	22076.975	57.28	-11.93	45.35	74.00	-28.65	peak
H	22076.975	48.21	-11.93	36.28	54.00	-17.72	AVG
H	22991.700	57.47	-11.79	45.68	74.00	-28.32	peak
H	22991.700	47.04	-11.79	35.25	54.00	-18.75	AVG
H	23864.250	56.78	-11.33	45.45	74.00	-28.55	peak
H	23864.250	47.67	-11.33	36.34	54.00	-17.66	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

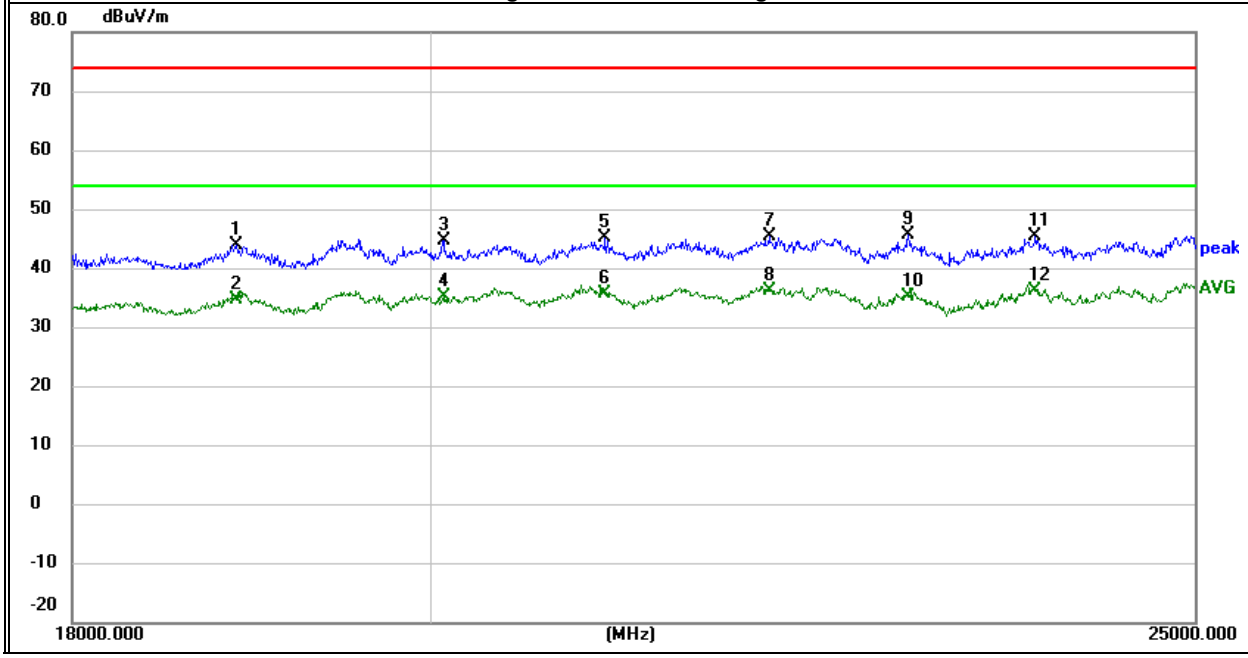

2480

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	18914.025	59.73	-14.24	45.49	74.00	-28.51	peak
V	18914.025	52.00	-14.24	37.76	54.00	-16.24	AVG
V	20067.975	58.38	-12.57	45.81	74.00	-28.19	peak
V	20067.975	49.56	-12.57	36.99	54.00	-17.01	AVG
V	21504.200	57.92	-12.25	45.67	74.00	-28.33	peak
V	21504.200	50.00	-12.25	37.75	54.00	-16.25	AVG
V	22382.000	57.20	-11.63	45.57	74.00	-28.43	peak
V	22382.000	49.19	-11.63	37.56	54.00	-16.44	AVG
V	23127.325	55.25	-11.96	43.29	74.00	-30.71	peak
V	23127.325	46.85	-11.96	34.89	54.00	-19.11	AVG
V	23706.400	55.81	-11.54	44.27	74.00	-29.73	peak
V	23706.400	47.36	-11.54	35.82	54.00	-18.18	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

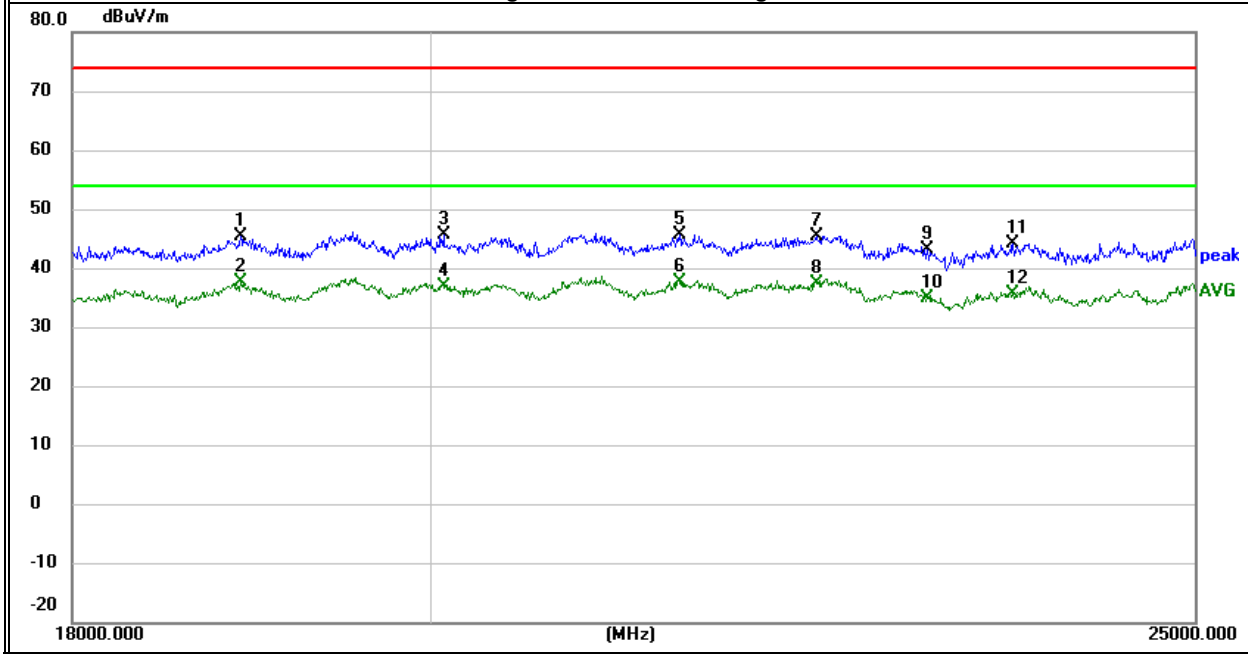

2480

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	18884.625	59.33	-14.29	45.04	74.00	-28.96	peak
H	18884.625	50.47	-14.29	36.18	54.00	-17.82	AVG
H	20067.800	57.81	-12.57	45.24	74.00	-28.76	peak
H	20067.800	48.78	-12.57	36.21	54.00	-17.79	AVG
H	21046.575	58.40	-12.29	46.11	74.00	-27.89	peak
H	21046.575	49.64	-12.29	37.35	54.00	-16.65	AVG
H	22076.975	58.28	-11.93	46.35	74.00	-27.65	peak
H	22076.975	49.71	-11.93	37.78	54.00	-16.22	AVG
H	22991.700	59.47	-11.79	47.68	74.00	-26.32	peak
H	22991.700	50.04	-11.79	38.25	54.00	-15.75	AVG
H	23864.250	57.28	-11.33	45.95	74.00	-28.05	peak
H	23864.250	48.67	-11.33	37.34	54.00	-16.66	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

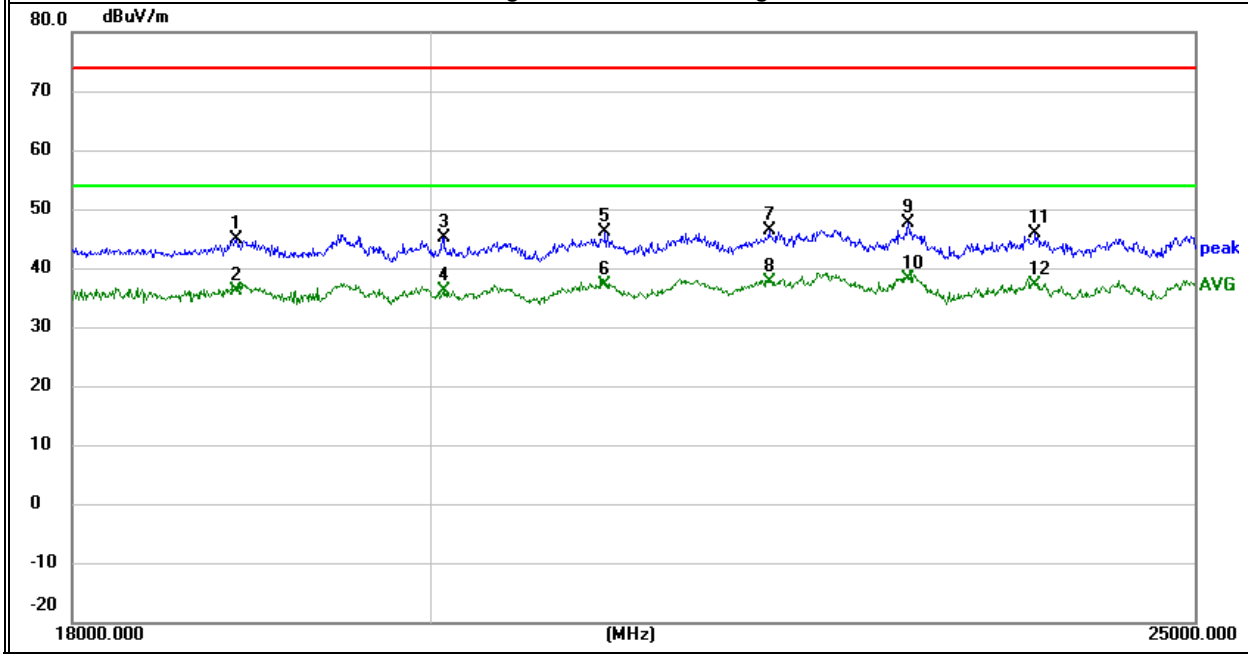

■ Radiated Spurious at Band Edges

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	23.9 ℃	Relative Humidity:	56.5%
Test Mode:	Mode2/ Mode4-GFSK	Test By:	Nikki Yang

2402

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2390.000	14.04	29.88	43.92	74.00	-30.08	peak

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

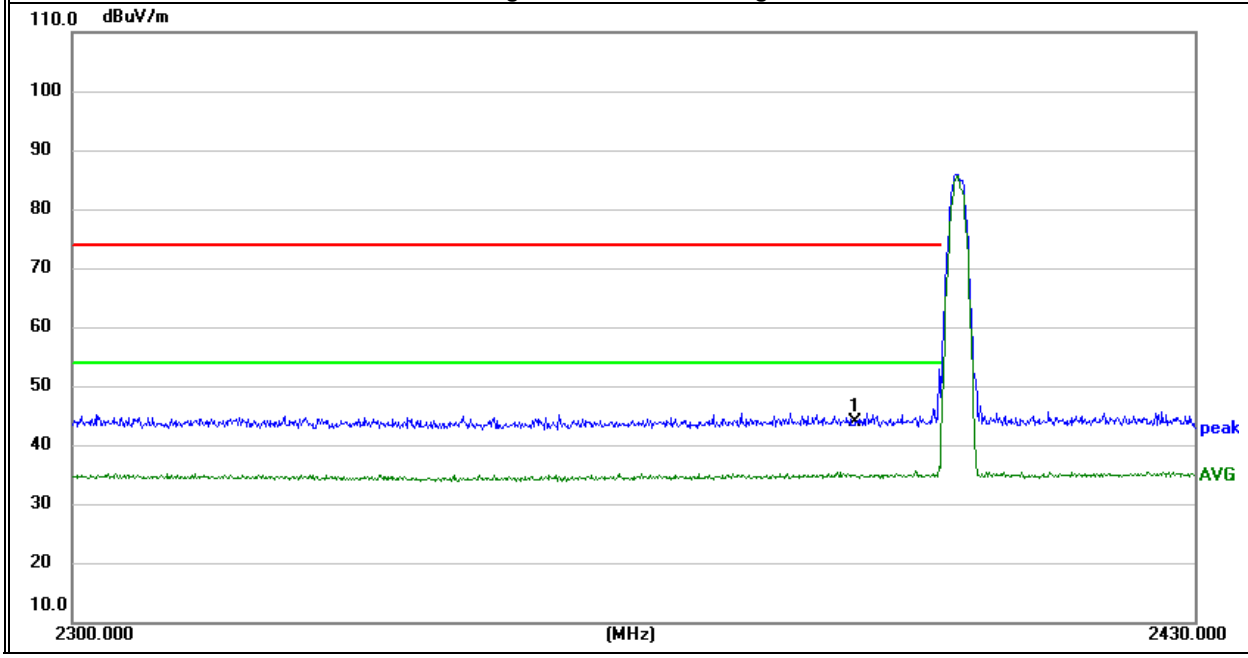

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	2351.233	16.95	29.54	46.49	74.00	-27.51	peak
H	2351.233	4.81	29.54	34.35	54.00	-19.65	AVG
H	2390.000	14.31	29.88	44.19	74.00	-29.81	peak
H	2390.000	5.16	29.88	35.04	54.00	-18.96	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

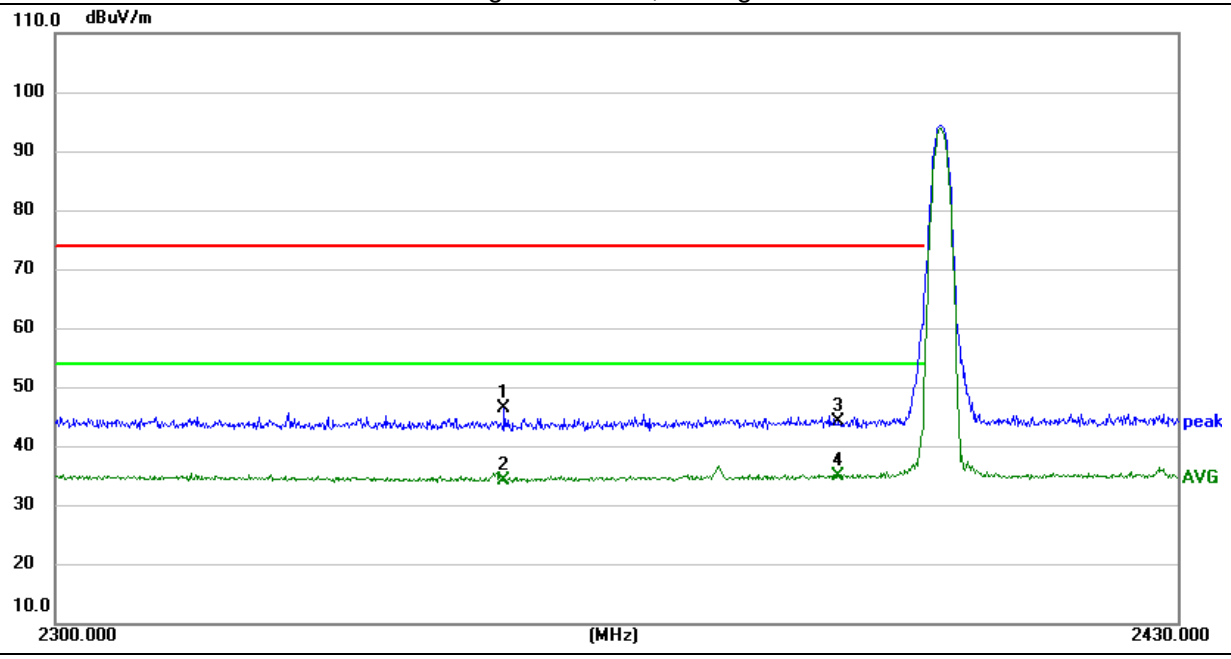

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
V	2483.500	21.22	30.69	51.91	74.00	-22.09	peak
V	2483.500	12.38	30.69	43.07	54.00	-10.93	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

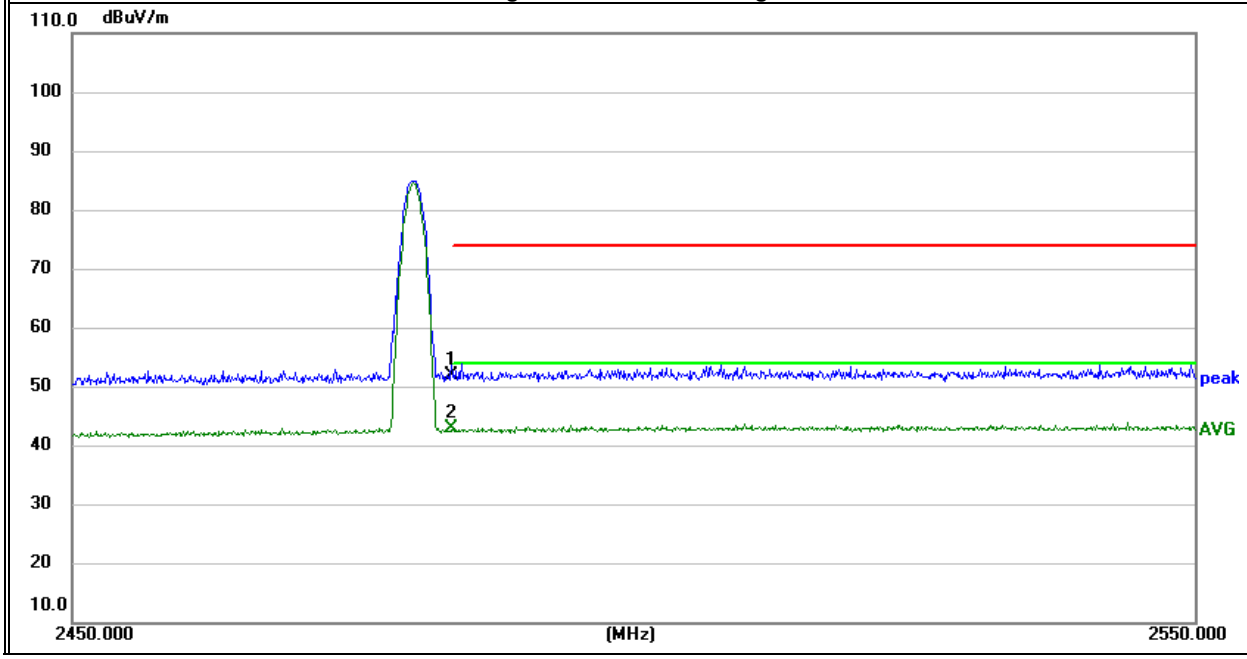

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
H	2483.500	21.06	30.69	51.75	74.00	-22.25	peak
H	2483.500	12.17	30.69	42.86	54.00	-11.14	AVG

Remark:
Emission Level = Meter Reading+ Factor, Margin= Emission Level- Limit, Factor= Antenna Factor + Cable Loss - Preamp Factor
All the modulation modes have been tested, and the worst-case result was GFSK. Only the worst-case mode reported.
Other emissions are attenuated more than 20dB below the permissible limits, so it does not recorded in the report.
When PK value is lower than the Average value limit, average don't record.

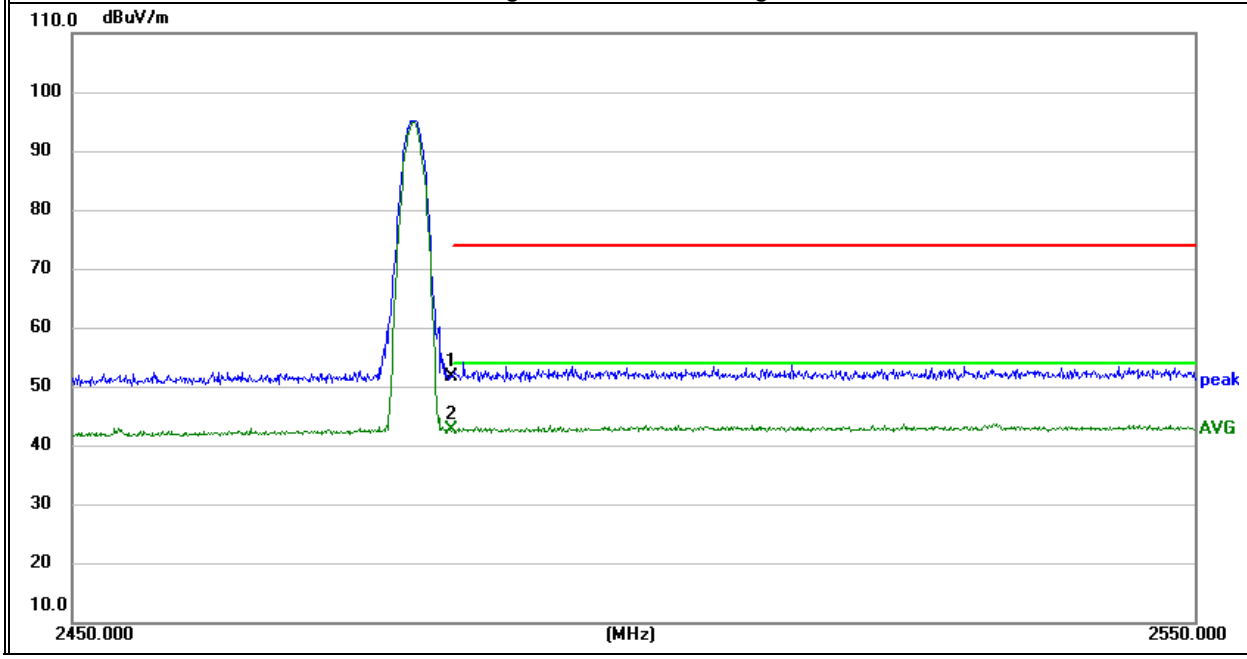

7.3 NUMBER OF HOPPING CHANNEL

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii)and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.3.2 Conformance Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 clause 7.8.3
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT must have its hopping function enabled.
Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW : To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold

7.3.6 Test Results

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode 5	Test By:	Nikki Yang

Test data reference attachment.

7.4 HOPPING CHANNEL SEPARATION MEASUREMENT

7.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.4.2 Conformance Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 clause 7.8.2
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Use the following spectrum analyzer settings:
Span = Measurement Bandwidth or Channel Separation
RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold

7.4.6 Test Results

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Nikki Yang

Test data reference attachment.

7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

7.5.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.5.2 Conformance Limit

The average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 clause 7.8.4
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT must have its hopping function enabled.
Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel
RBW ≥ 1MHz
VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel
Detector function = peak
Trace = max hold
Measure the maximum time duration of one single pulse.
Set the EUT for DH5, DH3 and DH1 packet transmitting.
Measure the maximum time duration of one single pulse.

7.5.6 Test Results

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Nikki Yang

Test data reference attachment.

7.6 20DB BANDWIDTH TEST

7.6.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.6.2 Conformance Limit

No limit requirement.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 clause 6.9.2
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW = 1% to 5% of the OBW
VBW ≥ 3RBW
Sweep = auto
Detector function = peak
Trace = max hold

7.6.6 Test Results

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Nikki Yang

Test data reference attachment.

7.7 PEAK OUTPUT POWER

7.7.1 Applicable Standard

According to FCC Part 15.247(b)(1) and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.7.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 clause 7.8.5.
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW ≥ the 20 dB bandwidth of the emission being measured
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold

7.7.6 Test Results

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Nikki Yang

Test data reference attachment.

7.8 CONDUCTED BAND EDGE MEASUREMENT

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.8.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 clause 7.8.6.
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT must have its hopping function enabled.
Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW = 100KHz
VBW = 300KHz
Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
Repeat above procedures until all measured frequencies were complete.

7.8.6 Test Results

EUT:	Sound Card Voice Changer	Model No.:	BT10
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2 /Mode4/ Mode 5	Test By:	Nikki Yang

Test data reference attachment.

7.9 SPURIOUS RF CONDUCTED EMISSION

7.9.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024.

7.9.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

Establish an emission level by using the following procedure:
a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ [3 × RBW].
d) Detector = peak.
e) Sweep time = auto couple.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.
Then the limit shall be attenuated by at least 20 dB relative to the maximum amplitude level in 100 kHz.

7.9.6 Test Results

Remark: The measurement frequency range is from 30MHzHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Test data reference attachment.

7.10 ANTENNA APPLICATION

7.10.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.10.2 Result

The EUT antenna is permanent attached Ceramic Antenna (Gain:2.06 dBi). It comply with the standard requirement.

7.11 FREQUENCY HOPPING SYSTEM (FHSS) EQUIPMENT REQUIREMENTS

7.11.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. (g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. (h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

7.11.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule. This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock. Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.
This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for FCC Part 15.247 rule.

7.11.3 EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below: Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.
The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8 TEST RESULTS

8.1 CONDUCTED OUTPUT POWER

Test Result

Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (dBm)	Verdict
GFSK	DH5	0	-2.509	0.56	21	PASS
		39	-2.110	0.62		PASS
		78	-1.650	0.68		PASS
π/4DQPSK	2-DH5	0	-2.968	0.50		PASS
		39	-2.667	0.54		PASS
		78	-2.314	0.59		PASS
8DPSK	3-DH5	0	-2.966	0.51		PASS
		39	-2.674	0.54		PASS
		78	-2.276	0.59		PASS

Test Graphs

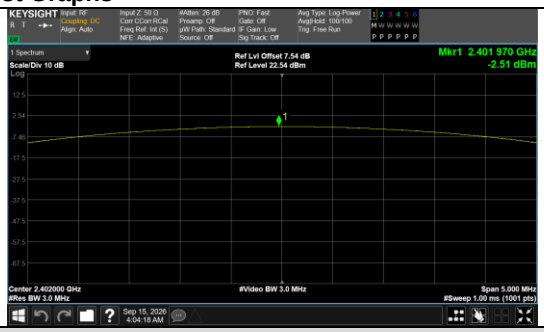

Peak Output Power
GFSK_Channel 0

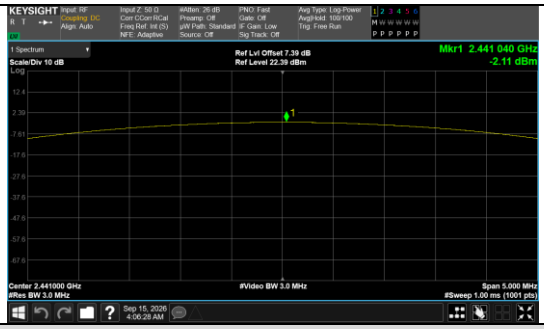

Peak Output Power
GFSK_Channel 39

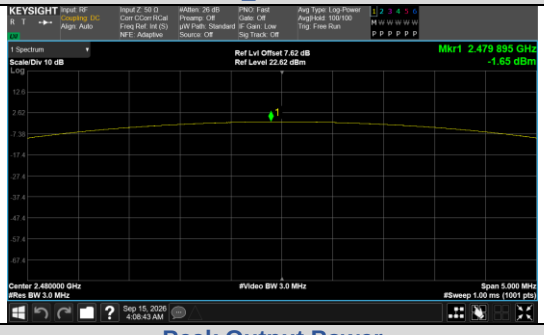

Peak Output Power
GFSK_Channel 78

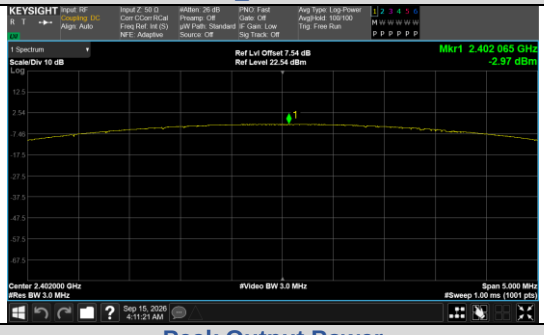

Peak Output Power
π/4DQPSK_Channel 0

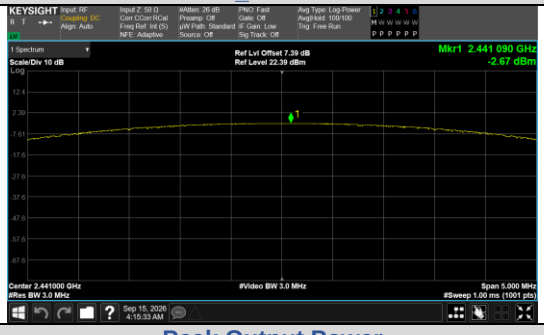

Peak Output Power
π/4DQPSK_Channel 39

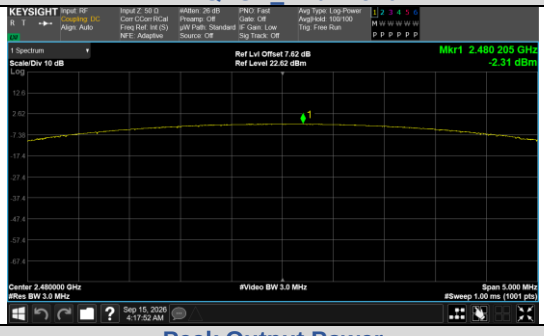

Peak Output Power
π/4DQPSK_Channel 78

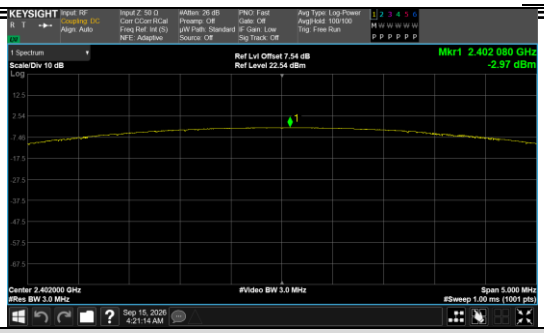

Peak Output Power
8DPSK_Channel 0

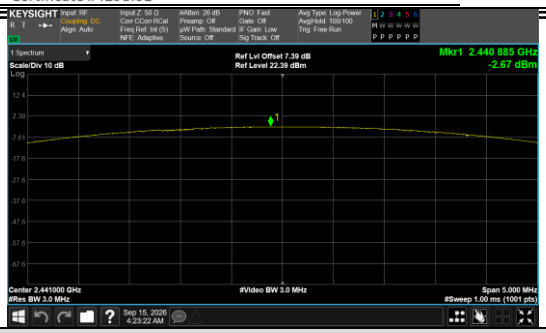

Peak Output Power
8DPSK_Channel 39

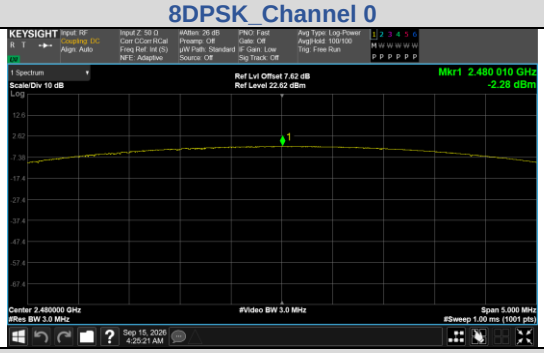

Peak Output Power
8DPSK_Channel 78

8.2 99% BANDWIDTH

Test Result

Modulation	Channel	Center Frequency (MHz)	99% BW (MHz)
GFSK	0	2402	0.76
	39	2441	0.76
	78	2480	0.76
π/4DQPSK	0	2402	1.17
	39	2441	1.16
	78	2480	1.17
8DPSK	0	2402	1.15
	39	2441	1.16
	78	2480	1.16

Test Graphs

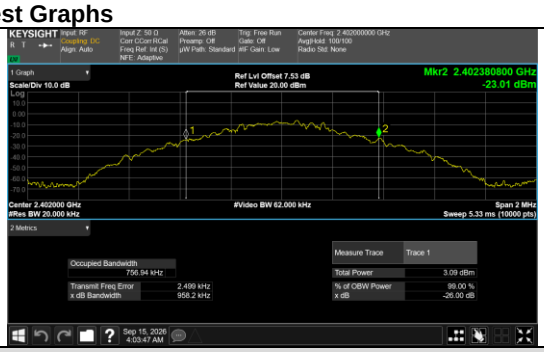

GFSK_DH5_Channel 0

π/4DQPSK_2-DH5_Channel 0

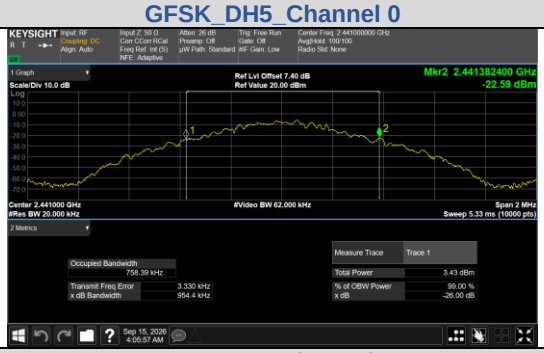

GFSK_DH5_Channel 39

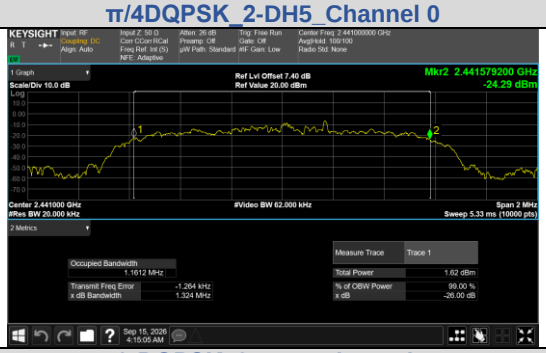

π/4DQPSK_2-DH5_Channel 39

GFSK_DH5_Channel 78

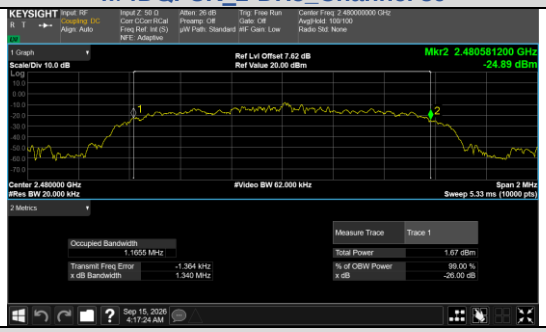

π/4DQPSK_2-DH5_Channel 78

8DPSK_3-DH5_Channel 0

8DPSK_3-DH5_Channel 39

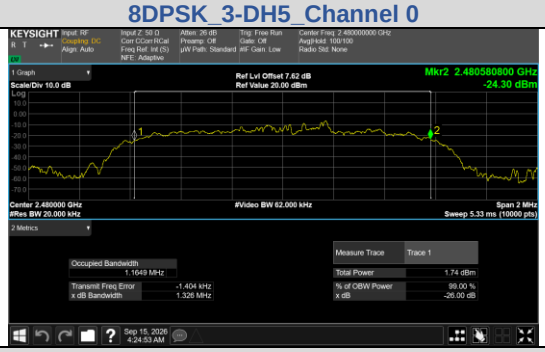

8DPSK_3-DH5_Channel 78

8.3 20dB Bandwidth

Test Result

Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	0.8583
	39	2441 MHz	0.8597
	78	2480 MHz	0.8583
π/4DQPSK	0	2402 MHz	1.252
	39	2441 MHz	1.256
	78	2480 MHz	1.246
8DPSK	0	2402 MHz	1.258
	39	2441 MHz	1.248
	78	2480 MHz	1.255

Test Graphs

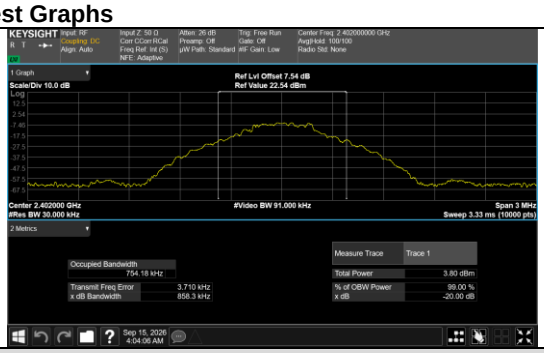

GFSK_DH5_Channel 0

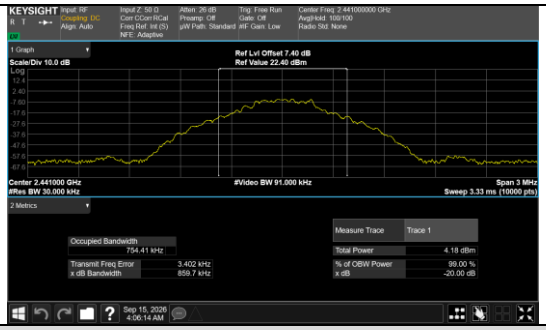

GFSK_DH5_Channel 39

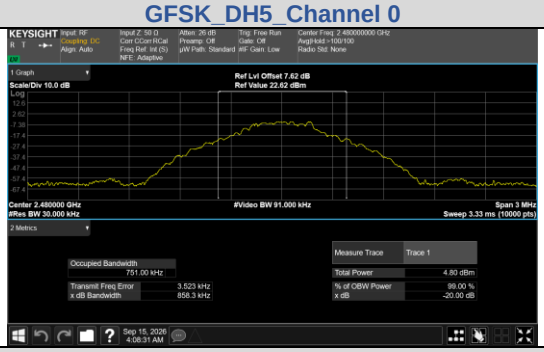

GFSK_DH5_Channel 78

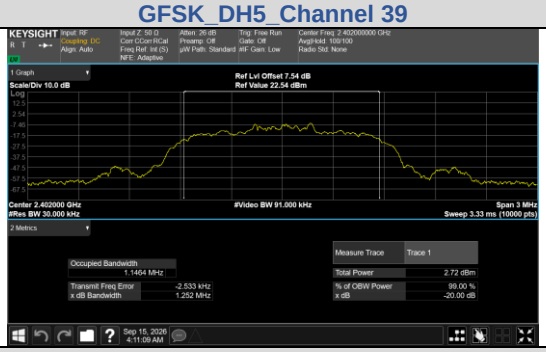

π/4DQPSK_2-DH5_Channel 0

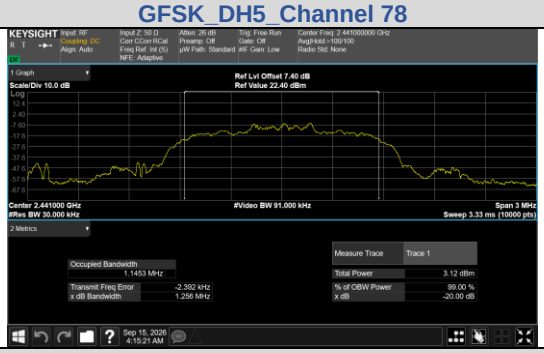

π/4DQPSK_2-DH5_Channel 39

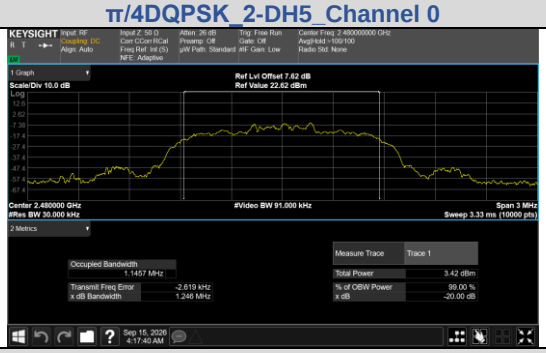

π/4DQPSK_2-DH5_Channel 78

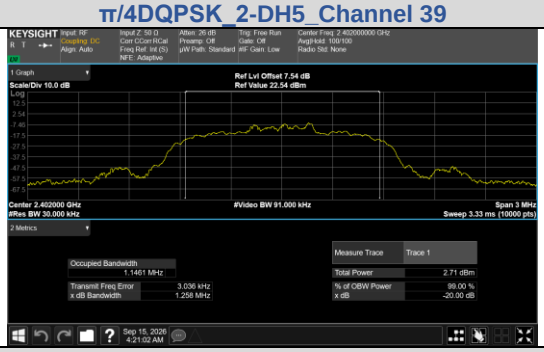

8DPSK_3-DH5_Channel 0

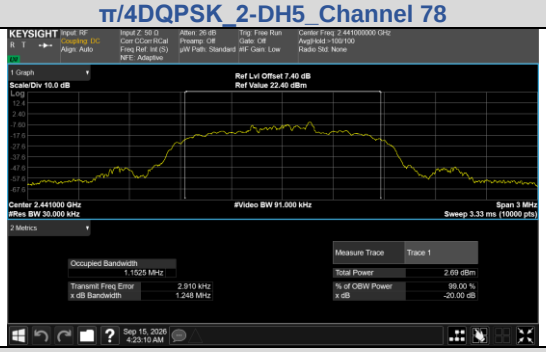

8DPSK_3-DH5_Channel 39

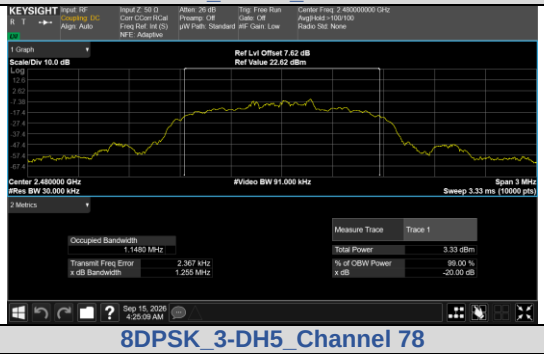

8DPSK_3-DH5_Channel 78

8.4 CARRIER FREQUENCIES SEPARATION

Test Result

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Minimum Limit (MHz)	Verdict
GFSK	DH5	2402.1554	2403.0138	0.8584	0.573	PASS
GFSK	DH5	2440.0249	2441.006	0.9811	0.573	PASS
GFSK	DH5	2479.0417	2480.0168	0.9751	0.573	PASS
π/4DQPSK	2-DH5	2402.1833	2403.1518	0.9685	0.837	PASS
π/4DQPSK	2-DH5	2440.144	2441.0468	0.9028	0.837	PASS
π/4DQPSK	2-DH5	2479.0621	2480.1386	1.0765	0.837	PASS
8DPSK	3-DH5	2401.8551	2403.0162	1.1611	0.839	PASS
8DPSK	3-DH5	2440.027	2440.9826	0.9556	0.839	PASS
8DPSK	3-DH5	2478.9607	2480.1131	1.1524	0.839	PASS

Test Graphs

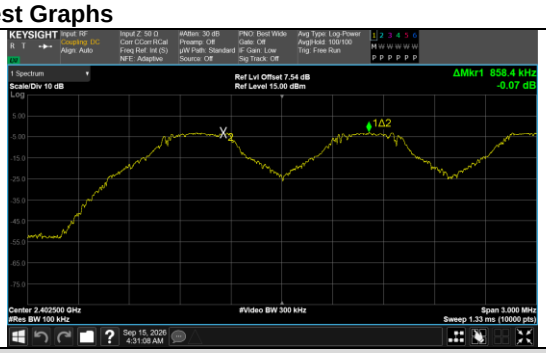

GFSK

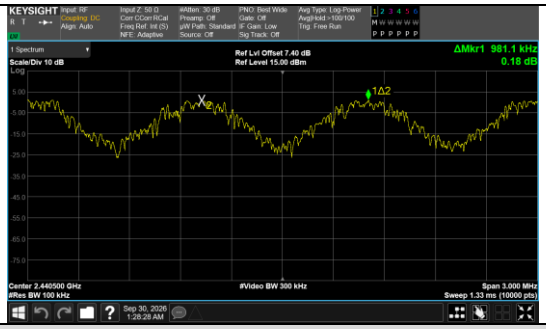

GFSK

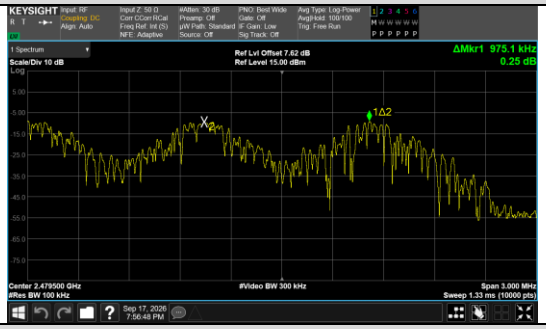

GFSK

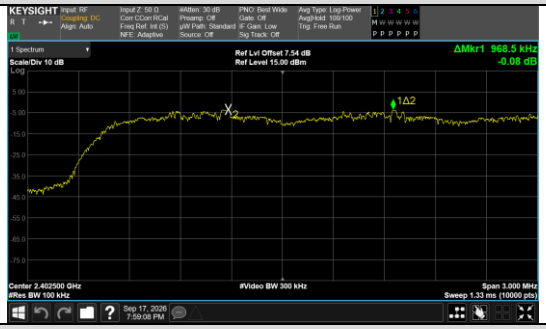

π/4DQPSK

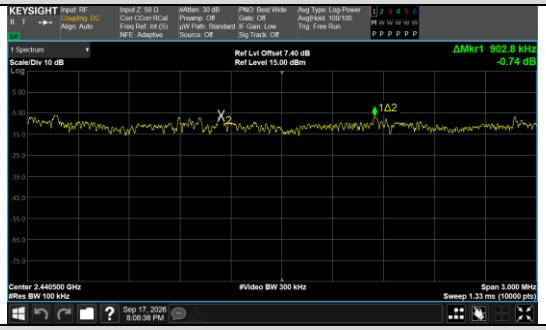

π/4DQPSK

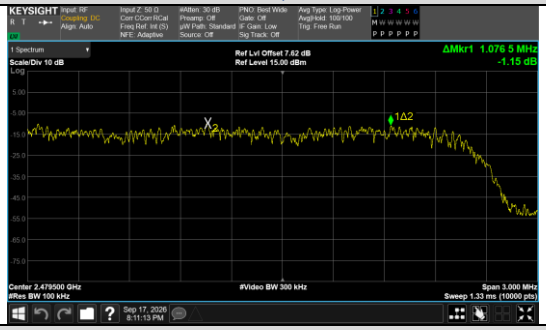

π/4DQPSK

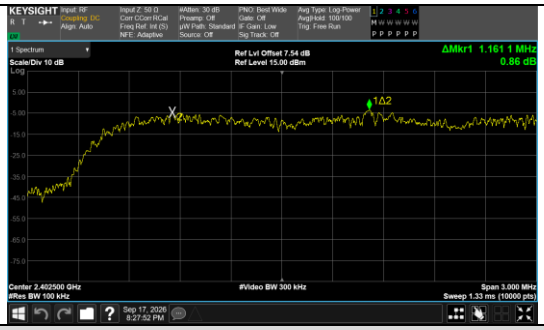

8DPSK

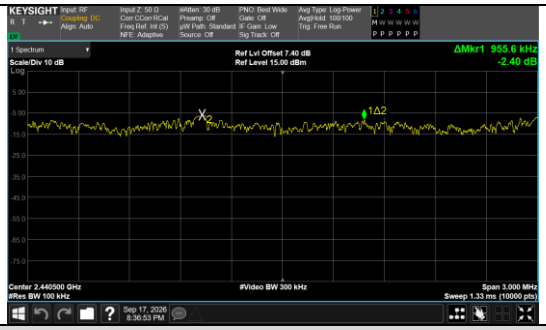

8DPSK

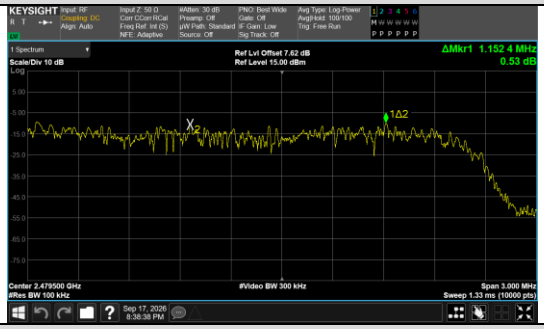

8DPSK

8.5 CONDUCTED SPURIOUS & BAND EDGE EMISSION

Test Result

Non-Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Verdict
GFSK	DH5	0	761.00	-52.635	-22.83	-29.805	PASS
			2399.00	-55.798	-22.83	-32.968	PASS
			2400.00	-55.919	-22.83	-33.089	PASS
		39	948.27	-49.184	-22.55	-26.634	PASS
		78	768.49	-48.254	-22.05	-26.204	PASS
			2483.50	-57.980	-22.05	-35.930	PASS
π/4DQPSK	2-DH5	0	948.30	-52.833	-23.05	-29.783	PASS
			2391.70	-55.214	-23.05	-32.164	PASS
			2400.00	-56.660	-23.05	-33.610	PASS
		39	948.27	-48.189	-22.76	-25.429	PASS
		78	769.11	-44.957	-22.46	-22.497	PASS
			2483.50	-57.784	-22.46	-35.324	PASS
8DPSK	3-DH5	0	766.00	-50.417	-23.05	-27.367	PASS
			2396.88	-55.728	-23.05	-32.678	PASS
			2400.00	-56.464	-23.05	-33.414	PASS
		39	769.74	-50.674	-23.07	-27.604	PASS
		78	769.11	-49.352	-22.50	-26.852	PASS
			2483.50	-57.285	-22.50	-34.785	PASS
Note: input compensation coeffcient (dB)= Cable Loss (dB)							

Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Verdict
GFSK	DH5	Hopping	2397.35	-54.658	-22.76	-31.898	PASS
			2400.00	-56.261	-22.76	-33.501	PASS
			2483.50	-49.360	-22.06	-27.300	PASS
π/4DQPSK	2-DH5		2395.14	-53.721	-23.54	-30.181	PASS
			2400.00	-55.488	-23.54	-31.948	PASS
			2483.50	-56.128	-28.07	-28.058	PASS
8DPSK	3-DH5		2396.74	-53.480	-23.32	-30.160	PASS
			2400.00	-55.613	-23.32	-32.293	PASS
			2483.50	-56.015	-28.56	-27.455	PASS
Note: input compensation coeffcient (dB)= Cable Loss (dB)							

Test Graphs

Non-Hopping

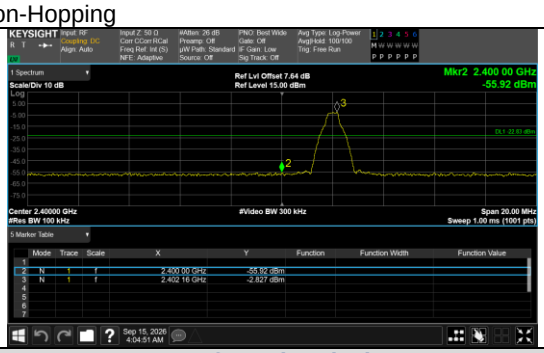

Out Of Band Emission
GFSK_DH5_Channel 0

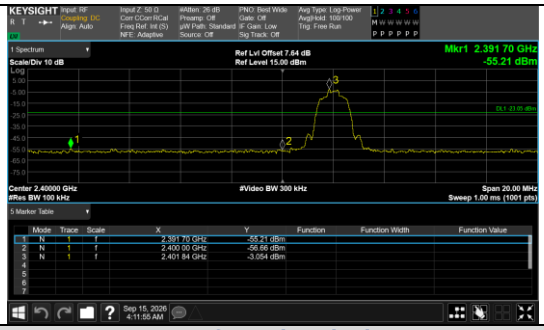

Out Of Band Emission
π/4DQPSK_2-DH5_Channel 0

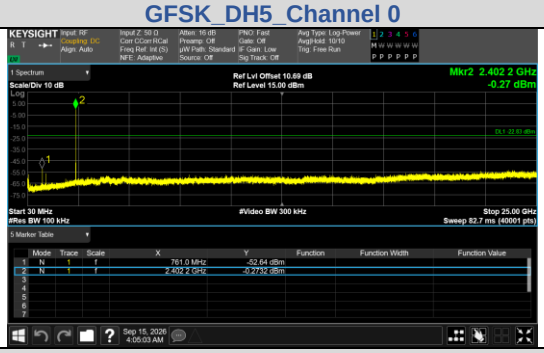

30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 0

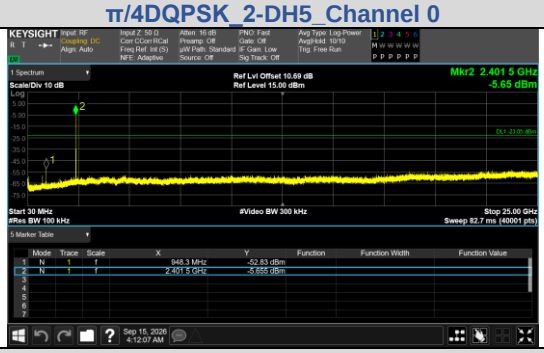

30.0 MHz - 25000.0 MHz
π/4DQPSK_2-DH5_Channel 0

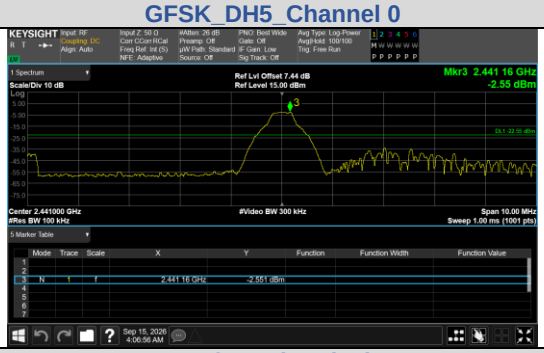

Out Of Band Emission
GFSK_DH5_Channel 39

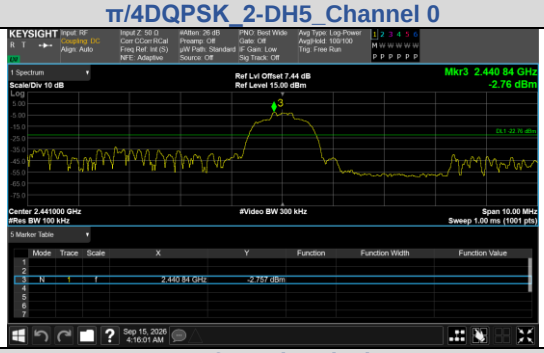

Out Of Band Emission
π/4DQPSK_2-DH5_Channel 39

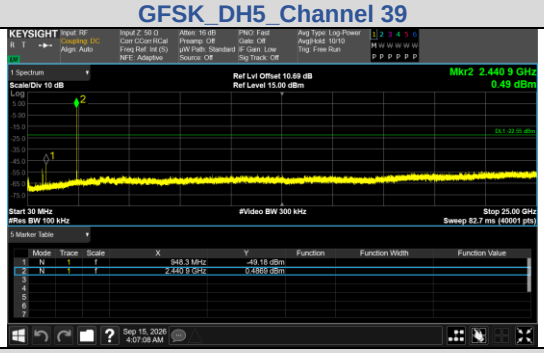

30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 39

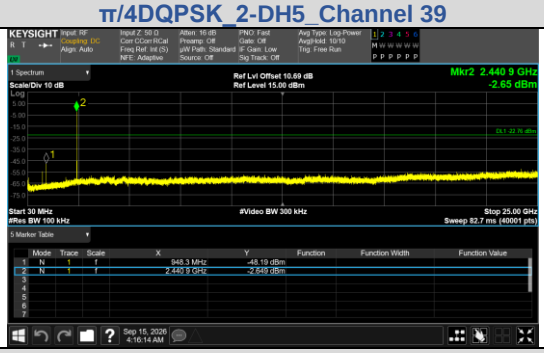

30.0 MHz - 25000.0 MHz
π/4DQPSK_2-DH5_Channel 39

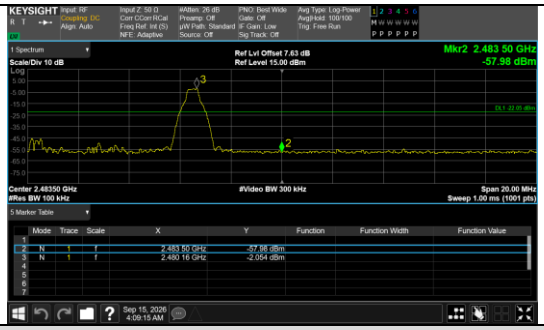

Out Of Band Emission
GFSK_DH5_Channel 78

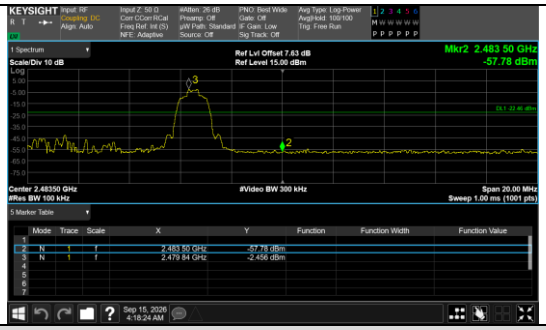

Out Of Band Emission
π/4DQPSK_2-DH5_Channel 78

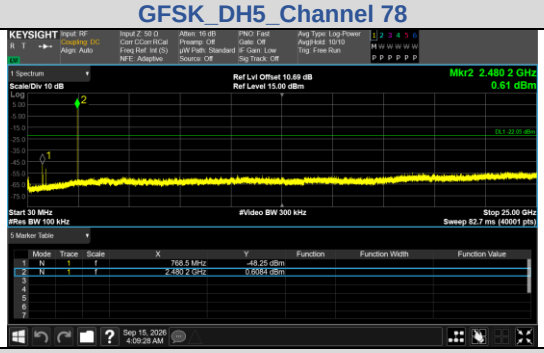

30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 78

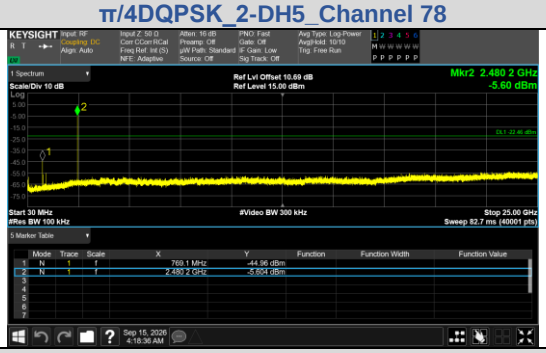

30.0 MHz - 25000.0 MHz
π/4DQPSK_2-DH5_Channel 78

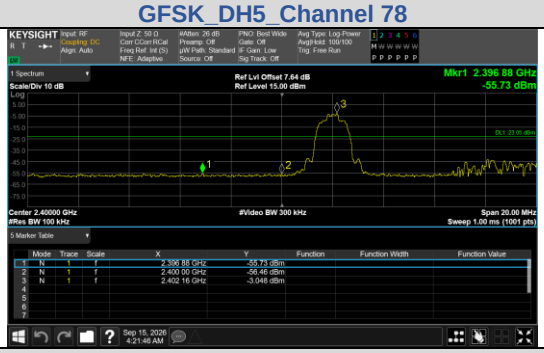

Out Of Band Emission
8DPSK_3-DH5_Channel 0

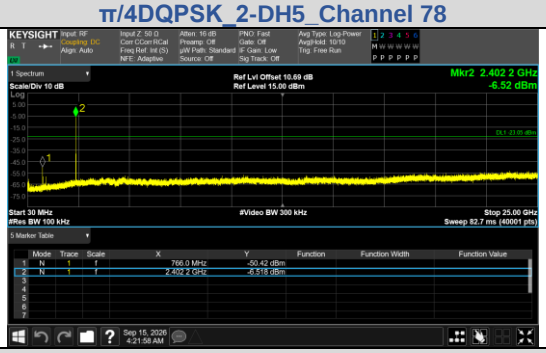

30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 0

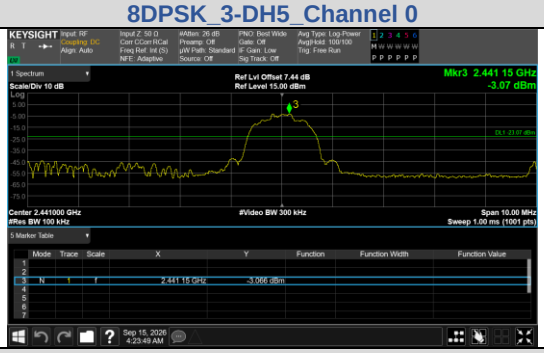

Out Of Band Emission
8DPSK_3-DH5_Channel 39

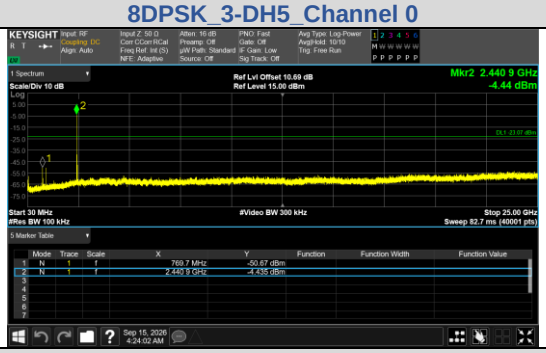

30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 39

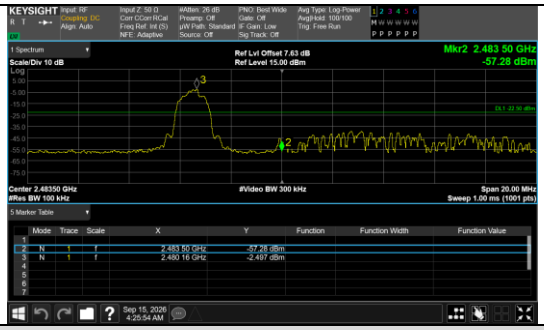	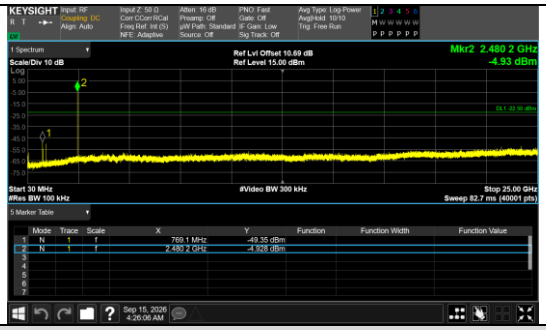
Out Of Band Emission 8DPSK_3-DH5_Channel 78	30.0 MHz - 25000.0 MHz 8DPSK_3-DH5_Channel 78

Hopping

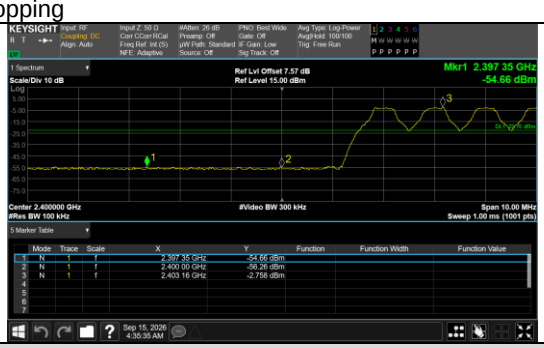	
Out Of Band Emission(Left) GFSK_DH5_Channel Hopping	Out Of Band Emission(Left) π/4DQPSK_2-DH5_Channel Hopping
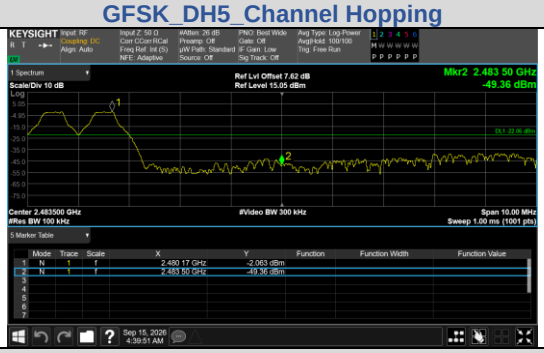	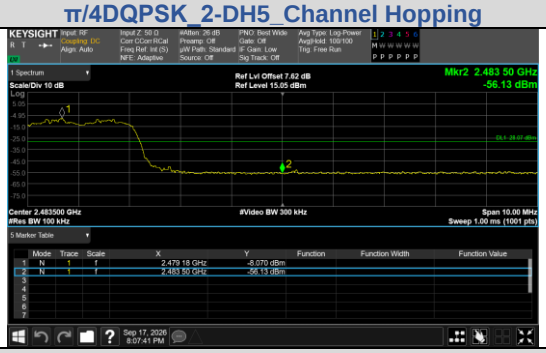
Out Of Band Emission(Right) GFSK_DH5_Channel Hopping	Out Of Band Emission(Right) π/4DQPSK_2-DH5_Channel Hopping
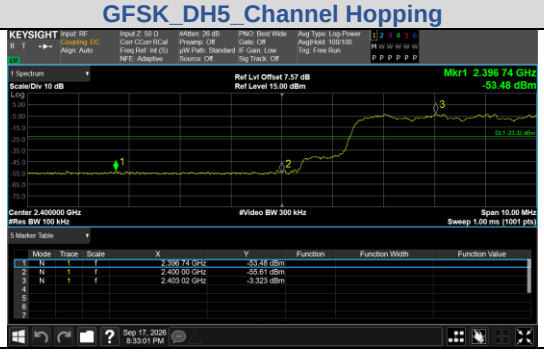	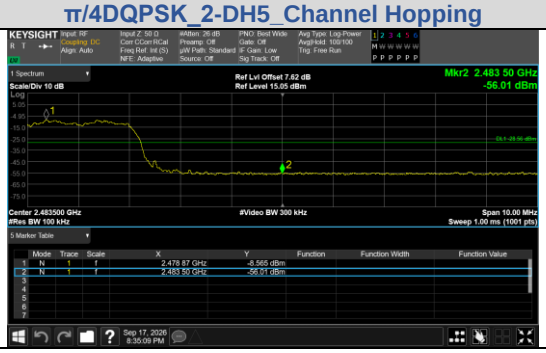
Out Of Band Emission(Left) 8DPSK_3-DH5_Channel Hopping	Out Of Band Emission(Right) 8DPSK_3-DH5_Channel Hopping

8.6 DUTY CYCLE

Test Result

Modulation	Packets	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)	1/T
GFSK	DH5	0	2.8780	3.748	76.79	0.7679	1.1470	0.3475
		39	2.8760	3.748	76.73	0.7673	1.1503	0.3477
		78	2.8780	3.748	76.79	0.7679	1.1470	0.3475
π/4DQPSK	2-DH5	0	2.8820	3.748	76.89	0.7689	1.1413	0.3470
		39	2.8800	3.748	76.84	0.7684	1.1441	0.3472
		78	2.8800	3.748	76.84	0.7684	1.1441	0.3472
8DPSK	3-DH5	0	2.8840	3.748	76.95	0.7695	1.1379	0.3467
		39	2.8820	3.748	76.89	0.7689	1.1413	0.3470
		78	2.8840	3.748	76.95	0.7695	1.1379	0.3467

Test Graphs

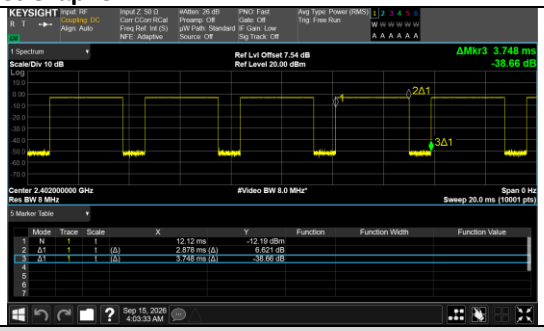

GFSK(DH5)_Channel 0

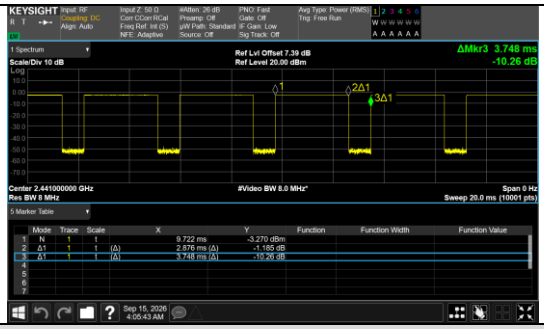

GFSK(DH5)_Channel 39

GFSK(DH5)_Channel 78

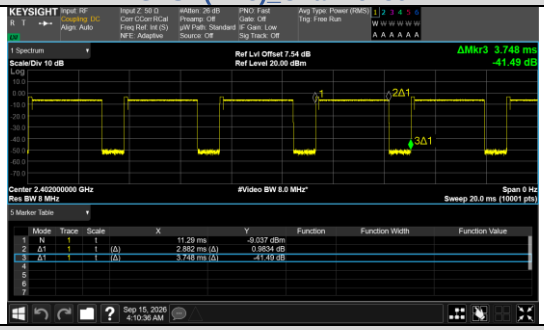

π/4DQPSK(2-DH5)_Channel 0

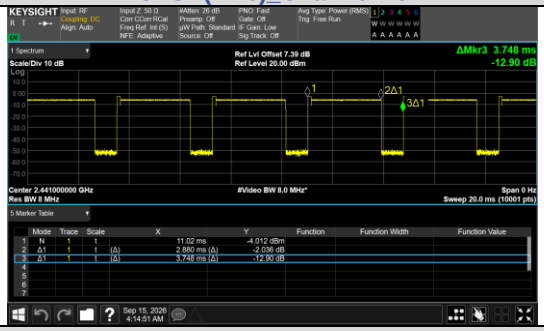

π/4DQPSK(2-DH5)_Channel 39

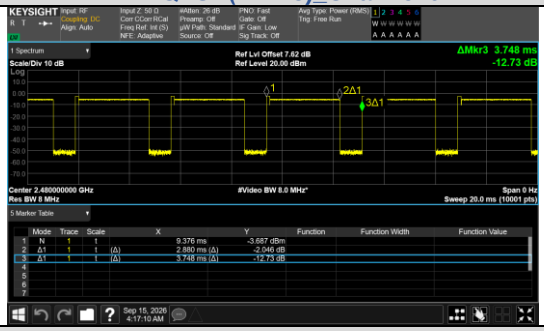

π/4DQPSK(2-DH5)_Channel 78

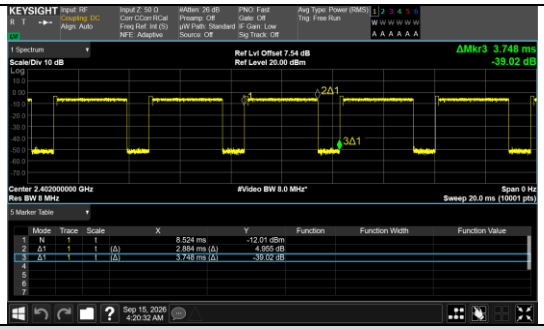

8DPSK(3-DH5)_Channel 0

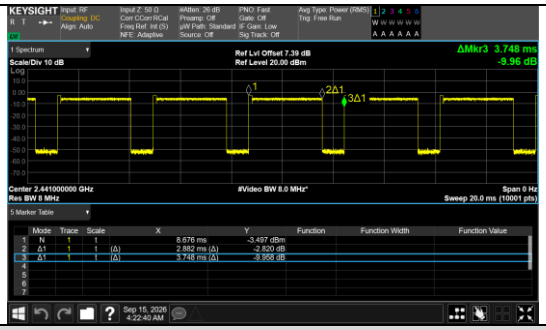

8DPSK(3-DH5)_Channel 39

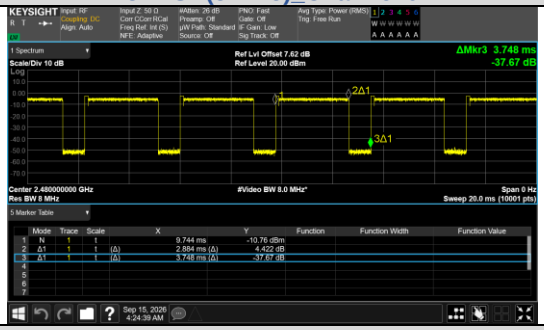

8DPSK(3-DH5)_Channel 78

8.7 DWELL TIME

Test Result

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	Hopping	0.3948	316	124.76	< 400	PASS
	DH3		1.6320	157	256.22		PASS
	DH5		2.8800	98	282.24		PASS
π/4DQPSK	2-DH1		0.4044	314	126.98		PASS
	2-DH3		1.6560	157	259.99		PASS
	2-DH5		2.8960	112	324.35		PASS
8DPSK	3-DH1		0.4056	285	115.6		PASS
	3-DH3		1.4640	157	229.85		PASS
	3-DH5		2.9040	108	313.63		PASS
Note: Dwell time=Pulse time(ms)*Number of Pulses in 31.6 seconds							

Test Graphs

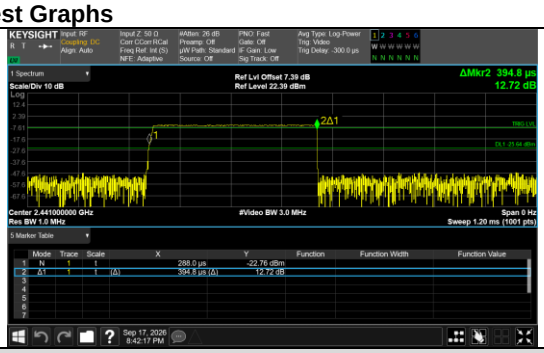

Pulse Width
GFSK_DH1

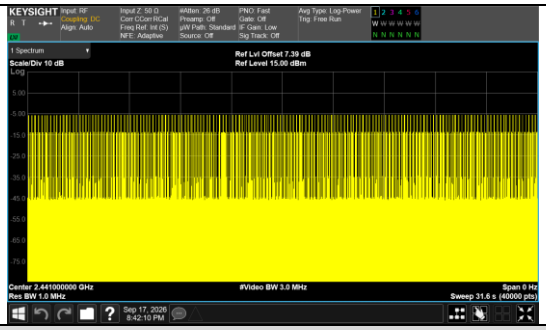

Number of Pulses in 31.6 seconds
GFSK_DH1

Pulse Width
GFSK_DH3

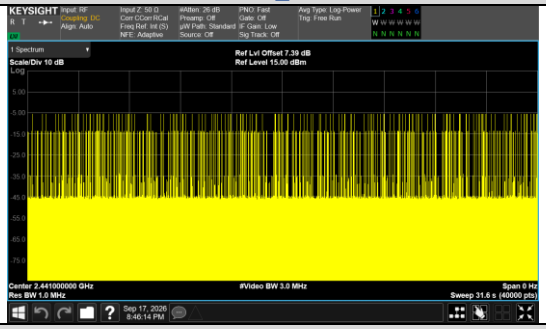

Number of Pulses in 31.6 seconds
GFSK_DH3

Pulse Width
GFSK_DH5

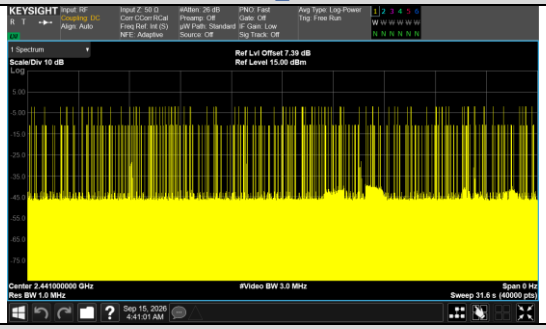

Number of Pulses in 31.6 seconds
GFSK_DH5

Pulse Width
π/4DQPSK_2-DH1

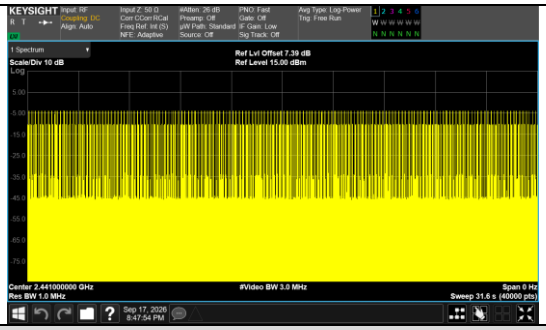

Number of Pulses in 31.6 seconds
π/4DQPSK_2-DH1

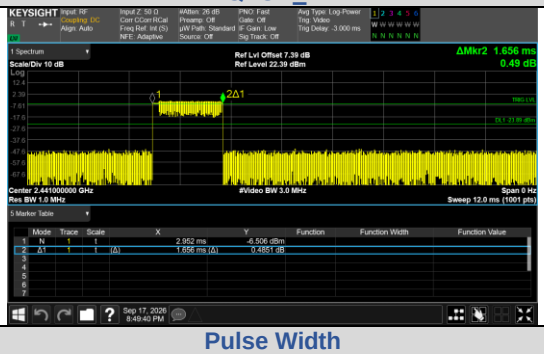

Pulse Width
π/4DQPSK_2-DH3

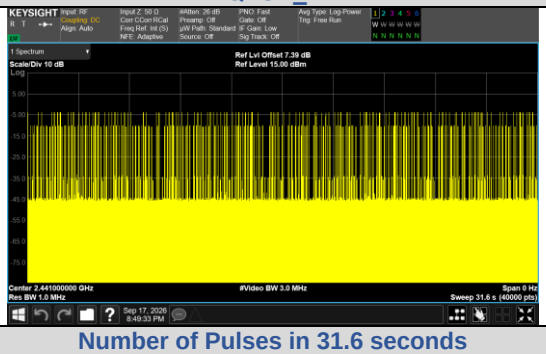

Number of Pulses in 31.6 seconds
π/4DQPSK_2-DH3

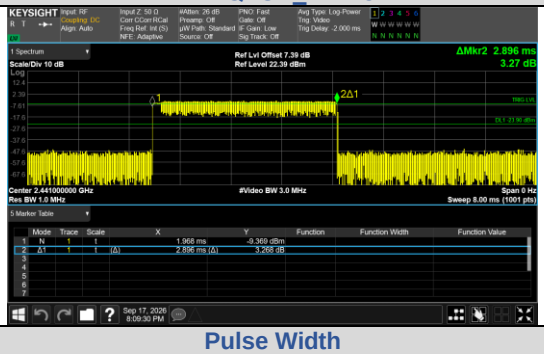

Pulse Width
π/4DQPSK_2-DH5

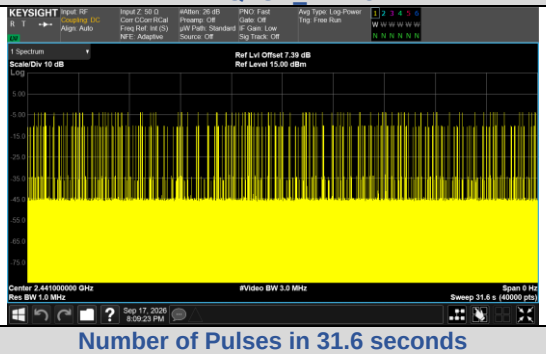

Number of Pulses in 31.6 seconds
π/4DQPSK_2-DH5

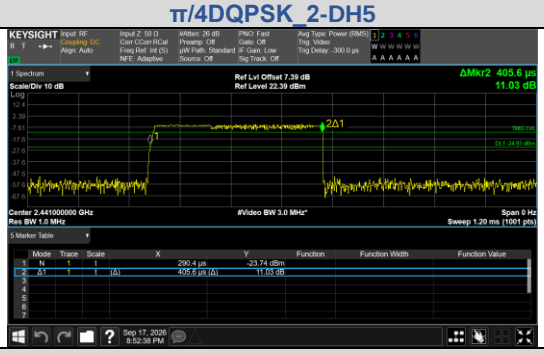

Pulse Width
8DPSK_3-DH1

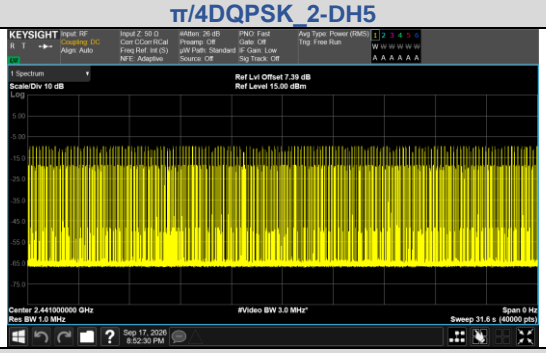

Number of Pulses in 31.6 seconds
8DPSK_3-DH1

Pulse Width
8DPSK_3-DH3

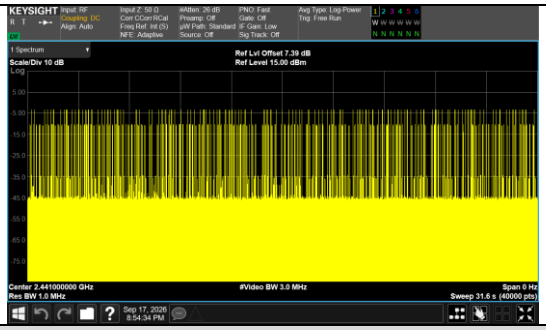

Number of Pulses in 31.6 seconds
8DPSK_3-DH3

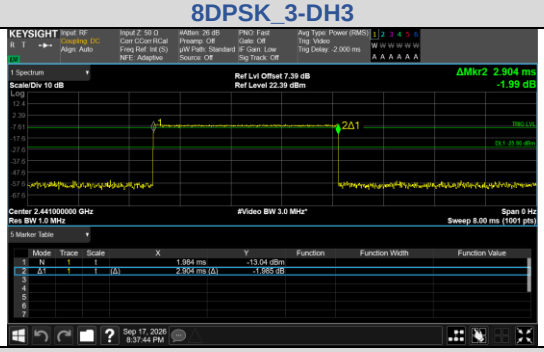

Pulse Width
8DPSK_3-DH5

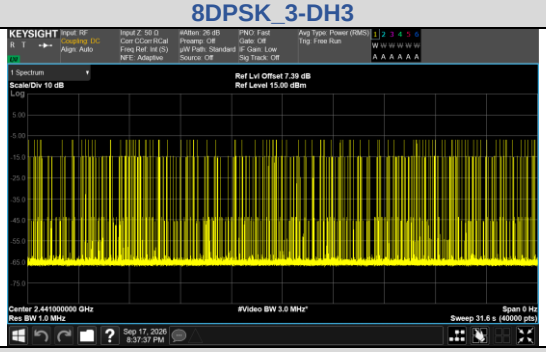

Number of Pulses in 31.6 seconds
8DPSK_3-DH5

8.8 NUMBER OF HOPPING CHANNEL

Test Result

Modulation	Packet	Number of Hopping Channel	Limit	Verdict
GFSK	DH5	79	15	PASS
π/4DQPSK	2-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS

Test Graphs

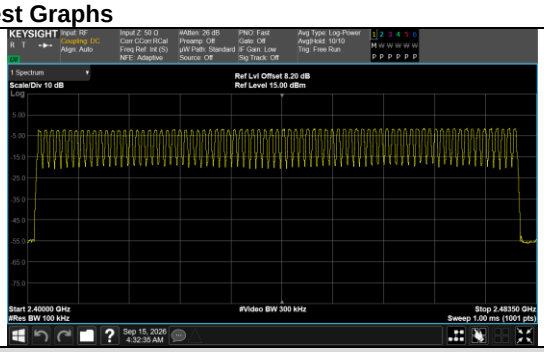

Hopping Plot
GFSK

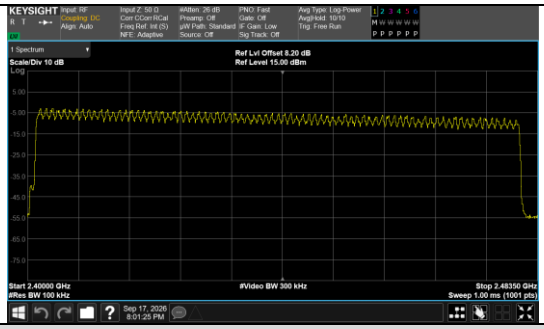

Hopping Plot
π/4DQPSK

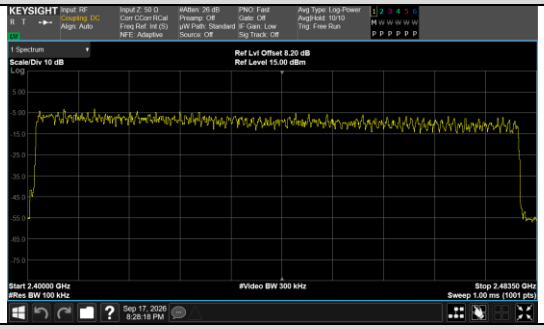

Hopping Plot
8DPSK